


A-1


FSC 3040

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government hereby incurs no responsibility, nor any obligation whatsoever, and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be construed as an endorsement, approval, or recommendation of the manufacturer, or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may, in any way be related thereto.


NOTE: This drawing was approved by joint action of the War and Navy Departments as the Army-Navy standard for the procurement of standard drawings for the same product and shall become effective for the procurement of supplies, or for use in new design, not later than six months after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.

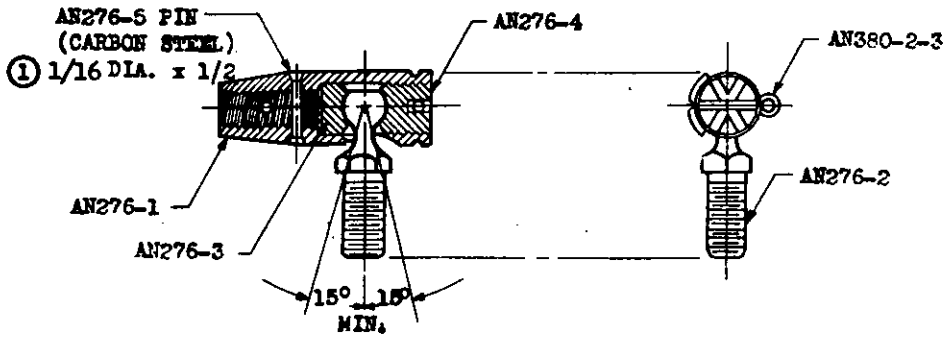


AN276-6 JOINT ASSEMBLY

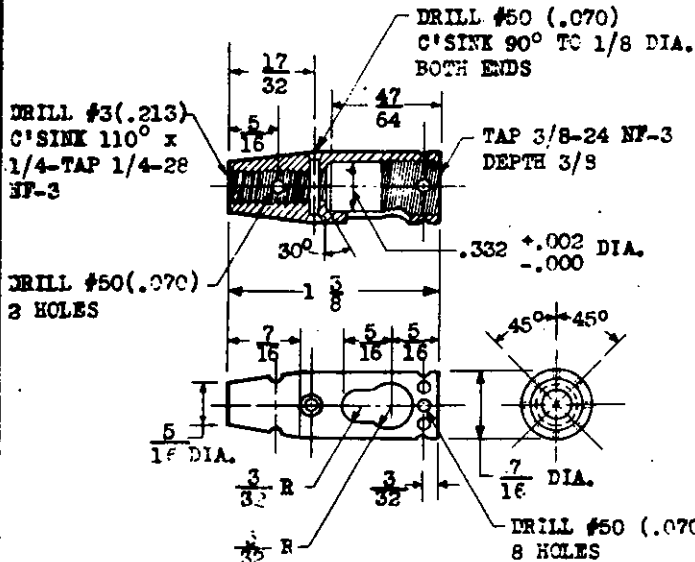


AN276-1 ADAPTER (CARBON STEEL)

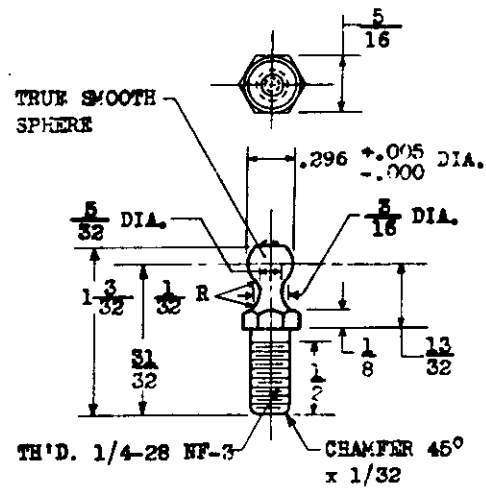

AN276-2 BOLT (NICKEL OR HOLY. STEEL)

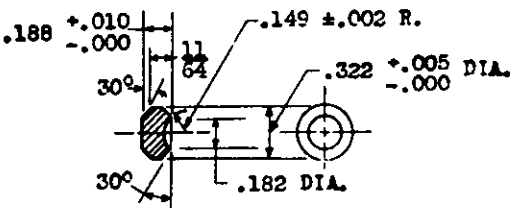

AN276-3 BEARING (BRONZE)

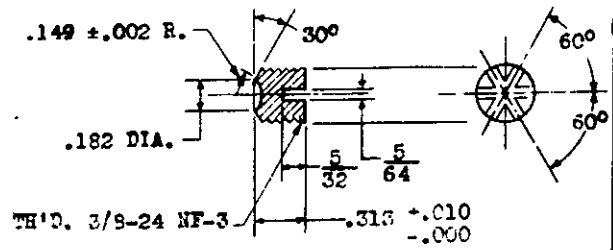

AN276-4 RETAINER (BRONZE)

MATERIAL: CARBON STEEL, SPECIFICATION AN-QQ-S-646 (FOR -1 AND -5).
NICKEL STEEL, SPECIFICATION AN-QQ-S-689; OR,
HOLY. STEEL, SPECIFICATION AN-S-9; OR, } (FOR -2)
CHROME HOLY. STEEL, SPECIFICATION AN-S-14 OR AN-S-16.
BRONZE, SPECIFICATION QQ-B-746 (FOR -3 and -4).
HEAT TREAT: STEEL (FOR -2) 125,000 to 140,000 LBS./SQ. IN., SPECIFICATION AN-QQ-H-201.
FINISH: STEEL: CADMIUM PLATE, SPECIFICATION AN-QQ-P-421, OR ZINC PLATE.

② CANCELLED AFTER 1 NOVEMBER 1974
NO SUPERSEDING STANDARD

PROCURMENT SPECIFICATION	ARMY-NAVY AERONAUTICAL STANDARD	AN276
NONE	JOINT - BALL AND SOCKET	

ARMY AIR FORCES STOCK CLASSIFICATION 04-A

① SUPERSEDES FORMER ARMY AND NAVY STANDARD ISSUES OF AN276

APPROVED 24 Feb 43 REVISED ① 2 Oct 43 ② 1 Nov 74

72

95%