

MIL-STD-188-116-4
9 MARCH 1987

SUPERSEDING:
SEE FOREWORD

MILITARY STANDARD
INTEROPERABILITY STANDARDS
FOR
INFORMATION AND RECORD
TRAFFIC EXCHANGE
MODE VI



AMSC N/A

AREA TCTS/SLHC

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

MIL-STD-188-116-4

FOREWORD

1. This military standard is approved and mandatory for use by all Departments and Agencies of the Department of Defense in accordance with OASD (C³I) Memo; 16 Aug 1983, (see Appendix A).

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to:

Director
Joint Tactical Command, Control and Communications
Agency
ATTN: C3A-IASO
OASDC3I, ASC
Washington, DC 20301-3160

by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

3. Originally, Military Standard 188 (MIL-STD-188) covered technical standards for tactical and long haul communications, but later evolved through revisions (MIL-STD-188A, MIL-STD-188B) into a document applicable to tactical communications only (MIL-STD-188C).

4. The Defense Communications Agency (DCA) published DCA Circulars (DCAC) promulgating standards and engineering criteria applicable to the long haul Defense Communications System (DCS) and to the technical support of the National Military Command System (NMCS). The Joint Tactical Communications Office (JTCCO) published TRI-TAC specifications promulgating standards applicable to the joint tactical communication system known as the TRI-TAC system.

5. As a result of a Joint Chiefs of Staff (JCS) action, standards for all military communications are now being published in a MIL-STD-188 series of documents. The MIL-STD-188 series is subdivided into a MIL-STD-188-100 series covering common standards for tactical and long haul communications, a MIL-STD-188-200 series covering standards for tactical communications only, and a MIL-STD-188-300 series covering standards for long haul communications only. Emphasis is being placed on developing common standards for tactical and long haul communications published in the MIL-STD-188-100 series.

MIL-STD-188-116-4

FOREWARD

6. This document is the result of JCS action requiring that the technical characteristics of channel control procedures previously contained in various specifications and DCAC be updated and published in the MIL-STD-188 series of standards. This document contains the technical requirements for Mode VI. The entire MIL-STD-188-116 series is as follows:

- a. MIL-STD-188-116-1: Mode I
- b. MIL-STD-188-116-2: Mode II
- c. MIL-STD-188-116-3: Mode V
- d. MIL-STD-188-116-4: Mode VI
- e. MIL-STD-188-116-5: Mode VII

7. The MIL-STD-188-116 series will not normally contain message standards and related information. They are, however, presented here only to the extent necessary for clarity of a channel control procedure.

8. Mode VI was previously described in JTCO documents.

9. This document supersedes paragraphs 3.2.4.2 and all subparagraphs and Appendix I of the Joint Tactical Communications Office specification TT-A3-9013-0048B.

MIL-STD-188-116-4

(This page intentionally left blank)

MIL-STD-188-116-4

CONTENTS

		<u>Page</u>
Paragraph 1.	SCOPE - - - - -	1
1.1	Purpose - - - - -	1
1.2	Scope - - - - -	1
1.3	Application - - - - -	1
1.4	System standards and design objectives (DOs) - - - - -	1
1.5	Tailoring - - - - -	2
2.	APPLICABLE DOCUMENTS - - - - -	3
2.1	Government documents - - - - -	3
2.1.1	Standards - - - - -	3
2.2	Order of precedence - - - - -	3
2.3	Source of documents - - - - -	3
3.	DEFINITIONS - - - - -	5
3.1	Definition of terms - - - - -	5
3.1.1	Bit error ratio (BER) - - - - -	5
3.1.2	Character set - - - - -	5
3.1.3	Data rate - - - - -	5
3.1.4	Loop rate - - - - -	5
3.1.5	Mode I - - - - -	5
3.1.6	Mode II - - - - -	5
3.1.7	Mode V - - - - -	6
3.1.8	Mode VI - - - - -	6
3.1.9	Mode VII - - - - -	6
3.2	Abbreviations and acronyms - - - - -	6
4.	GENERAL REQUIREMENTS - - - - -	7
4.1	Mode VI - - - - -	7
4.2	Duplex operation - - - - -	7
4.3	Characters - - - - -	7
4.3.1	Data characters - - - - -	7
4.3.2	Control characters - - - - -	7
4.3.3	Framing characters - - - - -	7
4.4	High-integrity - - - - -	8
4.5	Path delay accommodation - - - - -	8
4.6	Octet code - - - - -	8
5.	DETAILED REQUIREMENTS - - - - -	13
5.1	Mode VI protocol - - - - -	13
5.2	Mode VI message block and message block groups - - - - -	13
5.3	Message block structure - - - - -	13
5.3.1	Normal message blocks - - - - -	13
5.3.2	Short message blocks - - - - -	13
5.4	Data formats - - - - -	13
5.4.1	ASCII - - - - -	14

MIL-STD-188-116-4

CONTENTS - Continued

	<u>Page</u>
Paragraph 5.4.2	Other data codes and binary
	bit streams - - - - - 14
5.5	Framing characters - - - - - 14
5.5.1	Start of header (SOH) - - - - - 14
5.5.2	Select (SEL) character - - - - - 14
5.5.3	Start of text (STX) - - - - - 14
5.5.4	Block number (BN) - - - - - 14
5.5.5	End of transmission block (ETB) - - - - - 15
5.5.6	End of text (ETX) - - - - - 15
5.5.7	Block parity (BP) - - - - - 15
5.6	Special short blocks - - - - - 21
5.6.1	End of medium (EM) block - - - - - 21
5.6.2	Mode change (MC) block - - - - - 21
5.6.3	Record mark (DC3) block - - - - - 21
5.7	Message block groups - - - - - 21
5.8	Message transmission control- 22
5.8.1	Control character response - 22
5.8.1.1	Positive acknowledgment (ACK) - - - - - 22
5.8.1.2	Negative acknowledgment (NAK) - - - - - 22
5.8.1.3	Wait before transmitting (WBT) - - - - - 24
5.8.1.3.1	Restart - - - - - 24
5.8.1.4	File separator (FS) - - - - - 24
5.8.1.5	Vertical tabulation (VT) - - - - - 24
5.8.1.6	Group separator (GS) - - - - - 24
5.8.1.7	Reject message (RM) - - - - - 25
5.8.1.8	Cancel (CAN) - - - - - 25
5.8.1.9	Cancel acknowledgment (CAK) - 25
5.8.1.10	Invalid (INV) sequence - - - - - 28
5.8.1.11	Idle line, synchronization (SYN) - - - - - 28
5.9	Traffic state - - - - - 28
5.9.1	Transmitter - - - - - 28
5.9.2	Receiver - - - - - 28
5.9.3	Message block retransmission- 28
5.9.3.1	NAK blocks - - - - - 28
5.9.3.2	Unacknowledged blocks - - - - - 28
5.9.4	Receipt of a duplicate block- 28
5.9.5	Excessive block retransmission - - - - - 28
5.9.6	Block framing errors - - - - - 29
5.9.7	Excessive unexpected characters - - - - - 29
5.10	Mode VI traffic-state - - - - - 29

MIL-STD-188-116-4

CONTENTS - Continued

		<u>Page</u>
Paragraph 5.11	Character and bit transmission - - - - -	29
5.12	Mode VI timing and timeouts -	29
6.	NOTES - - - - -	37
6.1	Mode VI - - - - -	37
6.2	Examples - - - - -	37
6.2.1	96 Block group - - - - -	38
6.2.2	64 Block group - - - - -	39
6.2.3	32 Block group - - - - -	40
6.2.4	16 Block group - - - - -	41
6.3	Key word listing - - - - -	42
	 FIGURES	
Figure 1.	Mode VI - normal block - 1st block of message - - -	11
2.	Mode VI - normal block - one block message - - - -	11
3.	Mode VI - normal block - text block - - - - -	12
4.	Mode VI - normal block - last block of message - text block - - - - -	12
5.	Parity checking code rules for Mode VI message blocks	16
6.	Mode VI - short block - 1st block of message - - -	17
7.	Mode VI - short block - one block message - - - -	17
8.	Mode VI - short block - text block - - - - -	17
9.	Mode VI - short block - last block of message - text block - - - - -	17
10.	Example of EM block - - - - -	18
11.	Example of MC block beginning/end of binary text - - - - -	18
12.	Example of DC3 block - end of record - - - - -	18
13.	Mode VI message transmission	32

MIL-STD-188-116-4

CONTENTS - Continued

		<u>Page</u>
Figure	14. Mode VI message reception - -	33
	15. Conversion of nine track tape to Mode VI text characters - - - - -	57
	16. Typical structured format for seven track tape - - -	58
	17. Typical Mode VI trans- mission structured format actions/reactions - - - - -	59
	18. Typical structured format for seven track tape - - -	60
	19. Mode VI transmission structured format action/ reaction - - - - -	61
	20. Nonstructured format for seven track tape - - - - -	62
	21. Mode VI transmission nonstructured format action/reaction - - - - -	63
	22. Structured format for nine track tape - - - - -	64
	23. Mode VI transmission nonstructured format action/reaction - - - - -	65
	24. Nonstructured format for nine track tape - - - - -	66
	25. Mode VI transmission nonstructured format action/reaction - - - - -	67

TABLES

Table	I. American standard code for information interchange (ASCII) and Mode VI data characters - - - - -	9
	II. Mode VI data, control, and framing 8 bit environment character set - - - - -	10
	III. Mode VI 8 bit control and framing codes - - - - -	19
	IV. Mode VI select framing characters - - - - -	20
	V. Example of Mode VI acknowledgment sequences -	23

MIL-STD-188-116-4

CONTENTS - Continued

			<u>Page</u>
Table	VI.	Mode VI reject and cancel message procedures - - - -	26
	VII.	Normal Mode VI operations - -	27
	VIII.	Mode VI block framing errors-	31
	IX.	Mode VI timing and timeouts -	34
	X.	Conversion from seven track tape to Mode VI data (Block) character - - - -	54
		APPENDIX	
Appendix	A.	MEMORANDUM FROM THE UNDER SECRETARY OF DEFENSE FOR RESEARCH AND ENGINEERING: 16 AUGUST 1983 SUBJECT: MANDATORY USE OF MILITARY TELECOMMUNICATIONS STANDARDS IN THE MIL-STD-188 SERIES - -	43
	B.	ABBREVIATIONS AND ACRONYMS- -	45
	C.	DATA CONVERSION TECHNIQUES FOR SYSTEMS USING NON STANDARD CODES - - - - -	49
Paragraph	10.	GENERAL - - - - -	50
	10.1	Scope - - - - -	50
	10.2	Application - - - - -	50
	10.3	Application guidance - - - -	50
	20.	APPLICABLE DOCUMENTS - - - - -	50
	30.	DEFINITIONS - - - - -	50
	40.	GENERAL REQUIREMENTS - - - - -	50
	40.1	Minimum criteria - - - - -	50
	40.2	User responsibility - - - - -	51
	50.	SPECIFIC METHODOLOGY - - - - -	51
	50.1	Introduction - - - - -	51
	50.2	Magnetic tape messages - - -	51
	50.2.1	Structured format - - - - -	51
	50.2.2	Nonstructured format - - - -	52
	50.2.3	Tape marks - - - - -	52
	50.2.3.1	Record mark (DC3) block - - -	52

MIL-STD-188-116-4

CONTENTS - Continued

	<u>Page</u>
Paragraph 50.2.4	Code translation - - - - - 52
50.2.4.1	Seven track tape (SEL character B) - - - - - 52
50.2.4.2	Nine track tape (SEL character C) - - - - - 53
50.2.5	Transmission sequences - - - 53
50.2.5.1	Header - - - - - 53
50.2.5.2	Text - - - - - 56
50.2.5.3	End of transmission (EOT) - - 56

MIL-STD-188-116-4

1. SCOPE

1.1 Purpose. The purpose of this document is to ensure interoperability, and to promote commonality of communications equipment and subsystems using Mode VI channel control procedures. An additional objective of this document is to prevent proliferation of equipment serving the same or similar function. The variety of equipment shall be the minimum necessary to support the missions of the armed forces in accordance with Department of Defense Directive 4630.5, Compatibility and Interoperability of Tactical Command, Control, Communications, and Intelligence Systems.

1.2 Scope. This document specifies the minimum requirements necessary to implement information and record traffic exchange among data communications systems employed in long haul and tactical communications networks. It is not the intent of this document to specify any particular hardware or software design or implementation. Message formats are not included in this document.

1.3 Application. This document is applicable to the design and development of new equipment, assemblages, and systems. Existing systems that are undergoing major modification or rehabilitation shall comply with the standards contained in this document subject to the applicable requirements of current procurement regulations. This document shall not be used solely to justify retrofit of existing systems. This document, in whole or in part, is applicable only to the extent specified in the procurement documents of an equipment item or system.

1.4 System standards and design objectives (DOs). The parameters and other requirements specified in this document are mandatory system standards if the word "shall" is used in connection with the parameter value or requirement under consideration (see Appendix A). Non-mandatory system standards and DOs are identified as optional by the word "should" in connection with the parameter value or requirement under consideration. For a definition of the terms "system standards" and "design objectives" see FED-STD-1037. Information paragraphs, shown as notes, have been included to better define certain methods currently in use.

MIL-STD-188-116-4

1.5 Tailoring. As a minimum, only those features or functions specified herein, necessary to ensure interoperability among systems, shall be implemented in an equipment item. While every effort has been made to include all of the features necessary for protocol implementation, certain aspects are dependent upon system application and must be tailored by the specification writer. These aspects include alarm functions, Mode VI block group size, data rates, codes, message formats, etc.

MIL-STD-188-116-4

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Standards. The following standards form a part of this document to the extent specified herein. Unless otherwise specified the issues of these documents are those listed in the current issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto.

STANDARDS

FEDERAL

FED-STD-1037

Glossary of
Telecommunication Terms

FIPS PUB 17-1

Character Structure and
Character Parity Sense
for Serial-By-Bit Data
Communications in the
Code for Information
Interchange

2.2 Order of precedence. In the event of a conflict between this document and the references cited herein, the text of this document takes precedence. Nothing in this standard, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

2.3 Source of documents. Copies of the referenced federal standards are available from the Department of Defense Single Stock Point, Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120-5099. For specific acquisition functions, these documents should be obtained from the contracting activity or as directed by the contracting activity.

MIL-STD-188-116-4

(This page intentionally left blank)

MIL-STD-188-116-4

3. DEFINITIONS

3.1 Definition of terms. Definition of terms used in this document shall be as specified in FED-STD-1037. Those definitions of terms unique to information and record traffic exchange and not defined in FED-STD-1037 are provided below.

3.1.1 Bit error ratio (BER). BER is the error ratio measured at loop rate.

3.1.2 Character set. The synchronous character set used in the Mode VI protocol consists of 256 octets and is in compliance with the eight bit environment of FIPS PUB 17-1. The octets are divided into two 128 character sets, one containing an odd number of logical 1 bits per each octet and the other set containing an even number of logical 1 bits per each octet. The octet set containing the odd number of 1 bits maps directly into the eight bit American Standard Code for Information Interchange (ASCII) character set, i.e., the odd parity eight bit code. The set of octets used for control and framing has an even number of logical 1's (an all logical 0 octet is considered to have an even number of logical 1's).

3.1.3 Data rate. The rate, in bits per second, at which Mode VI octets are transferred between terminals (transmitter and receiver).

3.1.4 Loop rate. The rate at which bits are exchanged between terminal devices and transmission/crypto equipment.

3.1.5 Mode I. Mode I is an automatic repeat-request (ARQ) channel coordination procedure which provides for synchronous, simultaneous, independent, duplex data transfer. It is designed to be used over terrestrial links. Messages are structured into blocks. Blocks are transmitted to the receiver which acknowledges error free blocks. Blocks with errors are negatively acknowledged. All blocks which are negatively acknowledged are retransmitted. A block of data cannot be transmitted until the previous block has been positively acknowledged.

3.1.6 Mode II. Mode II is a channel coordination procedure which provides for asynchronous, simultaneous, independent, duplex data transfer. No acknowledgement procedure is implemented.

MIL-STD-188-116-4

3.1.7 Mode V. Mode V is a channel coordination procedure which provides for asynchronous, simultaneous, independent, duplex data transfer. It is designed to be used over terrestrial links. Error free messages are positively acknowledged. Messages with errors are rejected by the receiver and are retransmitted.

3.1.8 Mode VI. Mode VI is an ARQ channel coordination procedure which provides for synchronous, simultaneous, independent, duplex data transfer. It is designed to be used over terrestrial and satellite links. Messages are structured into blocks. Each block has a unique number associated with it. Error free blocks are positively acknowledged. Blocks containing errors are negatively acknowledged. All acknowledgements, positive and negative, have the unique block number associated with them. The blocks of a message are organized into block groups. All blocks in a block group are transmitted whether or not the preceding blocks have been positively acknowledged. All blocks in a block group must be positively acknowledged before transmission of the next block group is initiated.

3.1.9 Mode VII. Mode VII is an ARQ channel coordination procedure which provides for synchronous, simultaneous, independent, duplex data transfer. It is designed to be used over terrestrial and satellite links. Messages are structured into frames. Frames without errors are acknowledged. All frames received with errors are retransmitted. Mode VII is a subset of the Advanced Data Communications Control Procedure (ADCCP).

3.2 Abbreviations and acronyms. Abbreviations and acronyms used in this document are as defined in FED-STD-1037. Those abbreviations and acronyms unique to this document and not defined in FED-STD-1037 are provided in Appendix B.

MIL-STD-188-116-4

4. GENERAL REQUIREMENTS

4.1 Mode VI. The Mode VI channel coordination procedure provides for synchronous, simultaneous, independent, duplex data transfer. It is designed to be used over terrestrial and satellite links, and its major features include a unique identification scheme to identify control and data characters, high-integrity, and the ability to accommodate satellite link path delays.

4.2 Duplex operation. This shall be achieved by transmitter and receiver functions at each end of the transmission link. These transmitters and receivers shall be capable of simultaneously sending and receiving messages.

4.3 Characters. Mode VI operation shall use three generic character types: data, control, and framing. These characters are identified in the bit stream by their sequence and position relative to other characters. Characters to be used shall consist of the following generic types:

4.3.1 Data characters. There are 128 data characters, and these shall be as defined in table I. Data characters shall be eight bits long and shall have an odd number of logical 1 bits.

4.3.2 Control characters. There are also 128 characters available for use as control characters, and table II identifies those presently defined for use. Control characters shall also be eight bits long with an even number of logical 1 bits. Characters having an even number of logical 1 bits, and which are not an assigned control or framing (except BP) character shall be treated as errors.

4.3.3 Framing characters. Framing characters serve to delineate the beginning and end of each block of data that comprise the transmission of a message. Two framing characters precede the block and two succeed the block (see figures 1, 2, 3, and 4). Framing characters shall be eight bits long with an even number of logical 1 bits per character (except BP). The framing characters are:

- a. Start of header (SOH)
- b. Select (SEL) character
- c. Start of text (STX)
- d. Block number (BN)
- e. End of transmission block (ETB)
- f. End of text (ETX)
- g. Block parity (BP)

MIL-STD-188-116-4

4.4 High integrity. Message integrity is accomplished by positive acknowledgement of error-free received messages. Messages are structured, by the transmitter, into blocks of up to 80 data characters; normal block size is 80 data characters. These blocks are transmitted to the receiver which must positively acknowledge error-free receipt of each block. Blocks with errors are negatively acknowledged by the receiver and retransmitted by the transmitter. A control character hierarchy, which is discussed in subsequent sections, accomplishes the message block and acknowledgment process.

4.5 Path delay accommodation. Accommodation is achieved by requiring that a message block be acknowledged within a time period that is greater than a satellite link round trip delay. The message blocks are organized into block groups of up to 96 blocks. All blocks in a block group are transmitted whether or not preceding blocks have been positively acknowledged. However, all blocks in a block group must be positively acknowledged before transmission of the following block group is initiated.

4.6 Octet code. The requirement to transmit the total 128 characters of ASCII necessitated the development of an eight bit (octet) coded control system that is transparent to all data characters. The Mode VI character set consists of 256 eight bit characters. The eight bit Mode VI code is compliant with FIPS PUB 17-1, eight bit environment character structure. The eight bit (octet) character structure has no parity bit. The Mode VI code is divided into two 128 eight bit character groups. One character group consists of an even number of logical 1 or logical 0 bits and the other character group consists of an odd number of logical 1 bits. The even number logical 1 bits eight bit environment character group, is used by the Mode VI protocol for control and framing. Characters in the Mode VI protocol are transmitted serial-by-bit, serial-by-character in compliance with FIPS PUB 17-1.

MIL-STD-188-116-4

TABLE I. American standard code for
information interchange (ASCII)
and Mode VI data characters.

<div style="display: flex; align-items: center;"> <div style="border: 1px solid black; padding: 2px; margin-right: 5px;"> Bits a_7 a_6 a_5 a_4 a_3 a_2 a_1 </div> <div style="display: flex; flex-direction: column; align-items: center;"> <div style="margin-bottom: 5px;">\rightarrow</div> <div style="margin-bottom: 5px;">\rightarrow</div> <div style="margin-bottom: 5px;">\rightarrow</div> <div style="margin-bottom: 5px;">\rightarrow</div> </div> </div>					COLUMNS									
					ROW		0 0 0	0 0 1	0 1 0	0 1 1	1 0 0	1 0 1	1 1 0	1 1 1
							0	1	2	3	4	5	6	7
0	0	0	0	0	0	0	NUL	DLE	SP	0	•	P	'	p
0	0	0	1	1	1	1	SOH	DC1	!	1	A	Q	o	q
0	0	1	0	0	2	2	STX	DC2	"	2	B	R	b	r
0	0	1	1	1	3	3	ETX	DC3	#	3	C	S	c	s
0	1	0	0	0	4	4	EOT	DC4	\$	4	D	T	d	t
0	1	0	1	1	5	5	ENQ	NAK	%	5	E	U	e	u
0	1	1	0	0	6	6	ACK	SYN	&	6	F	V	f	v
0	1	1	1	1	7	7	BEL	ETB	(APOS)	7	G	W	g	w
1	0	0	0	0	8	8	BS	CAN	(8	H	X	h	x
1	0	0	1	1	9	9	HT	EM)	9	I	Y	i	y
1	0	1	0	0	10	10	LF	SUB	*	:	J	Z	j	z
1	0	1	1	1	11	11	VT	ESC	+	;	K	[k	{
1	1	0	0	0	12	12	FF	FS	,	<	L	\	l	
1	1	0	1	1	13	13	CR	GS	-	=	M]	m	}
1	1	1	0	0	14	14	SO	RS	.	>	N	^	n	~
1	1	1	1	1	15	15	SI	US	/	?	O	—	o	DEL

Note: Bit position a_8 (not shown), shall be generated, such that, the character shall have an odd number of logical 1 bits.

TABLE II. Mode VI data, control, and framing 8 bit environment character set.

Bits		a ₈ a ₇ a ₆ a ₅				0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1															
		a ₄ a ₃ a ₂ a ₁				0 0 0 0 1 1 1 1 0 0 0 0 1 1 1 1															
		a ₀				0 0 1 0 0 0 1 0 0 1 0 1 0 1 0 1															
		Column	Row																		
0 0 0 0		0	0	DLE	SP	48F	␣	80F*	96F	P	MUL		32F	␣	64F	P	ˆ	112F			
0 0 0 1		1	1	SOM		33F	1	65F*	Q	a	113F	SOM _F	DC1	1	49F	A	81F	97F	q		
0 0 1 0		2	2	STX	RM _F	34F	2	66F*	R	b	114F	STX _F	DC2	"	50F	B	82F	98F	r		
0 0 1 1		3	3	ETX _F	DC3	#	51F	C	83F*	99F	s	ETX	DC3 _C	35F	3	67F*	S	c	115F		
0 1 0 0		4	4	EOT		36F	4	68F*	T	d	116F		DC4	\$	52F	D	84F	100F	t		
0 1 0 1		5	5		NAK	%	53F	E	85F	101F	u	ENQ	NAK _C	37F	5	69F*	U	e	117F		
0 1 1 0		6	6	ACK _C	SYN	&	54F	F	86F	102F	v	ACK	SYN _C	38F	6	70F*	V	f	118F		
0 1 1 1		7	7	BEL	ETB _F	39F	7	71F*	W	g	119F	INV _C	ETB	(APOS)	55F	G	87F	103F	w		
1 0 0 0		8	8	BS	CAN _C	40F	8	72F*	X	h	120F	CAN _C	CAN	(56F	H	88F	104F	x		
1 0 0 1		9	9		EM)	57F	I	89F	105F	y	HT	EM _C	41F	9	73F	Y	1	121F		
1 0 1 0		10	10		SUB	*	58F	J	90F	106F	z	LF	MC _C	42F	:	74F*	Z	j	122F		
1 0 1 1		11	11	VT		43F	:	75F*	[k	123F	VT _C	ESC	+	59F	K	91F	107F	(
1 1 0 0		12	12		FS	.	60F	L	92F	108F	!	FF	FS _C	44F	<	76F	\	1	124F		
1 1 0 1		13	13	CR	GS _C	45F	-	77F*]	m	125F		GS	-	61F	M	93F	109F)		
1 1 1 0		14	14	SO	WBT _C	46F	>	78F	/	n	126F		RS	.	62F	N	94F	110F	~		
1 1 1 1		15	15		US	/	63F	0	95F	111F	DEL	SI		47F	?	79F	_	o	127F		

NOTES:

 = not used at this time, available for future use.

Subscript C = Control Character

Subscript F = Frame Character

* Denotes dual function code, i.e., RM or SEL code.

All BNs are also Control Codes when associated with ACK or NAK

65F also used as SEL CHARACTER A

66F also used as SEL CHARACTER B

67F also used as SEL CHARACTER C

68F also used as SEL CHARACTER D

69F also used as SEL CHARACTER E

70F also used as SEL CHARACTER F

71F also used as SEL CHARACTER G

72F also used as SEL CHARACTER H

74F also used as SEL CHARACTER J

75F also used as SEL CHARACTER K



77F also used as SEL CHARACTER M

80F also used as SEL CHARACTER P


83F also used as SEL CHARACTER S

MIL-STD-188-116-4

MIL-STD-188-116-4

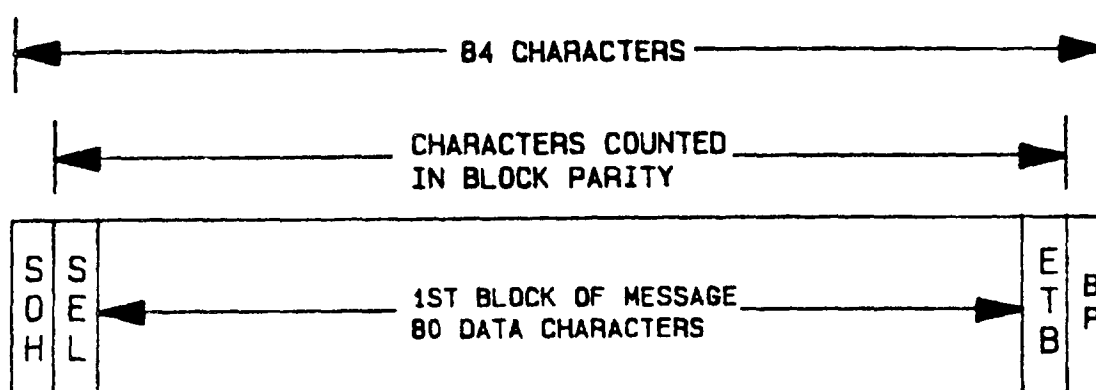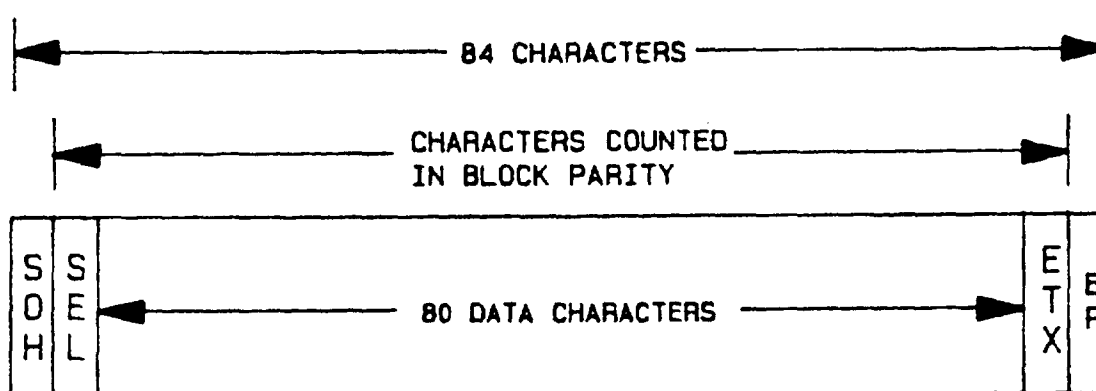FIGURE 1. Mode VI - normal block - 1st block of message.FIGURE 2. Mode VI - normal block - one block message.

MIL-STD-188-116-4

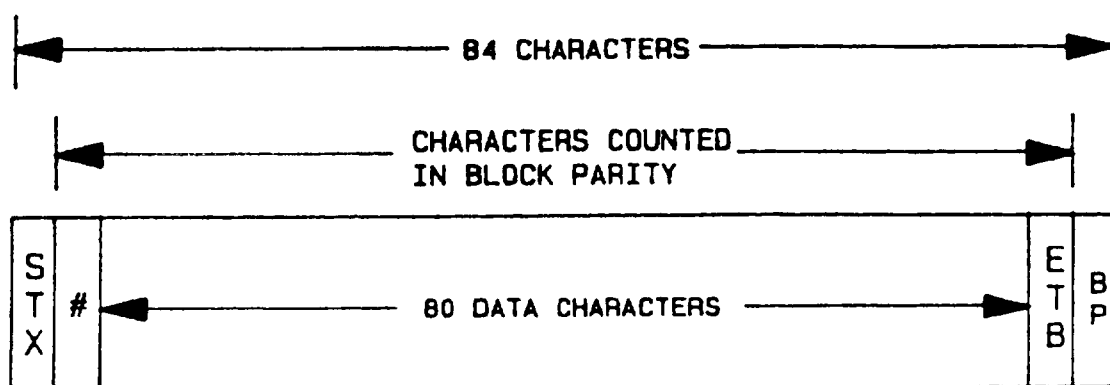

NOTE: # = Block number

FIGURE 3. Mode VI - normal block - text block.

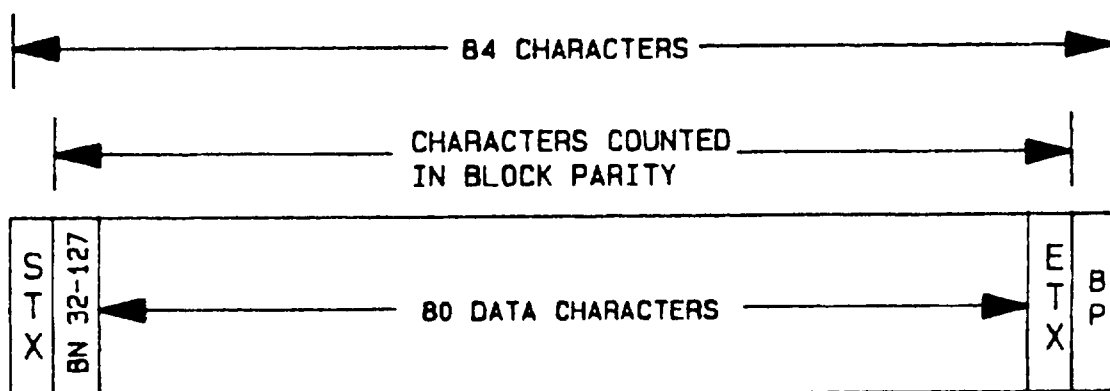


FIGURE 4. Mode VI - normal block - last block of message - test block.

MIL-STD-188-116-4

5. DETAILED REQUIREMENTS

5.1 Mode VI protocol. This document describes an information exchange protocol for a synchronous transmission system. The protocol provides for duplex exchange capability, automatic acknowledgment of receipt of message blocks, automatic error detection capability with subsequent retransmission, message block accountability, and channel synchronization, with provision to compensate for long haul path delay.

5.2 Mode VI message block and message block groups. Messages transmitted using the Mode VI protocol shall be divided into message blocks and message block groups. Block groups shall consist of 16, 32, 64, or 96 blocks. Each message block shall consist of no more than 80 data characters and four framing characters (see figures 1, 2, 3 and 4). Each character of the Mode VI block shall consist of eight bits. No idle or control characters shall be sent within a message block except end of medium control character (EM) as noted in 5.6.

5.3 Message block structure. Message blocks shall consist of normal blocks or short blocks.

5.3.1 Normal message blocks. Normal blocks shall contain 80 data characters and four framing characters (see figures 1, 2, 3, and 4).

5.3.2 Short message blocks. Short message blocks shall consist of from 0 to 79 data characters (see figures 5 through 12) and four framing characters and an EM control character. The total length of the short message block may vary from 5 to 84 characters. Short blocks may be used at any time and may be intermixed with normal blocks. The criteria to transmit short blocks shall be specified in the applicable procurement document. All Mode VI systems shall be capable of accepting any length short block.

5.4 Data formats. The protocol shall support the following data codes in the data portion of each block.

- a. American Standard Code for Information Interchange (ASCII) and the Mode VI data character set (odd number of 1 bits per character, see tables I and II).
- b. Other data codes and binary bit streams.

MIL-STD-188-116-4

5.4.1 ASCII. The protocol shall support the synchronous ASCII character set (see table I) with odd parity for data. This ASCII set correlates to the Mode VI data character set (see table II).

5.4.2 Other data codes and binary bit streams. Other data codes such as Binary Coded Decimal (BCD), Extended Binary Coded Decimal Interchange Code (EBCDIC), FIELDATA, etc., and binary bit streams such as PIXEL codes in digital facsimile shall be supported as seven bit segments with an eighth bit added to produce an odd number of logical 1 bits. Where a segment does not contain seven bits, the remainder of the segment shall be coded as logical 1 bits (see appendix C).

5.5 Framing characters. All framing characters with the exception of block parity (BP), shall have an even number of 1 bits (see tables II and III). The even number of 1 bits per character (and their position) shall distinguish framing characters from data characters (see tables I and II). The following subparagraphs define the framing characters.

5.5.1 Start of header (SOH). SOH shall be the first framing character of the first (header) block of a message. There shall be only one SOH per message. The SOH shall be followed by the select (SEL) character (see figures 1, 2, 6, and 7 and tables II and III).

5.5.2 Select (SEL) character. The SEL character shall be the second framing character of the first block of a message. Allowable SEL characters are identified in tables III and IV. SEL characters are used to define media and format in which blocks are to be output by the receiver.

5.5.3 Start of text (STX). STX shall be the first framing character of all blocks after the first block of a message (see figures 3, 4, 5, 8, and 9). STX shall be followed by a block number (BN).

5.5.4 Block number (BN). A BN shall be the second framing character of all blocks, after the SOH block. The numbering sequence shall be as shown in tables II and III. Blocks within a group shall be numbered consecutively from number 32 up to a BN equal to 31 plus the size of the transfer permitted or the BN of the ETX block. The block following the SOH block shall be numbered 33.


MIL-STD-188-116-4

5.5.5 End of transmission block (ETB). ETB shall be the third framing character of all blocks except the last block of a message. ETB shall be the 83rd position of a normal block or following the EM in a short block (see figures 1, 3, 6, and 8). ETB shall be followed by BP.

5.5.6 End of text (ETX). ETX shall be the third framing character of the last block of a message. ETX shall be the 83rd character position of the last normal block of a message or following the EM if a short block (see figures 2, 4, 5, 7, and 9). ETX shall be followed by BP.

5.5.7 Block parity (BP). BP shall be the last framing character of every block in the message. BP shall be formed by the binary addition without carry (modulo two) of each of the bits in each row of a block starting with the second framing character (see figure 5) including all data characters, the EM character, if used, and ETB or ETX. The summation shall result in a character of odd or even number of logical 1 bits. The receiving terminal shall generate the binary summation of each received character starting with the second character of each block. When ETB or ETX is detected, the next character shall be compared with the receiver generated BP. If the received BP character and the receiver generated summation are not equal, a negative acknowledgment (NAK) sequence shall be sent.





MIL-STD-188-116-4

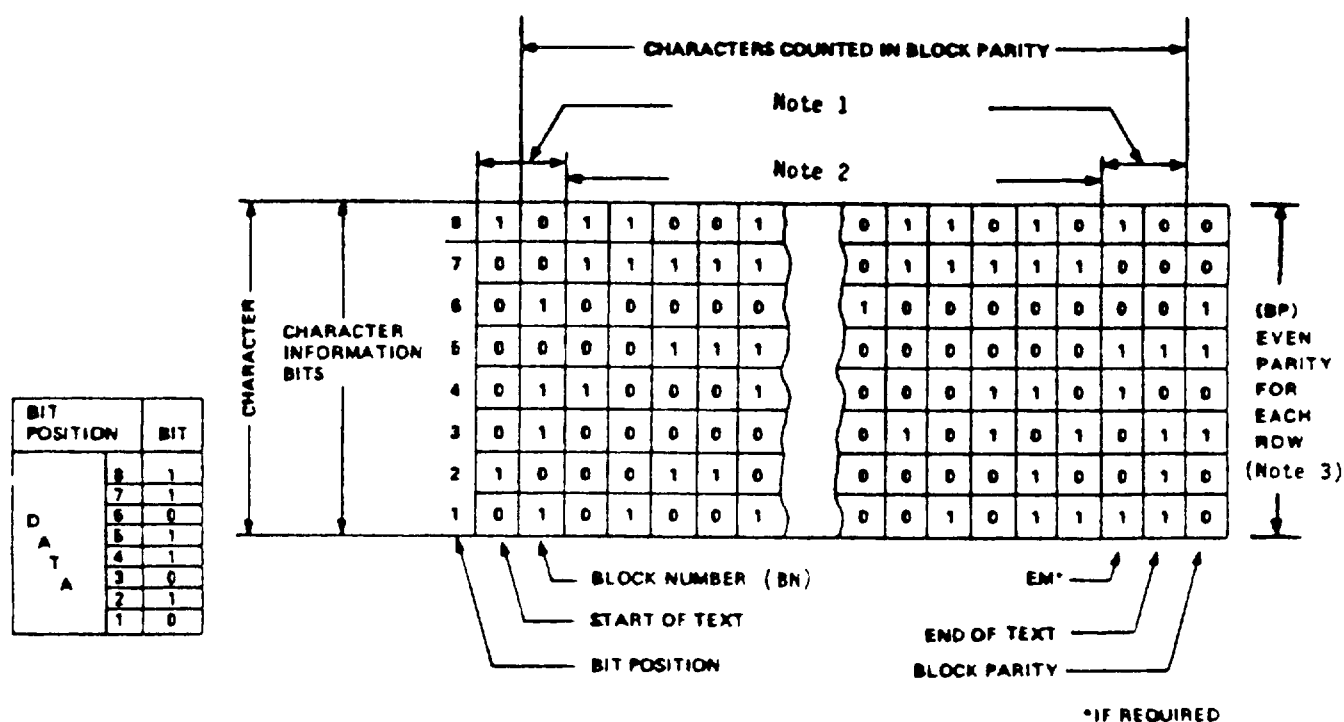

- Notes:
1. Even number of logical 1 bits per octet(character).
 2. Odd number of logical 1 bits per octet(character).
 3. Even number of logical 1 bits per row.

FIGURE 5. Parity checking code rules for Mode VI message blocks.

MIL-STD-188-116-4

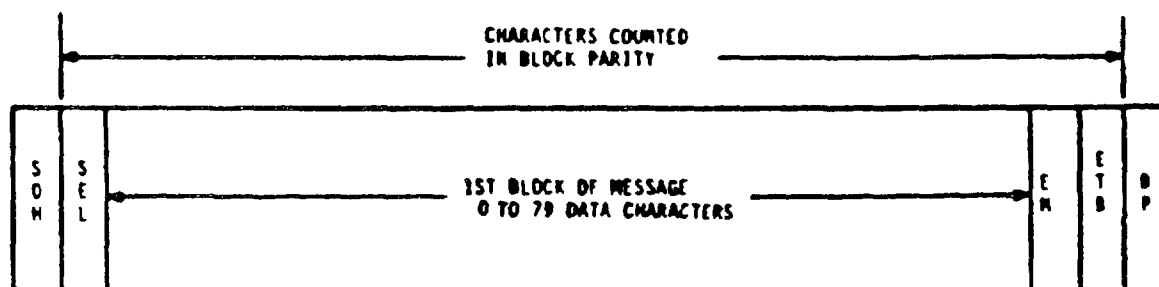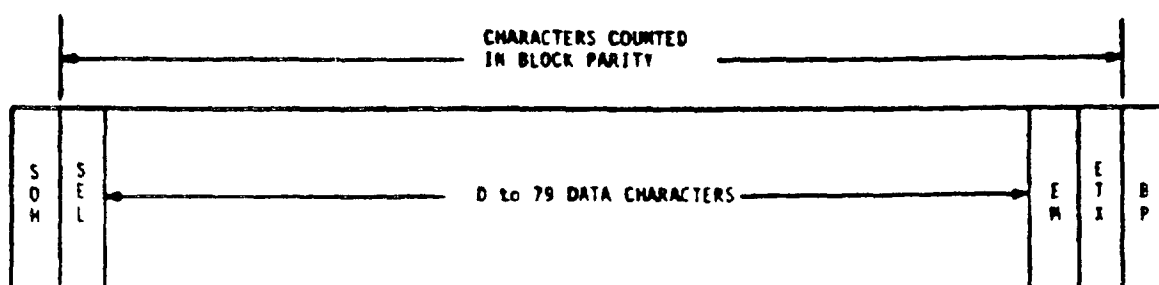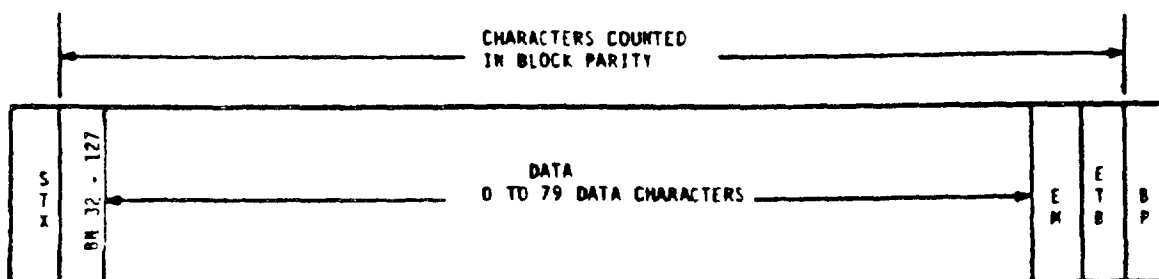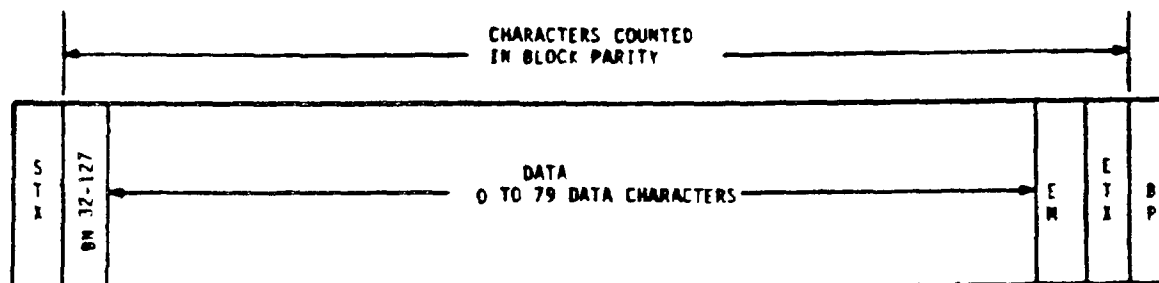FIGURE 6. Mode VI - short block - 1st block of message.FIGURE 7. Mode VI - short block - one block message.FIGURE 8. Mode VI - short block - text block.FIGURE 9. Mode VI - short block - last block of message - text block.

MIL-STD-188-116-4

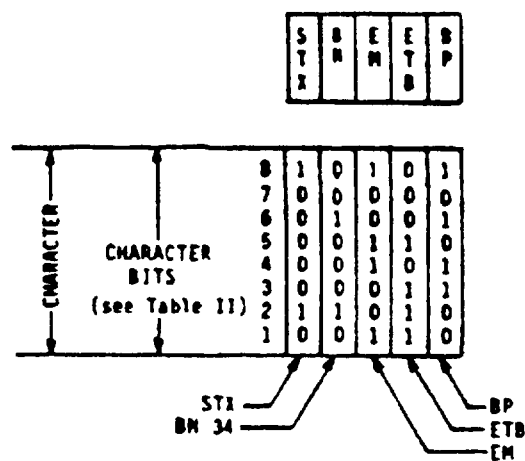


FIGURE 10. Example of EM block.

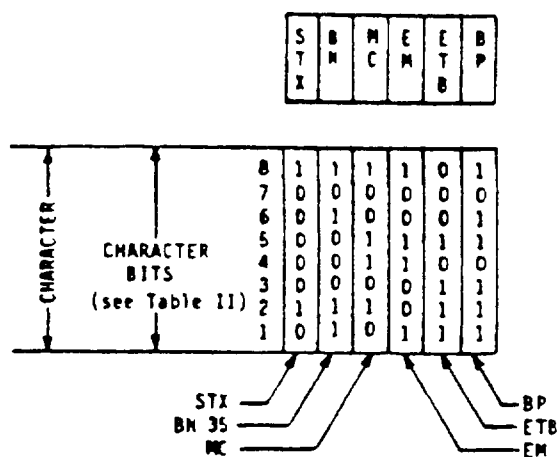


FIGURE 11. Example of MC block beginning/end of binary text.

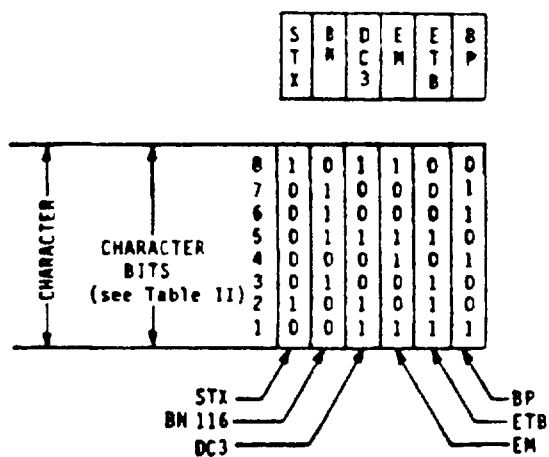


FIGURE 12. Example of DC3 block - end of record.

MIL-STD-188-116-4

TABLE III. Mode VI. 8 bit control and framing codes.

<div style="display: flex; align-items: center;"> <div style="border: 1px solid black; padding: 2px; margin-right: 5px;"> a_7 a_6 a_5 a_4 a_3 a_2 a_1 a_0 </div> <div style="display: flex; flex-direction: column; align-items: center;"> <div style="margin-bottom: 5px;">\rightarrow</div> <div style="margin-bottom: 5px;">\rightarrow</div> <div style="margin-bottom: 5px;">\rightarrow</div> <div style="margin-bottom: 5px;">\rightarrow</div> <div style="margin-bottom: 5px;">\rightarrow</div> <div style="margin-bottom: 5px;">\rightarrow</div> <div style="margin-bottom: 5px;">\rightarrow</div> <div style="margin-bottom: 5px;">\rightarrow</div> </div> <div style="display: flex; align-items: center;"> <div style="border: 1px solid black; padding: 2px; margin-right: 5px;"> Bits </div> <div style="display: flex; flex-direction: column; align-items: center;"> <div style="margin-bottom: 5px;">\downarrow</div> <div style="margin-bottom: 5px;">\downarrow</div> <div style="margin-bottom: 5px;">\downarrow</div> <div style="margin-bottom: 5px;">\downarrow</div> <div style="margin-bottom: 5px;">\downarrow</div> <div style="margin-bottom: 5px;">\downarrow</div> <div style="margin-bottom: 5px;">\downarrow</div> <div style="margin-bottom: 5px;">\downarrow</div> </div> </div> </div>					COLUMNS									
							0 0 0	0 0 1	0 1 0	0 1 1	1 0 0	1 0 1	1 1 0	1 1 1
							0	1	2	3	4	5	6	7
0	0	0	0	0					32	48	64	80*	96	112
0	0	0	1	1			SOH		33	49	65*	81	97	113
0	0	1	0	2			STX	RM	34	50	66*	82	98	114
0	0	1	1	3			ETX	DC3	35	51	67*	83	99	115
0	1	0	0	4					36	52	68*	84	100	116
0	1	0	1	5				NAK	37	53	69*	85	101	117
0	1	1	0	6			ACK	SYN	38	54	70*	86	102	118
0	1	1	1	7			INV	ETB	39	55	71*	87	103	119
1	0	0	0	8			CAK	CAN	40	56	72*	88	104	120
1	0	0	1	9				EM	41	57	73	89	105	121
1	0	1	0	10				MC	42	58	74*	90	106	122
1	0	1	1	11			VT		43	59	75*	91	107	123
1	1	0	0	12				FS	44	60	76	92	108	124
1	1	0	1	13				GS	45	61	77*	93	109	125
1	1	1	0	14				WBT	46	62	78	94	110	126
1	1	1	1	15					47	63	79	95	111	127

NOTES: = not used at this time, available for future use.

Bit position ^a8 (not shown), shall be generated, such that, the character has an even number of logical 1 bits.

* Denotes dual function code, i.e., BN or SEL code.

All BNs are also Control Codes when associated with ACK or NAK

65 also used for SEL character A
 66 also used for SEL character B
 67 also used for SEL character C
 68 also used for SEL character D
 69 also used for SEL character E
 70 also used for SEL character F
 71 also used for SEL character G
 72 also used for SEL character H
 74 also used for SEL character J
 75 also used for SEL character K
 77 also used for SEL character M
 80 also used for SEL character P
 83 also used for SEL character S

MIL-STD-188-116-4

TABLE IV. Mode VI select framing characters.

Select Character	Code								Identification
	a ₈	a ₇	a ₆	a ₅	a ₄	a ₃	a ₂	a ₁	
A	0	1	0	0	0	0	0	1	ITA#2.
B	0	1	0	0	0	0	1	0	Identifies the source transmission tape as being 7 track tape.
C	1	1	0	0	0	0	1	1	Identifies the source transmission tape as being 9 track tape.
D	0	1	0	0	0	1	0	0	Card format
E	1	1	0	0	0	1	0	1	Reserved for future use.
F	1	1	0	0	0	1	1	0	Switch card flash or higher precedence message identification. Activate operator alarm.
G	0	1	0	0	0	1	1	1	Reserved for future use.
H	0	1	0	0	1	0	0	0	Mode VI data code.
J	1	1	0	0	1	0	1	0	Reserved for future use.
K	0	1	0	0	1	0	1	1	Reserved for future use.
M	0	1	0	0	1	1	0	1	Reserved for future use.
P	0	1	0	1	0	0	0	0	Reserved for future use.
S	0	1	0	1	0	0	1	1	Mode VI data code. Switch flash or higher precedence messages identification. Activate operator alarm.

MIL-STD-188-116-4

5.6 Special short blocks. The Mode VI protocol shall implement special short blocks to support other data codes and binary bit streams.

5.6.1 End of medium (EM) block. This special short block shall consist of five characters: STX, BN, EM, ETB, and BP (see figure 10).

5.6.2 Mode change (MC) block. This special short block shall consist of six characters: STX, BN, MC, EM, ETB, and BP. The MC character shall have an even number of logical 1 bits. This block shall be used to define the beginning and end of the binary data portion of a message (see figure 11).

5.6.3 Record mark (DC3) block. (see figure 12 and appendix C).

5.7 Message block groups. Message block groups shall consist of 16, 32, 64, or 96 blocks. A block group containing an ETX block shall end with that block.

MIL-STD-188-116-4

5.8 Message transmission control. Message transmission using the Mode VI protocol shall be controlled by the exchange of control characters between the transmitter and receiver. Control characters shall indicate positive or negative receipt of blocks and block groups, reject blocks, cancel transmission, stop transmission, resume transmission, and establish channel synchronization. Control character sequence shall be initiated within ten character times after a request for answer, if no transmission is in progress, or upon completion of the current block transmission. The receiver shall recognize the sequence when two contiguous control characters are detected, except for positive or negative acknowledgment sequences which require detection of four contiguous characters (see table V).

5.8.1 Control character response. Control characters (CC) shall be sent by the receiver, in response to request for answer from the transmitter. The requests for an answer are ETB BP or ETX BP, File Separator (FS), and Cancel Message (CAN). When an end of block (ETB BP) or end of text (ETX BP) is received, the receiver shall respond with an ACK, NAK, reject message (RM), or wait before transmitting (WBT) sequence. When an FS sequence is received, the receiver shall respond with a vertical tabulation (VT), RM, or WBT sequence. When a cancel message (CAN) sequence is received, the receiver shall respond with CAN acknowledgment (CAK) or WBT sequence. Table V illustrates a four character ACK and NAK sequence.

5.8.1.1 Positive acknowledgment (ACK). ACK 32 through ACK 127 sequence shall be sent by the receiver to signal the transmitter that the corresponding numbered block has been received correctly. The ACK sequence shall consist of four contiguous characters, ACK ACK BN BN, where BN BN is characters 32 32 through 127 127 (see tables II, III and V).

5.8.1.2 Negative acknowledgment (NAK). NAK 32 through NAK 127 sequence shall be transmitted by the receiver if either a character error is detected or BPs do not match after the receipt of a properly framed block. NAK sequence is sent when an answer is requested and not at the time of detection of the error. The NAK sequence shall consist of four characters NAK NAK BN BN, where BN BN is characters 32 32 through 127 127 (see tables II, III, and V).

MIL-STD-188-116-4

TABLE V. Example of Mode VI acknowledgment sequences.

SEQUENCES	CHARACTER BIT POSITION			
	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1	8 7 6 5 4 3 2 1
ACK 32	ACK	ACK	32	32
	0 0 0 0 0 1 1 0	0 0 0 0 0 1 1 0	1 0 1 0 0 0 0 0	1 0 1 0 0 0 0 0
NAK 32	NAK	NAK	32	32
	1 0 0 1 0 1 0 1	1 0 0 1 0 1 0 1	1 0 1 0 0 0 0 0	1 0 1 0 0 0 0 0


 32 bits (4 contiguous characters)

MIL-STD-188-116-4

5.8.1.3 Wait before transmitting (WBT). WBT sequence shall consist of twenty contiguous WBT characters. A WBT sequence shall be sent by the receiving device under the following conditions:

- a. As an answer to a properly framed block to inform the transmitter to temporarily suspend block transmission.
- b. As an answer to File Separator (FS) or CAN control sequence, if a reply cannot be sent within one second.

5.8.1.3.1 Restart. Restart of a block transmission shall be initiated by the absence of WBT sequences for ten seconds or the receipt of a Group Separator (GS) sequence. WBT sequence shall be transmitted at one block time or one second intervals.

5.8.1.4 File separator (FS). Twenty contiguous FS characters shall be sent by a transmitter to signify receipt of positive acknowledgment of all line blocks transmitted in the block group. The valid responses to FS are WBT, VT, or RM. The acknowledgment of FS is VT. The FS sequence shall be repeated at one second intervals until a response is received or a ten second time-out condition is indicated.

5.8.1.5 Vertical tabulation (VT). Twenty contiguous VT control characters shall be sent by the receiver in response to FS. Receipt of VT characters shall inform the transmitter transmitting the FS that the block group has been acknowledged. A VT sequence sent in response to the last group of a message shall signify to the transmitter that the message is acceptable. Once a VT sequence has been sent in response to an FS sequence for the last group of a message, an RM shall not be sent by the receiver with the intent of rejecting the previous message. A received CAN sequence shall not cancel the previously received message. If a WBT sequence is not received within ten seconds after the transmitter has received a VT sequence, the transmitter shall automatically continue transmission.

5.8.1.6 Group separator (GS). Twenty contiguous GS characters shall be sent by a receiver to signify that it is ready to receive another group of message blocks. GS shall also be sent to continue receiving message blocks after the receiver has transmitted WBT.

MIL-STD-188-116-4

5.8.1.7 Reject message (RM). Twenty contiguous RM control characters shall be sent by the receiver in response to a properly framed block or an FS sequence to inform the transmitter that there is a detected uncorrectable condition. An RM sequence shall be sent by a receiver when an FS sequence has been received and the current block group does not contain the required number of blocks. Upon receipt of the RM sequence, the transmitter shall cause the message to be canceled. The RM sequence shall be retransmitted upon receipt of each FS sequence and be retransmitted at five second intervals until a CAN sequence is received (see table VI). An RM sequence shall be sent:

- a. After receipt of the first BP character of a block, which was not preceded by a CAN sequence.
- b. For equipment failure.
- c. Upon return from self test.

































5.8.1.8 Cancel (CAN). Twenty contiguous CAN characters shall be sent by a transmitter to direct the receiver to discard the message currently being received. The CAN sequence shall also be initiated upon receipt of an RM sequence (see tables VI and VII). The valid response to CAN is WBT or CAK. The CAN sequence shall be repeated at five second intervals until a response is received or a ten second time-out condition is indicated. A CAN sequence shall be sent:

- a. Prior to message transmission following terminal initialization.
- b. For equipment failure.
- c. Upon return from self test (see table VII).
- d. In response to a received RM sequence.

5.8.1.9 Cancel acknowledgment (CAK). Twenty contiguous CAK control characters shall be sent by the receiving device in response to a CAN to acknowledge the receipt of the CAN. A CAN shall be accepted and acknowledged within and between messages. A between message CAK shall indicate receipt of the CAN and shall not cause cancellation of the previous message. A within message CAK sequence shall inform the transmitter sending the CAN that the message being received has been discarded and that it may initiate a new message transmission.

MIL-STD-188-116-4

TABLE VI. Mode VI - reject and cancel message procedures.

STATE		Receiver (RCVR)	Transmitter (XMTR)	Description
TRAFFIC	IDLE			No data to send. New circuit established by XMTR.
	CIRCUIT ESTABLISHMENT (REJECT MESSAGE)			XMTR begins transfer of message blocks.
				Since CKT has not been established RCVR rejects incoming message and forces XMTR to send CAN sequence.
				XMTR detects RM and cancels MSG. RCVR detects CAN, discards MSG being received and sends CAK.
				XMTR and RCVR sends SYN to maintain synchronization.
TRAFFIC	MESSAGE CANCELLATION			XMTR begins transfer of msg blocks group(s). RCVR sends response to each received message block as blocks are received.
				XMTR sends last block of group.
				RCVR sends response to each received MSG block.
				XMTR detects uncorrectable error in MSG or response received and cancels MSG.
				RCVR detects CAN, discards MSG being received and sends CAK. XMTR and RCVR sends SYN to maintain synchronization.
TRAFFIC	REJECT MESSAGE			XMTR begins transfer of MSG block group(s).
				RCVR sends response to each MSG block as blocks are received. XMTR sends last block of group.
				RCVR detects uncorrectable error in message and sends RM sequence.
TRAFFIC	IDLE			XMTR detects RM and cancels MSG.
				RCVR detects CAN, discards MSG being received and sends CAK.
TRAFFIC	IDLE			XMTR & RCVR send SYN to maintain synchronization.

MIL-STD-188-116-4

TABLE VII. Normal Mode VI operations.

STATE	Receiver (RCVR)	Transmitter (XMTR)	Description
IDLE		SYN	No data to send. XMTR and RCVR send SYN New circuit established by XMTR.
	SYN		
		CAN	XMTR sends CAN sequence.
CHANNEL ESTABLISHMENT	CAN		RCVR detects CAN and sends CAK. RCVR clears any incomplete msgs.
		SYN	XMTR received CAK and continues sending SYN character.
	SYN		RCVR & XMTR are in SYN sync. RCVR & XMTR are in traffic state.
DATA TRANSFER	SYN	Transmit Msg Blocks	XMTR begins transfer of message block group(s).
	SYN/NAK-#/ACK-#	Transmit Msg Blocks	RCVR sends response to each received message block as blocks are received. XMTR sends last block of group.
	SYN/NAK-#/ACK-#	SYN	XMTR checks all responses for transmitted messages block group.
	SYN/NAK-#/ACK-#	Retransmit Msg Blocks	XMTR retransmits message blocks which were not positively acknowledged (ACK).
	SYN	SYN	XMTR has received ACKs for all blocks in the group.
	SYN	FS	XMTR transmits 20 FSs.
	VT	SYN	RCVR transmits 20 VT characters to acknowledge FS. RCVR sends SYN if GS cannot be sent immediately.
	SYN	SYN	XMTR prepares to send next block group upon receipt of VT.
	GS	SYN	RCVR sends 20 GS to indicate ability to continue receiving.
	SYN	SYN	XMTR continues traffic state or reaches end of message.

MIL-STD-188-116-4

5.8.1.10 Invalid (INV) sequence. The INV sequence shall be transmitted as twenty contiguous characters. The INV sequence shall be transmitted whenever an unexpected ACK, NAK, VT, or CAK sequence is received.

5.8.1.11 Idle line, synchronization (SYN). SYN shall be transmitted continuously to maintain character synchronization whenever data or control characters are not being transmitted. No less than six contiguous SYN characters shall be transmitted between Mode VI message blocks.

5.9 Traffic state. Tables VI and VII illustrate the normal Mode VI circuit establishment and transfer of data.

5.9.1 Transmitter. The transmitter shall transmit no more than the number of blocks specified by the selected block group size. After the transmission of a block group, the transmitter shall ensure that all blocks of the current group have been acknowledged before transmitting the message blocks of the next block group.

5.9.2 Receiver. The receiver shall send ACK or NAK for each block received.

5.9.3 Message block retransmission.

5.9.3.1 NAK blocks. Retransmission of NAK blocks shall be accomplished at the next available block time.

5.9.3.2 Unacknowledged blocks. Upon completion of the transmission of all message blocks in a block group, the transmitter shall retransmit all message blocks for which no acknowledgments have been received. After all unacknowledged blocks have been retransmitted, the process shall be repeated after a one second interval for all the then remaining unacknowledged blocks.

5.9.4 Receipt of a duplicate block. If a block is received which has been previously acknowledged, the receiver shall assume that the ACK sequence was not received by the transmitter. This block shall be acknowledged by the receiver. The duplicate block shall be discarded.

5.9.5 Excessive block retransmission. If a transmitter transmits a block eight times without receiving an ACK or WBT, the transmitter shall alarm.

MIL-STD-188-116-4

5.9.6 Block framing errors. Errors in framing characters or in their expected position shall cause the receiver to ignore the block (see table VIII). Once a frame error has been detected, the receiver shall discard present block accumulation and begin next message block accumulation.

5.9.7 Excessive unexpected characters. The receiver shall consider the receipt of 170 or more contiguous unexpected characters as excessive unexpected characters and shall alarm. When the alarm condition occurs, the protocol shall attempt to re-establish synchronization between systems.

5.10 Mode VI traffic-state. Figures 13 and 14 and tables VI and VII show the functions required to transmit and receive a Mode VI message. The Mode VI message transmission diagram (figure 13) shows the transmission of Mode VI line block groups and the protocol required for validation of the groups. The Mode VI message reception diagram (figure 14) shows the functions required to accept or reject incoming line block groups and the protocol requirements. The specific inputs and outputs are shown in figures 13 and 14. The alarms generated for abnormal conditions are depicted and processed, as shown on the traffic state in figures 13 and 14.

5.11 Character and bit transmission. Transmission of Mode VI characters (tables I, II, and III) shall be in accordance with FIPS PUB 17-1, that is, least significant bit first to most significant bit (see tables I, II, and III) a_1 through a_8 in ascending (consecutive) order.

5.12 Mode VI timing and timeouts. Table IX specifies the minimum Mode VI requirement for timing and timeout conditions and actions to be taken for proper operation.

MIL-STD-188-116-4

(This page intentionally left blank)

MIL-STD-188-116-4

TABLE VIII. Mode VI block framing errors.

	Frame Characters (FC)			
	Case #	STX or SOH	SEL or 32 thru N	ETB or ETX
First msg group	1	Not SOH	SEL	N/A
	2	SOH	Not SEL	N/A
	3	Not STX	33 - N	N/A
	4	STX	Not 33 - N	N/A
Other than first msg group	5	Not STX	32 - N	N/A
	6	STX	Not 32 - N	N/A
Any msg group	7	Not first character in block	N/A	N/A
	8	N/A	Not second character in block	N/A
	9	N/A	N/A	Not ETX or ETB
	10	N/A	N/A	ETX but block # is not equal to previously rec'd ETX block
	11	N/A	N/A	ETB but block # is greater than or equal to previously rec'd ETX block
	12	N/A	N/A	Not 83rd character and no EM in block
	13	N/A	N/A	Not 4th thru 83rd character and EM just before FC3

N/A: Not applicable (i.e. Framing Character Correct for this position)

N: 47 for Group Size = 16 blocks; 63 for Group Size = 32; 95 for Group Size = 64; 127 for Group Size = 96

MIL-STD-188-116-4

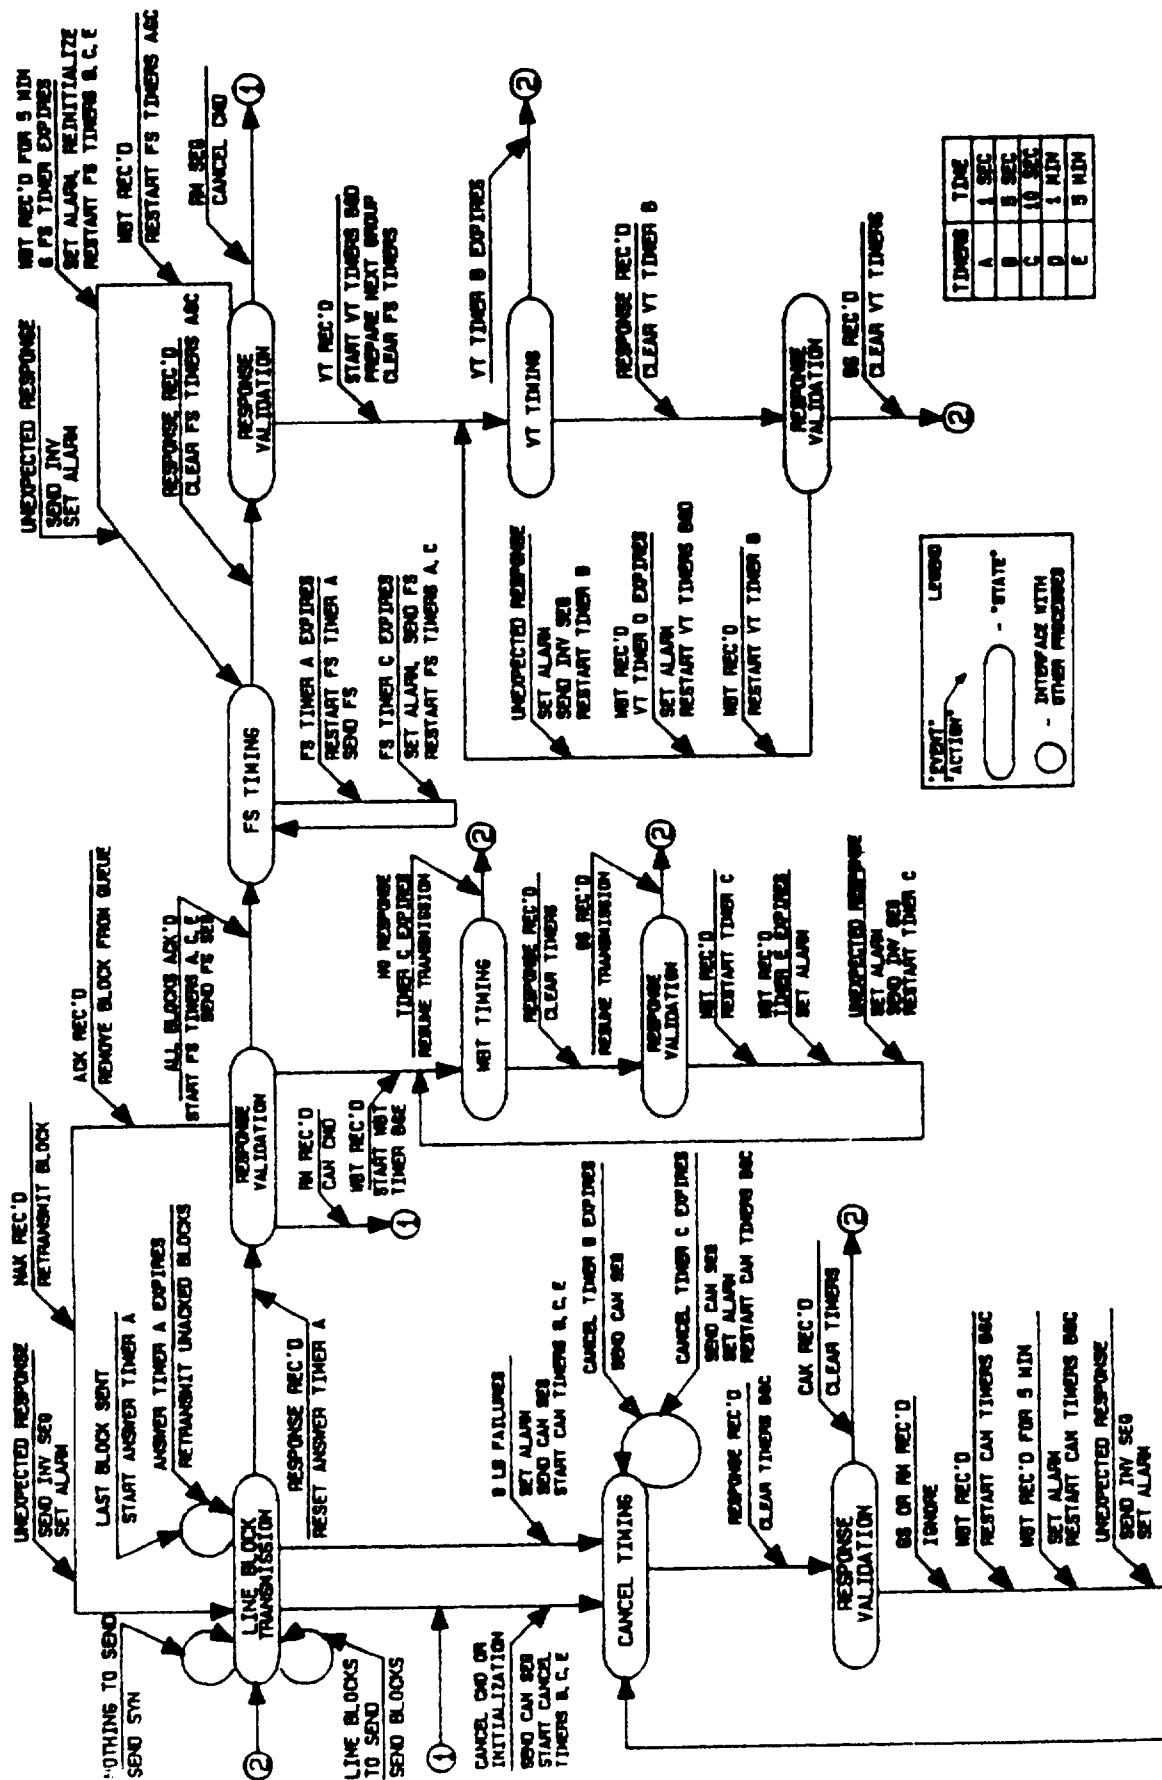


FIGURE 13. Mode VI message transmission.

MIL-STD-188-116-4

TABLE IX. Mode VI timing and timeouts.

FUNCTION	CAUSE	ACTION
WBT	WBT received.	Send only SYN.
	No WBT received for 10 sec.	Restart data transmission.
	5 min of WBT reception.	Alarm.
WBT	WBT transmission.	Send WBT sequence every second.
	For 1 sec no data or CC can be processed.	Send WBT sequence.
	Ready to received data.	Send GS sequence.
FS	FS transmission.	
	ACKs received for all blocks.	Send FS sequence.
	1 sec no VT or WBT.	Send FS sequence.
	10 sec no VT or WBT.	Alarm and send FS sequence.
FS	FS received.	Send VT sequence.
	For 1 sec unable to send VT.	Send WBT. Send WBT every second until VT is sent.
VT	VT transmission.	
	For 1 sec unable to send GS.	Send WBT sequence.
VT	VT received.	
	10 sec of VT.	Alarm.
	10 sec of no VT.	Restart data transmission.

MIL-STD-188-116-4

TABLE 1X. Mode VI timing and timeouts - Continued.

FUNCTION	CAUSE	ACTION
BLOCKS	1 sec after transmission of all blocks.	Transmit all blocks not ACK'd.
	All ACK2 blocks transmitted at least 8 times and all blocks not ACK'd.	Alarm.
RM	RM transmitted	
	5 sec.	Send RM, accept only WBT or CAN.
	10 sec.	Send RM and Alarm.
Y	RM received.	Send CAN.
CAN	CAN transmitted	
	5 sec.	Send CAN.
	10 sec.	Send CAN and Alarm.
CAN	CAN received.	Send CAK.
	CAN received unable to send CAK in one sec.	Send WBT. Send WBT every second until CAK is sent.
GS	GS transmitted.	Send GS after transmission of VT when ready to accept data.
		Transmission of GS sequence eliminates WBT sequence.
GS	GS received.	Transmitter continues sending data.

MIL-STD-188-116-4

(This page intentionally left blank)

MIL-STD-188-116-4

6. INFORMATION FOR GUIDANCE ONLY

(This section contains information of a general or explanatory nature which is helpful, but not mandatory.)

6.1 Mode VI throughput calculations. The following is the equation to be used to calculate the best theoretical throughput time to transmit a Mode VI message and the assumptions used to generate the equation:

- a. No errors are generated or detected.
- b. All blocks of a message except for last block have an equal number of bits.
- c. All responses are given in ten character times.
- d. There are six SYN characters between each block.

$$T = \left[(G - 1) \left(2RT + \frac{(B + 608)}{R} \right) + \left(2RT + \frac{(BL + 608)}{R} \right) \right] \text{SEC}$$

T = time to transmit a Mode VI message in seconds
 G = number of block groups required to transmit the message
 B = number of bits in a block group except for last block group
 BL = number of bits in last block group
 RT = round trip time in seconds
 R = data rate in bps.

608 = (10 ch to process last block + 4 ch ACK seq + 10 ch to process ACK + 12ch to process FS + 20 VTch + 20 GSch) x 8 bits/character.

6.2 Examples. The following subparagraphs are examples of the time to transmit a 6900 character message for each of the different block groups for RT equaling 0 sec, 0.5 sec, and 1 sec.

MIL-STD-188-116-4

6.2.1 96 Block group. The following is the equation used to calculate transmission time for 96 block group and a tabulation of data rate vs. time to transmit the message;

where $B = 0$

$$BL = [86 \text{ block/group (90ch/block} \times 8 \text{ bits/ch)} + 1 \text{ block/group (25ch/block} \times 8 \text{ bits/ch)}] \text{ bit/group}$$

$$BL = [86(720) + (200)] \text{ bits/group} = [62120] \text{ bits/group}$$

$$T = \left[(G-1) \left(2RT + \frac{B + 608}{R} \right) + \left(2RT + \frac{BL + 608}{R} \right) \right] \text{ SEC}$$

$$T = \left[(1-1) \left(2RT + \frac{0 + 608}{R} \right) + \left(2RT + \frac{62,120 + 608}{R} \right) \right] \text{ SEC}$$

$$T = \left[(0) \left(2RT + \frac{608}{R} \right) + \left(2RT + \frac{(62,722)}{R} \right) \right] \text{ SEC}$$

$$T = \left[2RT + \frac{62,722}{R} \right] \text{ SEC}$$

Data Rate (bps)	Mode VI Transmission Time in Seconds		
	RT = 1 sec	RT = 0.5 sec	RT = 0 sec
16000	5.93	4.93	3.93
9600	8.54	7.54	6.54
8000	9.85	8.85	7.85
4800	15.07	14.07	13.07
4000	17.69	16.69	15.69
2400	28.14	27.14	26.14
2000	33.37	32.37	31.37
1200	54.28	53.28	52.28

MIL-STD-188-116-4

6.2.2 64 Block group. The following is the equation used to calculate the transmission time of the Mode VI message using a block group size of 64 blocks and a tabulation of data rate vs. time to transmit the message;

Where $B = 64 \text{ blocks/group (90ch/block} \times 8 \text{ bits/ch)} = 46080 \text{ bits/group}$

and

$BL = 22 \text{ blocks/group (90 ch/block} \times 8 \text{ bits/ch)} + 1 \text{ block/group (25 ch/block} \times 8 \text{ bits/ch)} = 16040 \text{ bits/group}$

$$T = \left[(G - 1) \left(2RT + \frac{B + 608}{R} \right) + \left(2RT + \frac{(BL + 608)}{R} \right) \right] \text{ SEC}$$

$$T = \left[(2 - 1) \left(2RT + \frac{46080 + 608}{R} \right) + \left(2RT + \frac{(16040 + 608)}{R} \right) \right] \text{ SEC}$$

$$T = \left[1 \times \left(2RT + \frac{46688}{R} \right) + \left(2RT + \frac{16648}{R} \right) \right] \text{ SEC}$$

$$T = \left[2RT + \frac{46688}{R} + 2RT + \frac{16648}{R} \right] \text{ SEC}$$

$$T = \left[4RT + \frac{63336}{R} \right] \text{ SEC}$$

Data Rate (bps)	Mode VI Transmission Time in Seconds		
	RT = 1 sec	RT = 0.5 sec	RT = 0 sec
16000	7.96	5.96	3.96
9600	10.60	8.60	6.60
8000	11.92	9.92	7.92
4800	17.20	15.20	13.20
4000	19.84	17.84	15.84
2400	30.39	28.39	26.39
2000	35.67	33.67	31.67
1200	56.78	54.78	52.78

MIL-STD-188-116-4

6.2.3 32 Block group. The following is the equation used to calculate the transmission time of the Mode VI message using a block group size of 32 blocks and a tabulation of data rate vs. time to transmit the message:

Where $B = 32 \text{ blocks/group (90 ch/block} \times 8 \text{ bits/ch)} = 23040 \text{ bits/group}$

and

$BL = 22 \text{ blocks/group (90 ch/block} \times 8 \text{ bits/ch)} + 1 \text{ block/group (25 ch/block} \times 8 \text{ bits/ch)} = 16040 \text{ bits/group}$

$$T = \left[(G - 1) \left(2RT + \frac{B + 608}{R} \right) + \left(2RT + \frac{(BL + 608)}{R} \right) \right] \text{ SEC}$$

$$T = \left[(3 - 1) \left(2RT + \frac{23040 + 608}{R} \right) + \left(2RT + \frac{16040 + 608}{R} \right) \right] \text{ SEC}$$

$$T = \left[2 \left(2RT + \frac{23648}{R} + 2RT + \frac{16648}{R} \right) \right] \text{ SEC} = \left[4RT + \frac{47296}{R} + 2RT + \frac{16648}{R} \right] \text{ SEC}$$

$$T = \left[6RT + \frac{63944}{R} \right] \text{ SEC}$$

Data Rate (bps)	Mode VI Transmission Time In Seconds		
	RT = 1 sec	RT = 0.5 sec	RT = 0 sec
16000	10.00	7.00	4.00
9600	12.67	9.67	6.67
8000	14.00	11.00	8.00
4800	19.33	16.33	13.33
4000	21.99	18.99	15.99
2400	32.65	29.65	26.65
2000	37.98	34.98	31.98
1200	59.29	56.29	53.29

MIL-STD-188-116-4

6.2.4 16 Block group. The following is the equation used to calculate the transmission time of the Mode VI message using a block group size of 16 blocks and a tabulation of data rate vs. time to transit the message;

Where BL = 6 blocks/group (90ch/block x 8 bits/ch + 1 block/group (25 ch/block x 8b/ch) = 5520 bits/group

and

$$B = [16 \text{ blocks/group (90 ch/block x 8 bits/ch)}] = 11520 \text{ bits/group}$$

$$T = \left[(G - 1) \left(2RT + \frac{B + 608}{R} \right) + \left(2RT + \frac{(BL + 608)}{R} \right) \right] \text{ SEC}$$

$$T = \left[(6-1) \left(2RT + \frac{11520 + 608}{R} \right) + \left(2RT + \frac{5520 + 608}{R} \right) \right] \text{ SEC}$$

$$T = \left[(5) \left(2RT + \frac{12128}{R} \right) + \left(2RT + \frac{6128}{R} \right) \right] \text{ SEC} = \left[10RT + \frac{60640}{R} + 2RT + \frac{6128}{R} \right] \text{ SEC}$$

$$T = \left[12RT + \frac{66768}{R} \right] \text{ SEC}$$

Data Rate (bps)	Mode VI Transmission Time In Seconds		
	RT = 1 sec	RT = 0.5 sec	RT = 0 sec
16000	16.18	10.18	4.18
9600	18.96	12.96	6.96
8000	20.35	14.35	8.35
4800	25.91	19.91	13.91
4000	28.70	22.70	16.70
2400	39.82	33.82	27.82
2000	44.39	38.39	32.39
1200	66.64	60.64	54.64

MIL-STD-188-116-4

6.3 Key word listing. The following key words and phrases apply to MIL-STD-188-116-4:

- Automatic repeat-request
- Block parity
- Channel control procedures
- Eight bit code
- Eight bit environment character set
- Error detection
- Information exchange
- Line block
- Message block
- Message block groups
- Message protocol
- Mode VI
- Protocol

MIL-STD-188-116-4

APPENDIX A

MEMORANDUM FROM THE UNDER SECRETARY
OF DEFENSE FOR RESEARCH AND ENGINEERING

16 AUGUST 1983

SUBJECT: MANDATORY USE OF MILITARY TELECOMMUNICATIONS
STANDARDS
IN THE MIL-STD-188 SERIES

This appendix contains information related to MIL-STD-188-116-4. Appendix A is a mandatory part of this standard.

MIL-STD-188-110-4
APPENDIX A



RESEARCH AND
ENGINEERING

THE UNDER SECRETARY OF DEFENSE
WASHINGTON, D.C. 20301

16 AUG 1983

MEMORANDUM FOR ASSISTANT SECRETARY OF THE ARMY (INSTALLATIONS, LOGISTICS &
FINANCIAL MANAGEMENT)
ASSISTANT SECRETARY OF THE NAVY (SHIPBUILDING & LOGISTICS)
ASSISTANT SECRETARY OF THE AIR FORCE (RESEARCH DEVELOPMENT
& LOGISTICS)
COMMANDANT OF THE MARINE CORPS
DIRECTOR, DEFENSE COMMUNICATIONS AGENCY
DIRECTOR, NATIONAL SECURITY AGENCY

SUBJECT: Mandatory Use of Military Telecommunications Standards in the
MIL-STD-188 Series

On May 10, 1977, Dr. Gerald Dinneen, then Assistant Secretary of Defense(C3I), issued the following policy statement regarding the mandatory nature of the MIL-STD-188 series telecommunications standards:

"...standards as a general rule are now cited as 'approved for use' rather than 'mandatory for use' in the Department of Defense.

This deference to the judgment of the designing and procuring agencies is clearly appropriate to standards dealing with process, component ruggedness and reliability, paint finishes, and the like. It is clearly not appropriate to standards such as those in the MIL-STD-188 series which address telecommunication design parameters. These influence the functional integrity of telecommunication systems and their ability to efficiently interoperate with other functionally similar Government and commercial systems. Therefore, relevant military standards in the 188 series will continue to be mandatory for use within the Department of Defense.

To minimize the probability of misapplication of these standards, it is incumbent upon the developers of the MIL-STD-188 series to insure that each standard is not only essential but of uniformly high quality, clear and concise as to application, and wherever possible compatible with existing or proposed national, international and Federal telecommunication standards. It is also incumbent upon the users of these standards to cite in their procurement specifications only those standards which are clearly necessary to the proper functioning of the device or systems over its projected lifetime."

This statement has been reviewed by this office and continues to be the policy of the Department of Defense.

MIL-STD-188-116-4

APPENDIX B

LIST OF ABBREVIATIONS AND ACRONYMS USED IN MIL-STD-188-116-4

This appendix contains general information in support of MIL-STD-188-116-4. Appendix B is a non mandatory part of this document.

MIL-STD-188-116-4

APPENDIX B
ABBREVIATIONS AND ACRONYMS

This appendix provides definitions of abbreviations and acronyms used in this document. This appendix is not a mandatory part of this document.

ACK	Positive acknowledgement
ANSI	American National Standards Institute
ARQ	Automatic repeat-request
ASCII	American Standard Code for Information Interchange
AUTODIN	Automatic Digital Network
BCD	Binary Coded Decimal
BER	Bit error ratio
BN	Block number
BP	Block parity
BPS	Bits Per Second
CAK	Cancel acknowledgment
CAN	Cancel message
CC	Control character
CH	Character
CKT	Circuit
CMD	Command
DCA	Defense Communications Agency
DCS	Defense Communications System
DO	Design objective
DoD	Department of Defense
DODISS	DoD Index of Specifications and Standards
EBCDIC	Extended Binary Coded Decimal Interchange Code
EM	End of medium - framing character
EOT	End of transmission
ETB	End of transmission block
ETX	End of text
FC	Framing character
FS	File separator
GS	Group separator
INV	Invalid
ITA2	International Telegraph Alphabet #2
JCS	Joint Chiefs of Staff
JSC	Joint Steering Committee
JTCO	Joint Tactical Communications Office
LB	Line block
MC	Mode change
MIN	Minute
MNCS	National Military Command System
MSG	Message
MSU	Message switching unit
NAK	Negative acknowledgment
RCC	Receive Control Character

MIL-STD-188-116-4
APPENDIX B

RCVR	Receiver
REP	Reply
RM	Reject message
RT	Retransmit message
SEC	Second
SEL	Select character
SOH	Start of header
STX	Start of text
SYN	Idle Line Synchronization
SYNC	Synchronization
TCC	Transmit control character
VT	Vertical Tabulation
WBT	Wait Before Transmitting
XMTR	Transmitter

MIL-STD-188-116-4

(This page intentionally left blank)

MIL-STD-188-116-4

APPENDIX C

DATA CONVERSION TECHNIQUES FOR SYSTEMS
USING NON STANDARD CODES

This appendix contains information in support of MIL-STD-188-116-4. Appendix C is a non mandatory part of this document.

MIL-STD-188-116-4

APPENDIX C

10. GENERAL

10.1 Scope. This appendix defines techniques which may be used for transmitting data using Mode VI protocols by systems which use non standard information interchange codes. The general requirements of section 40 are mandatory, while the specific requirements in section 50 may be used.

10.2 Application. The requirements presented in section 50 may be used as guides in developing information interchange techniques among systems using non standard codes.

10.3 Application guidance. This appendix contains information and techniques which have been successfully used to transmit and receive seven and nine track non standard magnetic tape data. These techniques may be used to satisfy similar non standard transmission requirements. This appendix shall be tailored to suit unique requirements.

20. APPLICABLE DOCUMENTS

Not applicable.

30. DEFINITIONS

Not applicable.

40. GENERAL REQUIREMENTS

40.1 Minimum criteria. Any system or terminal transmitting information using Mode VI protocols shall conform to the following minimum criteria.

- a. The smallest data element shall be the octet defined in section 4 of MIL-STD-188-116-4.
- b. The octets within the data portion of each block shall contain an odd number of one bits.
- c. Framing characters and control characters shall be the character set defined in section 4 of MIL-STD-188-116-4.
- d. The special block defined as mode change shall be used to define the beginning and end of nonstandard coded data.

MIL-STD-188-116-4
APPENDIX C

(40.2 User responsibility. When using non standard codes in switched systems such as AUTODIN, the user has the following responsibilities:

- a. The user shall conform to the basic data element formats of the system.
- b. The user shall ensure, when using non standard codes, that the intended recipient has the capability to decipher, decode, or otherwise reconstruct the non standard coded data.

50. SPECIFIC METHODOLOGY

50.1 Introduction. The guidance in this section describes a methodology for seven and nine track magnetic tape conversion which has been successfully employed in AUTODIN (DCAC 370-D175-1). The methodology may be used to develop new methodologies.

T 50.2 Magnetic tape messages. This section contains the interface and control criteria for variable length data records and nonstandard code messages as applied to seven and nine track magnetic tape operation. It applies to terminals receiving and transmitting structured and non structured magnetic tape formatted messages. A magnetic tape message is a series of contiguous characters recorded on and read from magnetic tape as a single unit. Messages are separated by interrecord gaps. The length of messages are variable. Whenever a magnetic tape message is greater than 80 characters, the message is formatted into 80 character blocks for transmission by the transmitter and reformatted by the receiver. The end of a magnetic tape message is indicated by an EM control character. The EM control character is transmitted after the last character of the message. If the last block of the message contains 80 data characters, the EM control character is sent in a block by itself following the last block of the message (see figures 10, 16, 18, 20, 22 and 24).

50.2.1 Structured format. Structured formatted tape messages contain a Header and End of Transmission (EOT). A double tape mark is written on the tape after the last message to indicate the end of data to be transmitted.

MIL-STD-188-116-4
APPENDIX C

50.2.2 Nonstructured format. The nonstructured formatted magnetic tape contains data with no header or trailer information. The message header and EOT of nonstructured formatted data are introduced from another source. Additional information may be introduced from a separate source. After header transmission, the text is read from magnetic tape. The message text on magnetic tape is terminated by a double tape mark. The nonstructured format allows data to be transmitted from tapes which are void of communications headers and EOTs and allows data to be written on the receiving tape in the same manner.

50.2.3 Tape marks. A tape mark is used as a "data separator" for separating label records from data records, separating individual files, or separating groups of records within a particular file. Double tape marks are used as follows:

- a. On tapes containing one or more structured format messages, a double tape mark indicates that no more messages are contained on the tape. Double tape mark sequences are not permitted as text separators.
- b. In nonstructured format, where there is the text of only one message on the tape, double tape mark shall indicate the end of message text.
- c. The double tape mark sequence (a & b above) shall not be transmitted. Single tape marks shall be transmitted by formatting the DC3 character in a special six character block (see figure 12).

50.2.3.1 Record mark (DC3) block. This block shall consist of six characters: STX, BN, DC3, EM, ETB and BP. DC3 shall have an even number of logical 1 bits and shall be a Mode VI data character. This block shall be transmitted when a single tape mark is read within the message text (see figure 12).

50.2.4 Code translation.

50.2.4.1 Seven track tape (SEL character B). A seven track tape message consists of seven bits per track, six bits of binary data plus one parity bit (see table X). The terminal, that is used in preparing the seven track magnetic tape data for transmission, converts the magnetic tape seven bits to the eight bit Mode VI data characters as shown in table X.

MIL-STD-188-116-4
APPENDIX C

50.2.4.2 Nine track tape (SEL character C). A nine track tape text characters consists of nine bits: eight bits of binary data plus one parity bit. The terminal converts the nine track tape text data into Mode VI block data characters as follows (see figure 15):

- a. Convert the nine bits of text of the magnetic tape data into eight bits by removing the parity bit.
- b. Segment the magnetic tape message into groups of three text characters (24 bits).
- c. Convert the 24 bit groups into four six bit groups.
- d. Convert the six bits of each group into the Mode VI data character in the same manner as the six data bits of seven track are converted.

NOTE: If there are not three eight bit characters on the last character conversion for a record, 1 bits shall be inserted to fill the last six bit character before adding the EM character (see figure 15).

50.2.5 Transmission sequences. Figures 16 through 25 illustrate the manner in which different magnetic tape messages (records) are converted into blocks and transmitted.

50.2.5.1 Header. Data characters as defined in section 4 of this standard, are used to transmit the header. Select Character B is used for seven track tape and Select Character C is used for nine track tape. If the last block of the record containing the header contains less than 80 characters, then an EM control character is transmitted after the last character of the record (see figures 6 and 7). The EM is followed by the framing characters ETB and BP. If the last block of the header record contains 80 characters, then the EM control character is transmitted in a special short block (see figures 10 and 18).

MIL-STD-188-116-4
APPENDIX C

TABLE X. Conversion from seven track tape to Mode VI data (Block) character.

Seven-Track Magnetic Tape							Mode VI Block Character							
BITS							BITS							
b ₇	b ₆	b ₅	b ₄	b ₃	b ₂	b ₁	a ₈	a ₇	a ₆	a ₅	a ₄	a ₃	a ₂	a ₁
P	0	0	0	0	0	0	0	1	0	0	0	0	0	0
P	0	0	0	0	0	1	1	1	0	0	0	0	0	1
P	0	0	0	0	1	0	1	1	0	0	0	1	1	0
P	0	0	0	0	1	1	0	1	0	0	0	1	1	1
P	0	0	0	1	0	0	1	1	0	0	1	0	0	0
P	0	0	0	1	0	1	0	1	0	0	1	1	1	0
P	0	0	0	1	1	0	1	1	0	0	1	1	1	0
P	0	0	0	1	1	1	1	1	0	0	1	1	1	1
P	0	0	1	0	0	0	1	1	0	1	0	0	0	0
P	0	0	1	0	0	1	0	1	0	0	1	0	1	0
P	0	0	1	0	1	1	1	1	0	1	1	1	1	0
P	0	0	1	1	0	1	1	1	0	1	1	0	1	0
P	0	0	1	1	1	0	1	1	0	1	1	1	1	0
P	0	0	1	1	1	1	1	1	0	1	1	1	1	0
P	0	1	0	0	0	0	1	1	0	1	0	0	0	1
P	0	1	0	0	0	1	0	1	0	1	0	0	1	0
P	0	1	0	0	1	1	1	1	0	1	0	1	1	1
P	0	1	0	1	0	0	1	1	0	1	1	0	1	0
P	0	1	0	1	1	0	1	1	0	1	1	1	1	0
P	0	1	1	0	1	1	1	1	0	1	1	1	1	1
P	0	1	1	1	0	0	1	1	0	1	1	0	0	1
P	0	1	1	1	0	1	1	1	0	1	1	1	1	0
P	0	1	1	1	1	0	1	1	0	1	1	0	1	1
P	0	1	1	1	1	0	1	1	0	1	1	1	1	0
P	0	1	1	1	1	1	1	1	0	1	1	1	1	1

MIL-STD-188-116-4
APPENDIX C

Table X. Conversion from seven track tape to Mode VI data (Block) character - Continued.


Seven-Track Magnetic Tape							Mode VI Block Character							
BITS							BITS							
b ₇	b ₆	b ₅	b ₄	b ₃	b ₂	b ₁	a ₈	a ₇	a ₆	a ₅	a ₄	a ₃	a ₂	a ₁
P	1	0	0	0	0	0	1	1	1	0	0	0	0	0
P	1	0	0	0	0	1	0	1	1	0	0	0	0	1
P	1	0	0	0	1	0	0	1	1	0	0	0	1	0
P	1	0	0	0	1	1	1	1	1	0	0	0	1	1
P	1	0	0	1	0	0	0	1	1	0	0	1	0	0
P	1	0	0	1	0	1	1	1	1	0	0	1	0	1
P	1	0	0	1	1	0	1	1	1	0	0	1	1	0
P	1	0	0	1	1	1	0	1	1	0	0	1	1	1
P	1	0	1	0	0	0	0	1	1	0	1	0	0	0
P	1	0	1	0	0	1	1	1	1	0	1	0	0	1
P	1	0	1	0	1	0	1	1	1	0	1	0	1	0
P	1	0	1	0	1	1	0	1	1	0	1	1	0	1
P	1	0	1	1	0	0	1	1	1	0	1	1	0	0
P	1	0	1	1	1	0	0	1	1	0	1	1	0	1
P	1	0	1	1	1	1	1	1	1	0	1	1	1	0
P	1	1	0	0	0	0	0	1	1	1	0	0	0	0
P	1	1	0	0	0	1	1	1	1	0	0	0	1	0
P	1	1	0	0	1	0	1	1	1	0	0	1	1	1
P	1	1	0	1	0	0	1	1	1	0	1	0	0	0
P	1	1	0	1	1	0	0	1	1	1	0	1	0	1
P	1	1	0	1	1	1	1	1	1	0	1	1	1	0
P	1	1	1	0	0	0	1	1	1	1	0	0	0	0
P	1	1	1	0	1	0	0	1	1	1	0	0	1	0
P	1	1	1	0	1	1	1	1	1	1	0	1	1	1
P	1	1	1	1	0	0	0	1	1	1	0	0	0	0
P	1	1	1	1	0	1	0	1	1	1	0	1	0	1
P	1	1	1	1	1	0	1	1	1	1	0	1	1	1
P	1	1	1	1	1	0	0	1	1	1	1	0	0	0
P	1	1	1	1	1	1	1	1	1	1	1	1	1	1

NOTE: b₇ of seven track tape is the magnetic tape character parity bit
a₇ of the Mode VI character and is always a logical 1 bit.

MIL-STD-188-116-4
APPENDIX C

50.2.5.2 Text. The beginning of binary text is indicated by transmission of the control character Mode Change (MC) in a special short block (see figure 11). The magnetic tape text blocks are taken from tape and converted for transmission into 80-character line blocks. The character "DC3" is transmitted in a special block (see figure 12) and is formed whenever a single tape mark record is read within the message text of either a structured or nonstructured tape. The end of binary text is indicated by the transmission of the unique MC block (see figure 11). If the last block of a magnetic tape record contains less than 80 characters, an EM control character is transmitted after the last character of the record (see figures 8 and 9). The EM is followed by ETB BP. If the last block of the magnetic tape record contains 80 characters, then the EM control character is transmitted in a special short block (see figures 10 and 20).

50.2.5.3 End of transmission (EOT). The last block to be transmitted is the EOT block which contains the ETX framing character. Figures 15 through 25 illustrate the relationship between the information contained on tape and the transmitted blocks.

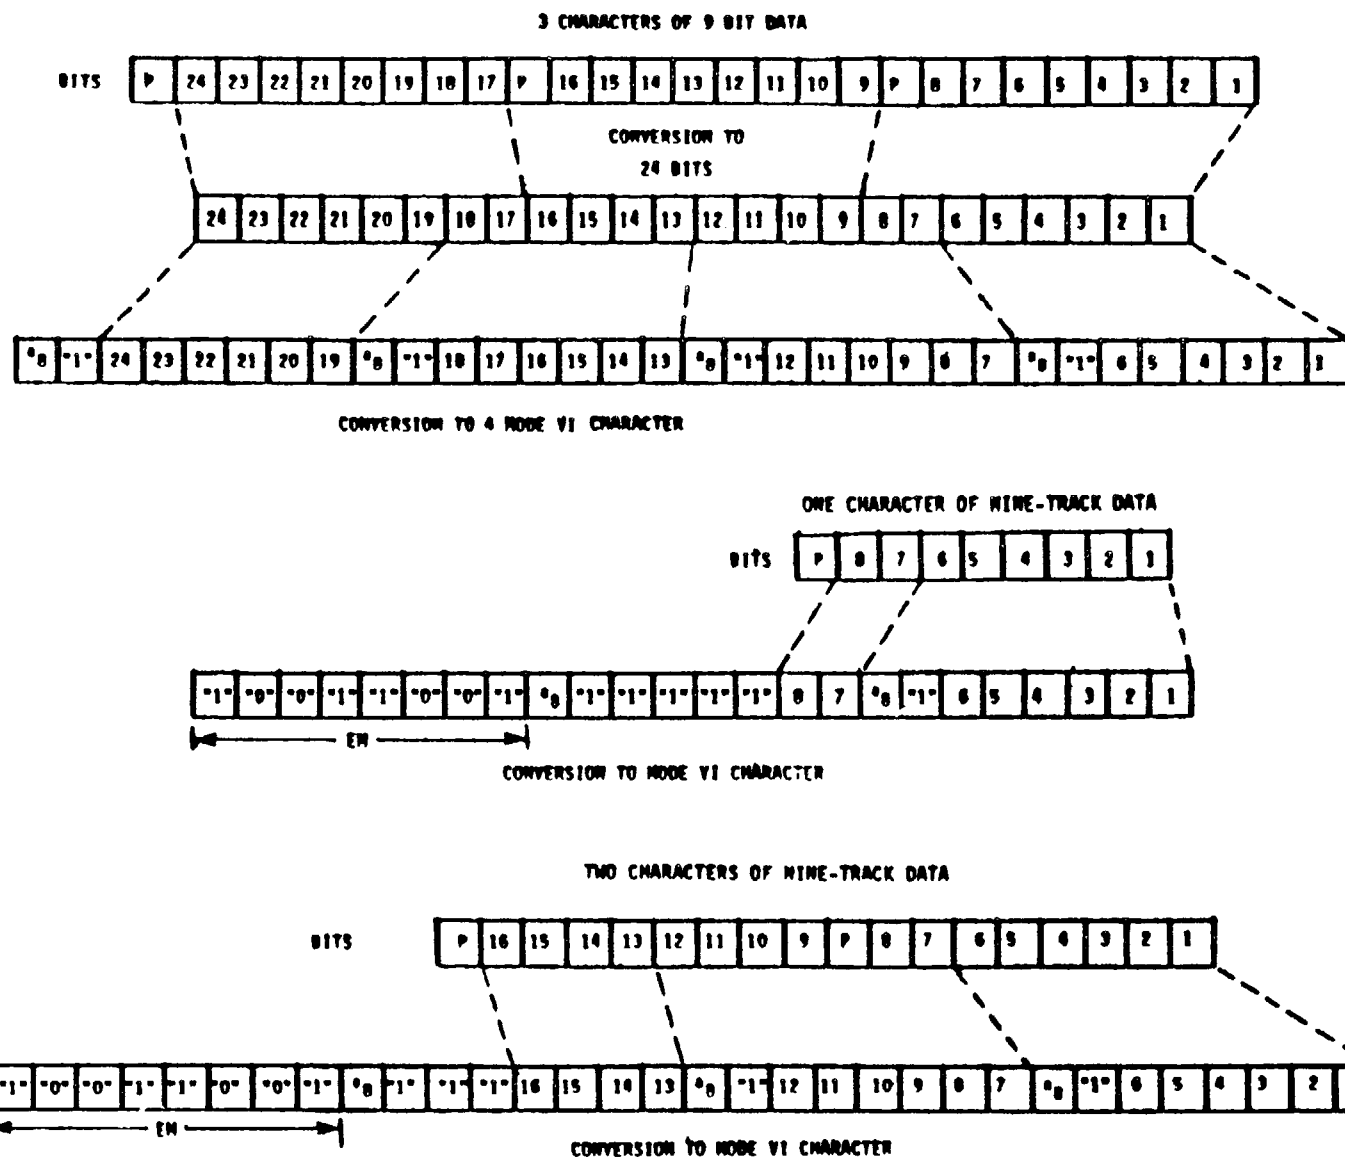

NOTE: ^a8 is generated such that the Mode VI character (Octect) contains an odd number of logical 1 bits.

FIGURE 15. Conversion of nine track tape to Mode VI text characters.

DATA AS CONTAINED ON TAPE (STRUCTURED MESSAGES) 1/

RECORD NO 1	2	3	4	5	6	7	8
MSG # 1 HEADER 60 CHAR	MSG # 1 TEXT 90 CHAR	MSG # 1 EOT 80 CHAR	MSG # 2 HEADER 80 CHAR	MSG # 2 TEXT 160 CHAR	MSG # 2 EOT 80 CHAR	TAPE MARK	TAPE MARK


DATA CONVERTED TO MODE VI BLOCKS 2/

RECORD NO 1					2					2 CONT					3							
S O H	B	MSG # 1 HDR 60 CHAR	E M	B T P	S T X	3 3	MSG # 1 TEXT 80 CHAR	E T B	B P	S T X	3 4	MSG # 1 TEXT 10 CHAR	E M T B	B P	S T X	3 5	MSG # 1 EOT 80 CHAR	E T X	B P			
4					5					5 CONT												
S O H	B	MSG # 2 HEADER 80 CHAR	E T B	B P	S T X	3 3	E M T B	B P	S T X	3 4	MSG # 2 TEXT 80 CHAR	E T B	B P	S T X	3 5	MSG #2 TEXT 80 CHAR	E T B	B P	S T X	3 6	E M T B	B P
6																						
S T X	3 7	MSG # 2 EOT 80 CHAR	E T X	B P																		

NOTE: 1/ MAGNETIC TAPE CONTAINING ONE OR MORE STRUCTURED MESSAGES IN LOCAL OR NATIVE CHARACTER CODING SCHEME WITH VARIABLE LENGTH RECORDS. HEADER, TEXT AND EOT RECORDS FOR EACH MESSAGE ON TAPE.

2/ SEE FIGURE 17 FOR TRANSMISSION OF THESE MODE VI BLOCKS.

FIGURE 16. Typical structured format for seven track tape.

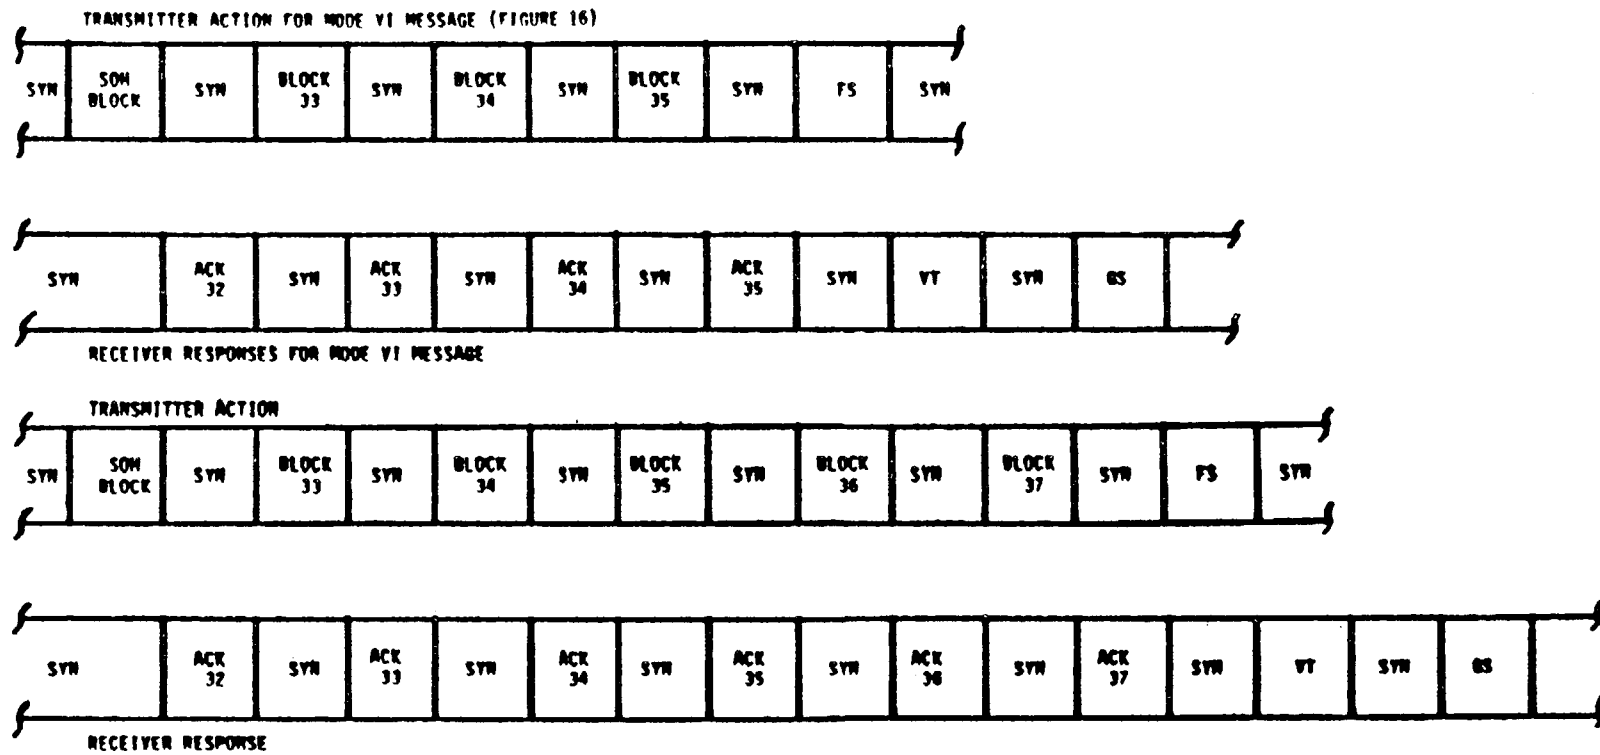

MIL-STD-188-116-4
APPENDIX C

FIGURE 17. Typical Mode VI transmission structured format actions/reactions.

MIL-STD-188-116-4 APPENDIX C

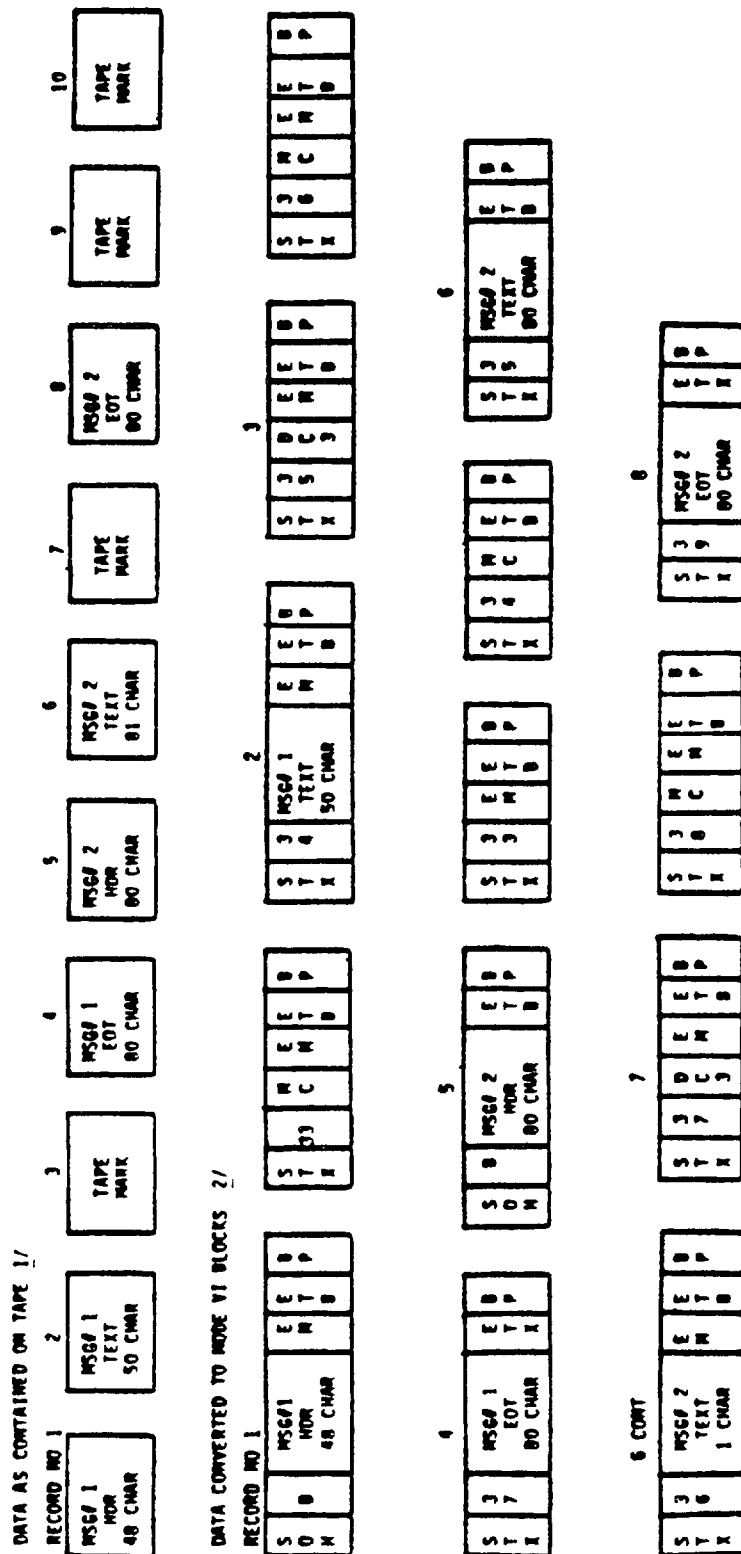


FIGURE 18. Typical structured format for seven track tape.

MIL-STD-188-116-4
APPENDIX C

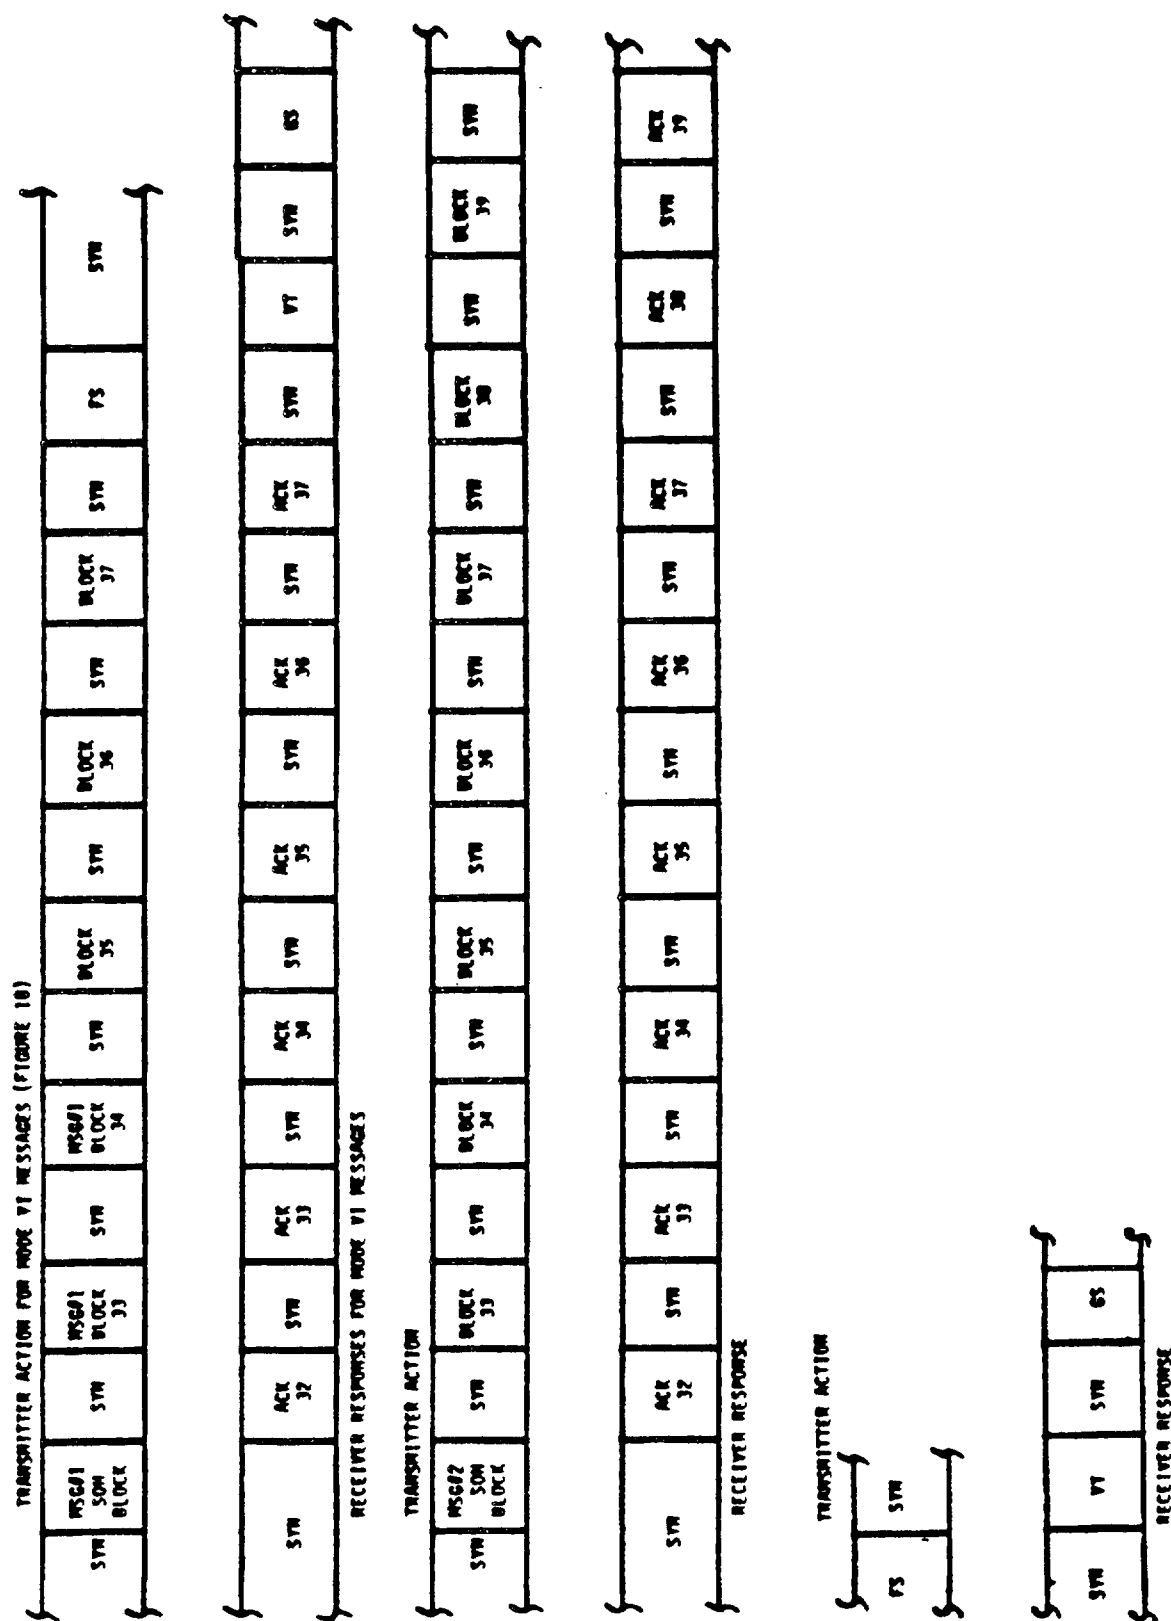


FIGURE 19. Mode VI transmission structured format action/reaction.

MIL-STD-188-116-4
APPENDIX C

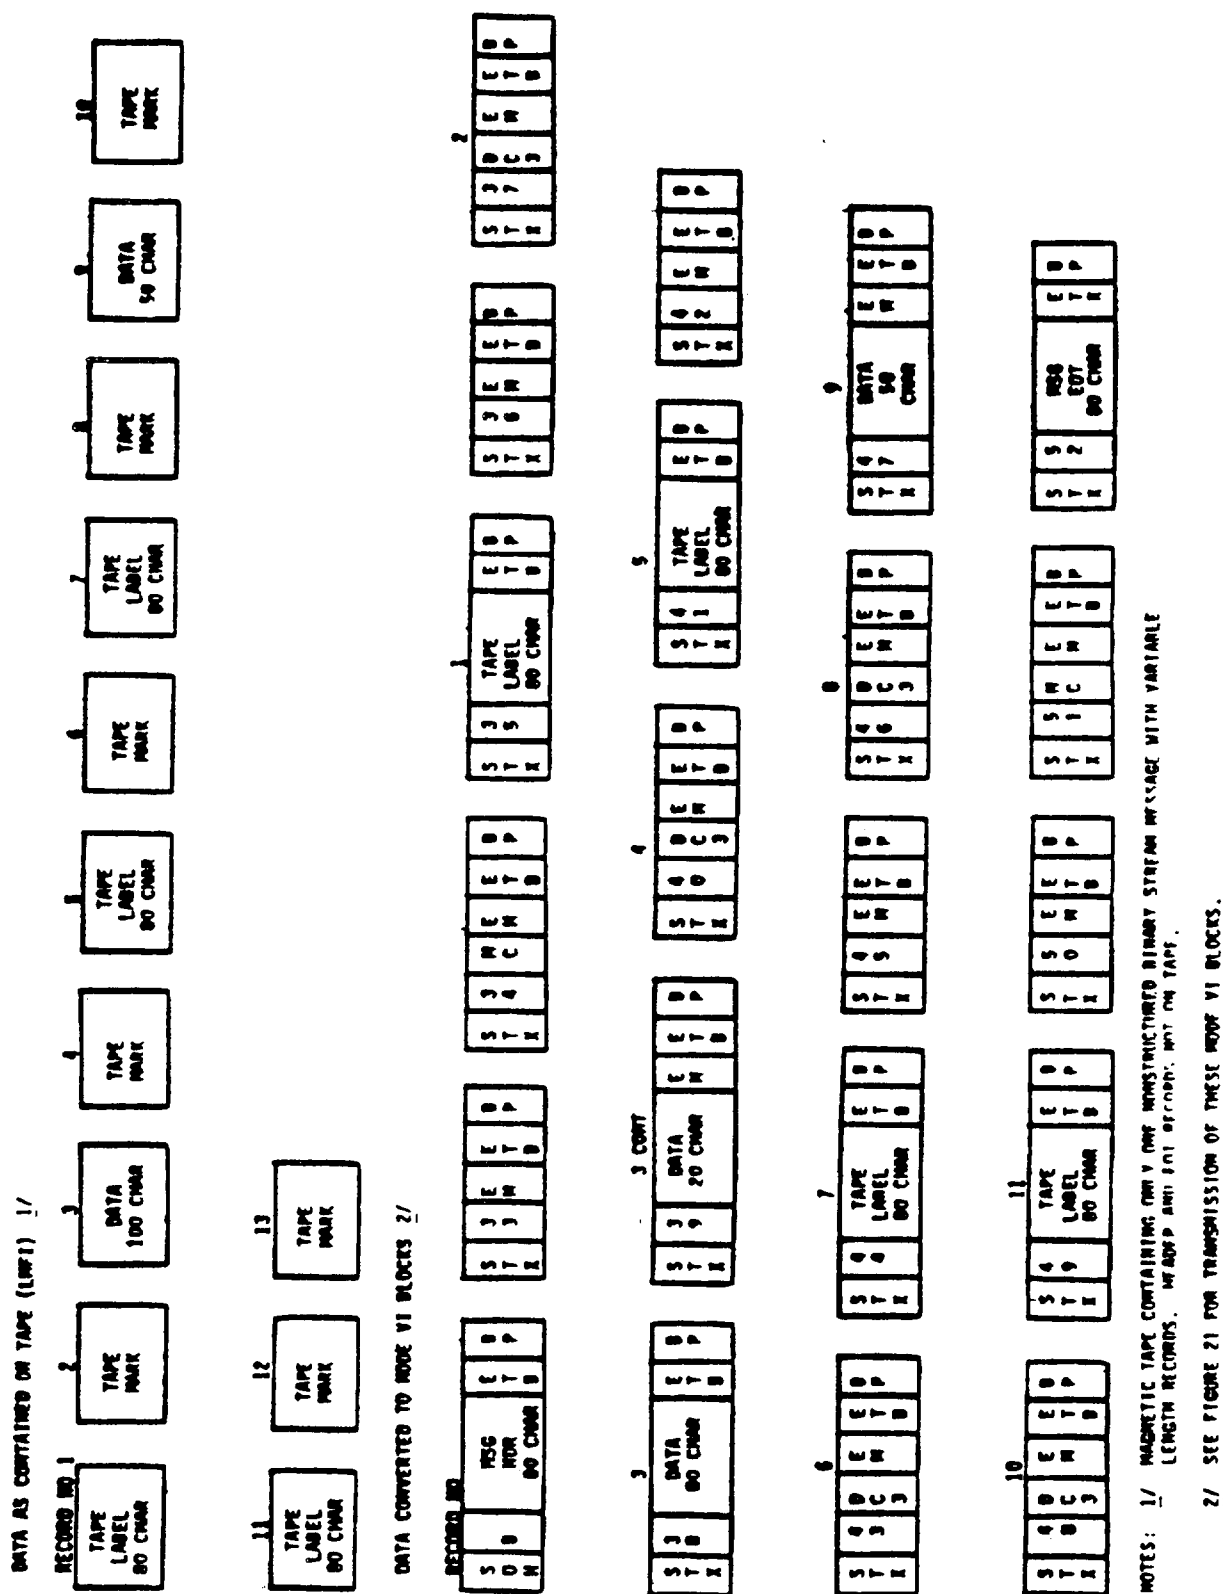


FIGURE 20. Nonstructured format for seven track tape.


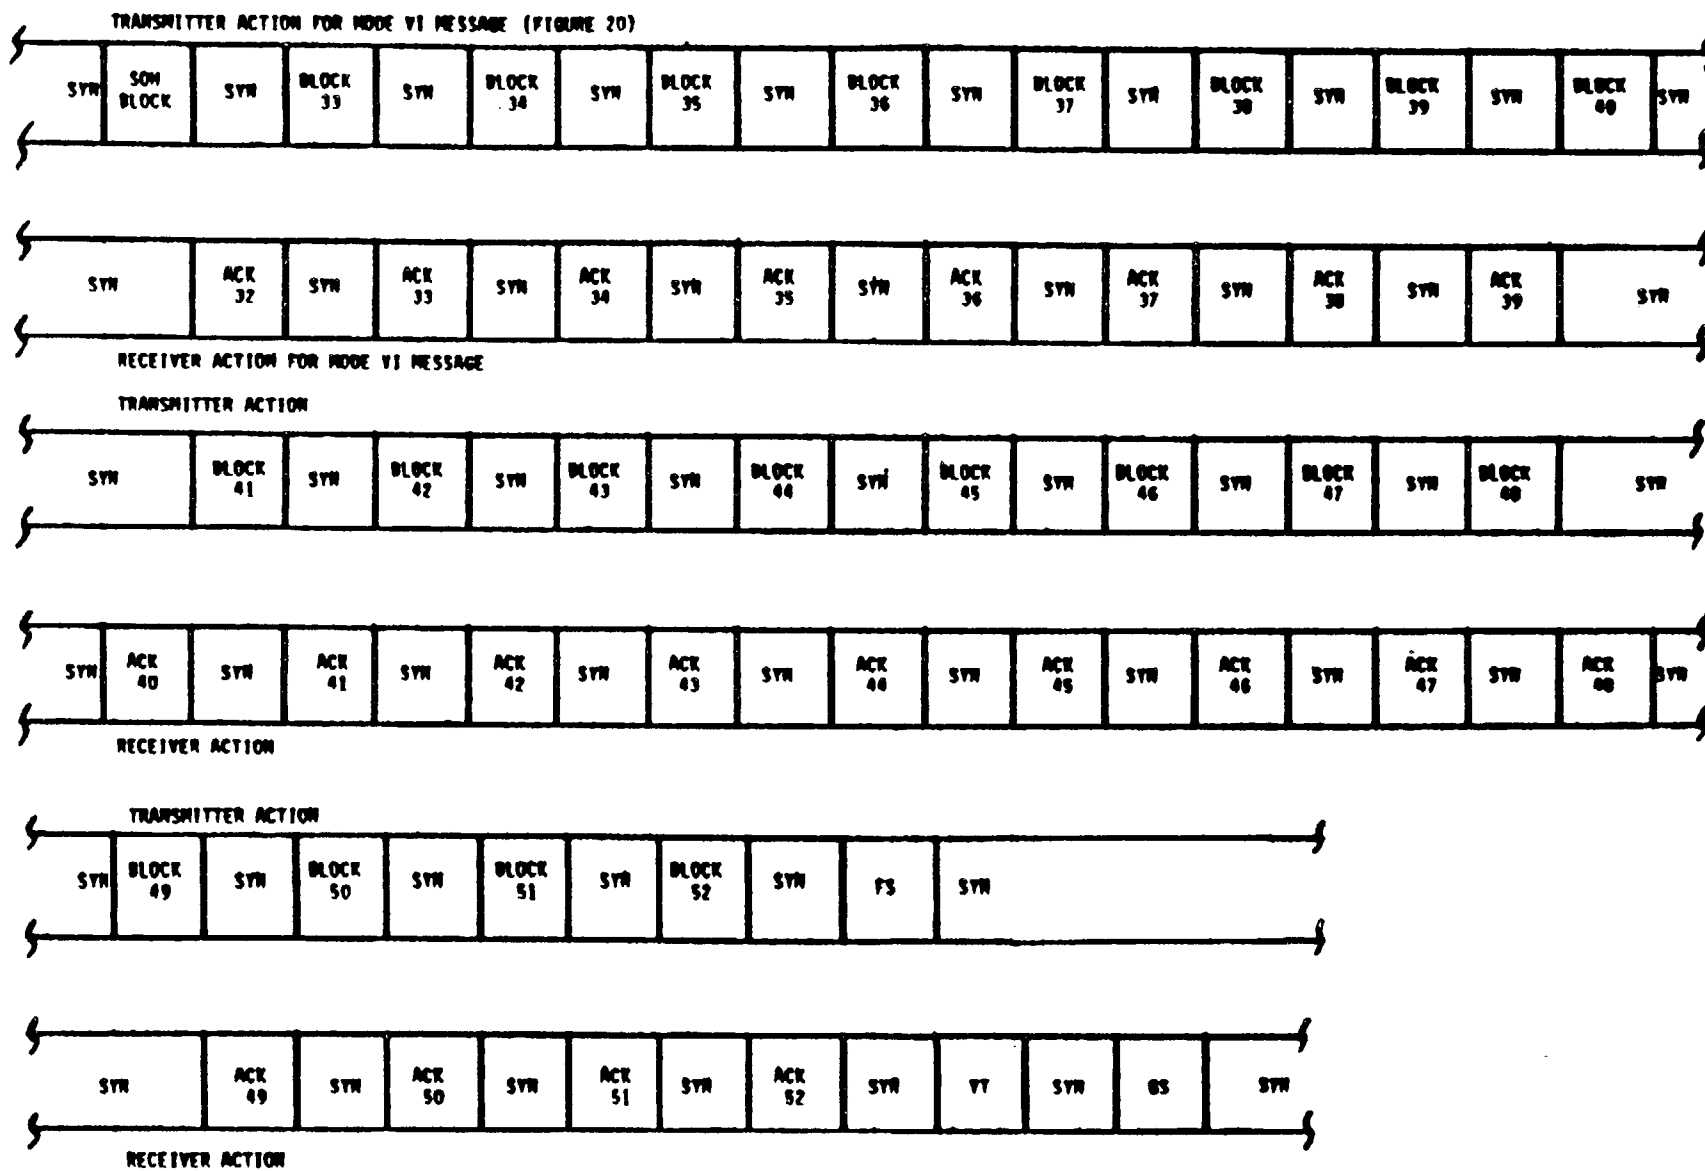


FIGURE 21. Mode VI transmission nonstructured format
action/reaction.

MIL-STD-188-116-4 APPENDIX C

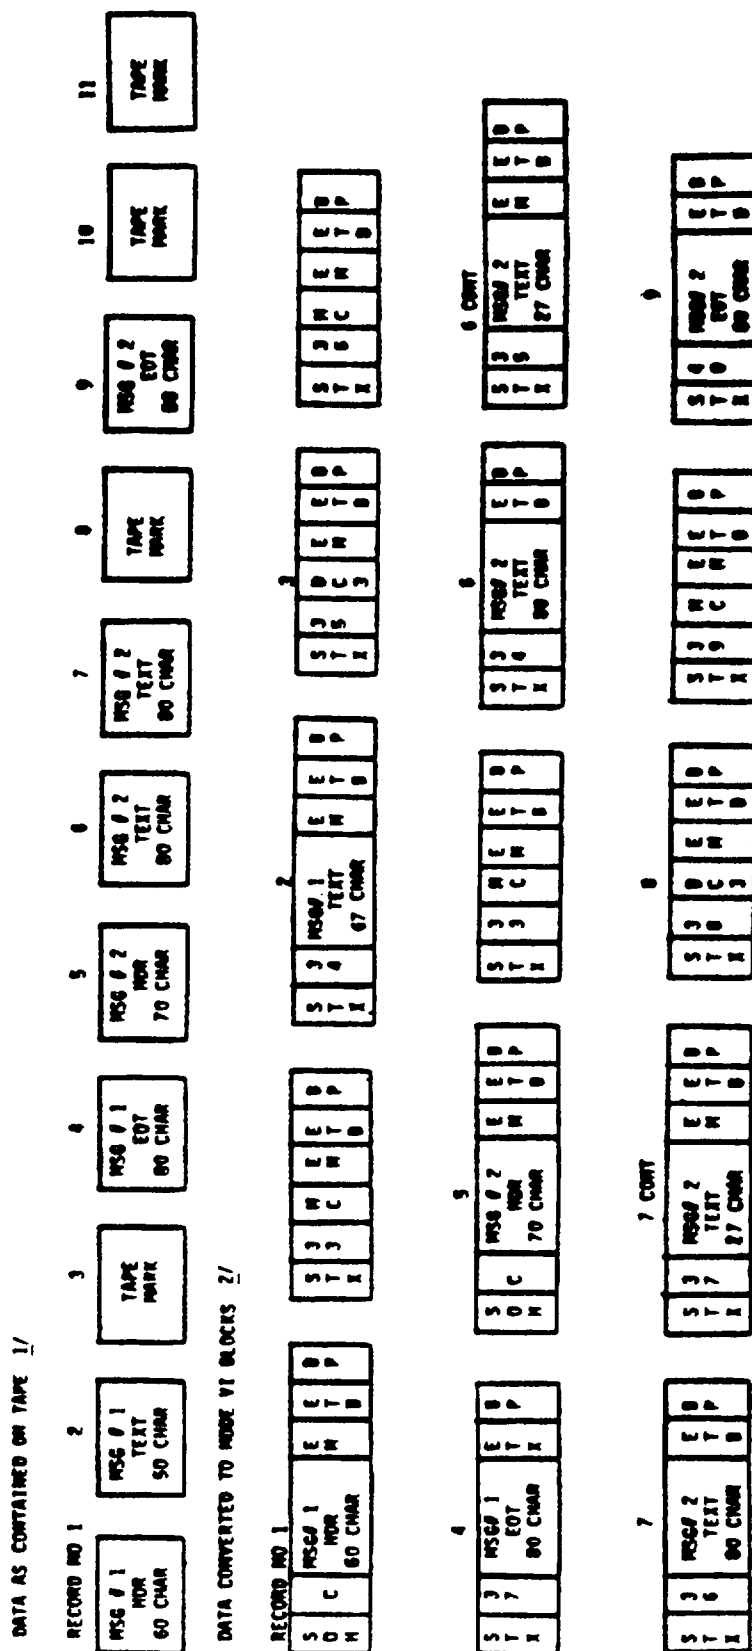

NOTES: 1/ MAGNETIC TAPE CONTAINING ONE OR MORE STRUCTURED BINARY STREAM MESSAGES WITH VARIABLE LENGTH RECORDS. HEADER, TEXT AND EOT FOR EACH MESSAGE ON TAPE.

2/ SEE FIGURE 23 FOR TRANSMISSION OF THESE MODE VI BLOCKS.

FIGURE 22. Structured format for nine track tape.


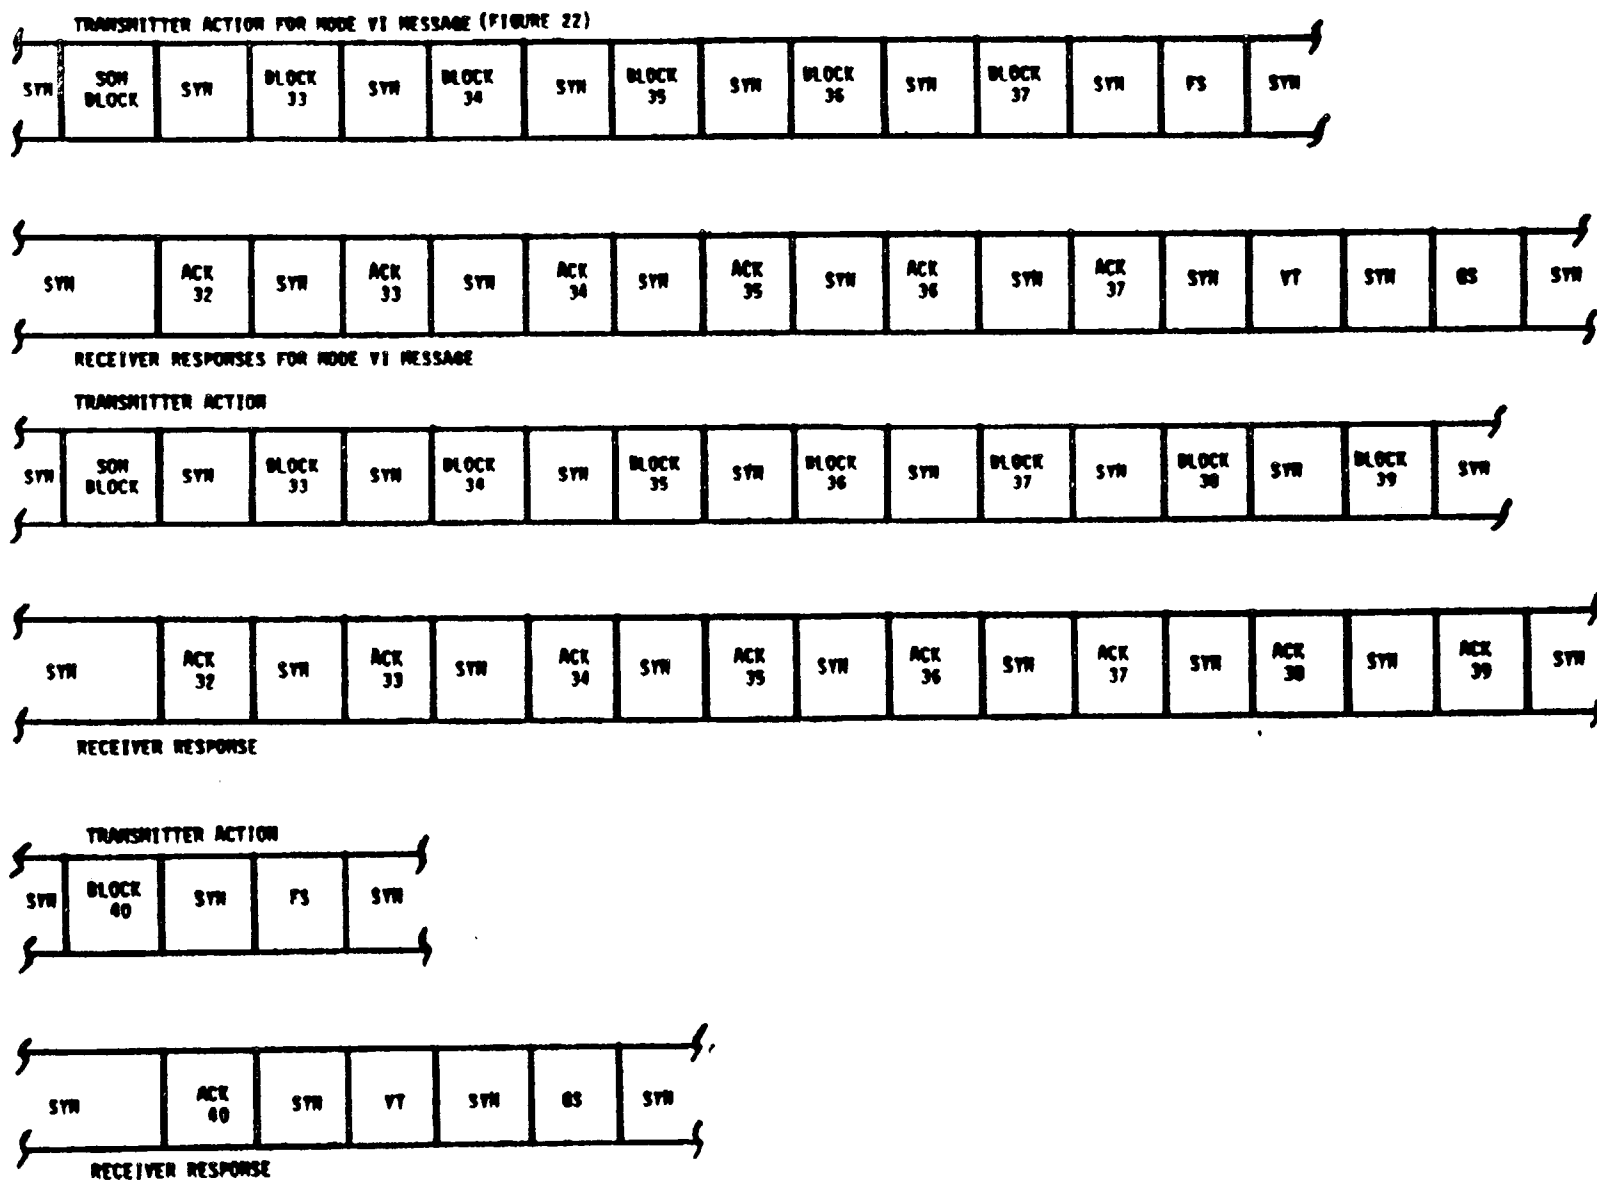


FIGURE 23. Mode VI transmission nonstructured format action/reaction.

MIL-STD-188-116-4
APPENDIX C

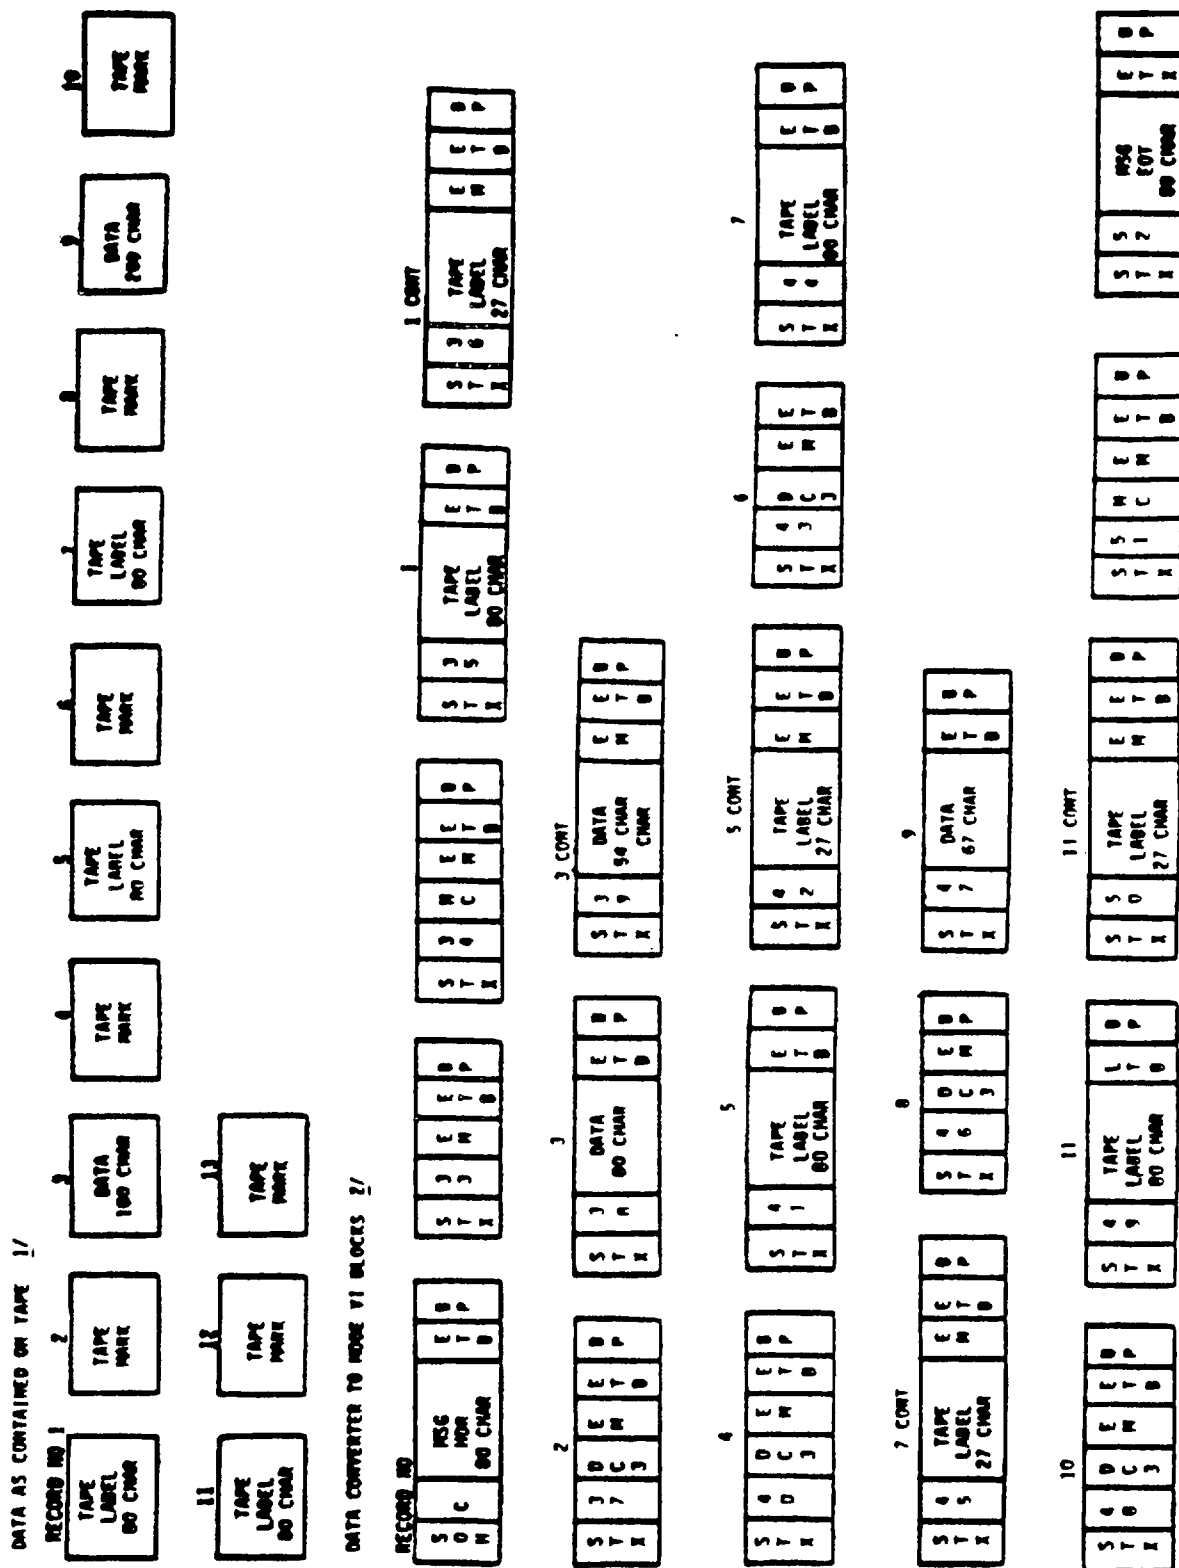

NOTES: 1/ MAGNETIC TAPE CONTAINING ONLY ONE UNSTRUCTURED BINARY STREAM MESSAGE WITH VARIABLE LENGTH RECORDS. HEADER AND FOOT NOT ON TAPE.

2/ SEE FIGURE 25 FOR TRANSMISSION OF THESE MODE VI BLOCKS.

FIGURE 24. Nonstructured format for nine track tape.

MIL-STD-188-116-4
APPENDIX C

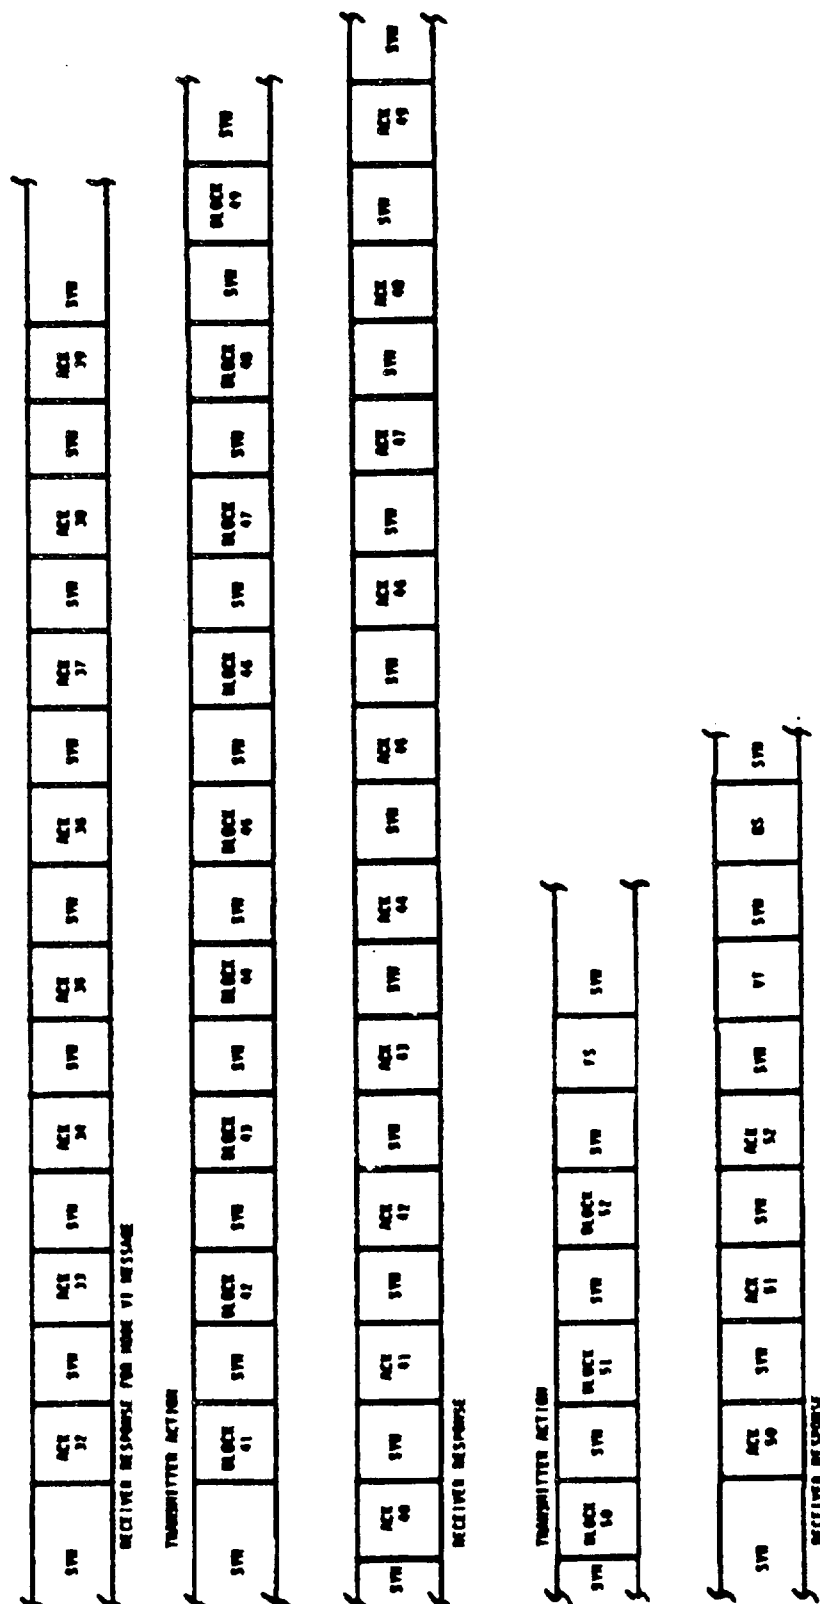


FIGURE 25. Mode VI transmission nonstructured format action/reaction.

MIL-STD-188-116-4
CONCLUDING MATERIAL

Custodians:

Army - SC
Navy - EC
Air Force - 90
DCA - DC
NSA - NS

Preparing Activity

JTC³A - JT
(Project TCTS-1160)

Review Activities:

Army - CR, AC
Navy - MC, TD, OM
Air Force - 02, 17
NSA -
DCA -
DODECAC

User Activities:

Army - CR
Navy - NC
Air Force - 13
DCA
NSA

Civilian Agency Coordinating Activities:

NCS - TS

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge (**DO NOT STAPLE**), and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was a rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgment will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 12082 WASHINGTON D.C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Director
Joint Tactical Command, Control and Communications Agency
ATTN: C3A-IASO
OASDC3I, ASC
Washington, D.C. 20301-3160

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

[illegible]