

INCH-POUND

NOTICE  
OF VALIDATION

A-A-50567  
NOTICE 1  
12 DECEMBER 2002

COMMERCIAL ITEM DESCRIPTION

VANITY; CABINET (WOOD OR WOOD AND STEEL)

A-A-50567, dated 28 February 1997, has been reviewed and determined to be valid for use in acquisition.

Custodians:  
Navy - YD  
Air Force - 99

Preparing activity:  
DLA-IS

AMSC N/A  
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 7105

[INCH-POUND]  
A-A-50567  
February 28, 1997  
SUPERSEDING  
MIL-V-28639A(YD)  
1 April 1991

## COMMERCIAL ITEM DESCRIPTION

### VANITY; CABINET (WOOD OR WOOD AND STEEL)

The General Services Administration has authorized the use of this commercial item description for all Federal agencies.

1. **SCOPE.** This Commercial Item Description (CID) covers requirements for sturdily constructed vanities for use in military bachelor quarters.
2. **CLASSIFICATION.** Vanities shall be of the following types and approximate sizes, as specified (see 7.2).

Type I - Single lavatory, double doors.

- Size A - 30 inches (762 millimetre (mm)) wide.
- Size B - 36 inches (914 mm) wide.
- Size C - 42 inches (1 067 mm) wide.
- Size D - 48 inches (1 219 mm) wide.

Type II - Double lavatory, two sets of double doors.

- Size A - 60 inches (1 524 mm) wide.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Commanding Officer (Code 1581), Naval Construction Battalion Center, 1000 23rd Avenue, Port Hueneme, CA 93043-4301, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 7105

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

## A-A-50567

### 3. SALIENT CHARACTERISTICS.

3.1 Description. Each vanity shall consist of a steel or wood body with wood doors and a one-piece countertop with a curved backsplash and a raised, drip-proof front edge. The countertop shall be surfaced with one-piece, post forming, laminated plastic sheet. Doors shall be wood surfaced on both sides with laminated plastic sheets. When body of vanity is wood, laminated plastic sheets shall be applied to surfaces. Finish and color of plastic shall be as specified (see 7.2).

3.2 Standard commercial product. The vanities shall, as a minimum, be in accordance with the requirements of this CID and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this CID but which are a part of the manufacturer's standard commercial product, shall be included in the vanities being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs or brochures, and represents the latest production model.

#### 3.3 Construction.

3.3.1 General. The vanity body, except doors, may be steel or wood. Vanity body depth shall be approximately 24 inches (610 mm), height shall be approximately 34-inch (864 mm) to underside of counter top, and width shall be as specified (see 7.2, and table I). The size of the opening in the counter top to accommodate the lavatory for type I, and two lavatories for type II shall be as specified (see 7.2). The back shall be open for access to plumbing. Toe space shall extend width of the vanity. The vanity shall be capable of being anchored at the top and bottom of the unit to the wall. Paint color for steel body units shall be as specified (see 7.2).

3.3.2 Doors. Doors shall be of particleboard or plywood core covered on both sides with laminated plastic sheets as specified (see 7.2). Doors shall be flush with unit face and attached with semi-concealed door hinges appropriate to support intended use. Door pulls shall be of anodized aluminum extrusion extending full height of each door. Magnetic catches for securing doors in the closed position shall be of manufacturer's standard commercial product. Each door shall close against rubber bumpers.

3.3.3 Counter top. The counter top shall be a one-piece unit with a 4-inch (102 mm) covered back splash and built-up front edge including dripproof rise at the counter front. The top shall overhang the body at the front and sides, except when end curbs are specified shall be flush. If one side of the vanity is to be located in a corner or abuts a wall, the counter top shall be provided with an end curb. When specified (see 7.2), end curbs shall be provided.

3.3.4 Miscellaneous hardware. Miscellaneous hardware items with threads shall be resistant to rust, oxidation, or electrolytic action.

A-A-50567

#### 4. REGULATORY REQUIREMENTS.

4.1 Materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR). Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this commercial item description are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term “recovered materials” means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description.

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

#### 5. REGULATORY REQUIREMENTS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer’s own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING. The preservation, packing, and marking shall be as specified in the contract or order.

#### 7. NOTES.

##### 7.1 Source of document.


7.1.1 The Federal Acquisition Regulation (FAR) is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

##### 7.2 Ordering data. Acquisition documents should specify the following:

- a. Type, and size of vanity required (see 2).
- b. Specify size of hole or holes required for the top to accommodate lavatories (see 3.3.1).
- c. Specify finish and color for laminated plastic covered surfaces and paint color for steel sides and other steel components (see 3.1, 3.3.1, and 3.3.2).
- d. Specify if end curbs are required and if required, on which side (see 3.3.3).

## A-A-50567

7.3 Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PINs to be used for items acquired to this description are created as follows:

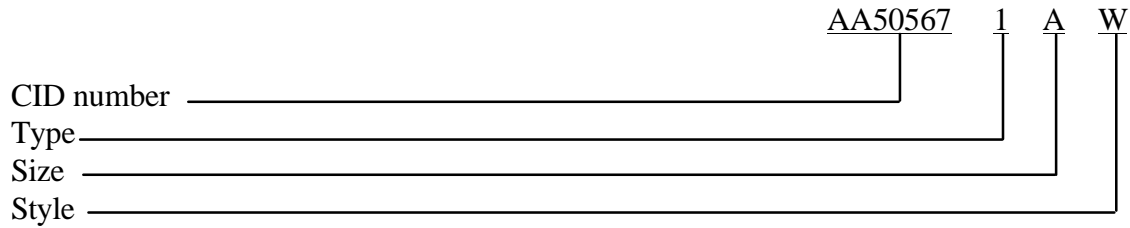

The above PIN is for a type I (single lavatory, double doors), size A (approximately 30.0-inch (762 mm)) wide, style W (wood body) (see table I).

TABLE I. PIN designators.

	Type		Approximate Size					Style	
	I	II	30	36	42	48	60	Wood	Metal
Pin Designator	1	2	A	B	C	D	E	W	M

**MILITARY INTERESTS:**

Custodians:

Navy - YD1  
Air Force - 99

Review Activities:

Army - GL  
Air Force - 84

**CIVIL AGENCY COORDINATING ACTIVITY:**

GSA - FSS

**PREPARING ACTIVITY:**

Navy - YD1

(Project 7105-0281)

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

## INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

### I RECOMMEND A CHANGE:

1. DOCUMENT NUMBER  
A-A-50567

2. DOCUMENT DATE (YYMMDD)

### 3. DOCUMENT TITLE

VANITY; WOOD, OR WOOD AND STEEL

### 4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

### 5. REASON FOR RECOMMENDATION

### 6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*

b. ORGANIZATION:

c. ADDRESS *(Include Zip Code)*

d. TELEPHONE *(Include Area Code)*

7. DATE SUBMITTED

(1) Commercial

(YYMMDD)

(2) AUTOVON  
*(if applicable)*

### 8. PREPARING ACTIVITY

a. NAME

ROBERT J. BRICKEY

b. TELEPHONE *Include Area Code*

(1) Commercial

805-982-5593

(2) AUTOVON

551-5593

c. ADDRESS *(Include Zip Code)*

COMMANDING OFFICER, NCBC CODE 1581B  
1000 23RD AVENUE  
PORT HUENEME, CA 93043-4301

IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:

DEFENSE QUALITY AND STANDARDIZATION OFFICE  
5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466  
Telephone (703) 756-2340 AUTOVON 289-2340