

INCH-POUND

AN914 Rev 11

12 December 2012

SUPERSEDING

AN914 Rev 10

19 July 2011

## DETAIL SPECIFICATION SHEET

## ELBOW, PIPE, INTERNAL AND EXTERNAL THREAD, 90°

Reinstated after 19 July 2011. Inactive for new design.  
For new design, use SAE-AS4854.

This specification is approved for use by all Departments and  
Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and  
SAE-AS4842.

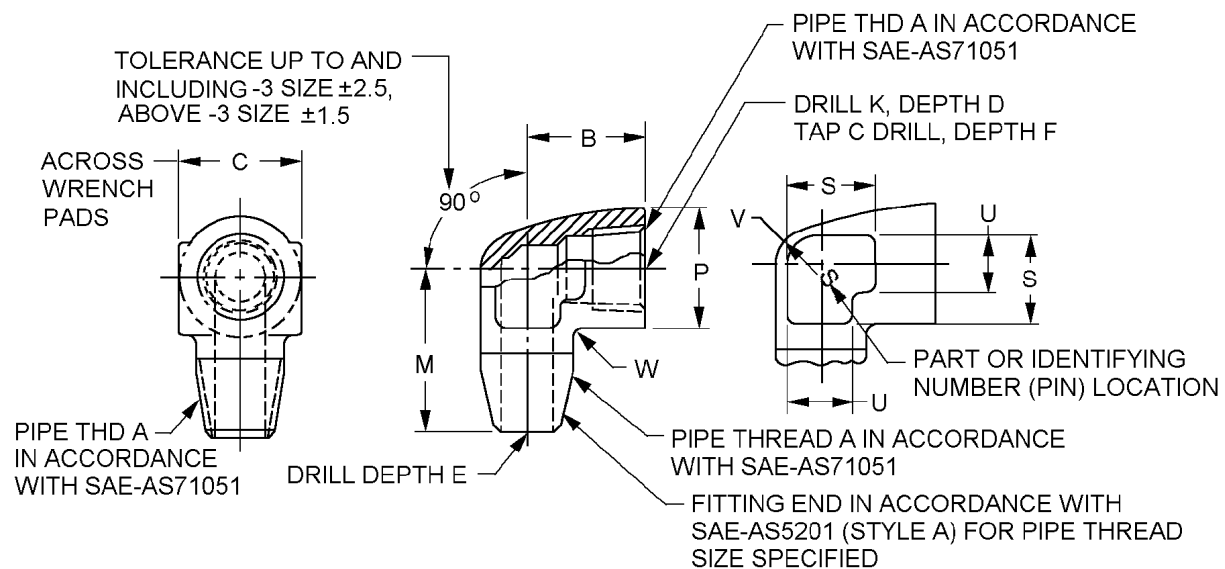


FIGURE 1. Elbow 90° dimensions and configuration.

## AN914 Rev 11

| Dash number | A                                  |                         | B<br>+.047 (1.19)<br>-0.00<br>inches (mm) | C<br>inches (mm) | D (drill depth)<br>+.047 (1.19)<br>-0.00<br>inches (mm) | E (drill depth)<br>+.047 (1.19)<br>-0.00<br>inches (mm) |
|-------------|------------------------------------|-------------------------|---|------------------|---|---|
|             | Pipe thread<br>ANPT<br>SAE-AS71051 | SAE-AS5201<br>size code |   |                  |   |   |
| 1           | 1/8-27                             | 02                      | .609 (15.47)                              | .625 (15.88)     | .641 (16.28)  | .891 (22.63)  |
| 2           | 1/4-18                             | 04                      | .891 (22.63)                              | .813 (20.65)     | .938 (23.83)  | 1.266 (32.16)   |
| 3           | 3/8-18                             | 06                      | .938 (23.83)                              | .938 (23.83)     | 1.000 (25.40)   | 1.359 (34.52)   |
| 4           | 1/2-14                             | 08                      | 1.172 (29.77)                             | 1.188 (30.18)    | 1.297 (32.94)   | 1.734 (44.04)   |
| 6           | 3/4-14                             | 12                      | 1.344 (34.14)                             | 1.375 (34.93)    | 1.469 (37.31)   | 1.859 (47.22)   |
| 8           | 1-11 1/2                           | 16                      | 1.594 (40.49)                             | 1.750 (44.45)    | 1.719 (43.66)   | 2.234 (56.74)   |
| 10          | 1/ 1/4-11 1/2                      | 20                      | 1.750 (44.45)                             | 2.156 (57.76)    | 1.906 (48.41)   | 2.375 (60.33)   |

| Dash number | F (drill depth)<br>inches (mm) | K<br>Dia.<br>inches (mm) | M<br>+.047 (1.19)<br>-0.00<br>inches (mm) | P<br>Dia.<br>inches (mm) | S<br>Approx<br>inches (mm) | U<br>Approx<br>inches (mm) |
|-------------|--------------------------------|--------------------------|---|--------------------------|----------------------------|----------------------------|
| 1           | .422 (10.72)                   | .188 (4.78)              | .859 (21.82)                              | .578 (14.68)             | .500 (12.70)               | .250 (6.35)                |
| 2           | .563 (14.30)                   | .281 (7.14)              | 1.219 (30.96)                             | .781 (19.84)             | .625 (15.88)               | .375 (9.53)                |
| 3           | .609 (15.47)                   | .406 (10.31)             | 1.297 (32.94)                             | .922 (23.42)             | .750 (19.05)               | .500 (12.70)               |
| 4           | .797 (20.24)                   | .531 (13.49)             | 1.609 (40.87)                             | 1.156 (29.36)            | .875 (22.23)               | .625 (15.88)               |
| 6           | .813 (20.65)                   | .719 (18.26)             | 1.734 (44.04)                             | 1.359 (34.52)            | 1.000 (25.40)              | .750 (19.05)               |
| 8           | .969 (24.61)                   | .938 (23.83)             | 2.109 (53.57)                             | 1.688 (42.88)            | 1.125 (28.58)              | .875 (22.23)               |
| 10          | .969 (24.61)                   | 1.125 (28.58)            | 2.250 (57.15)                             | 2.063 (52.40)            | 1.250 (31.75)              | 1.000 (25.40)              |

| Dash number | V<br>Rad.<br>inches (mm) | W<br>Rad.<br>inches (mm) | Weight max lbs (kg) |              |               |              |
|-------------|--------------------------|--------------------------|---------------------|--------------|---------------|--------------|
|             |                          |                          | Copper alloy        | Al alloy     | Steel, CRES   | Ti alloy     |
| 1           | .219 (5.56)              | .063 (1.60)              | .069 (0.03)         | .023 (0.010) | .069 (0.031)  | .038 (0.017) |
| 2           | .281 (7.14)              | .094 (2.39)              | .180 (0.08)         | .060 (0.027) | .180 (0.082)  | .100 (0.045) |
| 3           | .344 (8.74)              | .094 (2.39)              | .240 (0.11)         | .080 (0.036) | .240 (0.109)  | .132 (0.060) |
| 4           | .438 (11.13)             | .125 (3.18)              | .435 (0.20)         | .145 (0.066) | .434 (0.197)  | .240 (0.109) |
| 6           | .574 (14.58)             | .125 (3.18)              | .600 (0.27)         | .200 (0.091) | .599 (0.272)  | .331 (0.150) |
| 8           | .688 (17.48)             | .125 (3.18)              | 1.140 (0.52)        | .380 (0.172) | 1.138 (0.516) | .628 (0.285) |
| 10          | .859 (21.82)             | .156 (3.96)              | 1.720 (0.78)        | .580 (0.263) | 1.737 (0.788) | .959 (0.435) |

## NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified tolerances are  $\pm 0.016$  inch (0.41 mm).
4. Break sharp edges and remove all hanging burrs and slivers
5. Machined surfaces shall be finished to 125 $\mu$ in Ra, forged surfaces shall be 250 $\mu$ in Ra, unless otherwise specified on the figures. Surface finish shall be in accordance with ASME B46.1.
6. For design features purposes, this standard takes precedence over documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitation for bid.

FIGURE 1. Elbow 90° dimensions and configuration - Continued.

## AN914 Rev 11

## REQUIREMENTS:

Dimensions and configuration shall be in accordance with figure 1.

Materials and finishes shall be in accordance with SAE-AS4842, see table I for material and finish code.

TABLE I. Material and finish code letters.

| Material code      | Material  | Protective chemical finish <u>3/</u> <u>4/</u>   |
|--------------------|---|--|
| Blank<br><u>1/</u> | Copper alloy, type 377 forging in accordance with ASTM B124/B124M or half hard forging or bar in accordance with ASTM B138/B138M or bar in accordance with SAE-AMS4614  | No finish  |
| BC<br><u>1/</u>    | Copper alloy, type 377 forging in accordance with ASTM B124/B124M or half hard forging or bar in accordance with ASTM B138/B138M or bar in accordance with SAE-AMS4614  | Cadmium in accordance with SAE-AMS-QQ-P-416, type II, class 3  |
| D<br><u>2/</u>     | Type 2014-T6 aluminum alloy forging in accordance with SAE-AMS-QQ-A-367 or SAE-AMS4133, or type 2024-T6 aluminum alloy bar in accordance with SAE-AMS-QQ-A-225/6, or type 2024-T851 aluminum alloy bar in accordance with SAE-AMS-QQ-A-225/6 or SAE-AMS4339 | Anodize in accordance with SAE-AMS2472 or MIL-A-8625, type II, class 2, dye blue, duplex seal in accordance with procurement specification.  |
| DV<br><u>2/</u>    | Type 2014-T6 aluminum alloy forging in accordance with SAE-AMS-QQ-A-367 or SAE-AMS4133, or type 2024-T6 aluminum alloy bar in accordance with SAE-AMS-QQ-A-225/6, or type 2024-T851 aluminum alloy bar in accordance with SAE-AMS-QQ-A-225/6 or SAE-AMS4339 | High purity aluminum in accordance with MIL-DTL-83488, class 3, type II with maximum coating thickness of .0005 inch. Glass bead peen pressure shall be 25 psi (1.72 bar) maximum. |
| J                  | Type 304 corrosion resistant steel forging or bar in accordance with SAE-AMS-QQ-S-763 or SAE-AMS5639  | Passivate in accordance with SAE-AMS2700, type VI or VII   |
| K                  | Type 316 corrosion resistant steel forging or bar in accordance with SAE-AMS-QQ-S-763 or SAE-AMS5648  | Passivate in accordance with SAE-AMS2700, type VI or VII   |

See notes at end of table.

## AN914 Rev 11

TABLE I. Material and finish code letters - Continued.

| Material code   | Material  | Protective chemical finish <u>3/</u> <u>4/</u>   |
|-----------------|---|--|
| R               | Type 321 corrosion resistant steel forging or bar in accordance with SAE-AMS-QQ-S-763 or SAE-AMS5645.   | Passivate in accordance with SAE-AMS2700, type VI or VII   |
| W<br><u>2/</u>  | Type 7075-T73 aluminum alloy forging in accordance with SAE-AMS-QQ-A-367 or SAE-AMS4141, or type 7075-T73 aluminum alloy bar in accordance with SAE-AMS-QQ-A-225/9, in accordance with type 7075-T7351 Aluminum alloy bar in accordance with SAE-AMS4124. | Anodize in accordance with SAE-AMS2472 or MIL-A-8625, type II, class 2, dye brown similar to color 10080 in accordance with FED-STD-595, duplex seal in accordance with procurement specification. |
| WV<br><u>2/</u> | Type 7075-T73 aluminum alloy forging in accordance with SAE-AMS-QQ-A-367 or SAE-AMS4141, or type 7075-T73 aluminum alloy bar in accordance with SAE-AMS-QQ-A-225/9, in accordance with type 7075-T7351 Aluminum alloy bar in accordance with SAE-AMS4124. | High purity aluminum in accordance with MIL-DTL-83488, class 3, type II with maximum coating thickness of .0005 inch. Glass bead peen pressure shall be 25 psi (1.72 bar) maximum                  |
| T <u>3/</u>     | Titanium  | Anodize in accordance with SAE-AMS2488, type 2   |

1/ Material code was dash on previous revisions, changed to agree with SAE-ARP1590.

2/ Aluminum code D is inactivated, use code W.

3/ Titanium and cadmium shall not be used in oxygen systems.


4/ Cadmium shall not be used in potable water systems.

Oxygen systems for aerospace, shipboard, and ground support equipment. Parts for use on oxygen systems shall be identified in the PIN as code "A" and shall be furnished cleaned, packaged, and labeled in accordance with SAE-AS611 to a process approved by the user.

Users are cautioned that the 90° pipe elbow should be evaluated to their cleanliness requirements before installing in any equipment. Only qualified technical personnel with knowledge for the selection of cleaning methods for oxygen rich environments should make the determination as to what cleanliness level is acceptable for their application.

## AN914 Rev 11

PIN: The PIN consists of the prefix “AN” the specification sheet number, a dash number for internal and external pipe thread size, material code letter, finish code, and oxygen code. Unassigned PIN’s shall not be used.

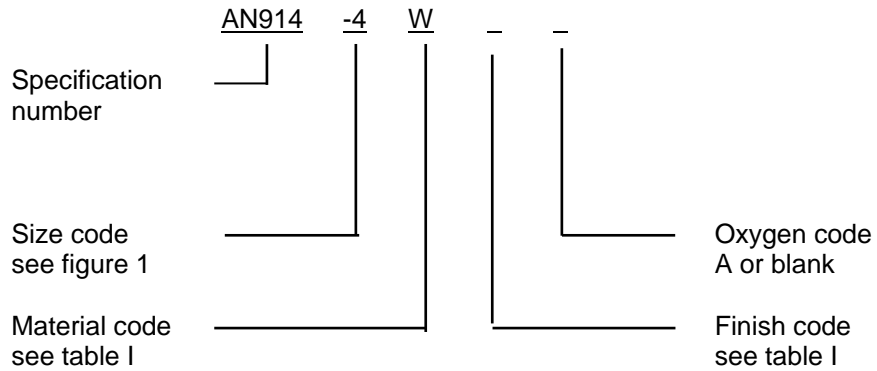

## PIN examples:

AN914-4W indicates a 90° elbow 1/2-14 ANPT internal and external pipe thread, aluminum alloy 7075-T73.

AN914-1WV indicates a 90° elbow 1/2-14 ANPT internal and external pipe thread, aluminum alloy 7075-T73 finish with high purity aluminum.

AN914-1WA indicates a 90° elbow 1/2-14 ANPT internal and external pipe thread, aluminum alloy 7075-T73 for use on oxygen systems.

Marking: Part shall be permanently marked with the AN PIN, and include the manufacturers CAGE, name, or trademark.

## Supersession data:

Due to stress corrosion cracking aluminum alloys 2014 and 2024 “D” designator has been replaced by aluminum alloy 7075 “W” designator. Example: AN914-8D use AN918-8W.

Metal cracking due to high temperatures CRES alloy 347 “S” designator has been replaced by CRES alloy 321 “R” designator. Example: AN914-8S use AN914-8R.

Table II provides a detailed cross-reference of AN914 PINs and replacement SAE-AS4854 PINs. Users are cautioned to evaluate replacements for their particular application.

**CAUTION:** The superseding information is valid as of the date of this specification and may be superseded by subsequent revisions of the superseding document.

## AN914 Rev 11

TABLE II. Cross-reference data.

| AN PIN<br>(inactive) | Pipe<br>size | Replacement<br>AS PIN<br>(for new design) | AN PIN<br>(inactive) | Pipe<br>size | Replacement<br>AS PIN<br>(for new design) |
|----------------------|--------------|---|----------------------|--------------|---|
| AN914-1              | .125         | AS4854-01                                 | AN914-6              | .750         | AS4854-06                                 |
| AN914-1D             | .125         | AS4854W01                                 | AN914-6D             | .750         | AS4854W06                                 |
| AN914-1DV            | .125         | AS4854W01V                                | AN914-6DV            | .750         | AS4854W06V                                |
| AN914-1J             | .125         | AS4854J01                                 | AN914-6J             | .750         | AS4854J06                                 |
| AN914-1K             | .125         | AS4854K01                                 | AN914-6K             | .750         | AS4854K06                                 |
| AN914-1R             | .125         | AS4854R01                                 | AN914-6R             | .750         | AS4854R06                                 |
| AN914-1S             | .125         | AS4854R01                                 | AN914-6S             | .750         | AS4854R06                                 |
| AN914-1T             | .125         | None                                      | AN914-6T             | .750         | None                                      |
| AN914-1W             | .125         | AS4854W01                                 | AN914-6W             | .750         | AS4854W06                                 |
| AN914-1WV            | .125         | AS4854W01V                                | AN914-6WV            | .750         | AS4854W06V                                |
| AN914-2              | .250         | AS4854-02                                 | AN914-8              | 1.000        | AS4854-08                                 |
| AN914-2D             | .250         | AS4854W02                                 | AN914-8D             | 1.000        | AS4854W08                                 |
| AN914-2DV            | .250         | AS4854W02V                                | AN914-8DV            | 1.000        | AS4854W08                                 |
| AN914-2J             | .250         | AS4854J02                                 | AN914-8J             | 1.000        | AS4854J08                                 |
| AN914-2K             | .250         | AS4854K02                                 | AN914-8K             | 1.000        | AS4854K08                                 |
| AN914-2R             | .250         | AS4854R02                                 | AN914-8R             | 1.000        | AS4854R08                                 |
| AN914-2S             | .250         | AS4854R02                                 | AN914-8S             | 1.000        | AS4854R08                                 |
| AN914-2T             | .250         | None                                      | AN914-8T             | 1.000        | None                                      |
| AN914-2W             | .250         | AS4854W02                                 | AN914-8W             | 1.000        | AS4854W08                                 |
| AN914-2WV            | .250         | AS4854W02V                                | AN914-8WV            | 1.000        | AS4854W08V                                |
| AN914-3              | .375         | AS4854-03                                 | AN914-10             | 1.250        | AS4854-10                                 |
| AN914-3D             | .375         | AS4854W03                                 | AN914-10D            | 1.250        | AS4854W10                                 |
| AN914-3DV            | .375         | AS4854W03V                                | AN914-10DV           | 1.250        | AS4854W10V                                |
| AN914-3J             | .375         | AS4854J03                                 | AN914-10J            | 1.250        | AS4854J10                                 |
| AN914-3K             | .375         | AS4854K03                                 | AN914-10K            | 1.250        | AS4854K10                                 |
| AN914-3R             | .375         | AS4854R03                                 | AN914-10R            | 1.250        | AS4854R10                                 |
| AN914-3S             | .375         | AS4854R03                                 | AN914-10S            | 1.250        | AS4854R10                                 |
| AN914-3T             | .375         | None                                      | AN914-10T            | 1.250        | None                                      |
| AN914-3W             | .375         | AS4854W03                                 | AN914-10W            | 1.250        | AS4854W10                                 |
| AN914-3WV            | .375         | AS4854W03V                                | AN914-10WV           | 1.250        | AS4854W10V                                |
| AN914-4              | .500         | AS4854-04                                 |                      |              |   |
| AN914-4D             | .500         | AS4854W04                                 |                      |              |   |
| AN914-4DV            | .500         | AS4854W04V                                |                      |              |   |
| AN914-4J             | .500         | AS4854J04                                 |                      |              |   |
| AN914-4K             | .500         | AS4854K04                                 |                      |              |   |
| AN914-4R             | .500         | AS4854R04                                 |                      |              |   |
| AN914-4S             | .500         | AS4854R04                                 |                      |              |   |
| AN914-4T             | .500         | None                                      |                      |              |   |
| AN914-4W             | .500         | AS4854W04                                 |                      |              |   |
| AN914-4WV            | .500         | AS4854W04V                                |                      |              |   |

## AN914 Rev 11

Changes from previous issues. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to SAE-AS4842, this document references the following:

|                    |                  |             |
|--------------------|------------------|-------------|
| FED-STD-595/10080  | SAE-AMS-QQ-P-416 | SAE-AMS4614 |
| MIL-A-8625         | SAE-AMS-QQ-S-763 | SAE-AMS5639 |
| MIL-DTL-83488      | SAE-AMS2472      | SAE-AMS5645 |
| ASME B46.1         | SAE-AMS2488      | SAE-AMS5648 |
| ASTM B124/B124M    | SAE-AMS2700      | SAE-ARP1590 |
| ASTM B138/B138M    | SAE-AMS4133      | SAE-AS611   |
| SAE-AMS-QQ-A-225/6 | SAE-AMS4124      | SAE-AS4854  |
| SAE-AMS-QQ-A-225/9 | SAE-AMS4141      | SAE-AS5201  |
| SAE-AMS-QQ-A-367   | SAE-AMS4339      | SAE-AS71051 |

## CONCLUDING MATERIAL

## Custodians:

Army - AV  
Navy - AS  
Air Force - 99  
DLA - CC

Preparing activity:  
DLA - CC

(Project 4730-2013-011)

## Review activities:

Navy - MC, SH  
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.