


## AIR MATERIEL COMMAND, WRIGHT FIELD, DAYTON, OHIO

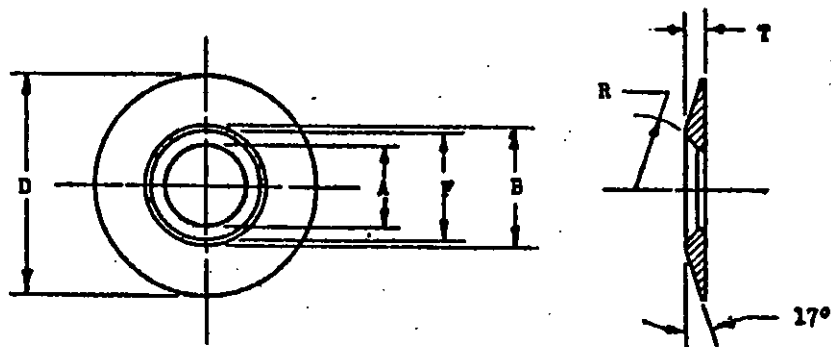

②

| PART<br>NUMBER | BOLT<br>SIZE | A<br>DIA | B<br>DIA | D<br>DIA | F<br>DIA | R<br>±.005<br>RAD | T    |
|----------------|--------------|----------|----------|----------|----------|-------------------|------|
| 950-3          | #10          | .234     | .438     | .750     | .375     | .375              | .078 |
| 950-4          | 1/4          | .297     | .500     | 1.000    | .438     | .375              | .094 |
| 950-5          | 5/16         | .375     | .562     | 1.000    | .500     | .375              | .094 |
| 950-6          | 3/8          | .438     | .625     | 1.125    | .562     | .500              | .094 |
| 950-7          | 7/16         | .500     | .750     | 1.250    | .688     | .500              | .125 |
| 950-8          | 1/2          | .562     | .812     | 1.500    | .750     | .500              | .125 |
|                |              |          |          |          |          |                   |      |

USE WITH BALL SEAT WASHERS SHOWN ON 955.

MATERIAL: STEEL.

② FINISH: CADMIUM PLATE, SPEC. AN-P-61 OR ZINC PLATE, SPEC. AN-P-32.

② REMOVE ALL BURRS AND SHARP EDGES.

② DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES:  
DECIMALS ±.010, ANGLES ±1°.

REVISED ① 1 NOV 26 ② 20 MAY 47

APPROVED

22 MAR 26

②

ARMY AIR FORCES STANDARD

--WASHER - BALL SOCKET

950