


INCH-POUND  
MIL-PRF-32271/11  
30 October 2008

PERFORMANCE SPECIFICATION SHEET  
BATTERY, NON-RECHARGEABLE, LITHIUM

This specification is approved for use by all Departments  
and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification and MIL-PRF-32271.

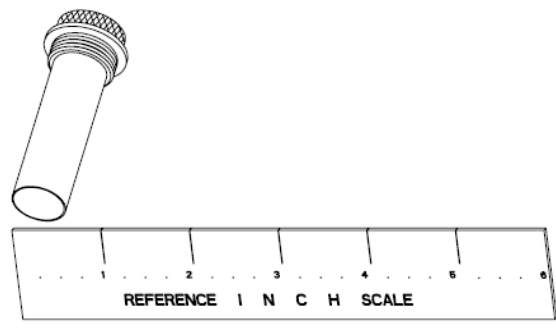

See NOTES for  
nominal  
dimensions; see  
applicable  
drawing for  
dimensional  
requirements.

Figure 1 – General View, M32271/11 Battery Shape

REQUIREMENTS (see 1.2 for Type, Class, and Features descriptions):

- Type – I
- Class – 1
- Features – A
- PIN – M32271/11-11A
- Approved chemistry: Lithium manganese dioxide (Li/MnO<sub>2</sub>)

Specification requirements: The following requirements of MIL-PRF-32271, identified therein as “when specified”, are applicable as indicated below:

## MIL-PRF-32271/11

<u>Requirement</u>	<u>Specification Reference</u>	<u>Applicability</u>
Parallel cell arrangements	3.4	No
Connectors <sup>1</sup>	3.4.5	Yes
Battery charger connection	3.4.5.1	No
Connection integrity	3.4.5.2	No
Terminal integrity	3.4.6	No
Complete discharge device	3.4.7	No
State of charge device	3.4.8	No
State of charge data output	3.4.8e	No
Cell charging	3.5.3	No
Nail penetration	3.5.4	No
Cell series string short circuit	3.5.6	No
Parallel string charge protection	3.5.6.1	No
Charge protection	3.5.11	No
Over-current protection	3.5.13.1	No
Over-temperature protection	3.5.14	No
Surface temperature	3.6h	No
Capacity tests LR and LRT		No
Immersion	3.7.8	Yes
Watertight integrity	3.7.9	No
DO NOT CHARGE! marking	3.8.1.2b	No
Complete discharge device marking/label	3.8.4	No
State of charge marking	3.8.5	No

Dimensions, marking and configuration

Battery - Drawing A3315888  
 Battery Connector – Drawing A3315888  
 Mating Connector – P/N SDU-5/E or equal  
 Battery Charger Connector – Not applicable

Battery voltages (3.4.4 & 4.6.1.5):

Battery open-circuit voltage (3.4.4.1 & 4.6.1.5.1):

Maximum – 6.6 volts

Minimum – 6.0 volts

Battery closed circuit voltage (3.4.4.2 & 4.6.1.5.2):

For capacity, initial voltage delay and closed circuit voltage: Minimum – 4.0 volts

Cell closed circuit voltage test (3.4.4.3 & 4.6.1.3): Minimum - 2.0 volts per cell

Maximum weight (3.1 & 4.6.1.6): 2.5 ounces (70.9 g)

Capacity test requirements (3.6 & 4.6.4):

---

<sup>1</sup> For continuity only

## MIL-PRF-32271/11

Test	Initial voltage delay		Minimum Capacity	Storage Period		Cut-off Volts
	Time (MAX) to Volts			1-Week	4-Week	
I	1 second	4.0	22 hours			4.0
L	1 second	4.0	10 hours			4.0
H	1 second	4.0	21 hours			4.0
IT	1 second	4.0	20.5 hours	19.8 hours		4.0
LT	1 second	4.0	9.3 hours	9.0 hours		4.0
HT	1 second	4.0	19.5 hours	18.9 hours		4.0

Abuse test minimum capacity requirement (3.5.12 & 4.6.2.12i): 0.93 ampere-hours

## METHODS OF EXAMINATION AND TEST:

Verification requirements. The following verification requirements of MIL-PRF-32271, identified therein by the phrase "when specified," are applicable as indicated below:

Test Requirement	Specification Reference	Applicability
Parallel discharges	Tables III, IV, IX & XI	No
Connector <sup>2</sup>	4.6.1.7	Yes
Battery charger connection test	4.6.1.7.1	No
Static connection integrity	4.6.1.7.2	No
Dynamic connection integrity	4.6.1.7.3	No
Terminal integrity	4.6.1.8	No
Complete discharge device	4.6.1.9	No
State of charge device	4.6.1.10	No
Cell charging	4.6.2.3	No
Nail penetration	4.6.2.4	No
Cell series string short	4.6.2.6	No
Parallel cell charge protection	4.6.2.6.1	No
Charge protection test	4.6.2.11	No
Battery over-current protection	4.6.2.13	No
Battery over-temperature protection	4.6.2.14	No
Surface temperature	4.6.4.1	No
Capacity test LR	4.6.4.1.5	No
Capacity test LRT	4.6.4.1.9	No
Immersion	4.6.5.8	Yes
Watertight integrity	4.6.5.9	No

Cell closed-circuit voltage test: When cells are tested as specified in 4.6.1.3, load each cell with 45 ohms, 45 milli-amperes, or 0.1 watts.

Battery closed-circuit voltage test: When tested as specified in 4.6.1.5.2, load each battery with 90 ohms, 45 milli-amperes, or 0.2 watts.

<sup>2</sup> Verification for continuity only; insertion and withdrawal measurements not required for this battery

## MIL-PRF-32271/11

Connector (4.6.1.7): This test required to prove continuity only. Insertion and withdrawal force measurements are not required. Continuity can be demonstrated by the battery's ability to power the SDU-5/E in lieu of voltage measurements.

Abuse test, pre-discharge: When tested as specified in 4.6.2.12a, discharge with a load of 45 milli-amperes for 11 hours.

Abuse test, pulse discharge: When tested as specified in 4.6.2.12i, discharge with a load of 90 milli-amperes for 1 minute followed by 40 milli-amperes for 4 minutes, cycled continuously to 4.0 volts.

Immersion: When tested as specified in 4.7.5.8, apply a load of 45 milli-amperes during the storage and immersion time periods specified.

Capacity tests (4.6.4):

Test	Discharge Rate	Duty Cycle
I	45 milli-amperes	Continuous discharge to zero volts, followed by 45 milli-amperes forced discharge for 5 minutes.
L	45 milli-amperes	Continuous discharge to cut-off voltage
H	45 milli-amperes	Continuous discharge to cut-off voltage
IT	45 milli-amperes	Continuous discharge to cut-off voltage
LT	45 milli-amperes	Continuous discharge to cut-off voltage
HT	45 milli-amperes	Continuous discharge to cut-off voltage

NOTES:

(This section contains information of a general nature which may be helpful, but is not mandatory)

Intended use: This battery is intended for use in an emergency strobe light.

<sup>3</sup>Nominal ratings: The following are the nominal ratings for the battery described by this specification sheet. They are provided for information purposes.

---

<sup>3</sup> Capacity and energy delivered by a battery are significantly affected by usage conditions, such as temperature and loads applied. If you have any questions about use of this battery in a particular device or circumstance, please visit the following web site (contact info is posted): <http://www.cerdec.army.mil/c2d/armypower>.

## MIL-PRF-32271/11

<b>Battery PIN:</b>	<b>M32271/11-11A (Li/MnO<sub>2</sub>)</b>
<i>Overall Dimensions:</i>	3.1 in L x 0.665 in DIA (DIA for battery, not flange)
<i>MAX Weight:</i>	2.5 ounces (70.9 grams)
<i>Voltage Range:</i>	4.0-6.6
<i>Nominal Capacity: (in ampere-hours)</i>	1.0 Amp-hr
<i>Nominal Energy: (in watt-hours)</i>	5.0 Watt-hrs
<i>MAX rated power output:</i>	225 milli-watts
<i>MAX continuous load rating:</i>	45 milli-amperes
<i>MAX pulse load rating:</i>	90 milli-amperes
<i>Instantaneous trip rating:</i>	Not applicable
<i>Operating temperature range:</i>	-20 to 130°F (-29 to 55°C)
<i>Storage temperature range:</i>	-40 to 160°F (-40 to 71°C)
<i>MAX abusive temperature: (non-operating)</i>	195°F (91°C)

Other data:

Military Type Designations. The military type designation that relates to the PIN covered by this specification sheet is as follows: The BA-5374()/U designation has been used for the Type I PIN. This is a replacement for the BA-1574/U mercury battery, which is no longer available.

This battery was exempt from the transportation requirements of 49 CFR 173.185 until January 2008; now it is subject to the test requirements therein beginning in October 2009. Class 9 shipping labels typically won't be needed; consult with 49 CFR 173.185 for package quantity/size limitations. It has solid cathodes and contains less than 1.0 gram of lithium per cell and less than 2.0 grams of lithium per battery. It should be noted that all non-rechargeable lithium batteries are restricted from shipment as cargo aboard passenger aircraft within, entering, or leaving the US.

This battery does not have a complete discharge device. It is considered Non-Hazardous Solid Waste per the Resource Conservation and Recovery Act (RCRA). However, it is considered Hazardous Waste in states using Bioassay rules. Check with your local disposal office for rules that apply.

Navy safety tests of NAVSEA S9310-AQ-SAF-010 are required for this battery during first article testing. The test data provided from the testing will be used to evaluate applications for specific using devices and Navy platforms. Devices using this battery may require US Navy Safety Approval prior to use by Department of Navy users unless such approval has already been granted. Please consult with NAVSEA Instruction 9310.1 for further information.

MIL-PRF-32271/11

Custodians:

Army – CR  
Navy – NW  
Air Force – 99  
DLA – GS

Preparing activity:

Army – CR  
(Project Number 6135-2006-014)

Review activities:

Navy – SH, AS, MC  
Air Force – 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil> or <http://assist.daps.dla.mil/quicksearch/>.