
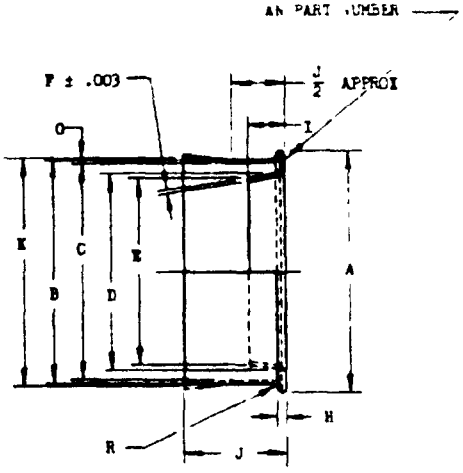


NSC This drawing was approved by joint action of the War and Navy Departments on the Army-Navy standard for this product. The drawing represents an authorized standard drawing for the same product and shall be used as the basis for the procurement of commercial supplies, or for use in war design, not later than 6 months after the latest date of approval shown. It may be put into effect, however, at an earlier date after presentation.

Also Government drawings, specifications, or other data are used for any purpose other than in connection with a definite project approved by the United States Government thereby incurs no responsibility or obligation whatsoever; and the fact that the Government may have furnished, or it may be supplied the said drawings, specifications, or other data is not to be regarded by contractors or others as in any manner limiting the holder or any other person or organization, or restricting any rights or permissions in manufacturing, use, or sale any product or invention that may in any way be related thereto.



AN PART NO.	CONDUIT SIZE	A DIA	B DIA	C DIA	D DIA	E DIA	F	G	H	I	J	K + .015 - .000 DIA	R MAX RAD
AN3050-3	3/16	.448	.385	.345	.188	1/8	.017	.020	.040	7/64	7/16	.398	.020
AN3050-4	1/4	.566	.447	.407	.250	3/16	.017	.020	.040	7/64	7/16	.460	.030
AN3050-6	3/8	.682	.572	.532	.375	5/16	.017	.020	.040	1/8	7/16	.585	.030
AN3050-8	1/2	.807	.697	.657	.500	7/16	.017	.020	.040	5/32	7/16	.710	.030
AN3050-10	5/8	.932	.822	.782	.625	9/16	.017	.020	.040	5/32	7/16	.835	.030
AN3050-12	3/4	1.105	.982	.942	.750	11/16	.017	.020	.040	5/32	1/2	1.001	.030
AN3050-16	1	1.355	1.267	1.227	1.000	15/16	.017	.020	.040	5/16	5/8	1.300	.030
AN3050-20	1-1/4	1.668	1.522	1.482	1.250	1- 3/16	.017	.020	.040	5/16	5/8	1.555	.030
AN3050-24	1-1/2	2.018	1.777	1.737	1.500	1- 7/16	.017	.020	.040	5/16	3/4	1.823	.030
AN3050-28	1-3/4	2.160	2.029	1.989	1.750	1-11/16	.017	.020	.040	5/16	7/8	2.088	.030
AN3050-32	2	2.410	2.282	2.242	2.000	1-15/16	.017	.020	.040	5/16	1	2.353	.030
AN3050-40	2-1/2	2.910	2.797	2.757	2.500	2- 7/16	.017	.020	.040	5/16	1	2.868	.030

④ MATERIAL ALUMINUM, SPECIFICATION QQ-A-561, TEMPER O OR SPECIFICATION QQ-A-350, TEMPER O
 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES FRACTIONS ±1/64, DECIMALS ±.005

APPROVED BY: [Signature] 6 FEB 41 2 11 AUG 47 15 MAY 52 15 JUN 53

PROCUREMENT SPECIFICATION NONE	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3050
	FERRULE-CONDUIT, FLEXIBLE	