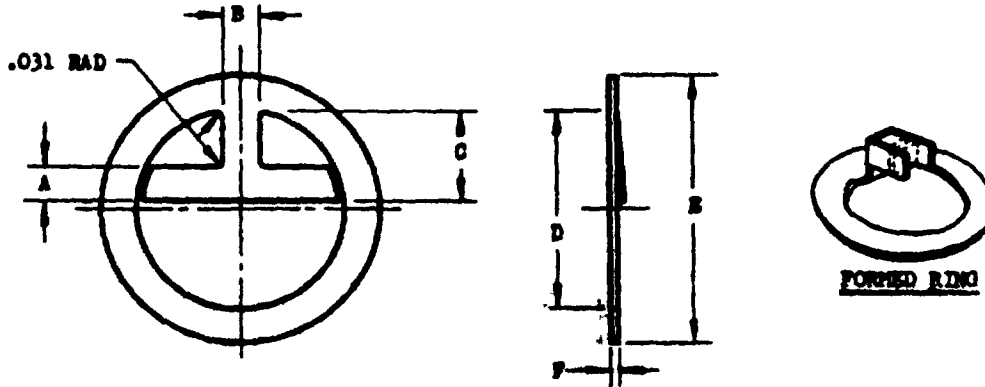


[illegible]

AN PART NO.	USE WITH AN SHELL SIZE	A	B	C	D ±.005 DIA	E ±.005 DIA	F +.005 -.002
AN3111 -1	8S & 10S	.062	.062	.156	.323	.448	.020
AN3111 -2	10SL, 12 & 12S	.062	.062	.188	.441	.566	
AN3111 -3	14 & 14S	.062	.062	.188	.557	.682	
AN3111 -4	16 & 16S	.094	.094	.406	.620	.907	
AN3111 -5	18	.125	.125	.312	.682	.932	
AN3111 -6	20 & 22	.125	.125	.500	.914	1.105	
AN3111 -7	24 & 28	.125	.125	.438	1.105	1.355	
AN3111 -8	32	.125	.125	.562	1.418	1.668	.032
AN3111 -9	36	.125	.125	.562	1.668	1.918	
AN3111-10	40	.125	.125	.562	1.910	2.160	
AN3111-11	44	.125	.125	.688	2.160	2.410	
AN3111-12	48	.125	.125	.688	2.660	2.910	

MATERIAL: SOFT COPPER, SPEC QQ-C-501a-3.

PLATING: TIN

•DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS $\pm .010$.

APPROVED 22 Oct 48 REVISED