



1. The Government hereby grants to other persons the right to use the information contained herein for their own purposes, provided that the information is not to be used for the production of similar information without the express written consent of the Government. The Government shall not be bound by any limitation on the right to use the information contained herein. The Government shall not be bound by any limitation on the right to use the information contained herein. The Government shall not be bound by any limitation on the right to use the information contained herein.

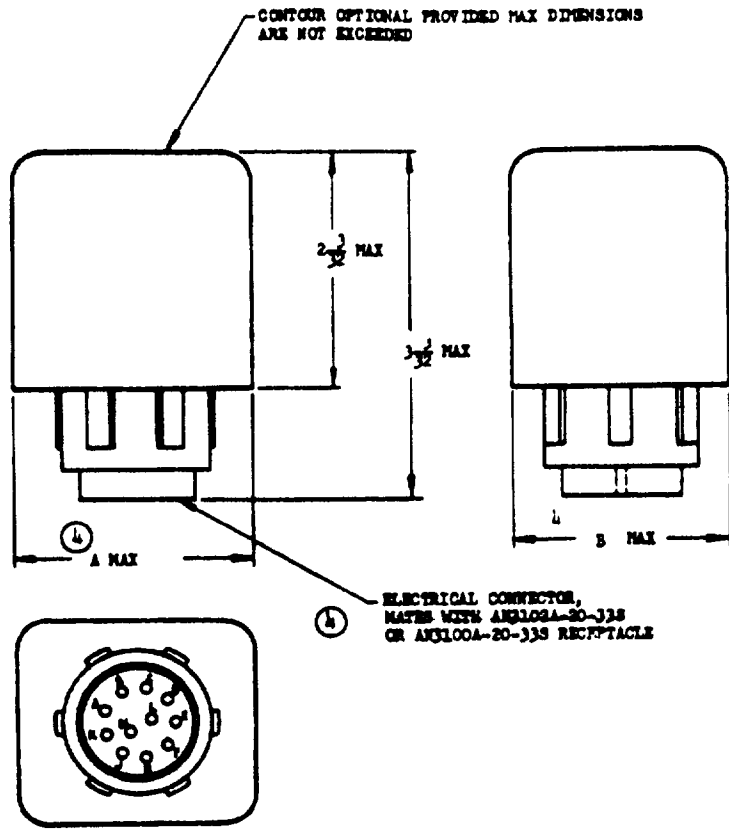

DETAIL REQUIREMENTS

- (A) MAXIMUM OPERATING VOLTAGE 29 VOLTS
- (B) PICKUP VOLTAGE 18 VOLTS
- (C) DROPOUT VOLTAGE 7 VOLTS +0, -5.5
- (D) RATED LOAD: (PER POLE)

	NORMALLY OPEN	NORMALLY CLOSED
RESISTIVE (A-C 600-CYCLE, 115 VOLTS)	10 AMP	10 AMP
RESISTIVE (DC)	10 AMP	10 AMP
INDUCTIVE	10 AMP	10 AMP
MOTOR	6 AMP	6 AMP

- (E) COIL CURRENT 0.35 AMP MAX
- (F) MINIMUM OPERATING PERIOD 3 HOURS
- (G) MINIMUM OPERATING CYCLES 50,000
- (H) MAXIMUM WEIGHT 7.6 POUND
- (I) RATED DUTY CONTINUOUS
- (J) NOMINAL COIL VOLTAGE 28 VOLTS

AN PART NO.	A (MAX)	B (MAX)
AN3308-1	2-3/32	1-23/32
AN3308-2	2-3/16	1-33/16

INACTIVE FOR DESIGN AFTER 17 NOV 1954 NO SUPERSEDING STANDARD

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 387.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED. TOLERANCES FRACTIONS ±1/64, DECIMALS ±.005.

OVERLOAD, RUPTURE, AND CONTACT DROP TESTS OF SPECIFICATION MIL-R-6106 ARE NOT APPLICABLE TO PART NUMBER AN3308-1 RELAY. PART NUMBER AN3308-2 RELAY SHALL BE EQUIPPED WITH GLASS TO METAL SEALED ELECTRICAL CONNECTOR. PART NUMBER AN3308-2 RELAY SHALL MEET MINIMUM CURRENT REQUIREMENTS ESTABLISHED IN THE PROCUREMENT SPECIFICATION.

PROCUREMENT SPECIFICATION MIL-R-6106	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3308
	RELAY, 10 AMP, 3PDT, SEALED, CONNECTOR MOUNTING, CLASS 0	

APPROVED 21 Apr 50 REVIEWED 1 28 Jul 52 ? 17 Mar 54 3 10 Apr 54 4 27 Jul 58