

MILITARY STANDARD

UNIT LOAD

FOR UNDERWAY REPLENISHMENT

MIL-STD-1323-342
(NAVY)

24 August 1990

GUIDED MISSILE, AGM-136A (TACIT RAINBOW) IN CONTAINER CNU-432/E

UNIT LOAD DATA DODIC/NALC NO. TBD

NUMBER OF TACIT RAINBOWS PER CONTAINER 1
NUMBER OF CONTAINERS PER UNIT LOAD 2
GROSS WEIGHT OF ONE CONTAINER 850 LBS
WEIGHT OF STEEL STRAPPING 5 LBS
GROSS WEIGHT OF UNIT LOAD 1705 LBS Δ
CUBE 96.3 CU FT

Δ DO NOT USE FOR SHIPPING WEIGHT

SHIPPING AND STORAGE CONTAINER, CNU-432/E


DRAWING 18894-DL8644200-10

CONTAINER DIMENSIONS

LENGTH 111 1/4
WIDTH 25 1/4
HEIGHT (OVERALL) . . . 30 1/4
(STACKING) . . . 29

DO NOT STACK MORE THAN
3 UNIT LOADS HIGH IN STORAGE.

HAZARD CLASSIFICATION		
DODIC/NALC	ITEM NAME	DOT
PE37	AGM-136A	CLASS A

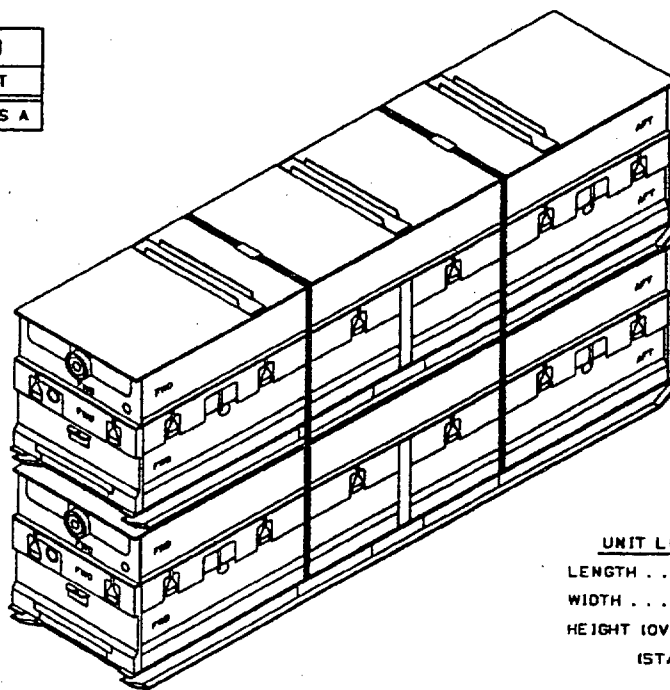

UNIT LOAD DIMENSIONS

LENGTH 111 1/4
WIDTH 25 1/4
HEIGHT (OVERALL) . . . 59 1/4
(STACKING) . . . 58

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION IS UNLIMITED.

NOTES:

- UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
- FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV	REVISION DESCRIPTION	DATE	TDA	SYSCOM
LTR				
			APPROVAL	

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

P. Smiler 8/22/90
SIGNATURE TDA, WPNSTA EARLE DATE
W. P. Earle 8/22/90
SIGNATURE AIRSYS COM BY DIRECTION DATE

ORIGINATOR *A. Bender* 8/15/90
DATE

WPNSTA EARLE, NEW JERSEY

PAGE 1 OF 2


MIL-STD-1323-342 (NAVY).

UNITIZING PROCEDURE

- (A) STACK TWO CONTAINERS AS SHOWN.
 (B) POSITION STRAPPING, ITEM 1, THROUGH THE FORK POCKETS OF THE BOTTOM CONTAINER WITH THE FORWARD STRAP AT THE FORWARD END OF THE FORWARD POCKET AND THE AFT STRAP AT THE AFT END OF THE AFT POCKET.
 (C) POSITION STRAPPING, ITEM 1, OVER THE UNIT LOAD. TENSION AND DOUBLE NOTCH THE SEALS, ITEM 2.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-1323 (NAVY).

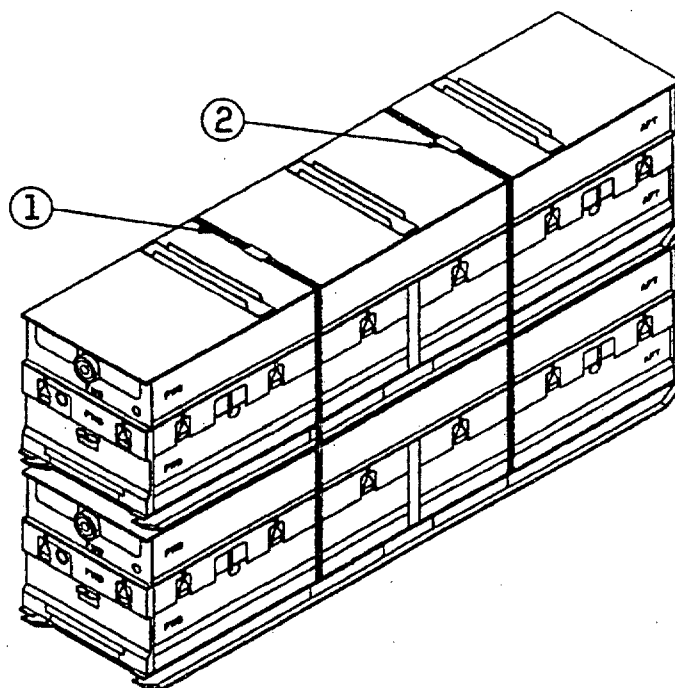

DEUNITIZING PROCEDURE

- (A) CUT AND REMOVE STRAPPING.
 (B) REMOVE TOP CONTAINER.

NOTES:

1. ALL MATERIALS SHALL BE IN ACCORDANCE WITH THE BASIC DOCUMENT, MIL-STD-1323 (NAVY).
 2. DO NOT USE TYPE 1 STRAPPING WITH POWER MACHINES.

2	2	SEAL	SEE NOTE 1	1 1/4
2	1	STEEL STRAPPING	SEE NOTES 1 & 2	1 1/4 X .035 X 14 FT 6 IN
REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS

LIST OF MATERIALS

REVIEW ACTIVITY:
NAVY-05, AS

PREPARING ACTIVITY:
NAVY-05
PROJECT NO. 8140-N7591

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL		OMB Approval No. 22-R255
<p>INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.</p>		
DOCUMENT IDENTIFIER AND TITLE		
MIL-STD-1323-342, Unit Load f/Tacit Rainbow in CNU-432/E Container		
NAME OF ORGANIZATION AND ADDRESS		CONTRACT NUMBER
		MATERIAL PROCURED UNDER A
		<input type="checkbox"/> DIRECT GOVERNMENT CONTRACT <input type="checkbox"/> SUBCONTRACT
1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?		
A. GIVE PARAGRAPH NUMBER AND WORDING.		
B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES		
2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID		
3. IS THE DOCUMENT RESTRICTIVE?		
<input type="checkbox"/> YES <input type="checkbox"/> NO (If "Yes", in what way?)		
4. REMARKS		
SUBMITTED BY (Printed or typed name and address - Optional)		TELEPHONE NO.
		DATE

DD FORM 1426
1 JAN 72

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802