


NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereunder assumes no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE.—This device was approved by joint action of the Air Force and Navy Departments in accordance with the provisions of the Air Force-Navy Standard for this device. This standard is intended to be used for the same product and shall become effective for the purpose of procurement of such product on or after the date of approval shown, but later than six months after the latest date of approval shown.

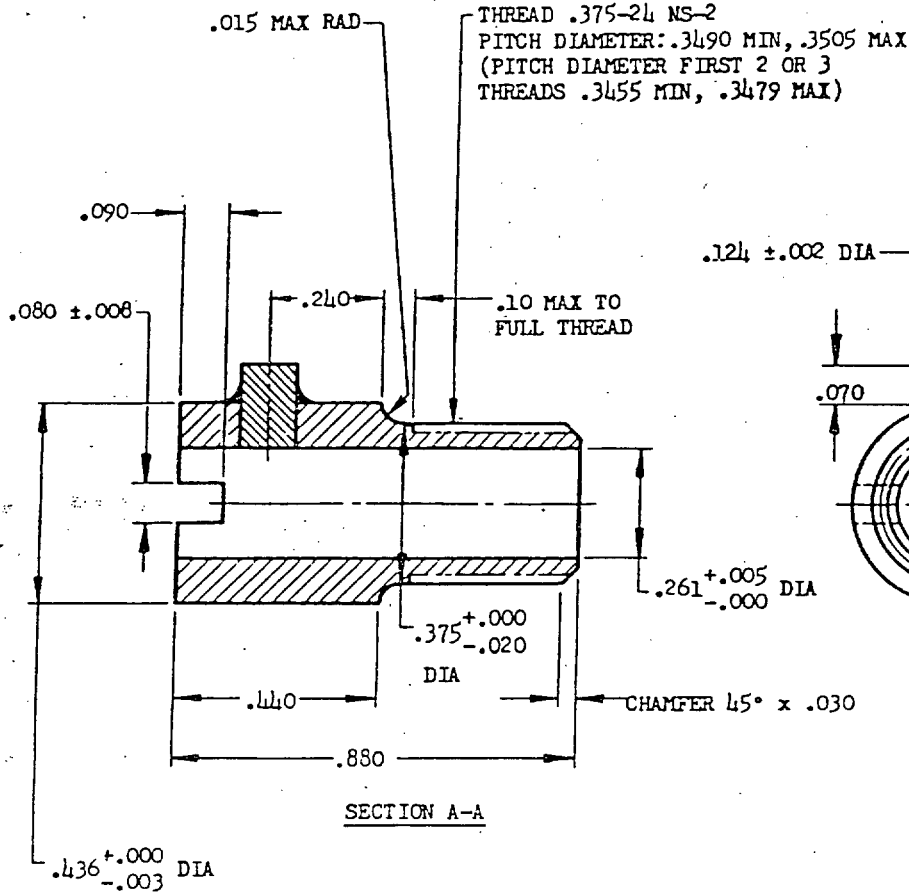

AN PART NO.
AN4076-1

THREAD FORM SHALL BE IN ACCORDANCE WITH SPECIFICATION AN-S-126.

MATERIAL: AN-QQ-S-771, COMPOSITION FM, CONDITION B.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: THREE PLACE DECIMALS ±.010, ANGLES ±2°.

④

PROCUREMENT SPECIFICATION
 NONE

AIR FORCE-NAVY AERONAUTICAL STANDARD
 FITTING - ENGINE CYLINDER HEAD TEMPERATURE MEASURING ELEMENT

AN4076

APPROVED 17 Dec 43 REVISED ① 21 Sep 44 ② 31 Oct 45 ③ 26 Mar 48 ④ 15 May 50