


CS: When Government drawings, specifications, or other data are used for any purpose other than in connection with a Government operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

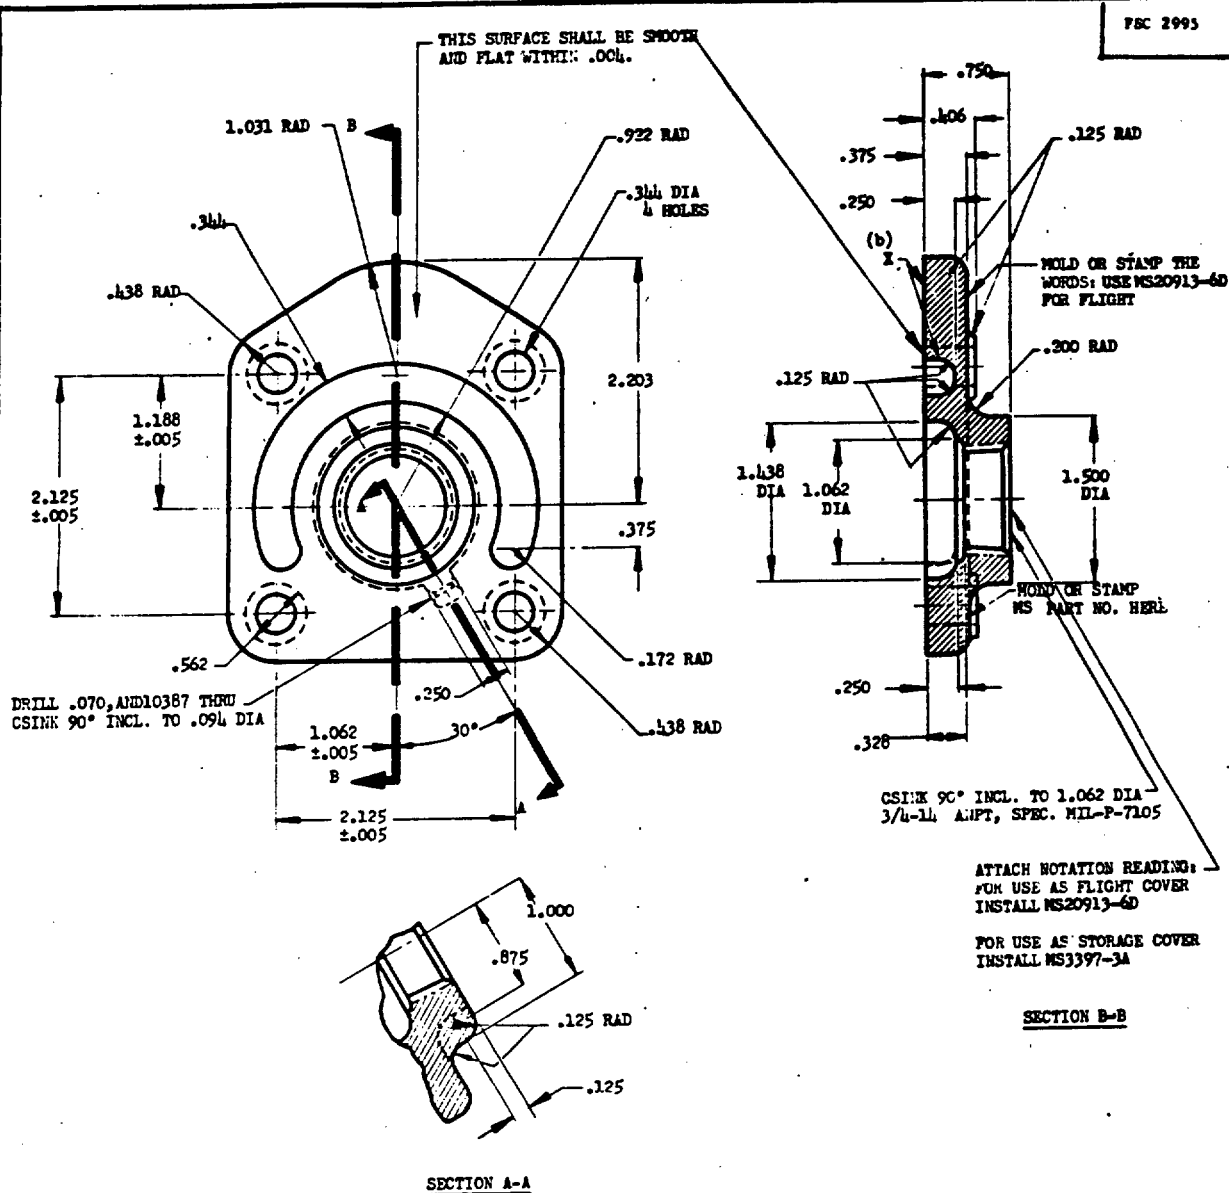

AN PART NO.

AN5025-1

MATERIAL: ALUMINUM ALLOY, SPEC. QQ-A-591; OR QQ-A-596.

FINISH: (a) ANODIZE ALL ALUM. ALLOY SURFACES IN ACCORDANCE WITH SPECIFICATION MIL-A-8625.  
 (b) PAINT ALL SURFACES (EXCEPT THOSE MARKED "X") WITH ONE COAT OF ZINC CHROMATE PRIMER, SPECIFICATION TT-P-1757, AND TWO COATS OF EITHER GRAY ENAMEL, SPECIFICATION TT-E-489, OR GRAY LACQUER, SPECIFICATION TT-L-32, ENGINE GRAY.  
 (c) OTHER SURFACES (EXCEPT THREADS) MAY BE PAINTED WITH PRIMER AND ONE COAT OF ENAMEL OR LACQUER.

BREAK SHARP EDGES .003 TO .015.

CASTING TO BE FURNISHED WITH A COMMERCIAL CLEANED PARTING LINE.

REMOVE FINS AND SPRUES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: THREE PLACE DECIMALS ±.010, ANGLES ± 2°.

PROCUREMENT SPECIFICATION

NONE

AIR FORCE-NAVY AERONAUTICAL STANDARD

COVER - PROPELLER GOVERNOR DRIVE

AN5025

APPROVED 23 Jan 66 REVISED 1 12 Feb 67 2 25 Jul 62 3 4 November 1970 4 19 February 1974