

AMC PAMPHLET

AMCP 706-341

THIS IS A REPRINT WITHOUT CHANGE OF ORDP 20-341

AD830277

# RESEARCH AND DEVELOPMENT OF MATERIEL

ENGINEERING DESIGN HANDBOOK

## CARRIAGES AND MOUNTS SERIES CRADLES



### STATEMENT #2 UNCLASSIFIED

This document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of: Army Materiel Command, Attn: AMCRD-TV, Washington, D.C. 20315

HEADQUARTERS, U. S. ARMY MATERIEL COMMAND

SEPTEMBER 1963

## **DISCLAIMER NOTICE**

**THIS DOCUMENT IS BEST QUALITY  
PRACTICABLE. THE COPY FURNISHED  
TO DTIC CONTAINED A SIGNIFICANT  
NUMBER OF PAGES WHICH DO NOT  
REPRODUCE LEGIBLY.**

## ENGINEERING DESIGN HANDBOOK SERIES

The Engineering Design Handbook Series is intended to provide a compilation of principles and fundamental data to supplement experience in assisting engineers in the evolution of new designs which will meet tactical and technical needs while also embodying satisfactory producibility and maintainability.

Listed below are the Handbooks which have been published or submitted for publication. Handbooks with publication dates prior to 1 August 1962 were published as 20-series Ordnance Corps pamphlets. AMC Circular 310-38, 19 July 1963, redesignated those publications as 706-series AMC pamphlets (i.e., ORDP 20-138 was redesignated AMCP 706-138). All new, reprinted, or revised handbooks are being published as 706-series AMC pamphlets.

### General and Miscellaneous Subjects

Number	Title
106	Elements of Armament Engineering, Part One, Sources of Energy
107	Elements of Armament Engineering, Part Two, Ballistics
108	Elements of Armament Engineering, Part Three, Weapon Systems and Components
110	Experimental Statistics, Section 1, Basic Concepts and Analysis of Measurement Data
111	Experimental Statistics, Section 2, Analysis of Enumerative and Classificatory Data
112	Experimental Statistics, Section 3, Planning and Analysis of Comparative Experiments
113	Experimental Statistics, Section 4, Special Topics
114	Experimental Statistics, Section 5, Tables
134	Maintenance Engineering Guide for Ordnance Design
135	Inventions, Patents, and Related Matters
136	Servomechanisms, Section 1, Theory
137	Servomechanisms, Section 2, Measurement and Signal Converters
138	Servomechanisms, Section 3, Amplification
139	Servomechanisms, Section 4, Power Elements and System Design
170(C)	Armor and Its Application to Vehicles (U)
270	Propellant Actuated Devices
290(C)	Warheads--General (U)
331	Compensating Elements (Fire Control Series)
355	The Automotive Assembly (Automotive Series)

### Ammunition and Explosives Series

175	Solid Propellants, Part One
176(C)	Solid Propellants, Part Two (U)
177	Properties of Explosives of Military Interest, Section 1
178(C)	Properties of Explosives of Military Interest, Section 2 (U)
210	Fuzes, General and Mechanical
211(C)	Fuzes, Proximity, Electrical, Part One (U)
212(S)	Fuzes, Proximity, Electrical, Part Two (U)
213(S)	Fuzes, Proximity, Electrical, Part Three (U)
214 (S)	Fuzes, Proximity, Electrical, Part Four (U)
215(C)	Fuzes, Proximity, Electrical, Part Five (U)
244	Section 1, Artillery Ammunition--General, with Table of Contents, Glossary and Index for Series
245(C)	Section 2, Design for Terminal Effects (U)
246	Section 3, Design for Control of Flight Characteristics
247(C)	Section 4, Design for Projection (U)
248	Section 5, Inspection Aspects of Artillery Ammunition Design
249(C)	Section 6, Manufacture of Metallic Components of Artillery Ammunition (U)

### Ballistic Missile Series

Number	Title
281(S-RD)	Weapon System Effectiveness (U)
282	Propulsion and Propellants
284(C)	Trajectories (U)
286	Structures
<u>Ballistics Series</u>	
140	Trajectories, Differential Effects, and Data for Projectiles
160(S)	Elements of Terminal Ballistics, Part One, Introduction, Kill Mechanisms, and Vulnerability (U)
161(S)	Elements of Terminal Ballistics, Part Two, Collection and Analysis of Data Concerning Targets (U)
162(S-RD)	Elements of Terminal Ballistics, Part Three, Application to Missile and Space Targets (U)

### Carriages and Mounts Series

341	Cradles
342	Recoil Systems
343	Top Carriages
344	Bottom Carriages
345	Equilibrators
346	Elevating Mechanisms
347	Traversing Mechanisms

### Materials Handbooks

301	Aluminum and Aluminum Alloys
302	Copper and Copper Alloys
303	Magnesium and Magnesium Alloys
305	Titanium and Titanium Alloys
306	Adhesives
307	Gasket Materials (Nonmetallic)
308	Glass
309	Plastics
310	Rubber and Rubber-Like Materials
311	Corrosion and Corrosion Protection of Metals

### Surface-to-Air Missile Series

291	Part One, System Integration
292	Part Two, Weapon Control
293	Part Three, Computers
294(S)	Part Four, Missile Armament (U)
295(S)	Part Five, Countermeasures (U)
296	Part Six, Structures and Power Sources
297(S)	Part Seven, Sample Problem (U)

HEADQUARTERS  
UNITED STATES ARMY MATERIEL COMMAND  
WASHINGTON 25, D. C.

30 September 1963


AMCP 706-341, Cradles, forming part of the Carriages and Mounts Series of the Army Materiel Command Engineering Design Handbook Series, is published for the information and guidance of all concerned.

(AMCRD)

FOR THE COMMANDER:

SELWYN D. SMITH, JR.  
Major General, USA  
Chief of Staff

OFFICIAL:

  
R. O. DAVIDSON  
Colonel, GS  
Chief, Administrative Office

DISTRIBUTION: Special


2

## PREFACE

This handbook on Cradles has been prepared as one of a series on Carriages and Mounts. It presents information on the fundamental operating principles and design of cradles.

This handbook was prepared under the direction of the Ordnance Engineering Handbook Office, Duke University, under contract to the Office of Ordnance Research. Text and line illustrations were prepared by The Franklin Institute, Philadelphia, Pennsylvania, under subcontract to the Ordnance Engineering Handbook Office. Technical assistance was rendered by the Ordnance Weapons Command.

## TABLE OF CONTENTS

	<i>Page</i>
PREFACE.....	i
LIST OF ILLUSTRATIONS.....	v
LIST OF SYMBOLS.....	vi
I. INTRODUCTION	
A. General.....	1
B. Purpose.....	1
C. Functions.....	1
II. EQUIPMENT ASSOCIATED WITH CRADLES	
A. Recoil Mechanism.....	1
B. Trunnions.....	2
C. Elevating Mechanism.....	2
D. Equilibrator.....	2
III. TYPES OF CRADLE	
A. The U-Type Cradle.....	2
B. The O-Type Cradle.....	3
C. Other O-Type Cradles.....	4
IV. DESIGN PROCEDURES	
A. Structure to Carry the Various Forces.....	5
1. Recoil Attachment to the Cradle.....	5
2. Equilibrator Attachment.....	7
3. Elevating Arc.....	7
4. Attachment for Transmitting Rifling Torque.....	10
B. Sliding Surfaces of U-Type Cradle.....	11
1. Load Analysis.....	11
2. Construction.....	12
C. Sliding Surface of O-Type Cradle.....	15
D. Effect of Friction on Sliding Surfaces.....	15
E. Effect of Temperature Variation on Sliding Surfaces.....	15
F. Location and Design of Trunnions.....	16
G. Strength Requirements.....	17
1. Trunnion Hubs.....	18
2. Recoil Mechanism Attachment Bracket.....	20

## TABLE OF CONTENTS (Concluded)

	<i>Page</i>
<b>V. DESIGN PRACTICE</b>	
A. Structure .....	21
B. Suggested Materials for Cradle .....	22
C. Manufacturing Procedures .....	22
D. Maintenance .....	22
 <b>VI. SAMPLE PROBLEM, O-TYPE CRADLE</b>	
A. Load Analysis .....	23
B. Elevating Arc .....	24
C. Recoil Mechanism Attachment Bracket .....	25
D. Cradle Body .....	25
E. Trunnion Analysis .....	31
 <b>VII. SAMPLE PROBLEM, U-TYPE CRADLE</b>	
A. Load Analysis .....	34
1. Rails and Slides .....	34
2. Equilibrator Load .....	35
3. Elevating Gear Load .....	36
4. Trunnion Loads .....	37
B. Cradle Body .....	38
1. Shear and Moment Chart .....	38
2. Stress and Deflection .....	38
 GLOSSARY .....	 40
 REFERENCES .....	 42
 INDEX .....	 43

## LIST OF ILLUSTRATIONS

<i>Figure</i>	<i>Page</i>
1 Weapon Showing Typical Components . . . . .	1
2 U-Type Cradle With Attached Recoil Mechanism . . . . .	3
3 U-Type Cradle With Integral Recoil Mechanism . . . . .	3
4 O-Type Cradles . . . . .	4
5 Forces on Recoiling Parts . . . . .	6
6 Equilibrator Attachments, Cantilever Type . . . . .	7
7 Equilibrator Attachment, Simple Beam Type . . . . .	7
8 External Loads on Cradle, Single Recoil System . . . . .	8
9 External Loads on Cradle, Double Recoil System . . . . .	9
10 Elevating Arc . . . . .	10
11 Forces Due to Rifling Torque . . . . .	10
12 Load Distribution on Rails, U-Type Cradle . . . . .	12
13 End View of Sliding Structure Showing Bearing Liner . . . . .	13
14 Tube Assembly Showing Rails . . . . .	13
15 Sleigh With Attached Recoil Cylinders, Gun Tube Secured With Yokes . . . . .	13
16 Sleigh With Integral Recoil Cylinders . . . . .	14
17 Slide and Guide Showing Assumed Deflections . . . . .	14
18 Trunnion Location With Respect to Recoil Forces . . . . .	16
19 Load Distribution on Trunnion Structure . . . . .	18
20 Gusset Reinforced Trunnion Housings . . . . .	19
21 Equivalent Ring Loading Conditions . . . . .	20
22 Loads on Elevating Arc . . . . .	25
23 Recoil Bracket and Loading Diagram . . . . .	26
24 Cradle Body Showing Applied Loads and Reactions . . . . .	27
25 Shear and Moment Diagram, Cradle Body . . . . .	28
26 Isolated Ring Section of Cradle . . . . .	28
27 Recoil Bracket With Gusset Reinforcement . . . . .	29
28 Trunnion: Loads and Reactions . . . . .	31
29 Gusset Load Diagram . . . . .	32
30 Trunnion Housing With Gusset Reinforcement . . . . .	32
31 Trunnion Housing and Cross Section of Cradle . . . . .	35
32 Applied Loads on Cradle . . . . .	36
33 Loads on Elevating Arc . . . . .	36
34 M/I Diagram . . . . .	39

## LIST OF SYMBOLS

$A_b$ bore area	$m_2$ mass of secondary recoiling parts
$a$ linear acceleration of projectile	$N_r$ twist of rifling in calibers per turn
$a_t$ peripheral acceleration of projectile	$P_g$ propellant gas pressure
$a_r$ acceleration of the secondary recoiling mass in a double recoil system	$p$ induced pressure of shrink fit
$c$ distance from vertical axis to outermost fiber	$R$ secondary recoil force; radius
$CG$ center of gravity	$R_b$ radius of bore
$\bar{d}$ distance of neutral axis from base of section	$R_g$ elevating gear load
$E$ modulus of elasticity	$R_p$ pitch radius of elevating arc
$F_A$ trunnion force parallel to axis of bore	$R_1$ normal reaction of front bearing
$F_a$ inertia force of recoiling parts in a single recoil system or of the primary recoiling parts in a double recoil system	$R_2$ normal reaction of rear bearing
$F_c$ inertia force of cradle	$r$ equilibrator moment arm; radius
$F_E$ equilibrator force	$S_f$ factor of safety
$F_g$ propellant gas force	$T_r$ rifling torque
$F_N$ trunnion force normal to axis of bore	$V$ vertical force or load
$F_T$ resultant trunnion force	$W$ weight, recoiling parts, single recoil system; induced ring load
$F_1$ inertia force of primary recoiling parts due to secondary recoil	$W_c$ weight of cradle
$F_2$ inertia force of secondary recoiling parts	$W_1$ weight of recoiling parts in a single recoil system or of the primary recoiling parts in a double recoil system
$f_1$ frictional resistance of front bearing	$W_2$ weight of secondary recoiling parts in a double recoil system
$f_2$ frictional resistance of rear bearing	$w$ unit load
$H$ horizontal force of load	$Z$ section modulus
$I$ moment of inertia of section	$\alpha$ angular acceleration of projectile
$I_p$ mass moment of inertia of projectile	$\Delta$ deflection; radial interference
$K$ total resistance to recoil	$\Delta D$ diametral deflection
$K_R$ force provided by the recoil mechanism	$\theta$ angle of elevation; angular deflection; location of ring load
$K_s$ slenderness factor	$\theta_r$ helix angle of rifling
$k$ radius of gyration of projectile	$\mu$ coefficient of friction
$L$ length or distance	$\nu$ Poisson's ratio
$M$ moment	$\sigma$ stress, general
$M_T$ moment about trunnion	$\sigma_b$ bearing stress
$M_s$ moment at the load	$\sigma_c$ compressive stress
$m_p$ mass of projectile	$\sigma_t$ tensile stress
$m_1$ mass of primary recoiling parts	$\tau$ shear stress

# CARRIAGES AND MOUNTS SERIES

## CRADLES\*

### I. INTRODUCTION

#### A. GENERAL

1. This is one of a series of handbooks on Carriages and Mounts. This handbook deals with the design of cradles.

#### B. PURPOSE

2. The cradle was first introduced in Ordnance Corps Pamphlet ORDP 20-340† where it was discussed as one of the elements that make up a carriage or mount. This handbook deals specifically with the cradle. The various types are discussed along with their components and pertinent design data.

\* Prepared by Martin Regina, Laboratories for Research and Development of The Franklin Institute.

† Reference 1. References are found at the end of this handbook.

#### C. FUNCTIONS

3. The cradle is one of the tipping parts and serves as the supporting structure for all other tipping parts. Its primary function is to support the gun tube. It provides the guides or tracks on which the tube slides during recoil and counterrecoil. It anchors the recoil mechanism. It prevents the tube from rotating. It transmits all firing loads, including those due to recoil, tube whip, and rifling torque, to the carriage. It provides the base for mounting sighting equipment. Figure 1 shows a typical cradle installation on a weapon.

### II. EQUIPMENT ASSOCIATED WITH CRADLES

#### A. RECOIL MECHANISM

4. The fixed part of the recoil mechanism

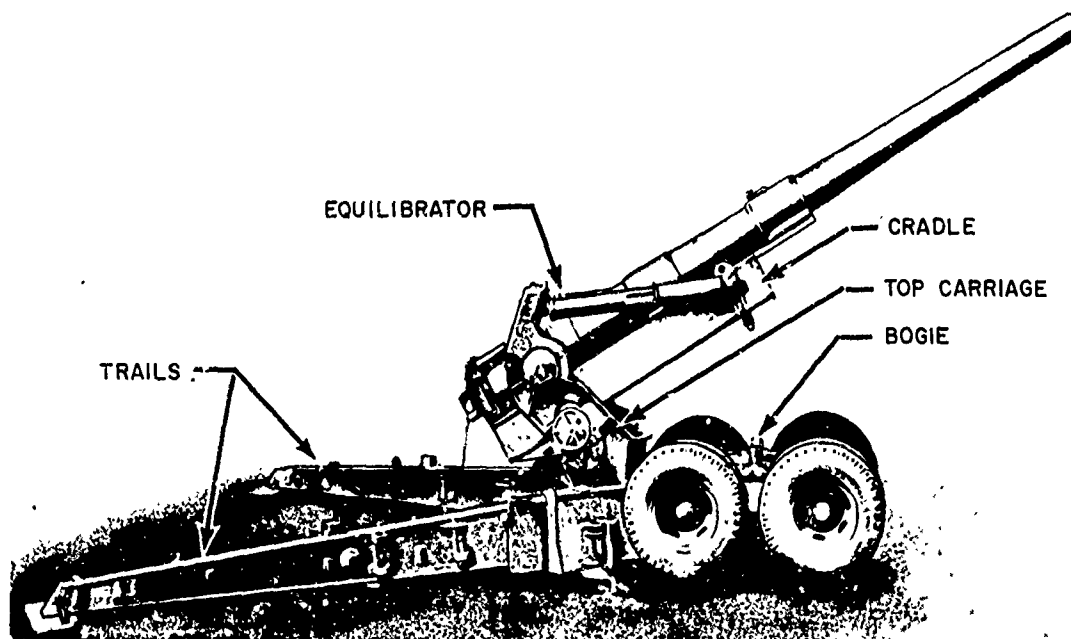


Figure 1. Weapon Showing Typical Components

is attached to the cradle and the movable portions are attached to the recoiling parts. There are, in general, two basic arrangements for the recoil mechanism. One has the recoil cylinder and recuperator fixed to the cradle and the piston rod fixed to the gun lug or breechblock. The other arrangement fixes the recoil cylinder and recuperator to the gun and the rod to the cradle. In the former case, the cylinder and recuperator are either integral parts of the cradle or separate parts rigidly attached to it. It is well to have the recoil mechanism installed as near as possible to the tube, not only for compactness but also for lower bending moments on the cradle which are axiomatic to lower stresses and, therefore, lighter structure.

#### B. TRUNNIONS

5. The trunnions are considered to be components of the cradle whether the trunnion bearings are located on the side frames or in the cradle itself. The trunnions, through which the firing loads are transmitted, are the main attachment to the top carriage and also serve as the pivot about which the tipping parts rotate during elevation. In the plan view, their axis should lie normal to the direction of recoil. In the side view, the trunnion axis should be located on or near the line parallel to the bore and passing through the center of gravity of the recoiling parts. This reduces tipping moments during firing and relieves the elevating arc of large loads.

#### C. ELEVATING MECHANISM

6. The elevating mechanism terminates at the elevating arc which is a gear segment rigidly attached to the cradle. It is here that the torque required to elevate is applied to the tipping parts. The pitch radius of the elevating arc is centered at the trunnions and should be as large as possible and still remain compatible with the size of the rest of the structure. A large radius results in small gear tooth loads and less effort to elevate the gun. Also, if the arc is large, the attachments to the cradle can be located farther apart and, although the torque transmitted to the tipping parts remains unaffected, the corresponding loads at the attachment points are decreased.

#### D. EQUILIBRATOR

7. One end of the equilibrator is attached to the top carriage and the other to the cradle. A large turning radius about the trunnion is desirable for the equilibrator as it lowers the forces. Hence, a more efficient design results. The attachment on the cradle may be at any convenient location on the structure or on the elevating arc, provided that clearances and strength requirements are met. Equilibrator design is discussed in Ordnance Corps Pamphlet ORDP 20-345.\*

### III. TYPES OF CRADLE

8. There are two basic types of cradle, designated according to the general form of cross section as the U-type and the O-type. Each has its own method of seating the gun tube. The U-type seats the tube on top and retains it by guides. The O-type holds the tube in a hollow cylinder whose inner wall conforms to the mating portion of the tube.

#### A. THE U-TYPE CRADLE

9. The degree of resemblance between the U-type cradle and the letter U depends on constructional features. If the recoil cylinder and recuperator are attached to the gun tube so that they become part of the recoiling system (Figure 2), the cradle may be approximately U-shaped, with provisions for accommodating rails and trunnions. If the recoil cylinder and recuperator are integral with the cradle (Figure 3), the resemblance to a U-section is lost. However, the term, U-type, still applies to indicate the general construction. For simplicity, the recuperators are omitted from Figures 2 and 3.

10. If the recoil cylinder and recuperator are attached to and recoil with the gun tube, the structure which supports them is called a sleigh. The sleigh carries the rails and thus supports the tube in the cradle. It may be a forging or a weldment. If a forging, the cylinders of the recoil mechanism are bored directly into it.

\* Reference 3.

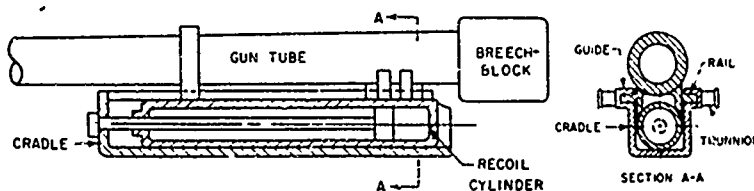


Figure 2. U-Type Cradle With Attached Recoil Mechanism

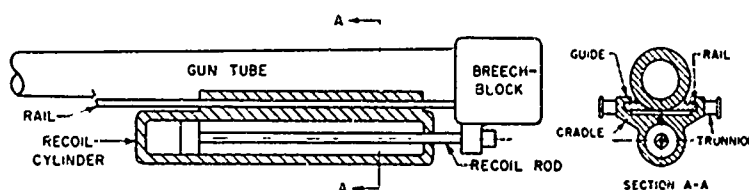


Figure 3. U-Type Cradle With Integral Recoil Mechanism

11. The sliding surfaces of the recoiling parts are called rails. Either the rails or their supporting guides may be channel-shaped to prevent them from separating due to the upsetting moments and rifling torques. Either, but not both, may be discontinuous, that is, made of several shorter lengths spaced at convenient distances. Rails may be attached to the sleigh. Whichever is used, the simple rail assembly or the sleigh, although not constituent parts, each should be treated as a component of the cradle.

12. The U-type cradle has several advantages. With a sleigh, the added weight of the recoiling parts reduces either recoil force or length of recoil. Ordinarily, the height of the weapon is decreased (lower silhouette) by having the recoil mechanism below the gun tube. The design of the gun tube is not influenced to any great extent by the fixtures that hold it in the cradle. Since the gun tube does not form the sliding surfaces for recoil, its contour, and hence wall thickness, need only conform to the gas pressure distribution along its length.

13. There are several disadvantages associated with the U-type cradle. Some are discussed below.

- a. Fabrication is difficult. The structure is complex and a high degree of accuracy is required in machining the slides and rails to

the proper alignment and fit. Production costs are high.

- b. If clearances are not sufficient for an underslung recoil mechanism, the trunnion height must be increased, with an accompanying increase in overturning moment and a higher silhouette.
- c. It is difficult to arrange the ideal loading pattern with the resultant of the recoil forces passing through the centerline of the trunnions. This arrangement is always attempted in order to minimize the elevating gear loads during recoil.
- d. During extended firing, heat transmitted from gun tubes to rails may cause warpage and eventual binding.
- e. Misalignment may occur in discontinuous rails or slides causing them to bind during recoil and counterrecoil. Binding of this nature may prevent the gun tubes from returning to the in-battery position.

#### B. THE O-TYPE CRADLE

14. This type has a cylindrical tube for its basic structural element (Figure 4). Each end contains suitable bearings in which the gun

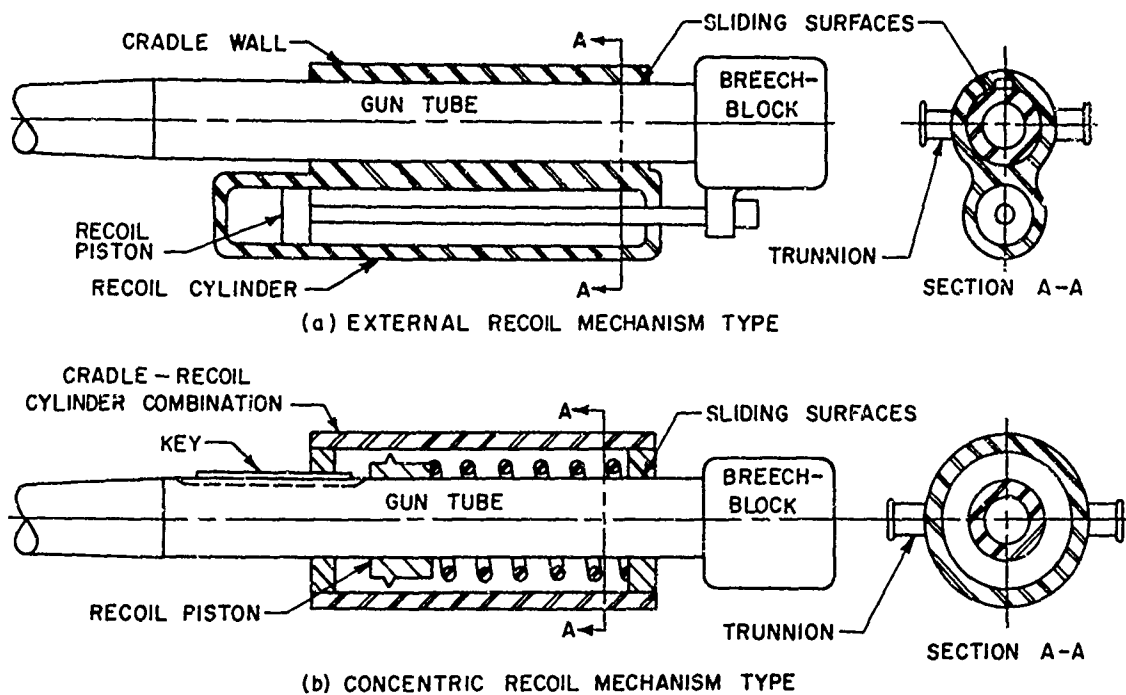


Figure 4. O-Type Cradles

tube slides. The outside surface of the tube is cylindrical for a considerable length forward of the breech. This surface is machined smooth and the tube itself serves as its own slide, the bearings functioning as guides during recoil and counterrecoil. A key transmits the rifling torque to the cradle to prevent rotation of the tube. Brackets or some similar structure are provided on the cylindrical portion of the cradle to attach the recoil mechanism, the trunnions, and the elevating arc.

15. The use of an O-type cradle offers several advantages. It is convenient to locate the trunnions on the line of action of the recoiling parts to relieve the elevating gear of firing loads. The structure is comparatively light which helps to increase mobility. Use of the O-type cradle does not require the sliding surfaces to be attached to the gun tube, thus eliminating this fabrication problem. The cylindrical surfaces reduce machining problems and provide more accurate alignment. A choice of a favorable location is available for the recoil mechanism. When the recoil mechanism is on the top of the tube, it does not present clearance problems while the tipping parts are being elevated.

16. There are several disadvantages inherent to the O-type cradle. The sliding surface of the gun tube is exposed to the weather, although this can be eliminated by the installation of a shield. It dictates, to some extent, the diameter of the tube forward of the chamber because it cannot be tapered along the sliding surface. If the forward portion of the sliding surface is made smaller in diameter, then two sleeve bearings of different diameters are necessary. The effects of heating the gun tube can be serious if the expansion exceeds the clearances in the bearings. The clearances which must be provided to avoid binding may result in sloppy fits while the gun is cold. Another clearance problem stems from the transport condition, where road clearances may be critical with the recoil mechanism attached to the top of the gun tube.

#### C. OTHER O-TYPE CRADLES

17. Another form of O-type cradle is the concentric recoil mechanism type (see Figure 4b). In outward appearance, it resembles the conventional type but, unlike the conventional type, the cradle forms the outer recoil cylinder

and fits concentrically around the gun tube. The internal elements of the recoil mechanism fit between outer diameter of the gun tube and inner diameter of the cradle. Due to the compactness of the assembly, this type cradle is usually found in tanks where space is at a premium. A big advantage offered by this type is that the recoil mechanism is on the axis of the gun bore which is also the line of action of the recoiling parts and can readily be made the location of the trunnions. Consequently, reactions to the moments at the trunnion bearings are negligible. Frictional forces are minimal, produced only by the normal component of the weight of the recoiling parts.

#### IV. DESIGN PROCEDURES

##### A. STRUCTURE TO CARRY THE VARIOUS FORCES

18. In its role of supporting structure for the other tipping parts, the cradle is subjected to a number of forces which it must transmit to the carriage. The predominant one is the recoil force. Others include the equilibrator force, the elevating gear reaction due to tipping moments, and the reaction on the key or guides due to the rifling torque. During the early stages of design, approximate loads are adequate and are readily available. When the design is in its final stages, the loads should be accurate. However, first approximations, in all likelihood, will be close enough to the final values so<sup>2</sup> that only minor revisions in the structure will be necessary.

##### 1. Recoil Attachment to the Cradle

19. When the recoil mechanism housing is integral with the cradle, the recoil forces are applied through it and no additional supporting structure is necessary. If it is merely attached to the cradle, appropriate yokes or similar structures are needed to carry its force to the cradle. If the recoil mechanism is attached to and moves with the recoiling parts, the recoil rod is fixed to the cradle, sometimes by an adapter or sometimes by a nut threaded to the end of the rod. The rod, in this case, is attached to the front of the cradle where local

reinforcement of the structure may be necessary to carry the load.

20. The method for calculating the approximate recoil force is found in Reference 2. This force comprises the sliding frictional resistance of the recoiling parts and the resistance provided by the recoil mechanism. Sketches in Figure 5 show how the applied loads and corresponding recoil force are distributed on the U-type and O-type cradles. Figure 5a has those of a single recoil system and Figure 5b has those of a double recoil system. The definitions of the symbols in Figure 5 follow.

$CG$  = the center of gravity of the recoiling parts

$F_a$  = inertia force of the recoiling parts in a single recoil system, or of the primary recoiling parts in a double recoil system

$F_g$  = propellant gas force

$F_1$  = inertia force of primary recoiling parts due to secondary recoil acceleration

$f_1$  = frictional resistance of front bearing

$f_2$  = frictional resistance of rear bearing

$K_R$  = force provided by recoil mechanism

$R_1$  = normal reaction of front bearing

$R_2$  = normal reaction of rear bearing

$W_1$  = weight of recoiling parts in a single recoil system or of the primary recoiling parts in a double recoil system

$\theta$  = angle of elevation

$K$  = total resistance to recoil (recoil force)

$\mu$  = coefficient of friction

$$f_1 = \mu R_1 \quad (1a)$$

$$f_2 = \mu R_2 \quad (1b)$$

$$K = K_R + f_1 + f_2 \quad (2)$$

$$F_a = F_g + W_1 \sin \theta - K - F_1 \cos \theta \quad (3)$$

The force  $F_1$  occurs in double recoil systems where

$$F_1 = \frac{W_1}{g} a_2 = m_1 a_2 \quad (4)$$

and the acceleration of the secondary recoiling mass is

$$a_2 = \frac{F_2}{m_2} \quad (5)$$

$$F_2 = \frac{K \cos \theta - W_1 \cos \theta \sin \theta - R}{1 + (m_1/m_2) \sin^2 \theta} \quad (6)^*$$

\* Obtained from Reference 2, Equation 88.

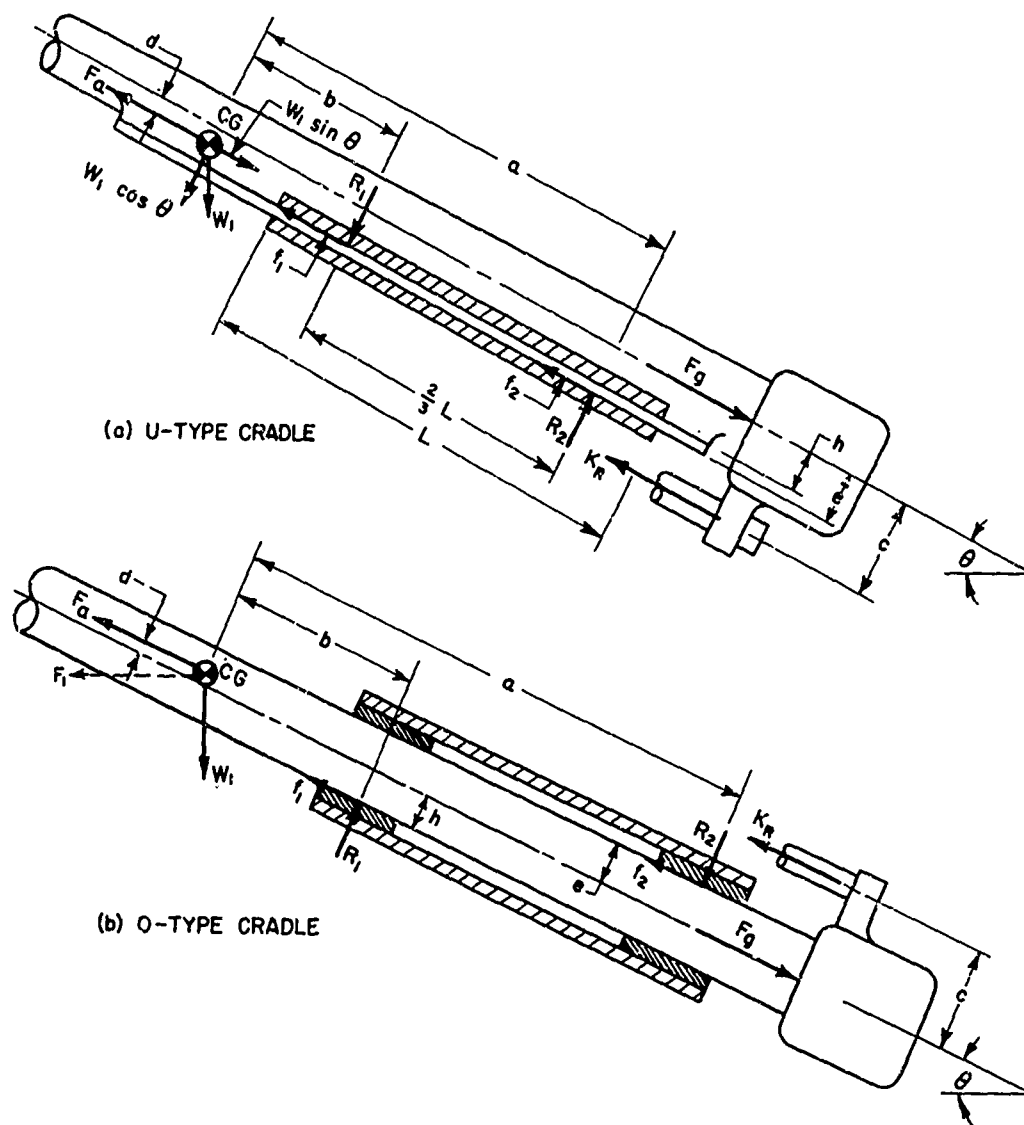


Figure 5. Forces on Recoiling Parts


where

$F_2$  = inertia force of secondary recoiling parts  
 $m_1 = W_1/g$ , mass of primary recoiling parts  
 $m_2 = W_2/g$ , mass of secondary recoiling parts  
 $R$  = secondary recoil force


The terms double recoil system, primary recoiling parts, and secondary recoiling parts are defined in the glossary. The forces applied to the secondary recoiling parts,  $F_2$  and  $R$ , are not applied to the cradle. Each appears merely as the means for determining  $F_1$ , a

primary force found only in double recoil systems. A detailed discussion of these forces appears in Reference 2.

It is assumed that the reactions  $R_1$  and  $R_2$  are uniformly distributed on the bearings but, if the mating bearing surfaces are continuous, a triangular loading distribution is assumed, with distance between load centers equal to two-thirds of the total length. After  $f_1$  and  $f_2$  are written in terms of  $R_1$  and  $R_2$ , there remain three unknown values, namely,  $R_1$ ,  $R_2$ , and  $K_R$ . These can be obtained by solving the three equations of static equilibrium.

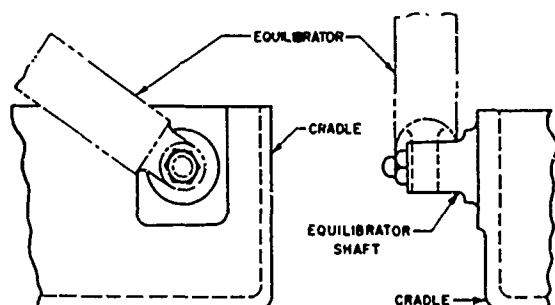

(a) EQUILIBRATOR ATTACHMENT ON CRADLE STRUCTURE

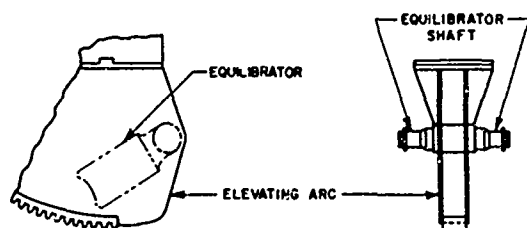

(b) EQUILIBRATOR ATTACHMENT ON ELEVATING ARC

Figure 6: Equilibrator Attachments, Cantilever Type

$$\Sigma V = 0 \quad (7a)$$

$$\Sigma H = 0 \quad (7b)$$

$$\Sigma M = 0 \quad (7c)$$

Assume that the axis of the bore is horizontal and take the moments at a convenient point such as the intersection of  $f_2$  and  $R_2$ .

## 2. Equilibrator Attachment

21. Each equilibrator, whether one or two to the weapon, pivots on a shaft attached to the cradle. If two are used, the shafts are usually cantilevered from each side of the structure

(Figure 6a) or the elevating arc (Figure 6b). If one is used, each end of the shaft is supported by the structure (Figure 7).

22. For any given angle of elevation, the equilibrator force is the one required to produce the moment which balances the weight moment of the tipping parts. Although actual equilibrator forces do not always equal the theoretically required ones, differences are small enough that the structure is not affected. Hence, for design purposes, the theoretical value will be used to simplify the load analysis. From Figures 8 or 9 the equilibrator force is

$$F_E = \frac{W_1 r_1 \cos(\theta + \phi_1) + W_c r_c \cos(\theta + \phi_2)}{r} \quad (8)$$

where

$W_1$  = weight of recoiling parts

$W_c$  = weight of cradle.

In Figure 8,  $\phi_2$  is negative.

It is apparent that, before the preliminary design of the cradle is completed, the equilibrator geometry, at least a preliminary one, must be determined in order to compute its force (see Reference 3).

## 3. Elevating Arc

23. The attachment of the elevating arc to the cradle should be through a well-fitting, rigid joint because the meshing of gear teeth is involved. Improper meshing of the gears will prove detrimental in one or all of three ways; poor load distribution may overstress the teeth, excessive wear may occur, and gear efficiency may decrease, thus requiring an increased torque at the handwheel. The attach-



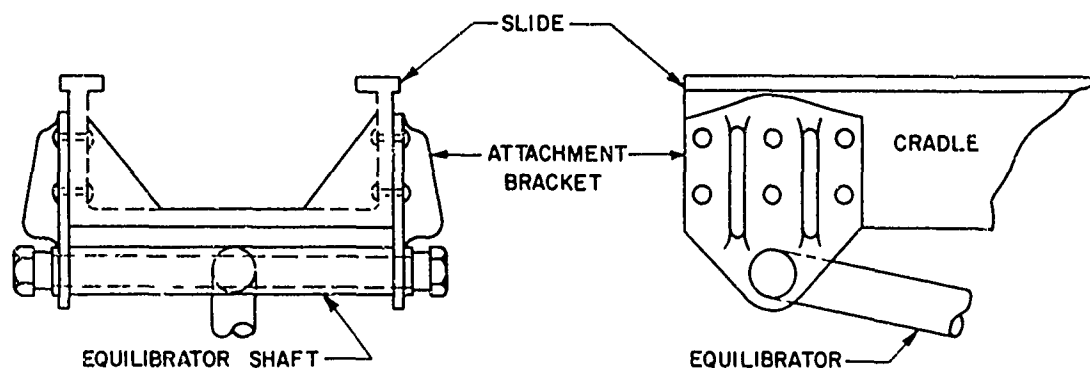


Figure 7. Equilibrator Attachment, Simple Beam Type

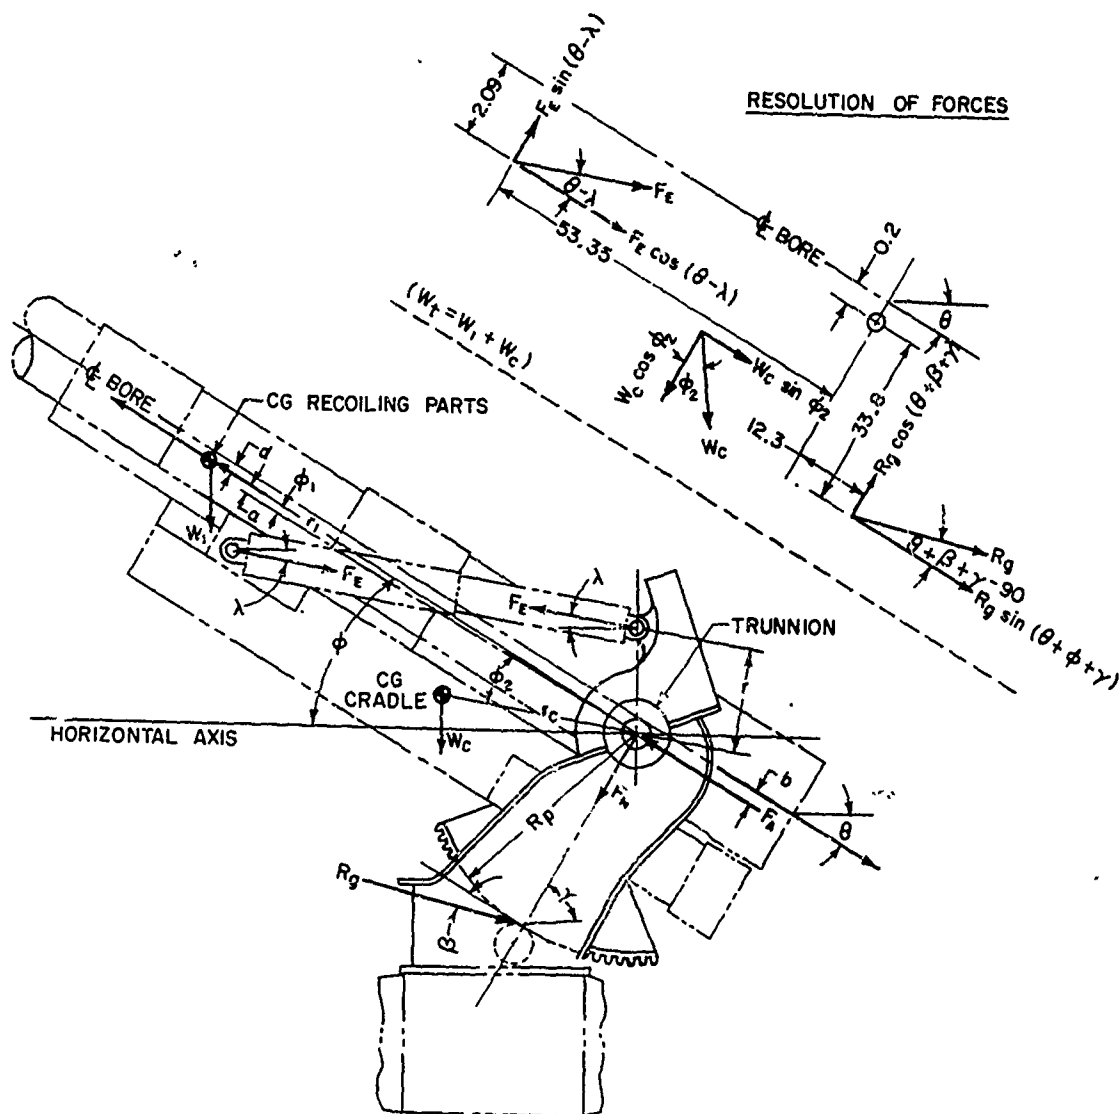


- $F_a$  = INERTIA FORCE OF RECOILING PARTS  
 $F_e$  = EQUILIBRATOR FORCE  
 $F_g$  = PROPELLANT GAS FORCE  
 $F_A$  = TRUNNION REACTION PARALLEL TO BORE  
 $F_N$  = TRUNNION REACTION NORMAL TO BORE  
 $F_g$  = ELEVATING GEAR LOAD  
 $R_p$  = PITCH RADIUS OF ELEVATING GEAR  
 $W_1$  = WEIGHT OF RECOILING PARTS  
 $W_c$  = WEIGHT OF CRADLE  
 $W_t$  = WEIGHT OF TIPPING PARTS  
 $\beta$  = PRESSURE ANGLE OF GEAR  
 $\theta$  = ANGLE OF ELEVATION

Figure 8. External Loads on Cradle, Single Recoil System

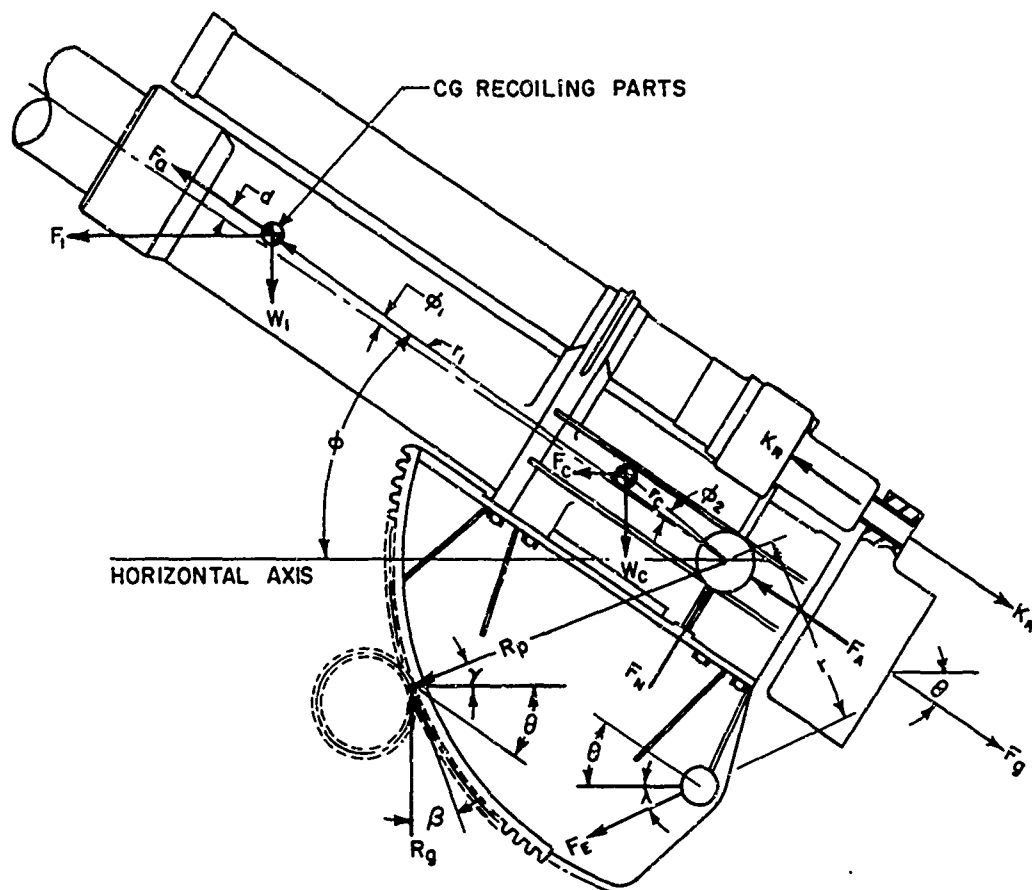

- $F_a$  = INERTIA FORCE OF PRIMARY RECOILING PARTS
- $F_i$  = INERTIA FORCE DUE TO SECONDARY RECOIL
- $F_A$  = TRUNNION REACTION PARALLEL TO BORE
- $F_c$  = INERTIA FORCE OF CRADLE
- $F_e$  = EQUILIBRATOR FORCE
- $F_g$  = PROPELLANT GAS FORCE
- $F_n$  = TRUNNION REACTION NORMAL TO BORE
- $K_R$  = FORCE IN RECOIL ROD
- $R_g$  = ELEVATING GEAR LOAD
- $R_p$  = PITCH RADIUS OF ELEVATING GEAR
- $W_i$  = WEIGHT OF PRIMARY RECOILING PARTS
- $W_c$  = WEIGHT OF CRADLE
- $\beta$  = PRESSURE ANGLE OF GEAR
- $\theta$  = ANGLE OF ELEVATION

Figure 9. External Loads on Cradle, Double Recoil System

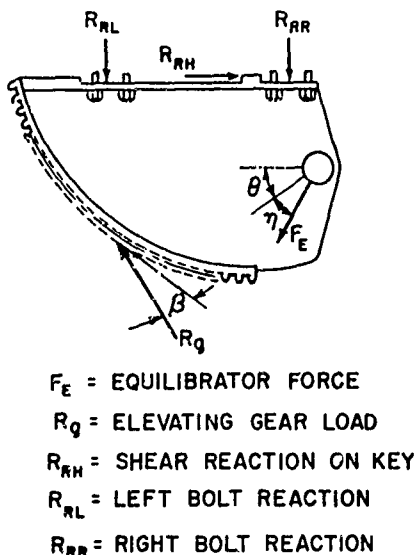

$F_E$  = EQUILIBRATOR FORCE  
 $R_Q$  = ELEVATING GEAR LOAD  
 $R_{RH}$  = SHEAR REACTION ON KEY  
 $R_{RL}$  = LEFT BOLT REACTION  
 $R_{RR}$  = RIGHT BOLT REACTION

Figure 10. Elevating Arc

ment then must be secured in a manner which will preclude objectionable misalignment under load. This requires close fitting machined surfaces held together by shear connections such as body-bound bolts, keys, pins, or shafts. Figure 10 illustrates the use of a key and bolts. It also shows the loads on the attachments between arc and cradle.

24. The action of equilibrators practically eliminates the gear load except during elevation and recoil. The largest load usually occurs during recoil. Only if the trunnions and the center of gravity of the recoiling parts lie on the bore axis will no additional gear load be applied during recoil. Figure 8 illustrates the applied external loads on the cradle for a single recoil system. In a double recoil system, the additional inertia loads  $F_1$  and  $F_r$  are produced by the secondary recoil acceleration\* and are applied horizontally at the centers of gravity of the primary recoiling parts and the cradle (Figure 9). The reaction on the gear,  $R_g$ , is computed by taking moments about the trunnions. The trunnion reactions, parallel and normal to the bore axis, are found by bringing the force system into equilibrium.

#### 4. Attachment for Transmitting Rifling Torque

25. In addition to supporting the tube, the

\* Reference 2, Chapter XI.

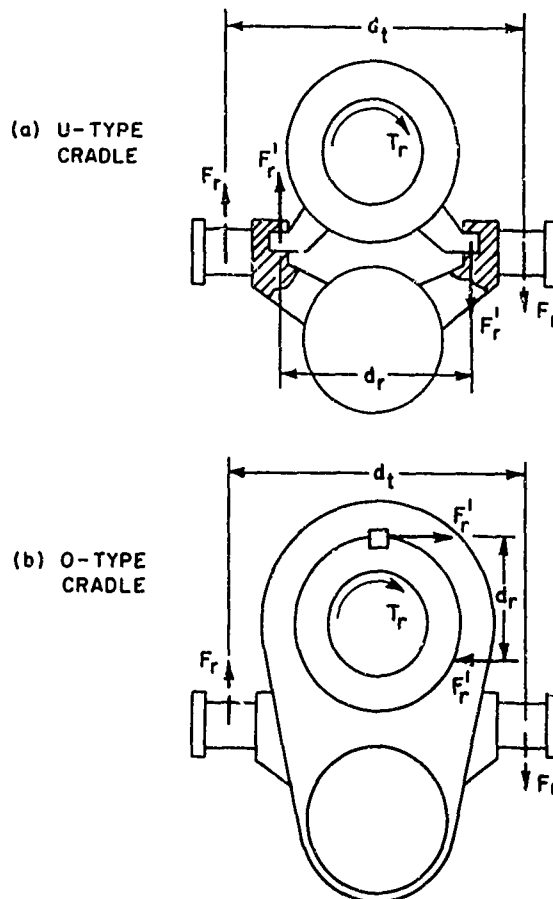


Figure 11. Forces Due to Rifling Torque

cradle must also transmit the rifling torque to the top carriage. Figure 11 shows the torque reactions on the cradle and the distances between load centers.

The approximate rifling torque equation

$$T_r = \frac{0.6\pi^2 R_b^3 P_a}{N_r} \quad (9)$$

is derived from the basic torque equation

$$T_r = I_p \alpha \quad (9a)$$

The derivation includes the following symbols

- $A_b$  = bore area (less rifling groove area)
- $a$  = linear acceleration of projectile
- $a_t$  = peripheral acceleration of projectile at the bore
- $F_a$  = propellant gas force
- $I_p$  = mass moment of inertia of projectile
- $k$  = radius of gyration of projectile

$m_p$  = mass of projectile  
 $N_r$  = twist of rifling, calibers per turn  
 $P_o$  = propellant gas pressure  
 $R_b$  = radius of bore  
 $\alpha$  = angular acceleration of projectile  
 $\theta_r$  = helix angle of the rifling

$$A_b = \pi R_b^2 \quad (9b)$$

$$F_o = A_b P_o \quad (9c)$$

From the general expression,  $F_o = m_p a$

$$a = \frac{F_o}{m_p} \quad (9d)$$

$$\tan \theta_r = \frac{\pi}{N_r} \quad (9e)$$

$$a_t = a \tan \theta_r \quad (9f)$$

Substituting the appropriate terms of Equations 9b, 9c, 9d, and 9e into Equation 9f and collecting terms, we have

$$a_t = \frac{\pi^2 R_b^2 P_o}{m_p N_r} \quad (9g)$$

$$\alpha = \frac{a_t}{R_b} = \frac{\pi^2 R_b P_o}{m_p N_r} \quad (9h)$$

The value,  $k^2 = 0.6 R_b$ , is generally accepted as an approximate value. Then

$$I_p = m_p k^2 = 0.6 m_p R_b \quad (9i)$$

Equation 9 is obtained by substituting the terms of Equations 9h and 9i into Equation 9a. From Figures 11a and 11b, the load on the trunnions due to rifling torque is

$$F_r = \frac{T_r}{d_t} \quad (10)$$

and, correspondingly, the load on the rails (Figure 11a) or on the key (Figure 11b) is

$$F_r' = \frac{T_r}{d_r}$$

Note that the maximum torque occurs when the propellant gas pressure is maximum. For the U-type cradle, the torque is transmitted directly to the guides through the rails or the sleigh in the form of vertical forces having a moment arm equal to the distance from their lines of action to the bore axis (Figure 11a). For the O-type cradle, the tube is keyed to the cylindrical portion of the cradle. The torque is transmitted through the key and the contacting surface between tube and cradle (Figure 11b). The moment arm extends


from the key to the center of the assumed triangular distributed load on the projected diameter. For either type cradle, the loads induced by the rifling torque are eventually transmitted to the top carriage by the trunnion.

## B. SLIDING SURFACES OF U-TYPE CRADLE


### 1. Load Analysis

26. There are two types of force on the slides: the normal forces and the frictional forces derived from the normal forces. The normal forces are obtained as reactions to the rifling torque, to the couple created by the recoil forces and the inertia of the recoiling parts, and to the weight of the recoiling parts. Thus, the shorter the distances between the forces parallel to the bore axis and the closer the center of gravity is to the midspan of the slides, the smaller will be the forces on the slides. Actually, in single recoil systems, the weight contributes little to the maximum forces; therefore, the center of gravity may fall outside the slides without deleterious effects. However, in double recoil systems, the inertia force due to secondary recoil may produce appreciable loads on the slides, and it becomes desirable not to have the center of gravity overhang the sliding surfaces.

27. When calculating the loads on rails and guides, the distribution of bearing pressure should be considered. If the two mating sliding surfaces are continuous, a triangular load distribution is assumed. Triangular load distribution implies zero clearance and linear compliance of rails and guides. The assumption of triangular load distribution is subject to change for unusual constructions. If the sliding surfaces are discontinuous, a trapezoidal distribution is assumed or, if the pads are spaced sufficiently far apart, uniform load distribution is assumed. Figure 12 illustrates these effects. The diagrams represent the reactions to the couple,  $M_n$ , of the recoiling parts. The reactions  $R_1$  and  $R_2$  are calculated by assuming that they are concentrated at the center of the area that represents the distributed load. After the reactions to the couple are found, those resulting from the rifling torque and the normal component of the

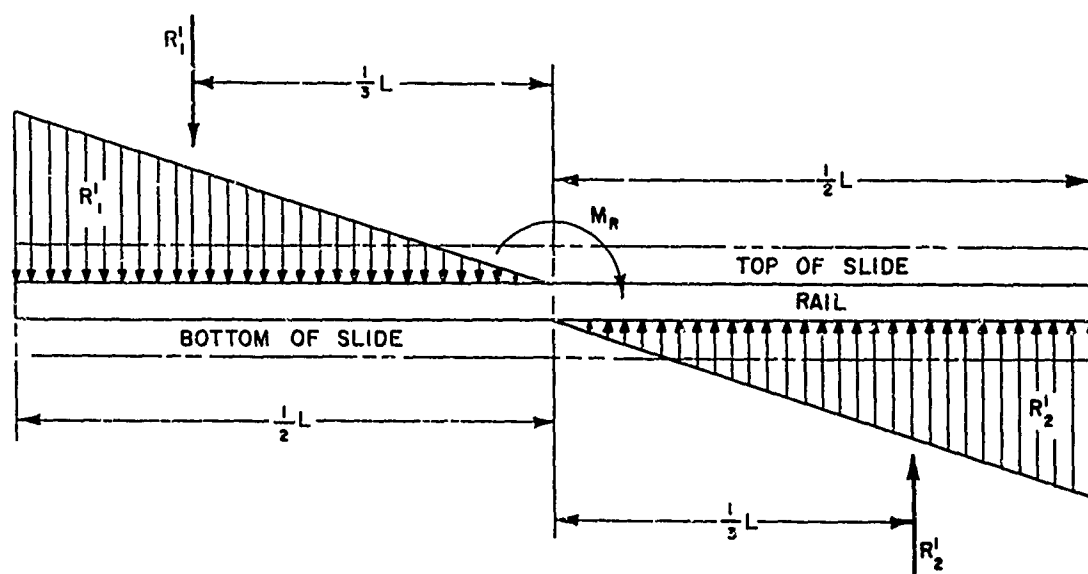

(a) CONTINUOUS RAIL

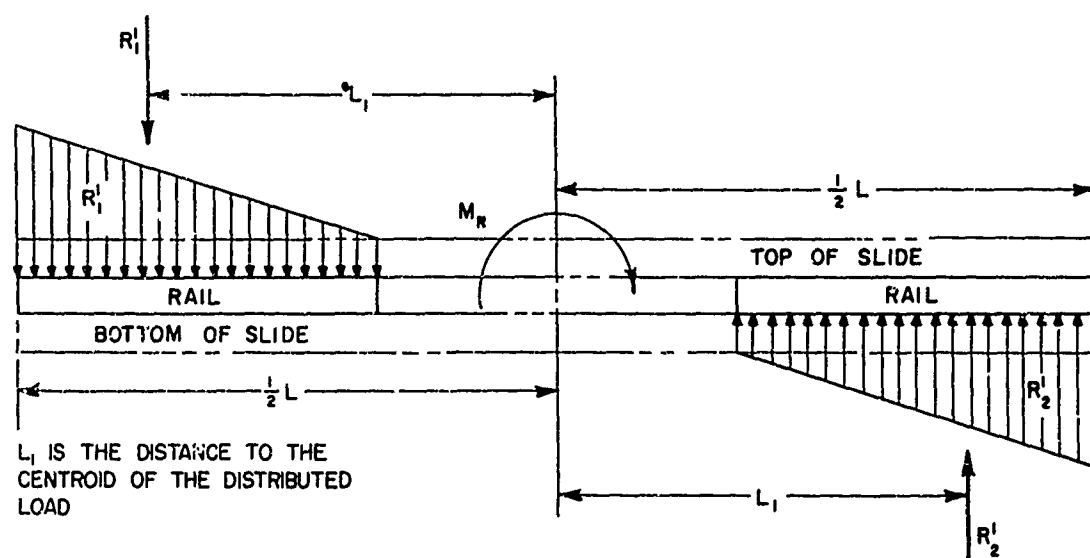

(b) DISCONTINUOUS RAIL

Figure 12. Load Distribution on Rails, U-Type Cradle

weight are added algebraically as uniformly distributed loads.

28. The maximum bearing pressure is then determined from the completed load diagram. A bearing pressure of 200 to 300 lb/in<sup>2</sup> is recommended for continuous motion but since motion is not continuous, bearing pressures as high as 500 lb/in<sup>2</sup> are permissible. If pressures exceed this limit, there is danger of se-

vere wear on the sliding surfaces, requiring early replacement. This condition must be tolerated if no other design resource is available but it usually means added maintenance and should be avoided if at all possible.

## 2. Construction

29. The sliding structure which supports

the recoiling parts consists of male and female members. The male members are called rails or slides and the female members are called guides. These latter are similar to channels in cross section, so that bearing surfaces will

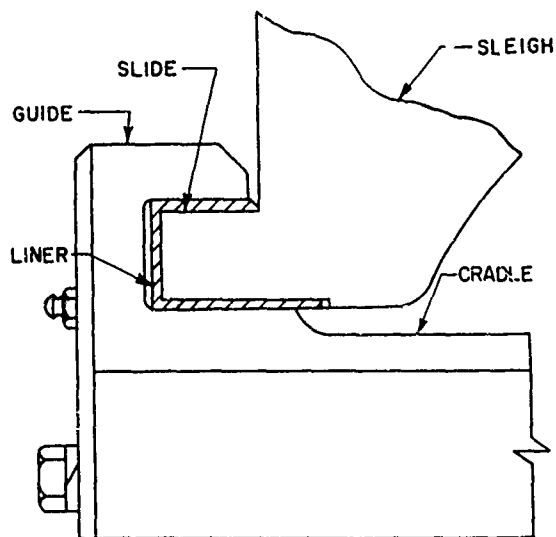


Figure 13. End View of Sliding Structure Showing Bearing Liner

support the rails against either upward or downward loads. Bronze liners with surface finishes between 32 and 63 microinch rms cover the rails and slides to provide the bearing surface (Figure 13). The guides are unlined but their surfaces are machined to the same finish as the rails and slides.

30. Rails are usually secured to the tube. The front attachment is to a sleeve or flat ring, either clamped or shrunk on the tube. The rear attachment is to a similar ring or it may be the breech ring. Figure 14 shows a typical installation. The rails or guides may be continuous or discontinuous. If the guides are discontinuous, they are sometimes called clips. Discontinuity in the sliding surfaces is not recommended if contact between them is broken during the recoil stroke because of the difficulty in re-entering the guides during counterrecoil. The present trend in design is to have continuous rails on the gun tube.

31. When a sleigh is used, the gun tube is held securely to it by collars or yokes as shown in Figure 15. Figure 16 shows another type sleigh. This one has the recoil cylinders

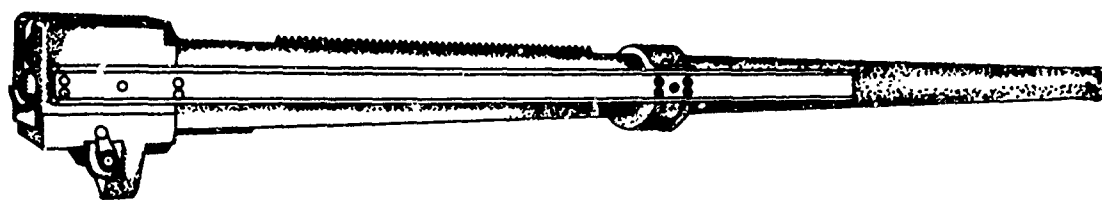


Figure 14. Tube Assembly Showing Rails

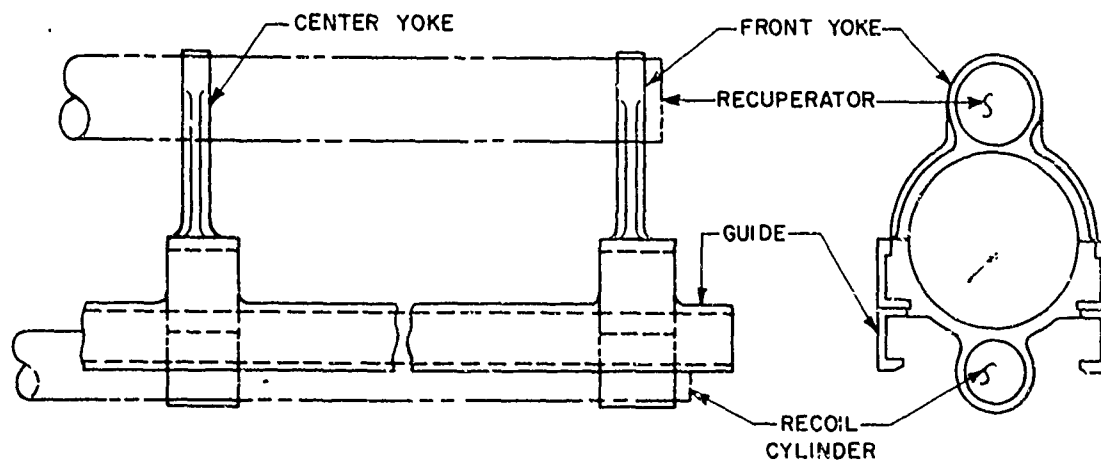


Figure 15. Sleigh With Attached Recoil Cylinders, Gun Tube Secured With Yokes

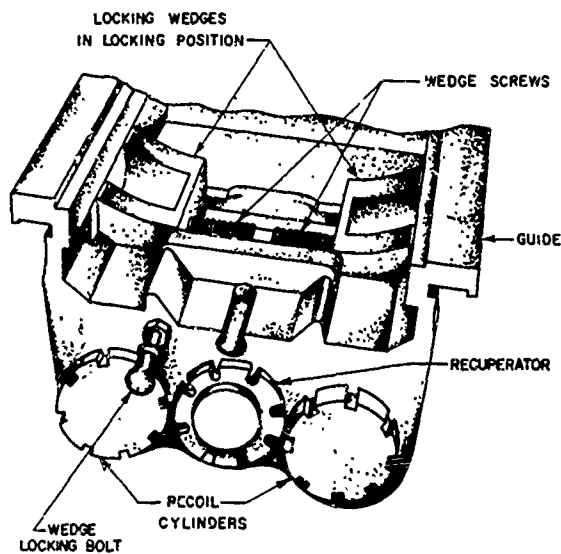



Figure 16. Sleigh With Integral Recoil Cylinders

integral with the sleigh body. Close fitting mating lugs on tube and sleigh preclude tipping while locking wedges preclude relative longitudinal motion. The wedges move laterally and fit into recesses machined in the tube structure. The structure forming the sliding surfaces may be bolted or welded to the sleigh. Sometimes they form an integral part, being machined from the sleigh or cradle structure.


32. The strength of the rail, slide, or guide is determined by the following conservative method of analysis. Assume that the maximum distributed load is constant for a distance of one inch. Isolate a one-inch length of structure with this load and investigate its strength. Thus at Section A-A of Figure 17a, which is one inch deep,

$$\begin{aligned} w &= \text{lb/in, unit load, maximum intensity} \\ F &= 1 \times w, \text{ lb, total load} \\ M &= Fd, \text{ lb-in, bending moment} \\ A &= 1 \times a, \text{ in}^2, \text{ area of section in tension} \\ \sigma_t &= \frac{Mc}{I} + \frac{F}{A}, \text{ lb/in}^2, \text{ tensile stress in section} \end{aligned} \quad (11)$$

33. In addition to strength requirements, the sliding members must have ample contacting surfaces to insure a reasonable bearing pressure (Paragraph 28). But large areas alone may not achieve a reasonable pressure if ensuing deflections cause a reduction in

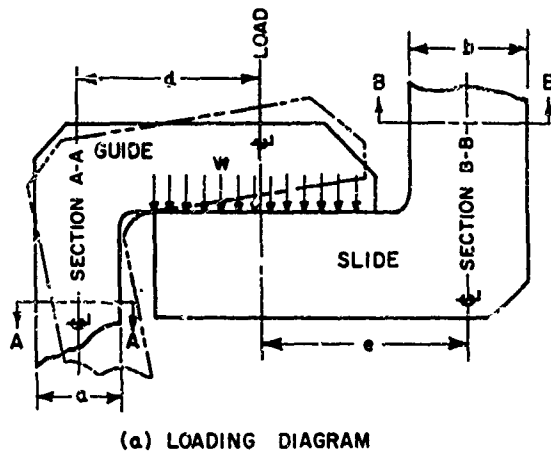

(a) LOADING DIAGRAM

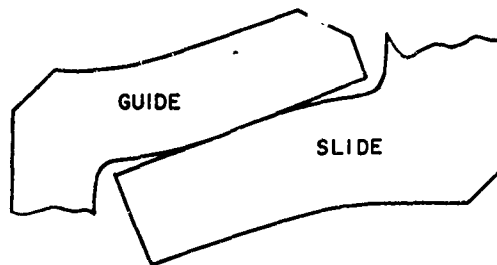

(b) CANTILEVER BEAM ANALOGY

Figure 17. Slide and Guide Showing Assumed Deflections

contact area, thereby intensifying the pressure. Two types of deflection may occur. One involves bending of the vertical members which causes the contacting areas to rotate and thus overload the edges of the bearing. This is illustrated by the phantom member in Figure 17a. However, if both members are identically constructed, angular deflections will be equal and the whole contact area remains intact. The other deflection concerns the equivalent cantilever beam of the bearing members as illustrated by the sectional view in Figure 17b. This deflection poses a difficult problem for, as the beam deflects, the load immediately becomes redistributed over a smaller space with accompanying higher pressures. Since the mating parts are of similar construction, they deflect similarly with the result that the contact area becomes progressively smaller, theoretically approaching a line. Actually, line contact never materializes but pressure

will peak excessively because of the deflections. A means of circumventing peak pressures employs the practice of providing enough flexibility in the structure to enable the deflection of one mating surface to conform to the deflection of the other, thus maintaining the original contact area. But this type of structure is not always feasible and may not be applicable to cradle design. If not, one must resort to approximation methods that are available for determining the required bearing area. One such method assumes a uniform load distribution with the maximum design pressure limited to 500 psi (see Paragraph 28).

#### C. SLIDING SURFACE OF O-TYPE CRADLE

34. The general discussions on the sliding surfaces of the U-type cradle apply as well to those of the O-type cradle. It is advantageous to have the center of gravity of the recoiling parts located as near as possible to the bearings. For the load analysis, the bearings are usually far enough apart to assume a uniform load distribution. The tipping moment during recoil produces the largest loads on the bearings. A bearing pressure of 200 to 300 lb/in<sup>2</sup> is desirable but pressure should not exceed 500 lb/in<sup>2</sup> (see Paragraph 28). The O-type differs in that the gun tube is keyed to the cradle and in that the reaction to the rifling torque is transmitted by the key, not by the sliding surfaces (see Figure 11). Because the structure must be held to reasonable proportions, and the sliding surface offered by the key is limited in area, the bearing pressures here may be much higher than on other sliding surfaces. However, due to the extremely short duration of the rifling torque, allowable bearing pressures may be high. After incorporating the factor of safety, they may approach the bearing strength of the material.

35. The construction of the sliding surfaces of the O-type cradle is relatively simple. The primary structure is a cylinder in which the gun tube slides during recoil. A bronze bearing at each end and a straight portion of the gun tube, machined to a 32 rms finish, provide the sliding surfaces. Thus, the gun tube serves as its own slide and the bearings serve as guides. The key is usually secured to the gun tube and

slides in the keyways of each bearing. Although the rifling torque is applied for only a short recoil distance, the key should be long enough to maintain contact with the bearings at all positions of the recoil stroke so that no difficulty in alignment develops during counterrecoil.

#### D. EFFECT OF FRICTION ON SLIDING SURFACES

36. Frictional forces, as such, are not a serious design criterion with respect to the structural strength. In other aspects, they present serious problems. For design analysis, the present practice is to use a coefficient of friction of 0.15\*. Friction resists recoil and thus forms part of the recoil force. Theoretically, it does not matter whether the recoil force is generated by friction or by the recoil mechanism. However, it is desirable to keep friction to a minimum by proper lubrication because wear and eventual damage to the sliding surfaces are less likely to occur. Also, frictional forces are somewhat of an unknown value on exposed surfaces and may vary considerably. If their maximum value is small, it will constitute only a small part of the total recoil force and will have only a slight effect on the functioning of the recoil mechanism.

#### E. EFFECT OF TEMPERATURE VARIATION ON SLIDING SURFACES


37. Artillery is employed in both desert and arctic climates. Changes in the ambient temperature will shrink or expand the structure. If made of like material, all components will be affected equally, causing no relative displacement among them. However, if the structural members are of unlike material, their rates of expansion will differ and this may prove deleterious simply by reducing clearances between moving parts to the extent where binding impends. The sliding surfaces of cradles must be of different materials because two mating surfaces of like material seldom provide compatible sliding properties. Bronze makes an excellent sliding surface for steel. Its coefficient of linear expansion is

\* Reference 4.

$3.5 \times 10^{-6}$  in/in/°F larger than that for steel. This value is computed from the coefficients in the centigrade scale of  $16.8 \times 10^{-6}$  for phosphor bronze and  $10.5 \times 10^{-6}$  for 1.2% carbon steel.\* Based on an ambient temperature of 70°F, the extreme ranges will show a difference in dimensions for bronze and steel of 0.00033 in/in at 165°F and of -0.00047 in/in at -65°F. The lower limit of the temperature extremes because of climatic conditions has the greater effect. However, neither extreme requires excessively loose fits to compensate for the thermal activity.

#### F. LOCATION AND DESIGN OF TRUNNIONS

38. The location of the trunnions in the vertical plane directly influences the reaction on the elevating gear during the recoil cycle. In single recoil systems, the reaction is due solely to the moment about the trunnions produced by the propellant gas force and the inertia force of the recoiling parts. Figure 18 shows these forces and the perpendicular distance from their lines of action to the trunnions. The position of the trunnions with

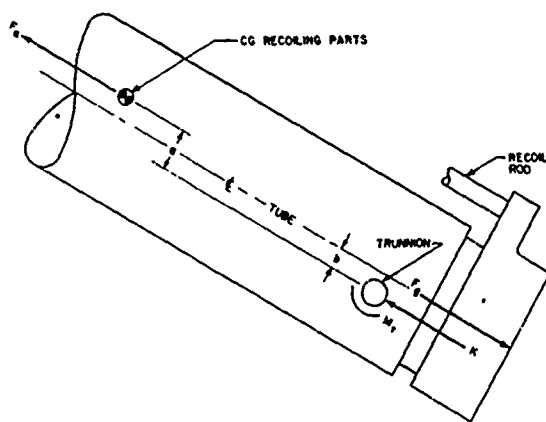

- $F_a$  = INERTIA FORCE OF RECOILING PARTS  
 $F_g$  = PROPELLANT GAS FORCE  
 $K$  = RECOIL FORCE  
 $M_T$  = MOMENT ABOUT TRUNNIONS

Figure 18. Trunnion Location With Respect to Recoil Forces

\* Reference 5, page 2239.

respect to these lines of action determines the moment. Thus, from Figure 18,

$$M_T = bF_g - aF_a \quad (12)$$

where  $a, b$  = moment arms

$F_a = F_g - K$ , inertia force at CG

$F_g$  = propellant gas force

$K$  = recoil force

$M_T$  = trunnion moment

If  $F_a$  and  $F_g$  represent the maximum inertia and propellant gas forces respectively, the ideal trunnion location lies within the limits of  $b \leq a \leq (F_g/F_a)b$  although it is not always feasible to have this arrangement. If  $a$  extends beyond these limits, or if  $a$  and  $b$  lie on opposite sides of the trunnion, then the moment will increase, varying as the distances. When  $a = (F_g/F_a)b$ , the moment becomes zero when the gas force becomes maximum. It gradually increases as the gas force diminishes and reaches the maximum of

$$M_T = -aF_a = -aK \quad (12a)$$

when the gas force becomes zero.

39. In double recoil systems, the inertia force of the tipping parts caused by the acceleration of the secondary recoiling parts becomes a factor when determining the trunnion moment and, subsequently, the elevating gear reaction (see Figure 9).† The trunnion location with respect to the center of the bore has little influence with this additional moment because the component of force perpendicular to the bore center line has a moment arm considerably larger than that for the parallel component.

40. The trunnion loads are composed of five components which are derived from the weight of tipping parts, recoil force, equilibrator force, force due to the rifling torque, and elevating gear reaction. The first four do not vary with trunnion location but form the bulk of the maximum trunnion loads; consequently, any change in the elevating gear reaction will not materially affect the trunnions but small shifts in trunnion location may greatly influence elevating gear reactions.

41. Sometimes the location of the trunnion in the vertical plane is adjusted to satisfy

† Reference 2, Chapter XI.

some structural requirement. For example, when located below the bore center line, more space will be provided for an underslung recoil mechanism. Or, if they are located on the center line, structural symmetry is preserved. Also, if the trunnions are on the center line, the sighting equipment will not have to be corrected for discrepancies due to an off-center location.

42. In the horizontal plane, it is advantageous to have the trunnions located equidistant from the center line of the gun bore. Here, the object is mainly one of symmetry. If symmetry cannot be achieved, the cradle will be subjected to a direct load and a couple equal to the recoil force times the offset. Its vertical component tends to turn the weapon on its side. Its horizontal component tends to rotate the cradle and top carriage. However, the base supporting the top carriage is symmetrical with respect to the bore and the loads revert to a symmetrical condition at this point. If any residual horizontal moment persists, it is resisted at the traversing gear. This discussion does not include the rifling torque which is transmitted through the structure while the projectile travels in the bore.

43. When the distances from the bore to the trunnions are unequal, the cradle must be made larger to offset the effects of the unsymmetrical loads and this eventually leads to a heavier structure. In considering deflections, symmetry becomes definitely desirable. If both sides of the cradle deflect equally, compensation for misalignment during firing presents lesser problems in fire control than if the two sides of the cradle deflected unequally. In the first case, the gun tube would remain essentially in line, while in the latter, it would turn slightly askew.

44. The size of the trunnion is usually dictated by required bearing dimensions. However, it should be investigated to determine its strength in bending and shear. As a rule, the trunnion may be considered a short beam and the stresses calculated according to the formulas below, which can be found in any text on strength of materials. The bending stress is

$$\sigma = \frac{Mc}{I} \quad (13)$$

and the shear stress,  $\tau$ , at any line  $q$  either on, or at a distance from, the neutral axis of the total section, is

$$\tau = \frac{F_r A_n \bar{d}}{It} \quad (14)$$

where  $A_n$  = area above the line  $q$   
 $t$  = thickness of section at  $q$   
 $\bar{d}$  = distance between the neutral axis of the section and the neutral axis of  $A_n$

$F_r = \sqrt{F_N^2 + F_A^2}$ , resultant shear at the section (see Figures 8 and 9)

$I$  = moment of inertia of the section

$L$  = moment arm of trunnion measured to center of bearing

$M = F_r L$ , bending moment

#### G. STRENGTH REQUIREMENTS

45. Stresses are calculated for a cradle which is assumed to be completely isolated from all other components of the gun. This approach is conservative because the stiffness associated with gun tube and structural members which ordinarily would lend strength to the cradle is ignored.

46. The general stresses of the main cradle structure are due to bending and direct shear. However, at each point of load application, local stresses are present which may be greater than or may augment the general stress. The local areas are loaded by the recoil mechanism, the trunnion, and the elevating mechanism through their attachments to the cradle. After the principal stresses have been found, usually by conventional methods of stress analysis, the equivalent stress is determined. An accepted method for computing the equivalent stress comes from the maximum-shear-stress theory of Tresca and Saint Venant\* which states that yielding begins when the largest difference of two principal stresses equals the yield strength of the material, or

$$\sigma_1 - \sigma_2 = \sigma_y \quad (15)$$

To be compatible with other components of the gun carriage, a factor of safety of 1.5 is recommended.

\* Reference 6, Page 39.

ommended for the cradle. Now, if  $\sigma_1 = \sigma_t$  and  $\sigma_2 = \sigma_c$ , the equivalent stress is

$$\sigma_e = \sigma_t - \sigma_c \quad (15a)$$

The factor of safety is

$$S_f = \frac{\sigma_y}{\sigma_e} \quad (15b)$$

### 1. Trunnion Hubs

47. The hubs or sockets holding the trunnions are either welded or bolted to the cradle. Reinforcements at the hub are sometimes necessary to distribute the loads and prevent local failure. If the trunnion shank fits the hub freely, the latter is stressed in shear and bending. But, if the joint is a shrink fit, the interface pressure produces hoop stresses in the trunnion shank and the hub. This pressure is found by equating the interference to the total deflection of the concentric cylinders at their interface.

Thus

$$p = \frac{E\Delta}{r} \left/ \left( \frac{r_2^2 + r^2}{r_2^2 - r^2} + \frac{r^2 + r_1^2}{r^2 - r_1^2} \right) \right. \quad (16)$$

where  $E$  = modulus of elasticity

$p$  = pressure at interface due to shrink fit

$r$  = radius at contact surfaces of concentric cylinders

$r_1$  = inner radius of inner cylinder

$r_2$  = outer radius of outer cylinder

$\Delta$  = radial interference


48. The strength of the gussets supporting the hub is based on the loading arrangement shown in Figure 19, the hub being assumed to be supported by the gussets only. The load distribution of the reactions  $R_G$  and  $R_h$  is assumed triangular and is based on the load parallel to the cannon bore.

Each structural member, whether gusset or hub, must be statically balanced. Therefore, by isolating the hub

$$R_G = \frac{F_A}{n} \quad (17)$$

$$r_A R_A + \frac{2}{3} c R_G = a \frac{F_A}{n} \quad (17a)$$

where  $F_A$  = trunnion load parallel to bore  
 $n$  = number of gussets parallel to  $F_A$

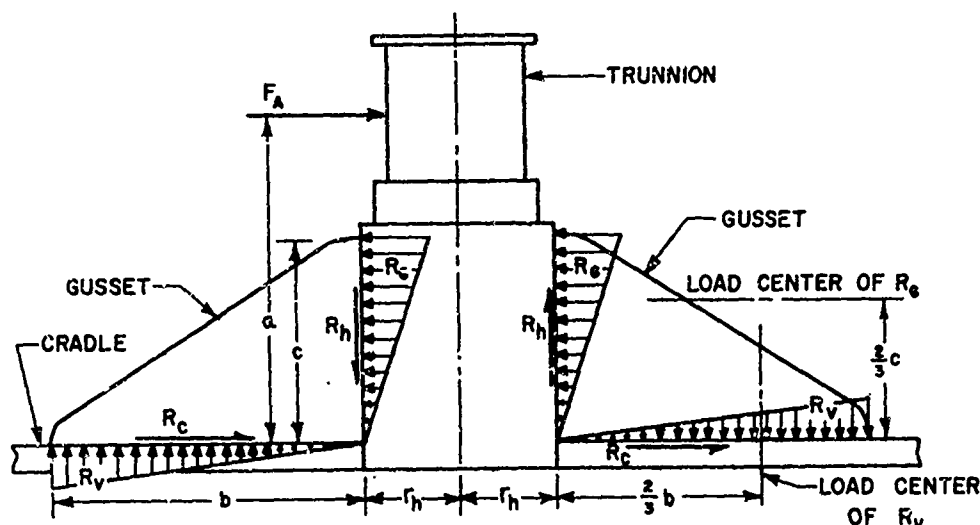

$F_A$  = TRUNNION LOAD PARALLEL TO  $\phi$  BORE

$R_G$  = SHEAR BETWEEN GUSSET AND CRADLE BODY

$R_G$  = HORIZONTAL REACTION OF GUSSET, DISTRIBUTED

$R_h$  = SHEAR BETWEEN GUSSET AND HUB

$R_v$  = VERTICAL REACTION OF GUSSET, DISTRIBUTED

Figure 19. Load Distribution on Trunnion Structure

When a gusset is isolated

$$R_s = R_A \quad (17b)$$

$$R_s = R_G \quad (17c)$$

$$bR_s = cR_G \quad (17d)$$

Substitute the value of  $R_G$  of Equation 17 into Equation 17a and solve for  $R_A$

$$R_A = \frac{a - \frac{2}{3}c}{r_A} \frac{F_A}{n} \quad (17e)$$

Since  $R_s = R_A$ , substitute the expressions in Equations 17 and 17e for  $R_G$  and  $R_s$  in Equation 17d and solve for  $b$

$$b = \frac{r_A}{a - \frac{2}{3}c} c \quad (17f)$$

This is the gusset length required to substantiate the assumption of the triangular load distribution. If  $R_G$  represents the area of a triangle, then

$$w = \frac{2R_G}{c}, \text{ maximum unit load on the gusset} \quad (18)$$

and the maximum direct tensile or compressive stress becomes

$$\sigma = \frac{w}{t} \quad (19)$$

The elastic stability is checked by assuming that the gusset is a rectangular plate loaded in compression on the two opposite edges. This assumption, although approximate, is conservative. The critical compressive stress is\*

$$\sigma_c = K_s \frac{E}{1 - \nu^2} \left( \frac{t}{b} \right)^2 \quad (20)$$

where  $b$  = width of loaded edge

$t$  = thickness of gusset


$K_s$  = fixity factor determined from the width to length ratio

$E$  = modulus of elasticity


$\nu$  = Poisson's ratio

49. Gussets should be arranged so that the transmitted loads will not unduly aggravate the stresses and deflections of the cradle wall. For example, those gussets that are tangent to the cradle generally produce less stress and deflection than those that are not tangent. This characteristic often leads to appreciable

\* Reference 7, Page 312, Conditional A, Case 4. Reprinted by permission from *Formulas for Stress and Strain*, 3rd Ed., by R. J. Roark, Copyright 1954, McGraw-Hill Book Co., Inc.

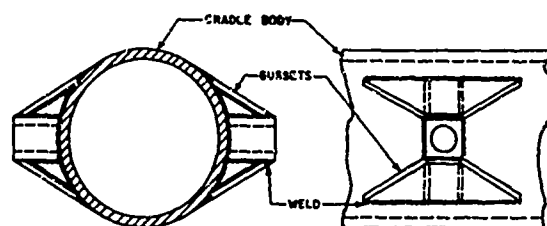

(a) LONGITUDINAL GUSSETS TANGENT TO CRADLE

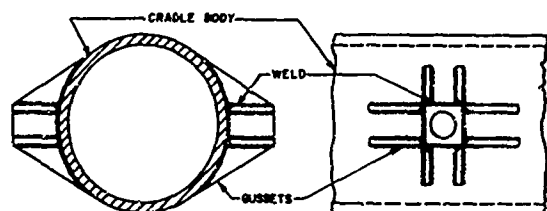

(b) LONGITUDINAL GUSSETS IN CHORDAL DIRECTION

Figure 20. Gusset Reinforced Trunnion Housings

savings in weight as the cradle wall is less able to sustain the induced radial load of the latter. Figure 20 shows two types of construction, both having the same origin on the trunnion housing. Since the gusset of tangential direction is essentially larger than the one of chordal direction, its moment arm to the weld seam is also larger, thereby inducing a larger load perpendicular to the weld. However, the low stress and deflection affected by the tangential component may more than compensate for the larger load. If both types of construction are feasible, each should be investigated to determine which is preferable.

50. One method for determining the influence of the gusset load involves isolating a section of the cradle wall and treating it as a ring. Its width is assumed equivalent to the length of the gusset at the weld. This approach is conservative as the analysis does not utilize the stiffness provided by the adjacent cradle wall, thus yielding bending moments and deflections somewhat larger than their true values. The gussets of the trunnion housings provide loads equivalent to those on the diagrams shown as Conditions (a) and (b) of Figure 21. The equations that follow are specific applications of Case 8 from Reference 7, Table VIII, and define the bending moment and deflection at critical points on the ring.

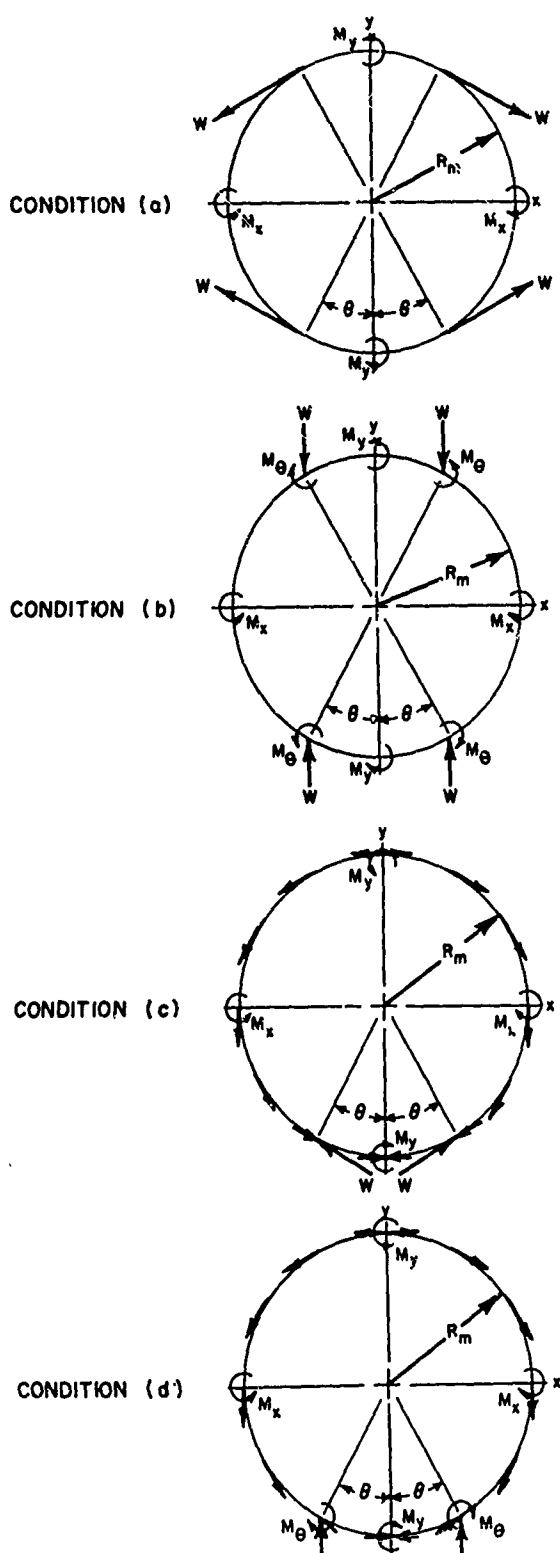


Figure 21. Equivalent Ring Loading Conditions

When loads are tangent, equations are obtained by superimposing the expressions for their horizontal and vertical components.

$M_x$  = moment at the x-axis

$M_y$  = moment at the y-axis

$M_\theta$  = moment at the load

$\Delta D_x$  = diametral deflection on x-axis

$\Delta D_y$  = diametral deflection on y-axis

$I$  = moment of inertia of ring cross section

$E$  = modulus of elasticity

$R_m$  = mean radius of ring

$W$  = concentrated ring load

Positive deflections indicate increase in diameter.

Condition (a): four equal tangential loads symmetrical about the x- and y- axes.

$$M_x = WR_m \left[ \frac{2\theta}{\pi} - \sin \theta \right] \quad (21)$$

$$M_y = WR_m \left[ \frac{2\theta}{\pi} + (\cos \theta - 1) \right] \quad (22)$$

$$\Delta D_x = \frac{WR_m^3}{EI} \left[ \frac{4\theta}{\pi} + \theta \cos \theta - 2 \sin \theta \right] \quad (23)$$

$$\Delta D_y = \frac{WR_m^3}{EI} \left[ \left( \frac{4\theta}{\pi} - 2 \right) + 2 \cos \theta + \left( \theta - \frac{\pi}{2} \right) \sin \theta \right] \quad (24)$$

Condition (b): four equal and parallel chordal loads symmetrical about the x- and y-axes.

$$M_x = WR_m \left[ \frac{2}{\pi} (\theta \sin \theta + \cos \theta) - 1 \right] \quad (25)$$

$$M_y = WR_m \left[ \frac{2}{\pi} (\theta \sin \theta + \cos \theta) - \sin \theta \right] \quad (26)$$

$$M_\theta = M_y \quad (27)$$

$$\Delta D_x = \frac{WR_m^3}{EI} \left[ \frac{4}{\pi} (\theta \sin \theta + \cos \theta) - \sin^2 \theta - 1 \right] \quad (28)$$

$$\Delta D_y = \frac{WR_m^3}{EI} \left[ \frac{4}{\pi} (\theta \sin \theta + \cos \theta) + (\cos \theta - 2) \sin \theta + \left( \theta - \frac{\pi}{2} \right) \right] \quad (29)$$

## 2. Recoil Mechanism Attachment Bracket

51. The recoil mechanism cylinder may be integral with the sleigh or it may be attached to the sleigh or cradle by brackets, one at the rear near the trunnions, the other farther

toward the front. One bracket, usually the front, serves merely as a stabilizing structure while the other transmits the recoil rod force to the cradle. These forces produce shear and bending stresses at the joint between bracket and cradle body. One method for calculating the stresses and converting these stresses to applied loads on the cradle body is demonstrated in the sample problem in Section VI. Local bending moments and deflections are present at the attachments. These are found according to the methods of Paragraph 50 but, in this case, only two loads are involved. Cases 2 and 25 of Reference 7, Table VIII, and Case 25 were used to derive the equations for Conditions (c) and (d) of Figure 21 respectively.

Condition (c): two equal tangential loads symmetrical about the y-axis.

$$M_x = WR_m \left[ \frac{\theta}{\pi} - \frac{1}{2} \sin \theta \right] \quad (30)$$

$$M_y = WR_m \left[ \left( \frac{\theta}{\pi} - 1 \right) - \left( \frac{\theta}{\pi} - 1 \right) \cos \theta + \frac{3}{2\pi} \sin \theta \right] \quad (31)$$

$$\Delta D_x = \frac{WR_m^3}{EI} \left[ \frac{2\theta}{\pi} - \sin \theta + \frac{\theta}{2} \cos \theta \right] \quad (32)$$

$$\Delta D_y = \frac{WR_m^3}{EI} \left[ \left( \frac{2\theta}{\pi} - 1 \right) + \left( \frac{\theta}{2} - \frac{\pi}{4} \right) \sin \theta + \cos \theta \right] \quad (33)$$

Condition (d): two equal and parallel chordal loads symmetrical about the y-axis.

$$M_x = WR_m \left[ \frac{1}{\pi} (\theta \sin \theta + \cos \theta) - \frac{1}{2} \right] \quad (34)$$

$$M_y = WR_m \left[ \frac{3}{2\pi} + \frac{1}{\pi} (\theta \sin \theta + \cos \theta) - \sin \theta - \frac{1}{\pi} \cos^2 \theta \right] \quad (35)$$

$$M_\theta = WR_m \left[ \left( \frac{5}{2\pi} - \frac{1}{\pi} \cos^2 \theta \right) \cos \theta - \left( 1 - \frac{2\theta}{\pi} \right) \sin \theta \right] \quad (36)$$

$$\Delta D_x = \frac{WR_m^3}{EI} \left[ \frac{2}{\pi} (\theta \sin \theta + \cos \theta) - \frac{1}{2} (\sin^2 \theta + 1) \right] \quad (37)$$

$$\Delta D_y = \frac{WR_m^3}{EI} \left[ \left( \frac{\theta}{2} - \frac{\pi}{4} \right) + \left( \frac{2\theta}{\pi} - 1 \right) \sin \theta + \left( \frac{2}{\pi} + \frac{1}{2} \sin \theta \right) \cos \theta \right] \quad (38)$$

52. Pressure is created by the deflection of the cradle wall and the resistance to it provided by the inner sliding member. When excessive, this pressure causes galling of the bearing. The object is to maintain this pressure within the acceptable limits defined in Paragraph 28. Equation 39 provides an approximate pressure\*

$$\Delta D_y = -0.467 \frac{wR_m^4}{EI} \quad (39)$$

where

$I$  = moment of inertia of ring cross section

$R_m$  = mean radius of ring

$w$  = load per linear inch on the periphery

The bearing pressure induced by the deflection can be solved by setting Equation 39 equal to either Equation 33 or 38, whichever is appropriate, and solving for  $w$ . The bearing pressure becomes

$$p_b = \frac{w}{b} \text{ psi} \quad (40)$$

where  $b$  = length over which the gusset load is applied.

## V. DESIGN PRACTICE

### A. STRUCTURE

53. The structure should be simple and symmetrical. Simplicity and symmetry offer several advantages. Fabrication is easier. They tend to keep weight down. A stronger, more compact, and efficient unit is the ultimate result. If a material of large strength-to-weight ratio is needed, high strength is indicated but if rigidity is also essential, low weight must be sacrificed and the necessary strength derived from a bulkier structure. Cradles must be rigid to insure an accurate weapon, therefore the overall design should be directed toward this end.

54. The choice of whether forgings, castings, or weldments should be used is usually determined by the nature of the structure. If high strength-weight ratios are needed, forgings are used. However, forgings are costly. If weight is not important, castings may be applicable. They provide large fillets, thus decreasing stress concentrations at re-en-

\* Reference 7, Page 142, Case 18. Reprinted by permission from *Formulas for Stress and Strain*, 3rd Ed., by R. J. Roark, Copyright 1954, McGraw-Hill Book Co., Inc.

trant angles. Forgings and castings are less susceptible to warpage than weldments although all should be stress relieved to insure dimensional stability. The main disadvantages of castings include bulkiness and a lengthy manufacturing process. Welded assemblies should be used where applicable. The built-up structure is relatively simple and light. Joints are permanent, providing a more rigid structure than if bolted or riveted. Weldments can be made from available stock material permitting construction at low cost in a relatively short time. Although weldments are prone to warp, this tendency is overcome by stress relieving through heat treatment.

#### B. SUGGESTED MATERIALS FOR CRADLE

55. The predominant requirements for the cradle are strength and rigidity. For its main structure, an inherently strong material with a high modulus of elasticity is preferred. This suggests steel although it does not exclude other materials having the required physical properties. For the sliding surfaces, hardness and compatibility are necessary, hardness to preclude scoring and compatibility to preclude galling of the contacting surfaces. Steel slides, rails, and guides, as components of the main structure, provide strength and rigidity and, as sliding members, provide a hardened surface. Hard bearing bronze, covering one member, also provides a hardened surface and, in conjunction with the bare steel of the other member, constitute two adjacent materials which can provide the compatibility requirement. Bronze is preferred to brass because of the tendency of the latter to form zinc oxide, a substance that promotes galling.

#### C. MANUFACTURING PROCEDURES

56. Standard production practices are followed in constructing cradles regardless of whether castings, forgings, or weldments form the basic structure. If this practice deviates, it is only in handling. Basic fabrication activities remain undisturbed. If necessary, machines are adapted for convenient operation. Warpage is corrected by stress relieving

through heat treatment. Those members of the cradle which require finished surfaces are made oversize so that residual irregularities may be removed when the part is machined to size.

#### D. MAINTENANCE

57. A well designed structure embodies good maintenance features; hence ease of maintenance, both preventive and corrective, begins on the drawing board.\* Inspecting, cleaning, and lubricating are activities usually associated with preventive maintenance, with lubrication being the most important because it not only reduces friction and the accompanying wear or galling but it also protects the sliding surfaces from corrosion. A good lubricant for sliding surfaces is Spec MIL-G-10924A grease which lubricates effectively through the temperature range of  $-65^{\circ}$  to  $125^{\circ}\text{F}$ . Lubrication should be a simple task requiring only a short time to perform. Therefore, fittings must be readily accessible on the assembled weapon but should not be located in highly stressed regions of the cradle because small holes cause stress concentrations. If this is unavoidable, then the lubrication holes should be heavily bossed for reinforcement.

58. A cradle functions best when clean. Any dirt or other foreign substance on slides or trunnions will impede recoil and elevation. Maintenance here means continuous effort in keeping the cradle and its attachments clean. Sand, mud, water, snow, or ice must not accumulate in it. Pockets created by structural members should have drain holes or should be easily reached for cleaning, otherwise water, from rain or melting snow, accumulating in these pockets may later freeze and damage even otherwise well designed equipment. Dirt must be kept off sliding surfaces. Cover plates are effective seals at the trunnion. Wipers, located where the initial contact begins between sliding surfaces, remove dirt and grit from the exposed portions of the slides.

59. Corrective maintenance is a repair or replacement activity which may require the disassembly of the cradle. In many instances this

\*The subject of maintenance is covered in detail in Reference 8.

work must be performed in the field where regular handling equipment is normally not available, thus increasing the burden of maintenance crews. If feasible, each subassembly should be designed so that it will not interfere with the dismantling of other components. When this practice is followed, only those parts requiring attention need be removed, leaving the undamaged ones undisturbed. This will expedite maintenance in the field particularly from the handling viewpoint.

60. Failure of the primary structure can often be repaired by welding. Hence, the selection of a weldable material while the cradle is in the design stage may prove to be an asset. Other repairs involve sliding surfaces. Scored or galled surfaces can be scraped and hand polished until smooth. If damage is too extensive, they must be replaced which is relatively easy if bronze liners are used. But if the damage is on the steel surface of a slide integral with the main structure, the entire cradle may have to be scrapped. This emphasizes the need for good design practice with respect to maintenance. Those members of a structure which have a critical function and which are prone to damage should be made detachable.

## VI. SAMPLE PROBLEM, O-TYPE CRADLE

### A. LOAD ANALYSIS

61. An O-type cradle is selected for the sample problem involving a double recoil gun carriage. Figure 5b represents the loading diagram for the analysis. Except for the center of gravity, all forces and their respective locations are as shown. The center of gravity lies on the line of action of  $R_1$ .

$$\begin{array}{ll} a = 80 \text{ in} & d = 0.10 \text{ in} \\ b = 0 & e = 7 \text{ in} \\ c = 16 \text{ in} & h = 7 \text{ in} \end{array}$$

$W_1 = 10,000 \text{ lb}$ , primary recoil weight

$W_2 = 14,000 \text{ lb}$ , secondary recoil weight

$F_g = 1,810,000 \text{ lb}$ , propellant gas force

$K = 150,000 \text{ lb}$ , primary recoil resistance

$R = 40,000 \text{ lb}$ , secondary recoil resistance

$\mu = 0.15$ , coefficient of friction

$\theta = 60^\circ$ , angle of elevation

62. There are five unknown quantities: the vertical reactions  $R_1$  and  $R_2$ , the frictional forces  $f_1$  and  $f_2$ , and the recoil rod force  $K_R$ . These are found by balancing the loads and moments; but first, the inertia forces  $F_a$  and  $F_1$  must be calculated. From Equation 6

$$F_2 = \frac{K \cos \theta - W_1 \cos \theta \sin \theta - R}{1 + \frac{m_1}{m_2} \sin^2 \theta}$$

$$F_2 = \frac{30,700}{1.535} = 20,000 \text{ lb}$$

From Equation 5

$$a_2 = \frac{F_2}{m_2} = \frac{F_2}{W_2/g} = \frac{20,000}{14,000} g = 1.43g$$

From Equation 4

$$F_1 = \frac{W_1}{g} a_2 = \frac{10,000}{g} 1.43g = 14,300 \text{ lb}$$

From Equation 3

$$\begin{aligned} F_a &= F_g + W_1 \sin \theta - K - F_1 \cos \theta \\ &= 1,810,000 + 8700 - 150,000 - 7200 \\ &= 1,661,500 \text{ lb} \end{aligned}$$

All information is now available to solve for the five unknowns.

$$\begin{aligned} \Sigma V &= 0 \\ R_1 - R_2 - F_1 \sin \theta - W_1 \cos \theta &= 0 \\ R_2 &= R_1 - 17,400 \end{aligned}$$

From Equation 2

$$\begin{aligned} K_R + f_1 + f_2 - K &= 0 \\ \text{but } f_1 &= \mu R_1 = 0.15 R_1 \\ \text{and } f_2 &= \mu R_2 = 0.15 R_1 - 2600 \end{aligned}$$

therefore

$$K_R = K - (f_1 + f_2) = 152,600 - 0.30 R_1$$

$$\Sigma M_{R_2} = 0$$

$$\begin{aligned} (c - e)K_R + a(F_1 \sin \theta + W_1 \cos \theta) + eF_g \\ - (e - d)(F_a + F_1 \cos \theta - W_1 \sin \theta) \\ - (a - b)R_1 - (e + h)f_1 = 0 \\ 9K_R + 80 \times 17,400 + 7 \times 1,810,000 - 6.9 \\ \times 1,660,000 - 80 R_1 - 14 \times 0.15 R_1 = 0 \end{aligned}$$

Substituting for  $K_R$  and solving for  $R_1$

$$\begin{aligned} 84.8 R_1 &= 3,981,000 \\ R_1 &= 46,900 \text{ lb} \\ R_2 &= 29,500 \text{ lb} \end{aligned}$$

$$\begin{aligned}f_1 &= 7,000 \text{ lb} \\f_2 &= 4,400 \text{ lb} \\K_R &= 138,600 \text{ lb}\end{aligned}$$

The cradle liners have a diameter of 14 inches and are 10 inches long

$$A_{br} = 10 \times 14 = 140 \text{ in}^2, \text{ bearing area}$$

$$\sigma_{br} = \frac{R_1}{A_{br}} = 366 \text{ lb/in}^2, \text{ bearing pressure}$$

This pressure is acceptable according to Paragraph 28.

63. Calculate the equilibrator force,  $F_E$ , by balancing the weight moment of the tipping parts about the trunnions. Referring to Figure 9,

$$\begin{aligned}M_w &= r_1 W_1 \cos(\theta + \phi_1) + r_c W_c \cos(\theta + \phi_2) \\&= 424,000 \text{ lb-in}\end{aligned}$$

$$\begin{aligned}\text{where } r_1 &= 75 \text{ in} & \theta &= 60^\circ \\r_c &= 25 \text{ in} & \phi_1 &= 0^\circ 04' \\W_1 &= 10,000 \text{ lb} & \phi_2 &= 0^\circ \\W_c &= 4000 \text{ lb}\end{aligned}$$

The equilibrator force at elevation  $\theta = 60^\circ$  is found by equating the equilibrator moment to the weight moment.

$$rF_E = M_w = 424,000 \text{ lb-in}$$

when  $r = 12 \text{ in}$

$$F_E = 35,300 \text{ lb, equilibrator force}$$

64. The reaction on the elevating gear arc,  $R_g$ , is found by balancing the moments about the trunnions. Before continuing, the forces at the center of gravity of the cradle should be resolved into components parallel and perpendicular to the bore. Again referring to Figure 9, the inertia force caused by secondary acceleration is

$$F_c = \frac{W_c}{g} a_2 = \frac{4000}{g} 1.43g = 5700 \text{ lb}$$

$$H_c = W_c \sin \theta - F_c \cos \theta = 600 \text{ lb, parallel to bore}$$

$$V_c = W_c \cos \theta + F_c \sin \theta = 6900 \text{ lb, perpendicular to bore}$$

Additional dimensions for Figure 9 are

$$\begin{aligned}\lambda &= 20^\circ \\ \gamma &= 25^\circ \\ \beta &= 20^\circ, \text{ pressure angle of gear tooth} \\ R_p &= 36 \text{ in, pitch radius of elevating arc}\end{aligned}$$

The applied loads and dimensions are those used in the previous sample problem. With

reference to Figure 5b, the trunnions are located 5.0 inches to the left of  $R_2$ .

$$\Sigma M_T = 0$$

$$\begin{aligned}R_g R_g \cos \beta + r F_E - r_c \cos \phi_2 V_c \\ - d(F_g + F_1 \cos \theta - W_1 \sin \theta) - r_c \sin \phi_2 H_c \\ - r_1 \cos \phi_1 (F_1 \sin \theta + W_1 \cos \theta) = 0\end{aligned}$$

$$R_g R_g \cos \beta = 36 \times .940 R_g = 33.8 R_g$$

$$r F_E = 12 \times 35,300 = 424,000$$

$$r_c \cos \phi_2 V_c = 25 \times 6900 = 172,000$$

$$r_c \sin \phi_2 H_c = 0$$

$$\begin{aligned}d(F_g + F_1 \cos \theta - W_1 \sin \theta) \\ = 0.10 \times 1,660,000 = 166,000\end{aligned}$$

$$\begin{aligned}r_1 \cos \phi_1 (F_1 \sin \theta + W_1 \cos \theta) \\ = 75 \times 17,400 = 1,305,000\end{aligned}$$

$$33.8 R_g = 1,219,000 \text{ lb-in}$$

$$R_g = 36,100 \text{ lb}$$

65. The trunnion reactions  $F_A$  and  $F_N$  are found through the summation of forces parallel and perpendicular to the center line of the bore

$$\begin{aligned}F_N &= (F_1 \sin \theta + W_1 \cos \theta) + V_c \\ &\quad + F_E \sin(\theta + \lambda) - R_g \cos(\theta + \gamma - \beta) \\ &= 17,400 + 6900 + 0.985 \times 35,300 \\ &\quad - 0.423 \times 36,100 = 43,800 \text{ lb}\end{aligned}$$

$$\begin{aligned}F_A &= F_g - (F_g + F_1 \cos \theta - W_1 \sin \theta) + H_c \\ &\quad - F_E \cos(\theta + \lambda) - R_g \sin(\theta + \gamma - \beta) \\ &= 1,810,000 - 1,660,000 + 600 - \\ &\quad 0.174 \times 35,300 - 0.906 \times 36,100 \\ &= 111,800 \text{ lb}\end{aligned}$$

## B. ELEVATING ARC

66. With reference to Figure 22, the loads at the attachments of elevating arc to cradle are calculated by resolving the equilibrator and gear tooth loads about these attachments. The key provides the shear resistance for the resultant horizontal load. Take moments about the intersection of  $R_{RR}$  and  $R_{RH}$  and solve for  $R_{RL}$ .

$$\begin{aligned}32 R_{RL} &= 25.85 R_g \cos 25^\circ + 13.14 R_g \sin 25^\circ - \\ &\quad 1.15 F_E \sin 80^\circ + 9.0 F_E \cos 80^\circ = 1,061,000 \\ 25.85 R_g \cos 25^\circ &= 25.85 \times 32,700 = 845,000 \\ 13.14 R_g \sin 25^\circ &= 13.14 \times 15,300 = 201,000 \\ 1.15 F_E \sin 80^\circ &= 1.15 \times 34,800 = 40,000 \\ 9.0 F_E \cos 80^\circ &= 9.0 \times 6100 = 55,000\end{aligned}$$

$$R_{RL} = 33,200 \text{ lb}$$

$$R_{RR} = R_{RL} + F_E \sin 80^\circ - R_g \sin 25^\circ = 52,700 \text{ lb}$$

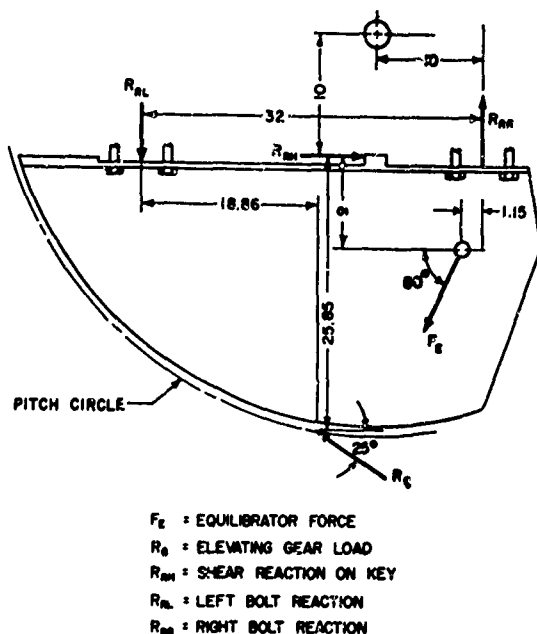


Figure 22. Loads on Elevating Arc

$$R_{RH} = R_E \cos 25^\circ + F_E \cos 80^\circ = 38,800 \text{ lb}$$

The reaction  $R_{RR} = 52,700 \text{ lb}$  determines the bolt number and size. Assuming that space is available for four bolts, each must carry 13,200 lb. If the factor of safety is 1.5, the tensile stress for a yield strength of 100,000 lb/in<sup>2</sup>, should not exceed 66,700 lb/in<sup>2</sup>. On this basis, 5/8-10 NC steel bolts are selected.

$$A_r = 0.202 \text{ in}^2, \text{ root area}$$

$$\sigma = \frac{13,200}{.202} = 65,300 \text{ lb/in}^2$$

$$S_f = \frac{100,000}{65,300} = 1.53$$

The size of the key is determined similarly. Assuming the same material as for the bolts, the shear strength is 60,000 lb/in<sup>2</sup> thus requiring a minimum shear area of  $\frac{R_{RH}}{60,000} \text{ in}^2$ .

Bearing stress also plays a part in the design of the key or the keyway if the usual case prevails where the strength of the material of the latter is lower than that for the key. The minimum bearing area becomes

$$A_{br} = \frac{R_{RH}}{\sigma_{br}}$$

where  $\sigma_{br}$  = allowable bearing stress

### C. RECOIL MECHANISM ATTACHMENT BRACKET

67. The rear recoil bracket shown in Figure 23 transmits the recoil rod force to the cradle. The shear is distributed uniformly along the gussets. To simplify bending stress calculations, the section formed by the welded joint between the three members of the bracket and the cradle body is assumed, conservatively, to be coplanar.

The tabulated moment of inertia calculations for the welded joint follow:

Dimension (in)	A	d	Ad	Ad <sup>2</sup>	I <sub>O</sub>	I <sub>BL</sub>
8 × 0.75	6	0.375	2.25	0.8	0.3	1.1
0.75 × 8	6	4.75	28.50	135.3	32.0	167.3
0.75 × 8	6	4.75	28.50	135.3	32.0	167.3
Σ	18		59.25	271.4	64.3	335.7

$$\bar{d} = \frac{\Sigma Ad}{A} = 3.29 \text{ in}$$

$$c = 8.75 - \bar{d} = 5.46 \text{ in}$$

$$I = \Sigma I_{BL} - \Sigma A \bar{d}^2 = 140.7 \text{ in}^4$$

$$M = 7.22 K_R = 7.22 \times 138,600 = 1,000,000 \text{ lb-in}$$

$$\sigma_c = \frac{Mc}{I} = 38,800 \text{ lb/in}^2$$

$$\sigma_t = \frac{M\bar{d}}{I} = 23,400 \text{ lb/in}^2$$

The yield strength of the material is 60,000 lb/in<sup>2</sup>, providing a factor of safety of

$$S_f = \frac{60,000}{38,800} = 1.55$$

Although the bracket itself is sufficiently strong, the ability of the cradle to withstand the induced radial loads may prove to be the critical design feature. This analysis is made later in Paragraph 72.

### D. CRADLE BODY

68. The forces due to the tensile and compressive stresses on each side of the neutral axis produce moments about the neutral axis whose sum is equal to the bending moment,  $7.22 K_R$ . The loads are assumed concentrated at their respective load centers. On the compression side, the section is rectangular and both stress and load distribution are tri-

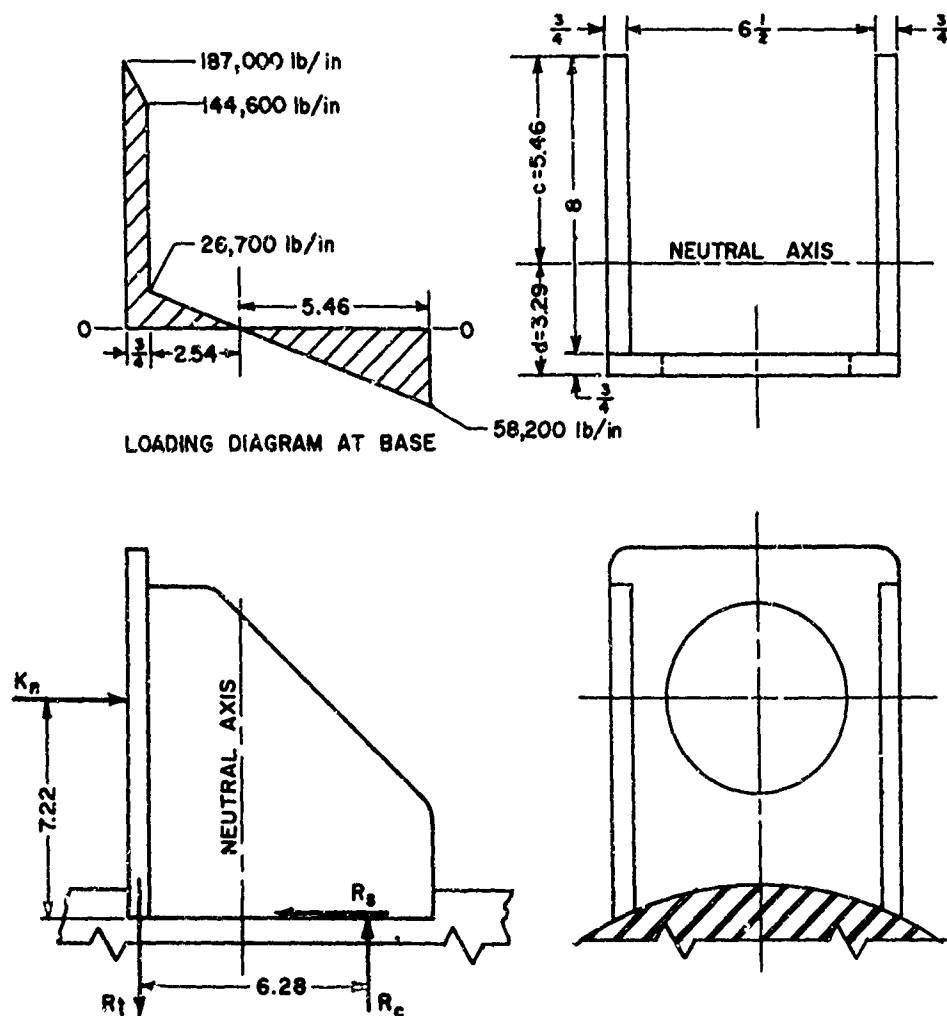


Figure 23. Recoil Bracket and Loading Diagram

angular. The compressive load is represented by the area of a triangle, thus,

$$R_c = \frac{1}{2} c t \sigma_c = 159,000 \text{ lb}$$

where

- $t \sigma_c = 56,100 \text{ lb/in}$ , altitude of triangle
- $t = 2 \times 0.75 = 1.5 \text{ in}$ , total thickness
- $c = 5.46 \text{ in}$ , base of triangle
- $R_t = 159,000 \text{ lb}$  (must equal  $R_c$ )


The span between the two reactions is

$$s = \frac{M}{R_t} = \frac{1,000,000}{159,000} = 6.28 \text{ in}$$

69. Figure 24 shows the dimensions and the

applied loads of the cradle body. The data are now complete for the shear and moment diagrams appearing in Figure 25. Loads upward and to the right are positive; counter-clockwise moments are positive. The trunnions are located at Station 0.

- $x$  = distance between stations
- $y$  = distance from cradle center line to horizontal load
- $H$  = horizontal load at a station
- $V$  = vertical load at a station
- $\Sigma V$  = total shear at a given station
- $M_x = x \Sigma V_{(n-1)}$ , moment due to vertical shear
- $M_y = y H$ , moment due to horizontal shear
- $M = \Sigma M_x + \Sigma M_y$ , moment at a given station

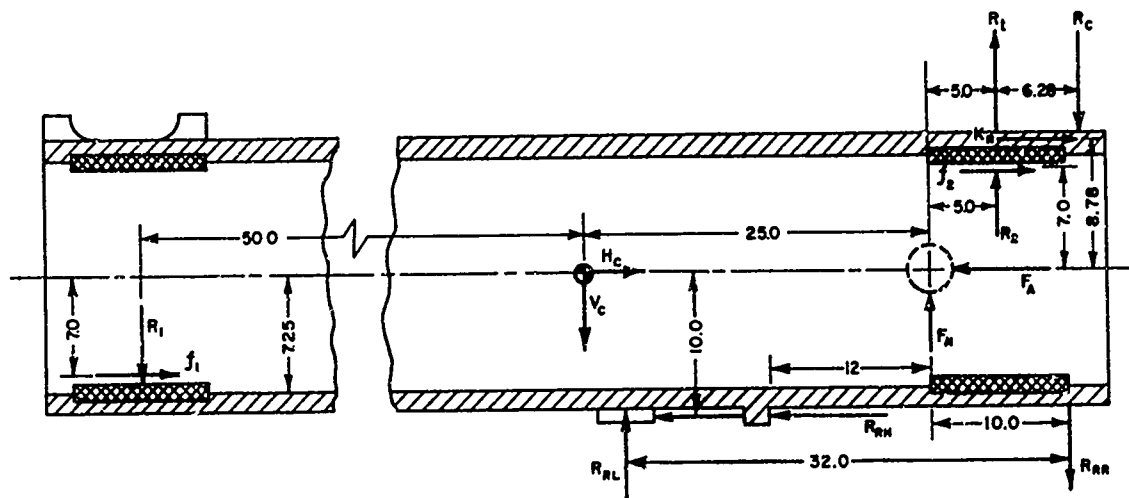

$F_A, F_N$  = AXIAL AND NORMAL REACTIONS ON TRUNNIONS  
 $f_1, f_2$  = FRICTIONAL FORCES ON FRONT AND REAR BEARINGS  
 $H_C, V_C$  = HORIZONTAL AND VERTICAL FORCES OF CRADLE MASS  
 $K_R$  = RECOIL ROD FORCE  
 $R_C, R_T$  = VERTICAL LOADS DUE TO RECOIL ROD OFFSET  
 $R_1, R_2$  = NORMAL LOADS ON FRONT AND REAR BEARINGS  
 $R_{RH}, R_{RL}, R_{RV}, R_{RT}$  = HORIZONTAL AND VERTICAL LOADS OF ELEVATING ARC  
**Figure 24. Cradle Body Showing Applied Loads and Reactions**

#### Shear and Moment Chart

Station	$x$	$V$	$\Sigma V$	$H$	$y$	$M_x$	$M_y$	$M$
75	0	-469	-469	70	7	0	49	49
25	50	-69	-538	6	0	2345	0	2394
22	3	332	-206		0	161		2555
12	10	0	-206			206		2931
12				-388	10		-388	2373
0	12	438	232	-1118	0	247	0	2620
-5	5	1885	2117			-116		2504
-5				44	7		-31	2473
-7.5	2.5	0	2117			-529		1944
-10	2.5	-527	1590		0	-529		1415
-11.3	1.28	-1590	0	1386	8.78	-204	-1218	-7

Units of  $x$  and  $y$  are given in inches;  $V$ ,  $\Sigma V$  and  $H$  in 100 lb;  $M_x$ ,  $M_y$  and  $M$  in 1000 lb-in.

To resume the analysis, assume the cylinder to have an ID of 14.5 inches and an OD of 15.5 inches. The area is

$$A = \frac{\pi}{4} (15.5^2 - 14.5^2) = 23.56 \text{ in}^2$$

The moment of inertia is

$$I = \frac{\pi}{64} (15.5^4 - 14.5^4) = 662 \text{ in}^4$$

The bending and shear stresses are

$$\sigma = \frac{Mc}{I} = \frac{2,761,000 \times 7.75}{662} = 32,400 \text{ lb/in}^2$$

$$\tau = \frac{\Sigma V}{A} = \frac{211,700}{23.56} = 9,000 \text{ lb/in}^2 \text{ (not critical)}$$

With the material having a yield strength of 60,000 lb/in<sup>2</sup>, the bending stress shows a factor of safety of almost 2, thus making a wall of  $\frac{1}{2}$ -inch thickness more than ample for the general bending stresses. However, local stresses present another problem and the wall must be

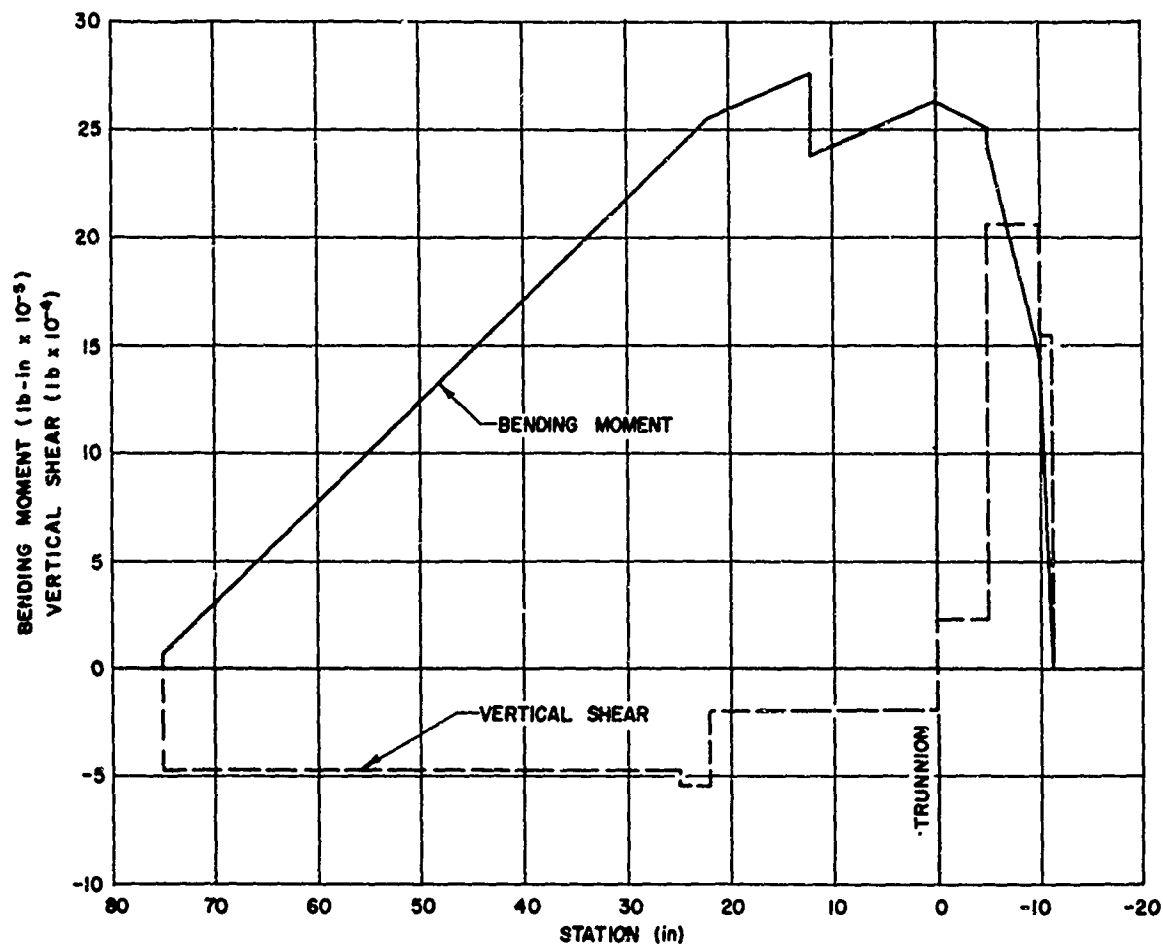


Figure 25. Shear and Moment Diagram, Cradle Body


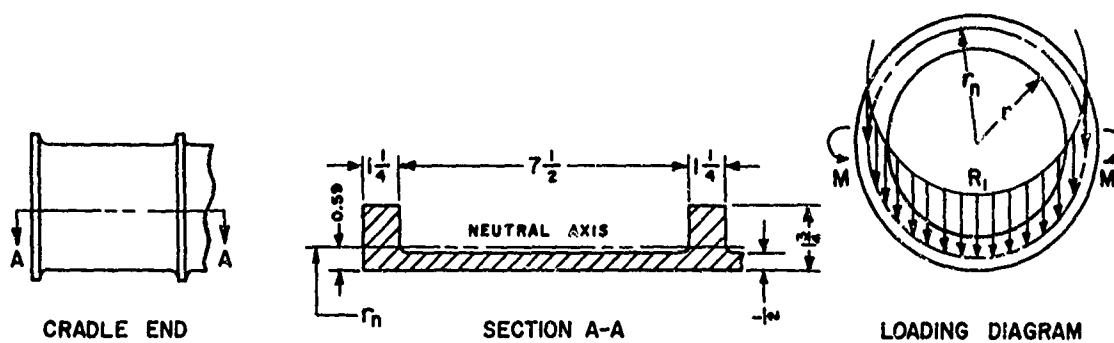


Figure 26. Isolated Ring Section of Cradle

reinforced where they appear. Rigidity is also needed to avoid local overloading and eventual galling of the bearing. Assume a ring at the front end of the cradle body with a cross section

10 inches in length with flanges at each end as shown in Figure 26. It carries a radial load  $R_1$  which is assumed to be uniformly distributed along the diameter of its centroidal

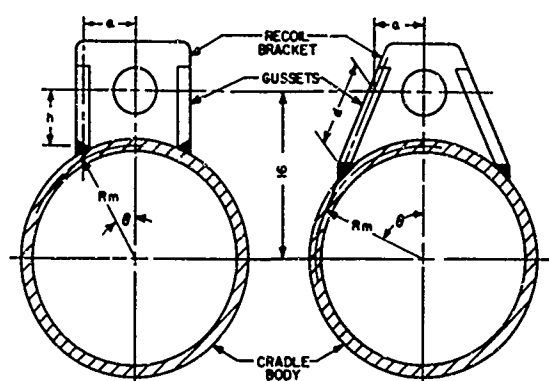

(a) CHORDAL GUSSETS (b) TANGENTIAL GUSSETS  
**Figure 27. Recoil Bracket With Gusset Reinforcement:**  
 axis. According to Equation 209 of Reference 9\*

$$M = \frac{1}{8} R_1 r_n = \frac{1}{8} \times 46,900 \times 8.09 = 47,400 \text{ lb-in}$$

where  $r_n = r + .59 = 7.5 + 0.59 = 8.09$  in,  
 the radius to the neutral axis of  
 the section

$$\sigma = \frac{Mc}{I} = 35,000 \text{ lb/in}^2$$

where  $I = 1.58 \text{ in}^4$   
 $c = 1.164$  in

70. The two types of gusset construction discussed in Paragraph 51 are illustrated in Figure 27. Sketch (a) shows the gussets parallel to chords of the ring. From Paragraph 68, the total load on two gussets is

$$R_c = 159,000 \text{ lb}$$

$$W = \frac{1}{2} R_c = 79,500 \text{ lb, load per gusset}$$

This condition is represented by Condition (d) of Paragraph 51 and Figure 21. The dimensions from Figures 23 and 27 are

$$\begin{aligned} a &= 3.625 \text{ in} & \theta &= 0.440 \text{ radian} \\ h &= 7.22 \text{ in} & \sin \theta &= 0.426 \\ R_m &= 8.5 \text{ in} & \cos \theta &= 0.905 \end{aligned}$$

From Equation 34

$$\begin{aligned} M_z &= WR_m \left[ \frac{1}{\pi} (\theta \sin \theta + \cos \theta) - \frac{1}{2} \right] \\ &= 79,500 \times 8.5 \times (-0.152) = \\ &\quad -102,800 \text{ lb-in} \end{aligned}$$

\* Reprinted by permission from *Advanced Mechanics of Materials* by B. F. Seely and J. O. Smith, Copyright 1952, John Wiley & Sons, Inc.

From Equation 35

$$\begin{aligned} M_y &= WR_m \left[ \frac{3}{2\pi} + \frac{1}{\pi} (\theta \sin \theta + \cos \theta) \right. \\ &\quad \left. - \sin \theta - \frac{1}{\pi} \cos^2 \theta \right] \\ &= 79,500 \times 8.5 \times 0.139 = 94,000 \text{ lb-in} \end{aligned}$$

From Equation 36

$$\begin{aligned} M_\theta &= WR_m \left[ \left( \frac{5}{2\pi} - \frac{1}{\pi} \cos^2 \theta \right) \cos \theta \right. \\ &\quad \left. - \left( 1 - \frac{2\theta}{\pi} \right) \sin \theta \right] \\ &= 79,500 \times 8.5 \times 0.177 = 119,700 \text{ lb-in} \end{aligned}$$

From Equation 37

$$\begin{aligned} \Delta D_z &= \frac{WR_m^3}{EI} \left[ \frac{2}{\pi} (\theta \sin \theta + \cos \theta) \right. \\ &\quad \left. - \frac{1}{2} (\sin^2 \theta + 1) \right] \\ &= \frac{79,500 \times 614}{29 \times 10^6 I} \times 0.105 = \frac{0.177}{I} \text{ in} \end{aligned}$$

From Equation 38

$$\begin{aligned} \Delta D_y &= \frac{WR_m^3}{EI} \left[ \left( \frac{\theta}{2} - \frac{\pi}{4} \right) + \left( \frac{2\theta}{\pi} - 1 \right) \sin \theta \right. \\ &\quad \left. + \left( \frac{2}{\pi} + \frac{1}{2} \sin \theta \right) \cos \theta \right] \\ &= \frac{79,500 \times 614}{29 \times 10^6 I} \times (-0.104) = \frac{0.175}{I} \text{ in} \end{aligned}$$

71. Lower bending moments and deflections become available by having the gussets tangent to the ring as shown in Sketch (b) of Figure 27. Then, according to Paragraph 51 and Condition (c) of Figure 21, the bending moments and deflections are relieved despite the larger gusset load which increases by the ratio of  $d/h$ , the distance of the applied load to the points of attachment of the two types of gusset. Thus

$$W = \frac{d}{h} \times \frac{R_c}{2} = 112,800 \text{ lb}$$

where  $d = 10.23$  in  
 $h = 7.22$  in

Other dimensions of Sketch (b), Figure 27, are

$$\begin{aligned} a &= 3.625 \text{ in} & \sin \theta &= 0.954 \\ R_m &= 8.25 \text{ in} & \cos \theta &= 0.300 \\ \theta &= 1.268 \text{ radian} \end{aligned}$$

From Equation 30

$$\begin{aligned} M_x &= WR_m \left[ \frac{\theta}{\pi} - \frac{1}{2} \sin \theta \right] \\ &= 112,800 \times 8.25 \times (-0.074) = -68,800 \text{ lb-in} \end{aligned}$$

From Equation 31

$$\begin{aligned} M_y &= WR_m \left[ \left( \frac{\theta}{\pi} - 1 \right) - \left( \frac{\theta}{\pi} - 1 \right) \cos \theta + \frac{3}{2\pi} \sin \theta \right] \\ &= 112,800 \times 8.25 \times 0.038 = 35,400 \text{ lb-in} \end{aligned}$$

From Equation 32

$$\begin{aligned} \Delta D_x &= \frac{WR_m^2}{EI} \left[ \frac{2\theta}{\pi} - \sin \theta + \frac{\theta}{2} \cos \theta \right] \\ &= \frac{112,800 \times 562}{29 \times 10^6} \times 0.044 = \frac{0.096}{I} \text{ in} \end{aligned}$$

From Equation 33

$$\begin{aligned} \Delta D_y &= \frac{WR_m^2}{EI} \left[ \left( \frac{2\theta}{\pi} - 1 \right) + \left( \frac{\theta}{2} - \frac{\pi}{4} \right) \sin \theta + \cos \theta \right] \\ &= \frac{112,800 \times 562}{29 \times 10^6} (-0.037) = -\frac{0.081}{I} \text{ in} \end{aligned}$$

72. A comparison of the required wall thickness for the two conditions shows that the tangential gussets are preferred. For the chordal gussets, the maximum equivalent stress is at  $\theta$  (see Sketch (a) of Figure 27). The dimensions of the cradle wall at this location are

$b = 5.46$  in, assumed ring width (Figure 23)  
 $c = 8.78$  in, chordal distance to gusset  
 $R_i = 7.5$  in, inside radius  
 $R_o = 9.5$  in, outside radius  
 $t = 2.0$  in, wall thickness  
 $M_o = 119,700$  lb-in (see Paragraph 70)

$Z = \frac{1}{6} bt^2 = 3.64 \text{ in}^3$ , section modulus  
 $\sigma_c = -M_o/Z = -32,800 \text{ lb/in}^2$   
 $I = \frac{\pi}{4} (R_o^4 - R_i^4) = 3910 \text{ in}^4$

The general bending moment is taken from the Shear and Moment Chart (Paragraph 69). At Station 5

$M = 2,473,000$  lb-in

$$\sigma_t = \frac{Mc}{I} = \frac{2,473,000 \times 8.78}{3910} = 5,600 \text{ lb/in}^2$$

From Equations 15a and 15b

$\sigma_e = \sigma_t - \sigma_c = 38,400 \text{ lb/in}^2$ , equivalent stress

$$S_f = \frac{\sigma_y}{\sigma_e} = \frac{60,000}{38,400} = 1.56, \text{ factor of safety.}$$

For the tangential gussets, the maximum equivalent stress is located on the  $x$ -axis where the general bending stress is zero. Thus

$$Z = \frac{1}{6} bt^2 = 2.05 \text{ in}^3$$

$$\sigma_e = -\sigma_r = -\frac{M_x}{Z} = 33,500 \text{ lb/in}^2$$

where

$M_x = -68,800$  lb-in (see Paragraph 63)

$b = 5.46$  in, assumed ring width (Figure 23)

$t = 1.5$  in, wall thickness

$R_o = 9.0$  in, outer radius of cradle wall

The wall thickness of 1.5 inches is preferred over that of 2.0 inches, thus demonstrating the advantage of tangential gussets.

73. The bearing pressure induced by the gusset load is found according to the method discussed in Paragraph 52. By equating the expressions for  $\Delta D_y$  in Equation 39 and Paragraph 71, we have

$$(-0.467) \frac{WR_m^2}{EI} = \frac{WR_m^2}{EI} (-0.037)$$



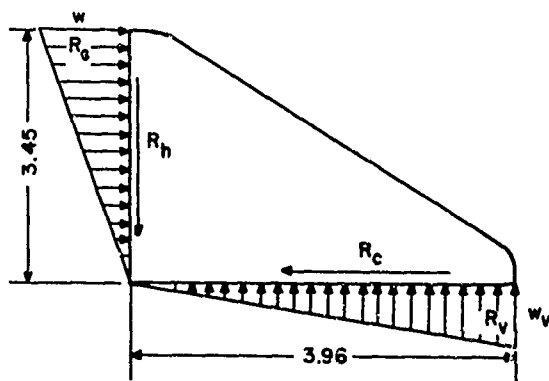


Figure 29. Gusset Load Diagram

According to Equation 17,  $R_o = 28,000$  lb, the total horizontal load on each gusset. From Equations 17b and 17e

$$R_h = R_v = \frac{(a - \frac{2}{3}c) F_A}{r_h n} = \frac{2.4 \times 111,800}{2.75 \times 4} = 24,400 \text{ lb}$$

the vertical load and reaction on the gusset. According to Equation 18,

$$w = \frac{2 \times 28,000}{3.45} = 16,200 \text{ lb/in, maximum linear load}$$

For a thickness of  $t = 0.5$  in, the direct tensile or compressive stress between gusset and hub is

$$\sigma = \frac{w}{t} = 32,400 \text{ lb/in}^2 \quad (\text{see Equation 19})$$

The direct shear stress is

$$\tau = \frac{R_h}{0.5c} = \frac{24,400}{0.5 \times 3.45} = 14,100 \text{ lb/in}^2$$

The combined shear stress is


$$\tau_{\max} = \sqrt{\left(\frac{\sigma}{2}\right)^2 + \tau^2} = 21,500 \text{ lb/in}^2$$

The combined tensile or compressive stress is


$$\sigma_{\max} = \frac{\sigma}{2} + \tau_{\max} = 37,700 \text{ lb/in}^2$$

With a tensile yield strength of 60,000 lb/in<sup>2</sup>, the shear and tensile factors of safety are, respectively,

$$S_s = \frac{.6 \times 60,000}{21,500} = 1.67$$

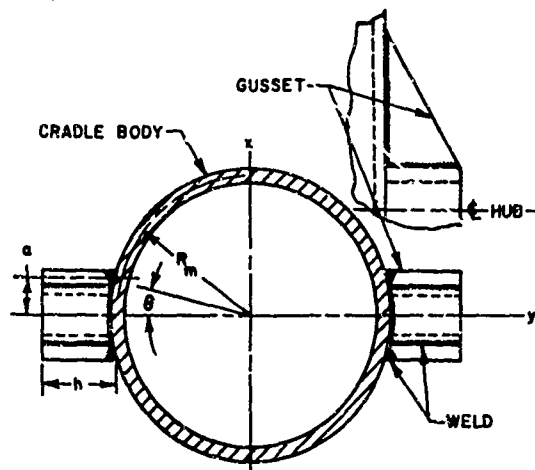

(a) CHORDAL GUSSETS

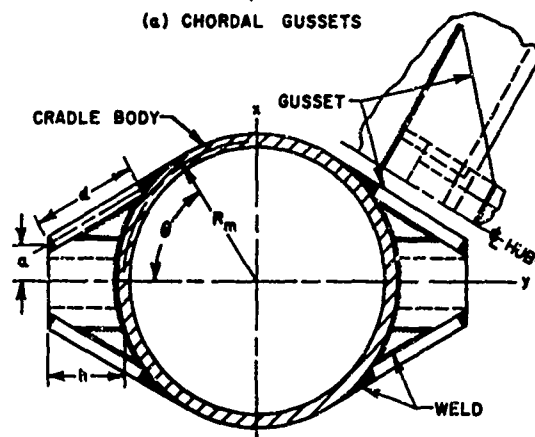

(b) TANGENTIAL GUSSETS

Figure 30. Trunnion Housing With Gusset Reinforcement

$$S_s = \frac{60,000}{37,700} = 1.59$$

From Equation 17f

$$b = \frac{r_h}{a - \frac{2}{3}c} c = \frac{2.75}{2.4} \times 3.45 = 3.96 \text{ in}$$

the required gusset length for the attachment to the cradle body. The stresses here are obviously less than those between gusset and trunnion hub.

77. The effects of the gussets on the cradle wall are discussed in Paragraph 50. In Figure 29,  $R_o$  represents the load  $W$  of Condition (b), Paragraph 50, and the chordal gussets in Figure 30a.

$$\begin{aligned} a &= 2 \text{ in} & \theta &= 0.237 \text{ radian} \\ h &= 3.45 \text{ in} & \sin \theta &= 0.235 \\ R_m &= 8.5 \text{ in} & \cos \theta &= 0.972 \end{aligned}$$

From Equation 25

$$\begin{aligned} M_x &= WR_m \left[ \frac{2}{\pi} (\theta \sin \theta + \cos \theta) - 1 \right] \\ &= 24,400 \times 8.5 \times (-0.346) = -71,700 \text{ lb-in} \end{aligned}$$

From Equation 26

$$\begin{aligned} M_y &= WR_m \left[ \frac{2}{\pi} (\theta \sin \theta + \cos \theta) - \sin \theta \right] \\ &= 24,400 \times 8.5 \times 0.419 = 87,000 \text{ lb-in} \end{aligned}$$

From Equation 28

$$\begin{aligned} \Delta D_z &= \frac{WR_m^3}{EI} \left[ \frac{4}{\pi} (\theta \sin \theta + \cos \theta) - \sin^2 \theta - 1 \right] \\ &= \frac{24,400 \times 614}{29 \times 10^6 I} (0.253) = \frac{0.131}{I} \text{ in} \end{aligned}$$

From Equation 29

$$\begin{aligned} \Delta D_y &= \frac{WR_m^3}{EI} \left[ \frac{4}{\pi} (\theta \sin \theta + \cos \theta) + (\cos \theta - 2) \sin \theta + \left( \theta - \frac{\pi}{2} \right) \right] \\ &= \frac{24,400 \times 614}{29 \times 10^6 I} (-0.268) = -\frac{0.139}{I} \text{ in} \end{aligned}$$

78. When the gussets are made tangent to the cradle body at the mean radius as shown in Figure 30b, they tend to develop smaller bending moments and deflections. The load  $W$  increases over the above value by the ratio of  $d/h$  for the reason presented in Paragraph 71.

$$W = \frac{d}{h} 24,400 = 44,900 \text{ lb}$$

$$\begin{aligned} \text{where } d &= 6.35 \text{ in} \\ h &= 3.45 \text{ in} \end{aligned}$$

Other dimensions are

$$\begin{aligned} a &= 2 \text{ in} & \sin \theta &= 0.859 \\ R_m &= 8.25 \text{ in} & \cos \theta &= 0.512 \\ \theta &= 1.033 \text{ radian} \end{aligned}$$

From Equation 21

$$\begin{aligned} M_x &= WR_m \left[ \frac{2\theta}{\pi} - \sin \theta \right] \\ &= 44,900 \times 8.25 (-0.201) = -74,500 \text{ lb-in} \end{aligned}$$

From Equation 22

$$\begin{aligned} M_y &= WR_m \left[ \frac{2\theta}{\pi} + (\cos \theta - 1) \right] \\ &= 44,900 \times 8.25 \times .170 = 63,000 \text{ lb-in} \end{aligned}$$

From Equation 23

$$\begin{aligned} \Delta D_z &= \frac{WR_m^3}{EI} \left[ \frac{4\theta}{\pi} + \theta \cos \theta - 2 \sin \theta \right] \\ &= \frac{44,900 \times 562}{29 \times 10^6} \times 0.127 = \frac{0.1108}{I} \end{aligned}$$

From Equation 24

$$\begin{aligned} \Delta D_y &= \frac{WR_m^3}{EI} \left[ \left( \frac{4\theta}{\pi} - 2 \right) + 2 \cos \theta + \left( \theta - \frac{\pi}{2} \right) \sin \theta \right] \\ &= \frac{44,900 \times 562}{29 \times 10^6 I} (-0.122) = \frac{-0.1062}{I} \text{ in} \end{aligned}$$

A comparison of results obtained for the two types of gussets shows that, although the tangential type has almost twice the load, the bending moments and deflections produced in the cradle wall are less than the maximum corresponding values of the parallel gussets.

79. To compute the induced bearing pressure, the procedure used in Paragraph 73 is followed

$$\begin{aligned} (-0.467) \frac{wR_m^4}{EI} &= \frac{WR_m^3}{EI} (-0.122) \\ w &= \frac{0.122 \times 44,900}{0.467 \times 8.25} = 1,422 \text{ lb in, peripheral load} \end{aligned}$$

From Equation 40, the bearing pressure is

$$P_b = \frac{w}{b} = \frac{1422}{3.96} = 360 \text{ psi}$$

where  $b = 3.96$  in (see Figure 29, Paragraph 76).

The pressure meets the conditions stated in Paragraph 28.

80. The critical compressive stress obtained from Equation 20 indicates that the possibility of the gussets buckling is extremely remote.

$$\sigma_c = K_c \frac{E}{1 - \nu^2} \left( \frac{t}{b} \right)^2 = 540,000 \text{ lb/in}^2$$

$$\begin{array}{ll} \text{where } a = 3.96 \text{ in} & K_c = 1.06 \\ b = 3.45 \text{ in} & t = 0.5 \text{ in} \\ E = 29 \times 10^6 \text{ lb/in}^2 & \nu = 0.3 \end{array}$$

## VII. SAMPLE PROBLEM, U-TYPE CRADLE

### A. LOAD ANALYSIS

81. A U-type cradle is selected for the sample problem involving a single recoil gun carriage. Figure 5a represents the loading diagram for the analysis

$$\begin{array}{ll} a = 80 \text{ in} & d = 0.1 \text{ in} \\ b = 20 \text{ in} & e = 8 \text{ in} \\ c = 16 \text{ in} & h = 7 \text{ in} \end{array}$$

$$\begin{array}{l} W_1 = 10,000 \text{ lb, weight of recoiling parts} \\ F_g = 1,810,000 \text{ lb, propellant gas force} \\ K = 150,000 \text{ lb, total recoil resistance} \\ \mu = 0.15, \text{ coefficient of friction} \\ \theta = 60^\circ, \text{ angle of elevation} \end{array}$$

82. The values of  $R_1$ ,  $R_2$ ,  $f_1$ ,  $f_2$  and  $K_R$  are unknown. These are found by balancing the loads and moments.

From Equation 3, since  $F_1$  is zero, the inertia force is

$$\begin{aligned} F_a &= F_g + W_1 \sin \theta - K \\ &= 1,810,000 + 8700 - 150,000 \\ &= 1,668,700 \text{ lb} \end{aligned}$$

$$\Sigma V = 0$$

$$R_1 - R_2 + W \cos \theta = 0$$

$$R_2 = R_1 + 5000$$

$$\Sigma H = 0$$

From Equation 2

$$K_R + f_1 + f_2 - K = 0$$

but from Equations 1 and 1a

$$\begin{aligned} f_1 &= \mu R_1 = 0.15 R_1 \\ f_2 &= \mu R_2 = 0.15 (R_1 + 5000) \end{aligned}$$

therefore

$$\begin{aligned} K_R &= K - (f_1 + f_2) = 149,200 - 0.30 R_1 \\ \Sigma M_{R_2} &= 0 \end{aligned}$$

$$(c-e)K_R + eF_g - (e-d)(F_a - W \sin \theta) - aW \cos \theta - (e-h)f_1 - (a-b)R_1 = 0$$

$$(a-b)R_1 = 60R_1$$

$$(e-h)f_1 = 1.0(0.15R_1) = 0.15R_1$$

$$\begin{aligned} (c-e)K_R &= 8(149,200 - 0.30 R_1) \\ &= 1,194,000 - 2.40R_1 \end{aligned}$$

$$eF_g = 8 \times 1,810,000 = 14,480,000$$

$$\begin{aligned} (e-d)(F_a - W \sin \theta) &= 7.9 \times 1,660,000 \\ &= 13,114,000 \end{aligned}$$

$$aW \cos \theta = 80 \times 5000 = 400,000$$

$$62.55R_1 = 2,160,000$$

$$R_1 = 34,500 \text{ lb}$$

$$R_2 = 39,500 \text{ lb}$$

$$f_1 = 5200 \text{ lb}$$

$$f_2 = 5900 \text{ lb}$$

$$K_R = 138,900 \text{ lb}$$

### 1. Rails and Slides

83. The reactions  $R_1$  and  $R_2$  are carried equally by two rails, each 90 inches long. These reactions have an assumed triangular distribution, but the reaction due to rifling torque is distributed uniformly. The rails are 3.0 inches wide and their center-to-center distance is 17 inches. From Paragraph 74,  $T_r = 545,000 \text{ lb-in}$

$$F'_r = \frac{T_r}{d} = \frac{545,000}{17} = 32,000 \text{ lb}$$

$$w_r = \frac{F'_r}{90} = 355 \text{ lb/in}$$

Let  $\frac{1}{2}R_2$  represent the triangular portion of  $R'_2$  (see Figure 12).

$$\frac{1}{2} \left( \frac{L}{2} \right) w_2 = \frac{1}{2} R_2$$

$$w_2 = \frac{39,500}{45} = 875 \text{ lb/in}$$

$$w = w_2 + w_r = 1230 \text{ lb/in}$$

The maximum bearing pressure becomes

$$\sigma_{br} = \frac{w}{3} = 410 \text{ lb/in}^2$$

This pressure is acceptable according to Paragraph 28.

The strength of the rail or slide is determined according to Paragraph 32 and Figure 17. Assume that rail and slide have identical cross-sectional dimensions

$$a = b = 0.75 \text{ in}$$

$$d = e = 2.25 \text{ in}$$

$$F = 1.0w = 1230 \text{ lb}$$

$$A = 1.0 \times 0.75 = 0.75 \text{ in}^2$$

$$Z = \frac{I}{c} = \frac{1}{6} \times 1.0 \times 0.75^2 = 0.0937 \text{ in}^3$$

$$M = eF = 2770 \text{ lb-in}$$

From Equation 11

$$\sigma_t = \frac{M}{Z} + \frac{F}{A} = 29,600 + 1600 = 31,200 \text{ lb/in}^2$$

$$S_f = \frac{60,000}{31,200} = 1.92$$

## 2. Equilibrator Load

84. Calculate the equilibrator force,  $F_E$ , by balancing the weight moment of the tipping parts about the trunnions. Referring to Figure 8

$$\begin{aligned} M_w &= r_1 W_1 \cos(\theta + \phi_1) + r_e W_e \cos(\theta + \phi_2) \\ &= 461,000 \text{ lb-in} \end{aligned}$$

where

$$r_1 = 75 \text{ in} \quad \theta = 60^\circ, \text{ angle of elevation}$$

$$r_e = 25 \text{ in} \quad \phi_1 = 0^\circ 04'$$

$$W_1 = 10,000 \text{ lb} \quad \phi_2 = -30^\circ$$

$$W_e = 4000 \text{ lb}$$

The equilibrator force is found by equating the equilibrator moment to the weight moment.

$$rF_E = M_w = 461,000 \text{ lb-in}$$

when  $r = 12 \text{ in}$

$$F_E = 38,400 \text{ lb, equilibrator force}$$

85. The equilibrator attachment to the cradle is similar to the trunnion housing of Figure 31. Its location is designated in the force diagram of Figures 8 and 32. The loads on the primary cradle structure are

$$R_s = \frac{3.91}{12} F_E \cos(\theta - \lambda) + \frac{1}{2} F_E \sin(\theta - \lambda)$$

$$= \frac{3.91}{12} \times 37,200 + \frac{1}{2} \times 10,000 = 17,100 \text{ lb}$$

$$R_t = \frac{3.91}{12} F_E \cos(\theta - \lambda) - \frac{1}{2} F_E \sin(\theta - \lambda)$$

$$= 12,100 - 5000 = 7100 \text{ lb}$$

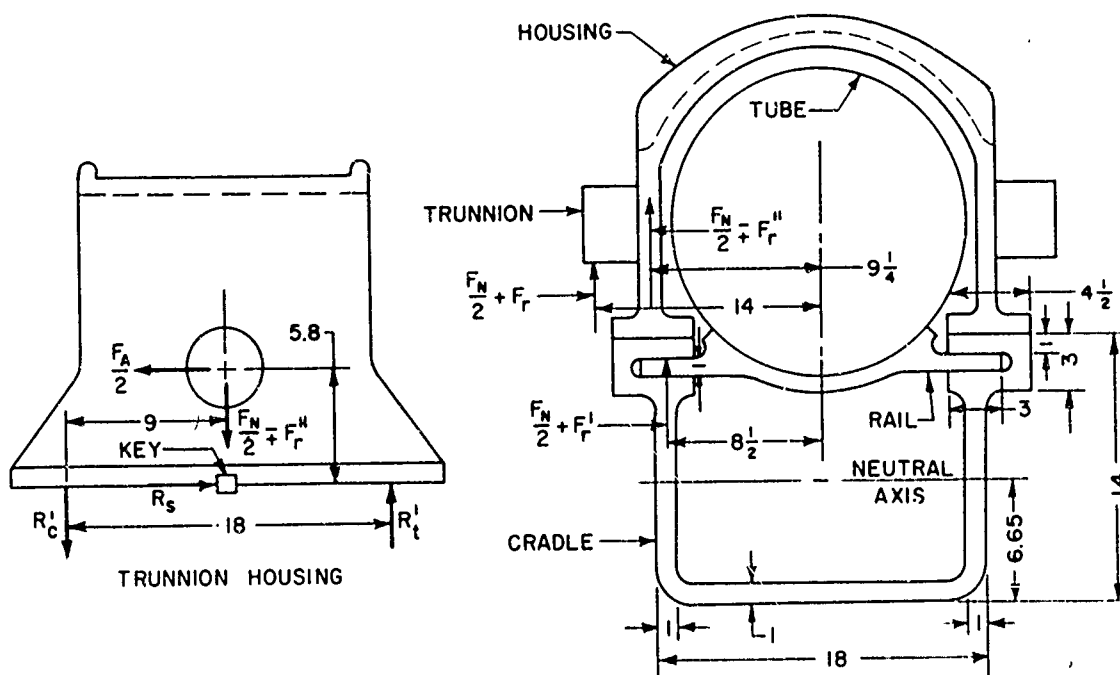


Figure 31. Trunnion Housing and Cross Section of Cradle

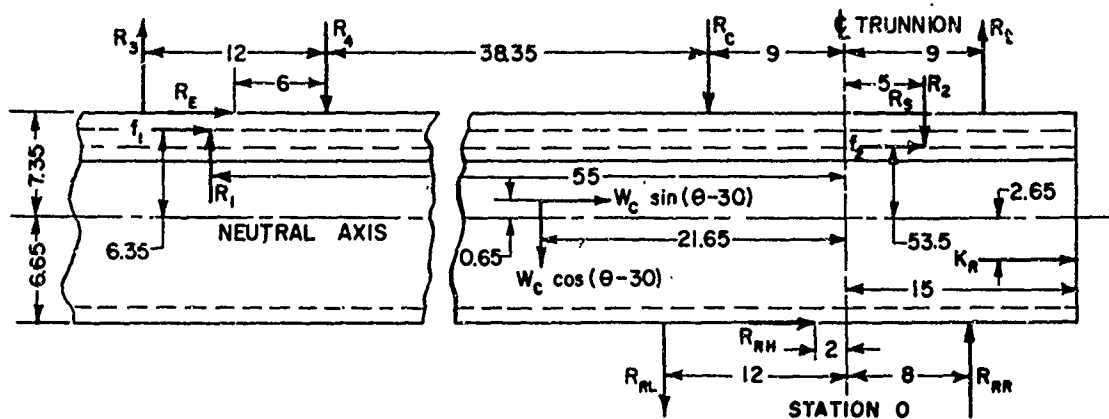


Figure 32. Applied Loads on Cradle

$R_k = F_E \cos(\theta - \lambda) = 37,200 \text{ lb}$   
 where  $\lambda = 45^\circ$  (see Paragraph 86).

### 3. Elevating Gear Load

86. The reaction on the elevating gear arc,  $R_o$ , is found by balancing the moment about the trunnions. Additional dimensions for Figure 8 are:

$$\begin{aligned} \lambda &= 45^\circ & a &= 0.10 \text{ in} \\ \gamma &= 50^\circ & b &= 0.2 \text{ in} \end{aligned}$$

$\beta = 20^\circ$ , pressure angle of gear tooth  
 $R_p = 36 \text{ in}$ , pitch radius of elevating arc

The applied loads and dimensions are those previously used in this sample problem. With reference to Figure 5a, the trunnions are located 5.0 inches to the left of  $R_2$ .

$$\Sigma M_T = 0$$

$$\begin{aligned} R_p R_o \cos \beta - r F_E + r_c W_c \cos(\theta + \phi_2) \\ + a(F_a - W_1 \sin \theta) - r_1 W_1 \cos(\theta + \phi_1) \\ - b F_o = 0 \end{aligned}$$

$$R_p R_o \cos \beta = 36 \times .940 R_o = 33.8 R_o$$

$$r F_E = 12 \times 38,400 = 461,000$$

$$r_c W_c \cos(\theta + \phi_2) = 25 \times 3460 = 87,000$$

$$a(F_a - W_1 \sin \theta) = 0.10 \times 1,660,000 = 166,000$$

$$\begin{aligned} r_1 W_1 \cos(\theta + \phi_1) &= 75 \times 10,000 \times .499 \\ &= 374,000 \end{aligned}$$

$$b F_o = 0.20 \times 1,810,000 = 362,000$$

$$33.8 R_o = 196,000 \text{ lb-in}$$

$$R_o = 5800 \text{ lb}$$

87. With reference to Figures 8 and 33, the loads at the attachments of elevating arc to cradle are calculated by resolving the gear tooth load about these attachments. Take moments about the intersection of  $R_{RL}$  and  $R_{RH}$ , the shear reaction on the key, and solve for  $R_{RL}$ .

$$\begin{aligned} 20 R_{RL} &= 4.3 R_o \cos(\theta + \beta + \gamma) \\ &\quad + 14 R_o \sin(\theta + \beta + \gamma) \\ &= 4.3 \times 3700 + 14 \times 4400 = 77,500 \\ R_{RL} &= 3900 \text{ lb} \end{aligned}$$

$$R_{RR} = R_{RL} + R_o \cos(\theta + \beta + \gamma) = 7600 \text{ lb}$$

$$R_{RH} = R_o \sin(\theta + \beta + \gamma) = 4400 \text{ lb}$$

The bolts and key size required to transmit

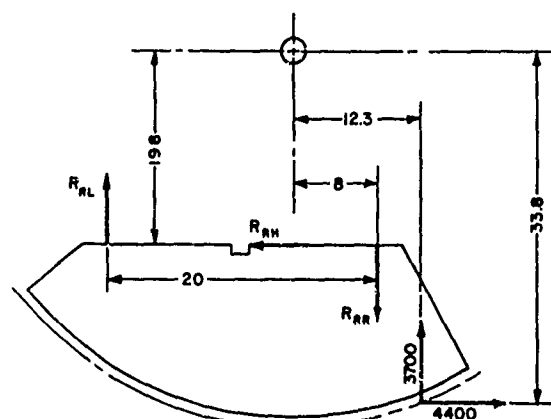


Figure 33. Loads on Elevating Arc

the above loads are determined as shown in Paragraph 56.

#### 4. Trunnion Loads

88. The trunnion reactions,  $F_A$  and  $F_N$ , are found by summation of forces parallel and perpendicular to the center line of the bore (Figure 8).

$$\begin{aligned} F_N &= F_E \sin (\theta - \lambda) + R_g \cos (\theta + \beta + \gamma) \\ &\quad - W_1 \cos \theta - W_c \cos \phi_2 \\ &= 10,000 + 3700 - 5000 - 3500 \\ &= 5,200 \text{ lb} \end{aligned}$$

$$\begin{aligned} F_A &= F_g - F_a + W_1 \sin \theta + W_c \sin \phi_2 \\ &\quad + F_E \cos (\theta - \lambda) + R_g \sin (\theta + \beta + \gamma) \\ &= 1,810,000 - 1,668,700 + 8700 + 2000 \\ &\quad + 37,200 + 4400 = 193,600 \text{ lb} \end{aligned}$$

89. The maximum load on the trunnion housing bolts is applied when the rifling torque is maximum.

$$T_r = 545,000 \text{ lb-in (see Paragraph 74)}$$

$$F_r' = \frac{T_r}{18.5} = 29,400 \text{ lb}$$

$$\frac{F_N}{2} = \frac{5200}{2} = 2600 \text{ lb}$$

$$\frac{F_A}{2} = \frac{193,600}{2} = 96,800 \text{ lb}$$

With reference to Figure 31, the maximum bolt load is

$$\begin{aligned} R_t' &= \frac{5.8}{18} \times \frac{F_A}{2} - \frac{1}{2} \left( \frac{F_N}{2} - F_r' \right) \\ &= 31,200 + 13,400 = 44,600 \text{ lb} \end{aligned}$$

There are four 5/8-11 NC bolts at  $R_t'$

$$A = 4 \times 0.202 = 0.808 \text{ in}^2, \text{ total root area}$$

$$\sigma = \frac{R_t'}{A} = 55,300 \text{ lb/in}^2, \text{ tensile stress}$$

$$S_f = \frac{100,000}{55,300} = 1.81$$

$$R_s = \frac{F_A}{2} = 96,800 \text{ lb, key load}$$

$$A_s = 4.5 \times 0.75 = 3.375 \text{ in}^2, \text{ shear area}$$

$$\tau = \frac{R_s}{A_s} = 28,700 \text{ lb/in}^2, \text{ shear stress}$$

$$S_f = \frac{0.6 \times 100,000}{28,700} = 2.09$$

$$A_{br} = 4.5 \times 0.375 = 1.6875 \text{ in}^2, \text{ bearing area}$$

$$\sigma_{br} = \frac{R_s}{A_{br}} = 57,400 \text{ lb/in}^2, \text{ bearing stress}$$

The cradle material has the lesser strength. At a yield of 60,000 lb/in<sup>2</sup>

$$S_f = \frac{1.4 \times 60,000}{57,400} = 1.46$$

90. The trunnion bearings are based on the loads that are present when the rifling torque is maximum. This is the only condition to be investigated here. Other conditions may be more critical and should be checked. From Paragraph 74

$$F_r = 19,500 \text{ lb}$$

From Paragraph 88

$$F_N = 5200 \text{ lb}$$

$$F_A = 193,600 \text{ lb}$$

Maximum trunnion load

$$F_T = \sqrt{\left(\frac{F_A}{2}\right)^2 + \left(\frac{F_N}{2} + F_r\right)^2} = 100,000 \text{ lb}$$

The trunnion bearing load of the single recoil type is over 45 per cent more than that for the double recoil type illustrating one advantage of having the latter type system (see Paragraph 74). The remaining analyses of trunnion and hub follow procedures similar to those of Paragraphs 74 through 76.

91. The reactions produced by the rifling torque are transmitted directly from the slides to the trunnion housing and therefore do not enter into the analysis of the (U-shaped) primary cradle structure. All the remaining normal and axial loads and reactions are considered. With reference to Figures 31 and 32, the total reactions now become

$$R_t = \frac{5.8}{18} F_A - \frac{1}{2} F_N = 62,400 - 2600 = 59,800$$

$$R_s = \frac{5.8}{18} F_A + \frac{1}{2} F_N = 65,000 \text{ lb}$$

$$R_s = F_A = 193,600 \text{ lb}$$

## B. CRADLE BODY

## 1. Shear and Moment Chart

Station	$x$	$V$	$\Sigma V$	$H$	$y$	$M_x$	$M_y$	$M$
59.35	0	171	171	0	0	0	0	0
55.00	4.35	345	516			-74		-74
				52	6.35		-33	-107
53.35	1.65	0	516			-85		-192
				372	7.35		-273	-485
47.35	6.00	-71	445	0	0	-310	0	-775
21.65	25.70	-35	410			-1143		-1918
				20	65		-1	-1919
12	9.65	-39	371	0	0	-396	0	-2315
9	3.00	-650	-279	0	0	-111	0	-2426
2	7.00	0	-279			195		-2231
				44	6.65		29	-2202
0	2.00	0	-279			56		-2146
				-1936	7.35		1420	-726
-5	5.00	-395	-674			139		-587
				59	5.35		-32	-619
-8	3.00	76	-598	0	0	202		-417
-9	1.00	598	0	0	0	60		-357
-15	6.00	0	0	1389	2.65		368	+11

Units of  $x$  and  $y$  are given in inches;  $V$ ,  $\Sigma V$  and  $H$  in 100 lb;  $M_x$ ,  $M_y$  and  $M$  in 1000 lb-in.

The maximum bending moment occurs nine inches in front of the trunnion. The moment of inertia is based on the dimension of the cradle cross section shown in Figure 31.

## 2. Stress and Deflection

92. The bending stress of 10,200 lb/in<sup>2</sup> falls far below the stress that would yield a factor of safety of 1.5. However, rigidity is a property of higher priority inasmuch as large deflections eventually mean poor accuracy. Thus, rather than decrease the section and increase its structural efficiency stress-wise, it is better to maintain its rigidity to promote better accuracy. Both structures, cradle and gun tube, combine their stiffness although they are treated as two parallel beams with no horizontal shear connection between them.

93. The deflections are determined by the moment area method (refer to Figure 34). First, the deflection is determined for the structure at the breech end by computing the moment of the  $M/EI$  area at this point, Station -15.0. This deflection is normal to the tangent of the elastic line at Station 59.35. Referring to the Shear and Moment Chart of Paragraph 91, the value of  $M/I$  is computed for each station and drawn to scale in Figure 34.

$$I = I_c + I_T = 4600 \text{ in}^4$$

Dimension (in)	$A$	$d$	$Ad$	$Ad^2$	$I_o$
18 × 11	198	5.5	1090	5995	1996
16 × 10	-160	6.0	-960	-5760	-1333
9 × 3	27	12.5	337.5	4219	20
6 × 1	-6	12.5	-75	-938	-
$\Sigma$	59		392.5	3516	683

The moment of inertia at the base line (BL) is

$$I_{BL} = \Sigma Ad^2 + \Sigma I_o = 4200 \text{ in}^4$$

$$\bar{d} = \frac{\Sigma Ad}{\Sigma A} = 6.65 \text{ in, distance from base line to neutral axis}$$

$$I_c = I_{BL} - \Sigma A\bar{d}^2 = 1590 \text{ in}^4, \text{ moment of inertia of cradle section}$$

$$c = 14 \quad \bar{d} = 7.35 \text{ in}$$

$$\sigma = \frac{Mc}{I} = \frac{2,426,000 \times 7.35}{1590} = 11,200 \text{ lb/in}^2, \text{ bending stress}$$

In the above table  
Dimension = base × height of parts of the section

$A$  = area of each part

$d$  = distance from base line to neutral axis of part

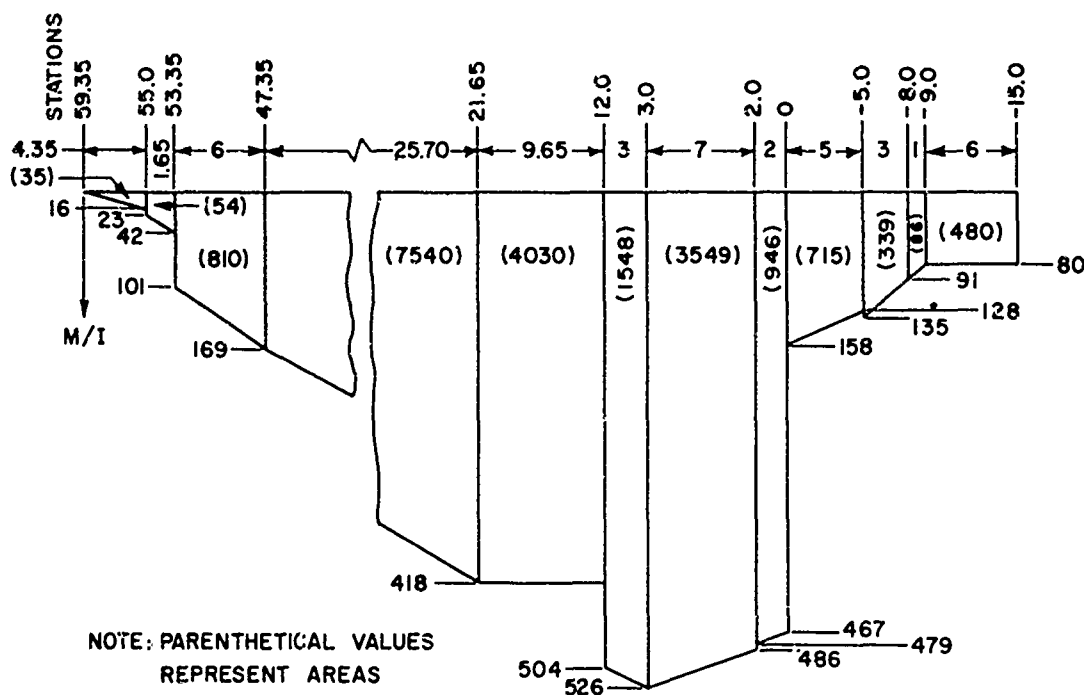


Figure 34. M/I Diagram

$I_o$  = moment of inertia of part about its own neutral axis

The moment of inertia of the tube is

$$I_T = \frac{\pi}{64} (D_o^4 - D_i^4) = 3010 \text{ in}^4, \text{ tube moment}$$

$D_o$  = 16 in, OD of tube

$D_i$  = 8 in, ID of tube

The areas between stations are computed and their centroids determined. The table below shows the moment of each area about Station -15.0.

$\bar{x}$	$A_M$	$\bar{x}A_M$	$\bar{x}$	$A_M$	$\bar{x}A_M$
3.00	480	1440	25.49	1548	39400
6.51	86	560	31.83	4030	128200
8.60	339	2910	47.7	7540	359500
12.59	715	9000	55.11	810	52750
16.0	946	15200	69.06	54	3730
20.55	3549	73000	71.45	35	2500

$$\Sigma \bar{x}A_M = 688,000 \text{ lb in}$$

$$\Delta = \left( \frac{M}{EI} \right)_M = \frac{\Sigma \bar{x}A_M}{E} = \frac{688,000}{29 \times 10^6} = 0.0237 \text{ in, deflection at Station --15.0}$$

$$\theta_1 = \frac{\Delta}{L} = \frac{0.0237}{74.35} = .00032 \text{ radian angular deflection at Station 59.35}$$

Assume that the clearance between rail and slide is 0.010 inches, extending along the entire length. This clearance permits the tube to rotate through a small angle until the rails become cocked in the slides. In this example, the length of the slides is 90 inches, thus

$$\theta_2 = \frac{0.010}{90} = 0.00011 \text{ radian}$$

$$\theta = \theta_1 + \theta_2 = 0.00043 \text{ radian}$$

the total angular deflection of gun tube that is attributed to the cradle structure.

## GLOSSARY

- breechblock.** The part of a gun, especially a cannon, which closes the breech.
- carriage, gun.** Mobile or fixed support for a cannon.
- carriage, top.** Primary supporting structure of a weapon. It supports the tipping parts and moves with the cradle in traverse. In double recoil systems it comprises the bulk of the secondary recoiling mass.
- clip.** A component of a discontinuous guide.
- counterrecoil.** Forward movement of a gun returning to firing position (battery) after recoil.
- cradle.** The nonrecoiling structure of a weapon which houses the recoiling parts and rotates about the trunnions to elevate the weapon.
- cradle, O-type.** A cradle which supports the gun tube within a cylindrical housing.
- cradle, U-type.** A cradle which supports the gun tube on longitudinal guides.
- elevating arc.** A gear segment rigidly attached to the tipping parts and serving as the terminal member in the gear train of the elevating mechanism.
- elevating mechanism.** Mechanism on a gun carriage or launcher by which the tipping parts are elevated or depressed.
- elevation.** Angle of elevation; the process of changing the angle of elevation.
- equilibrator.** The force-producing mechanism whose function is to provide a moment about the cradle trunnions equal and opposite to that caused by the muzzle preponderance of the tipping parts, thereby reducing the effort required to elevate.
- force, equilibrator.** The force generated by the equilibrator.
- force, propellant gas.** The force due to the propellant gases that drives the gun rearward into recoil.
- force, recoil.** The resistance provided to the recoiling parts.
- guide.** Channel-shaped structure of the cradle which provides sliding surface and support to the recoiling parts during the recoil cycle.
- guide, continuous.** Guide made of one continuous member.
- guide, discontinuous.** Guide made of several short lengths spaced at regular intervals. *See clip.*
- lug, gun.** An appendage of the breech ring for attaching the recoil mechanism.
- moment, tipping.** The couple created by the firing forces and the inertia of the tipping parts.
- moment, upsetting.** The couple created by the firing forces and the inertia of the recoiling parts.
- moment, weight.** The moment about the cradle trunnions produced by the weight of the tipping parts.
- mount, gun.** An item designed to support a gun.
- rail.** A supporting member of the recoiling parts that slides in a guide.
- rail, continuous.** Rail made of one member.
- rail, discontinuous.** Rail made of several short lengths spaced at regular intervals.
- recoil.** The rearward movement of a gun caused by the propellant gas force.
- recoil cylinder.** The cylinder that houses the recoil brake.
- recoil mechanism.** The unit that absorbs some of the energy of recoil and stores the rest for returning the recoiling parts to battery.
- recoil mechanism, concentric.** A recoil mechanism that is assembled concentrically on the gun tube.
- recoil system, double.** A system in which the gun recoils on the top carriage and the top carriage recoils on the bottom carriage.
- recoil system, single.** A system that has only the gun tube and its components as recoiling parts.
- recoiling parts.** Those parts of a weapon that move in recoil.
- recoiling parts, primary.** In a double recoil

system, the recoiling parts equivalent to those of a single recoil system, i.e., tube, breech assembly, guides or sleigh, and those parts of the recoil mechanism which move with the tube.

**recoiling parts, secondary.** In a double recoil system, the cradle, those parts of the primary recoil mechanism which do not move with the tube, the top carriage, and all those parts attached to it.

**recuperator.** The equipment that stores some of the energy of recoil for counterrecoil.

**ring, breech.** Breechblock housing, screwed or shrunk on the rear of a cannon.

**sleigh.** The housing of a gun tube that slides in a U-type cradle during the recoil cycle.

**slide.** Same as rail.

**tipping parts.** The assembled structure of a

weapon which moves in elevation or depression about the trunnions.

**torque, rifling.** The reaction on the gun tube of the angular accelerating forces on the projectile.

**traversing gear.** A gear rigidly attached to the traversing parts and meshed with the traversing mechanism.

**trunnion.** The cylindrical structural component of the cradle which serves as the pivot for the tipping parts and which transmits the recoil forces to the top carriage.

**trunnion bearing.** The bearing that supports the trunnion.

**tube, gun.** A hollow cylinder, usually of steel, in which a round of ammunition is fired and directed.

**tube whip.** The flexing of the gun tube due to accelerating forces normal to the tube axis.

## REFERENCES

1. ORDP 20-340, Ordnance Engineering Design Handbook, Carriages and Mounts Series, *Carriages and Mounts, General*.
2. ORDP 20-342, Ordnance Engineering Design Handbook, Carriages and Mounts Series, *Recoil Systems*.
3. ORDP 20-345, Ordnance Engineering Design Handbook, Carriages and Mounts Series, *Equilibrators*.
4. *A Report on the Analysis of Gun Carriage, 175mm, T76*, The Franklin Institute, Final Report F-2240, Part I.
5. Charles D. Hodgman, et al, Ed., *Handbook of Chemistry and Physics*, 40th Ed., Chemical Rubber Publishing Company, Cleveland, 1958-1959.
6. Hoffman and Sachs, *Introduction to the Theory of Plasticity for Engineers*, McGraw-Hill Book Co., Inc., New York, 1953.
7. R. J. Roark, *Formulas for Stress and Strain*, 3rd Ed., McGraw-Hill Book Co., Inc., New York, 1954.
8. ORDP 20-134, Ordnance Engineering Design Handbook, *Maintenance Engineering Principles for Design Engineers*.
9. F. B. Seely and J. O. Smith, *Advanced Mechanics of Materials*, John Wiley and Sons, Inc., New York, 1952.

## INDEX

Cleaning, 22

Cradle

body, 25, 37 *see also* Structure

function of, 1

O-type, 3, 10, 23

type, 2

U-type, 2, 10, 34

Design

of trunnion, 16, 31

practice, 21

problem, 23, 24

procedure, 5

Elevating arc, 2, 7, 24, 36

Equilibrator, 2, 7

Equilibrator force, 7, 24, 35

Friction effect, 15

Glossary, 40

Gussets, 18, 29, 32, 34

Illustrations, list, v

Inspection, 22

Keys, 24

Load analysis, 23, 34

Lubrication, 22

Maintenance, 22

Manufacture, 22

Materials, 22

O-type cradle, 3, 10, 23

Rails, 13, 34

Recoil

attachment bracket, 20, 25

force, 5

mechanism, 1, 5

References, 42

Rifling torque, 10, 31

Sample problem, 23, 34

Shear and moment chart, 26, 37

Sleigh, 2, 13

Sliding surfaces, 11, 15, 34

Strength requirement, 17

Structure, 5, 21 *see also* Cradle body

Symbols, list, vi

Temperature effect, 4

Trunnion, 2, 16, 18, 24, 31, 37

analysis, 31

design, 16, 31

hub, 18

load, 16, 24, 57

location, 16

U-type cradle, 2, 10, 34