

INCH-POUND

A-A-50386

13 March 1991

COMMERCIAL ITEM DESCRIPTION

GLOVES, MEN'S AND WOMEN'S

This Commercial Item Description is authorized for use in preference to MIL-G-24909.

Description - The gloves shall be slip on style with sewn in bolton thumb and shall have one piece fourchettes, top opening with turned under hem and a cut and sewn fabric liner. The thread used for stitching shall be of any commercial type suitable for the purpose intended. The color of the thread used for stitching the leather shall be black, approximating the color of the leather and the color of thread used for stitching the liner shall be natural. When stitching the liner finger tips to the shell finger tips, the stitching shall go over or into the existing stitches at the finger tips. The chain portion of the stitching shall be on the inside of the glove. The stitch type for seaming, the seam type, stitch gauge and stitch length shall produce adequately durable seams throughout the gloves.

Material - The trunks shall be cut from leather conforming to type A, class 2, sub-class b, of KK-L-254. The minimum wet and dry colorfastness shall be Munsell 7.5 (wet) and Munsell 8.5 (dry). The leather shall have a thickness of 1-1/2 to 2-1/4 ounces. Folds or wrinkles more than 1/16 inch wide in the flat are not acceptable. The requirements for total ash, chromic oxide, and pH are not applicable. The leather shall not discolor the water in the shrinkage temperature test. The leather shall be developed dyed black and shall approximately match shade number 27038 of FED-STD-595. The color shall be uniform throughout, and shall completely penetrate the leather from the grain side to the flesh side. NOTE: A developed dye is a skin whose color is obtained by the application of a dye, subsequent application of a suitable nitrite, followed by a developer.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, P.O. Box 59, Natick, MA 01760-0001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8440

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

A-A-50386

Fabric liner - The liner shall be made from a plain knit 50% polyester/50% wool (+ 5% for each fiber) fabric. The fabric shall have a minimum weight of 6.0 ounces per square yard and shall have 13-15 wales per inch and 13-15 courses per inch of a single yarn. The face side of the fabric shall be lightly napped. The color shall be natural or light beige. Recycled, reprocessed, or reused wool or polyester fibers are permitted.

Sizes. The gloves shall be of one type only in the following sizes as specified.

1 - 1C - 2 - 2C - 3 - 3C - 4 - 4C - 5 - 5C - 6 - 6C - 7 - 7C - 8 - 9 - 10

NOTE: Cadet sizes have shorter fingers. All sizes are "Unisex", however, sizes 1 through 3C are graded to accommodate the greatest percentile of women and sizes 4 through 10 are graded to accommodate the greatest percentile of men.

Label - A commercial type label is acceptable provided that additional printed cloth labels containing the contractors name, contract number and NSN is caught in the stitching of the commercial label. The commercial label may include care instructions and fiber content.

Sizes and measurements - The finished gloves shall conform to the dimensions specified below. All measurements and tolerances are expressed in inches. All measurements shall be taken without distorting the finished glove.

| Size | Overall Length (A) | Thumb Length (B) | Width (C) |
|------------|--------------------|------------------|-----------|
| 1 | 9-3/4 | 2-3/8 | 3-3/8 |
| 1C | 9-1/2 | 2-1/8 | 3-3/8 |
| 2 | 9-7/8 | 2-1/2 | 3-1/2 |
| 2C | 9-5/8 | 2-1/4 | 3-1/2 |
| 3 | 10-1/4 | 2-5/8 | 3-3/4 |
| 3C | 10 | 2-3/8 | 3-3/4 |
| 4 | 9-5/8 | 2-3/8 | 4 |
| 4C | 9-3/8 | 2-1/8 | 4 |
| 5 | 10 | 2-1/2 | 4-1/8 |
| 5C | 9-3/4 | 2-1/4 | 4-1/8 |
| 6 | 10-1/4 | 2-5/8 | 4-1/4 |
| 6C | 10 | 2-3/8 | 4-1/4 |
| 7 | 10-1/2 | 2-3/4 | 4-1/2 |
| 7C | 10-1/4 | 2-1/2 | 4-1/2 |
| 8 | 10-3/4 | 2-7/8 | 4-5/8 |
| 9 | 11 | 3 | 4-3/4 |
| 10 | 11-1/4 | 3-1/8 | 4-7/8 |
| Tolerance: | ± 1/4 | ± 1/8 | ± 3/16 |

NOTE: Refer to Figure 1 for A, B, and C measurements.

A-A-50386

Pairing - The gloves shall be matched, paired, placed palm to palm and tacked. Tacking shall be done with no less than two stitches, using a suitable ply cotton thread which will permit the gloves to be separated without tearing the leather.

Patterns - The government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides for a seam allowance of 1/16 to 3/32 for leather to leather seaming operations and 3/32 to 3/16 for liner seaming operations, except to top opening, which allows for a 3/8 to 1/2 inch hem. Commercial patterns may be used in lieu of government patterns provided they conform to the cited design and finished measurements.

Workmanship - After completion, the gloves shall be thoroughly cleaned and all foreign matter removed.

Product demonstration model - Offerers are required to submit two (2) pairs of gloves of their intended production and style. Product demonstration models will be analyzed and evaluated by the Government. Evaluation criteria and basis for award are contained in the solicitation. Product demonstration models will be retained by the Government. One (1) product demonstration model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the product demonstration model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Responsibility for inspection - The supplier is responsible for assuring the product conforms to the requirements. Glove lots will be inspected to determine conformance with the Commercial Item Description and the successful offerer's technical proposal negotiated. Acceptability of glove lots will be determined by the use of "Sampling Procedures and Tables for Inspection by Attributes", ANSI Z1.4, published by the American Society for Quality Control. Sampling procedures will be designated by the Government at the time of award. The sample unit is one glove and the selection done in pairs. The gloves will be examined for commercial type defects.

Defect - The gloves shall be examined for the following defects: any hole, cut, tear, needle chew, abraded surface, weak or thin spot, hard scars, brittle or bony area, or deep grain damage; leather shaded throughout the glove; color not as specified; any spot or stain (outside); thread ends not removed; stitching of liner finger tips to shell finger tips not as specified; not cut or fabricated in accordance with the product demonstration model; mispaired, i.e., two lefts or two rights; label missing, incorrect, or illegible; measurement of item not as specified; and any variation not otherwise classified herein but at variance with the product demonstration model.

Preservation - Ten (10) pairs of properly mated gloves of one size only, shall be neatly stacked in a bundle with every other pair reversed fingertip to cuff. Each bundle shall be loosely bound around the center with any suitable commercial grade kraft paper. The ends of the paper wrapper shall be either pinned, pasted, or secured with gummed paper tape (1 inch minimum width), or pressure sensitive tape.

A-A-50386

Packing - Thirty (30) pairs of gloves, of one size only, preserved as specified above, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to type CF, class domestic, grade 200, variety DW, size 1A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Each package shall be packed flat, three in length, one in width, and one in depth within the shipping container. Two ounces of flaked naphthalene conforming to class B of R-N-91 shall be evenly distributed throughout the pack. Each container shall have the contents completely covered on top and bottom with a sheet of 30 pound minimum basis weight kraft paper, of any suitable commercial grade.

Marking - In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

Palletization - When specified in the contract, gloves packed as specified above, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding methods C and D or Film bonding F or G. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, type IV; type V, class 1, size 2; or type VIII, fabricated from wood groups I, II, III or IV, grade A of NN-P-71, or 4-way, style 1, size A, type I, class 1 fabricated from groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

Custodians:
 Navy - NU
 Army - GL
 Air Force - 11

Preparing activity:
 Navy - NU

Project 8440-0194

Review activities:
 Navy - MC
 Air Force - 82, 99
 DLA - CT

User activities:
 Navy - CG
 Air Force - 45

A-A-50386

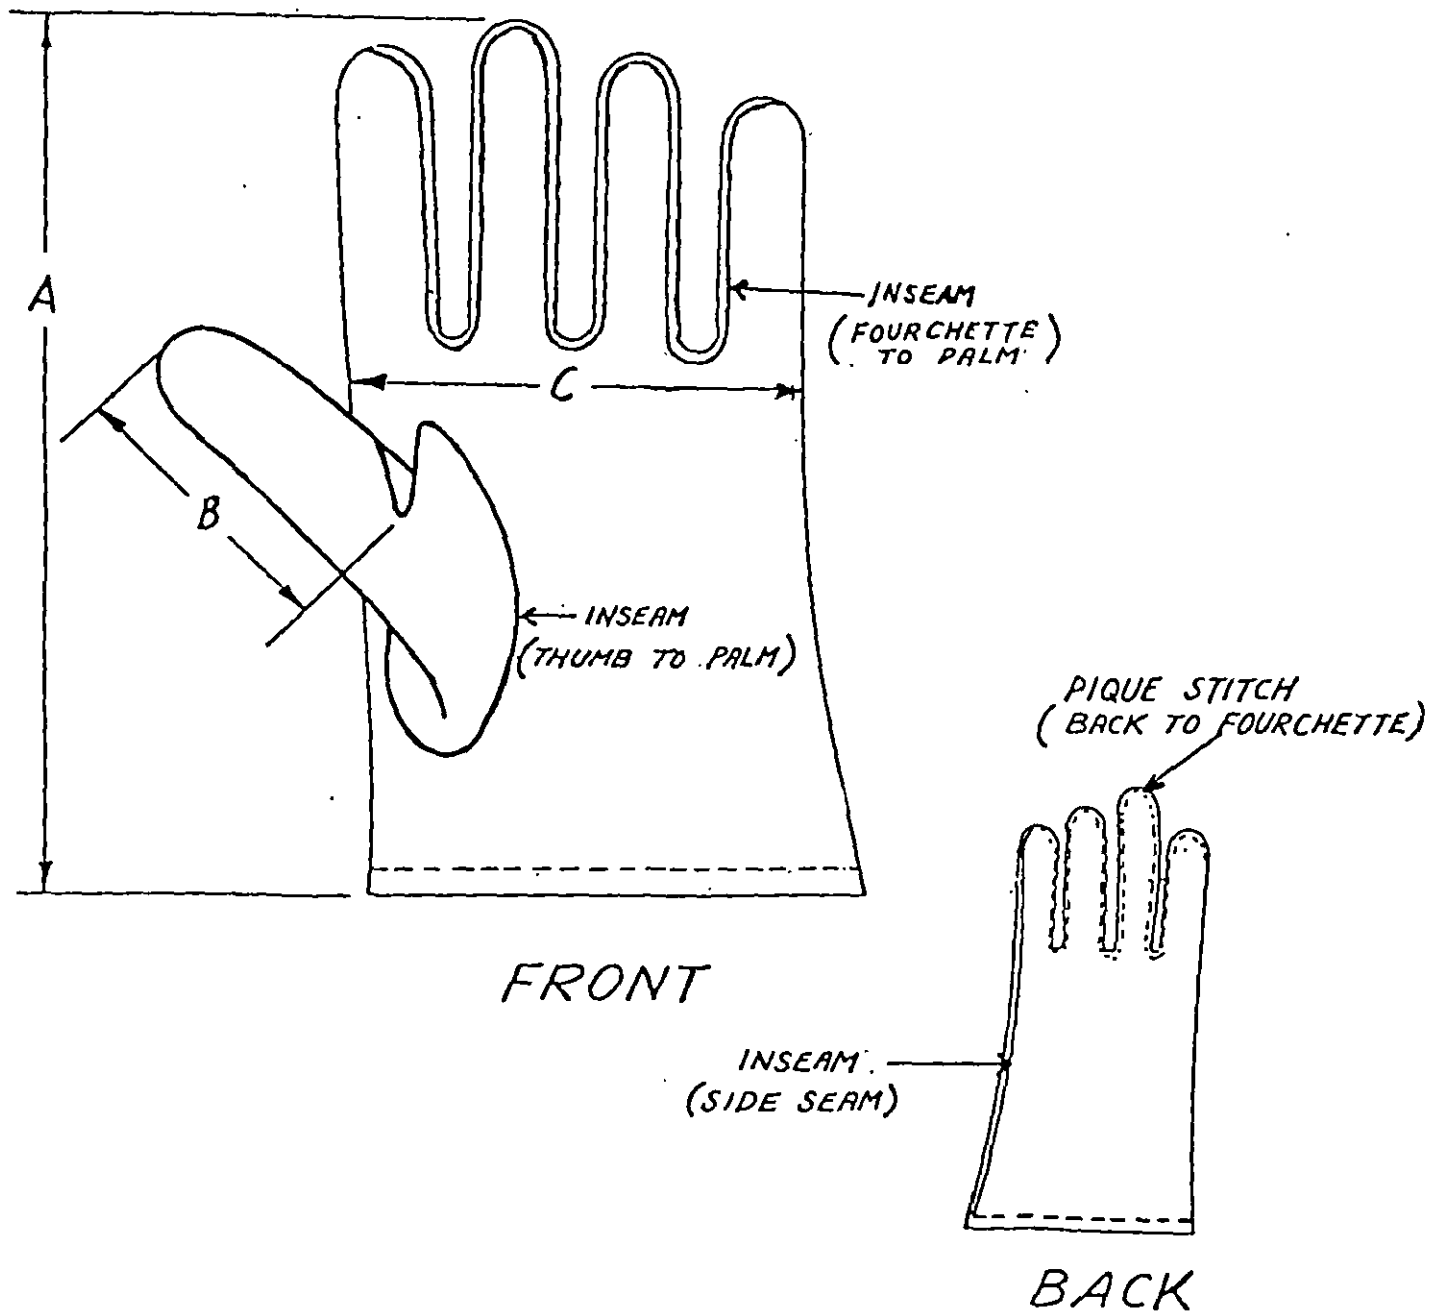


FIGURE 1

GLOVES, MEN'S AND WOMEN'S

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge (*DO NOT STAPLE*), and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
P.O. Box 59
Natick, MA 01760-0001



STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL*(See Instructions - Reverse Side)***1. DOCUMENT NUMBER**

A-A-50386

2. DOCUMENT TITLE

GLOVES, MEN'S AND WOMEN'S

3a. NAME OF SUBMITTING ORGANIZATION**4. TYPE OF ORGANIZATION (Mark one)**☐

VENDOR

☐

USER

☐

MANUFACTURER

☐

OTHER (Specify): _____

b. ADDRESS (Street, City, State, ZIP Code)**5. PROBLEM AREAS****a. Paragraph Number and Wording:****b. Recommended Wording:****c. Reason/Rationale for Recommendation:****6. REMARKS****7a. NAME OF SUBMITTER (Last, First, MI) - Optional****b. WORK TELEPHONE NUMBER (Include Area Code) - Optional****c. MAILING ADDRESS (Street, City, State, ZIP Code) - Optional****8. DATE OF SUBMISSION (YYMMDD)**