

A-A-50696
11 July 1991

COMMERCIAL ITEM DESCRIPTION

REELS, STATIC DISCHARGE, GROUNDING, 50 AND 75 FOOT CABLE LENGTHS

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for Military Specification MIL-R-83232 which is cancelled.

Abstract. This Commercial Item Description describes industrial type static discharge reels with either 50 or 75 foot cable lengths (fully extracted) used to dispel static charges from ground support equipment.

Type I - Large (75 foot cable)

Type II - Small (50 foot cable)

Salient characteristics.

Materials. The use of toxic or hazardous materials, as defined by the US Environmental Protection Agency, shall be the minimum consistent with performance requirements as stated herein.

Metals. Those metals used shall possess low resistivity. Metals other than those specified shall be corrosion resistant or treated to resist corrosion throughout the life of the unit due to contact with fuels, salt spray, or the following atmospheric conditions: Storage temperatures of -80 degrees to +160 degrees Fahrenheit, operational temperatures between -65 degrees and +125 degrees Fahrenheit, a relative humidity of 95 plus or minus 5 percent and airborne dust and sand particles encountered in desert operation.

Fungus-Proof materials. Materials which are not nutrients for fungi shall be used to the greatest practical extent. Where materials that are nutrients for fungi must be used, such materials shall be treated with a fungicidal agent commercially acceptable and compatible with those materials on which it is to be applied.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to:
San Antonio Air Logistics Center, AFLC, ATTN: SA-ALC/TIRDM, Kelly AFB, TX
78241-5000.

AMSC N/A

FSC 4930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

A-A-50696

Dissimilar metals. Unless protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other.

Construction. The reel trough shall be of such size to contain the entire cable lengths as specified herein when in the fully retracted position. When bolted to an appropriate fixture, the reel and base shall be so constructed as to be capable of withstanding a static load of 150-pounds applied at the cable free end grounding device or cable free end when grounding device is not installed.

Dimensions. The envelope dimensions of the reel in an upright position shall not exceed 12 inches in height, 11 inches in depth, and 5 inches in width. For mounting, two 1/2 inch diameter bolt holes shall be symmetrically located in the base 7 and 7/8 inches apart on center (see figure 1).

Mounting position. The unit shall be capable of operating when mounted in any position about a 360 degree axis.

Cable outlet guide. A cable outlet guide shall be provided that will allow the cable to return to the reel from any position within a 90 degree arc to the plane of rotation of the reel without kinking or tangling.

Automatic rewind. The reel shall be spring loaded with a spring manufactured from a corrosion resistant steel or one of steel that has been treated to prevent corrosion which will automatically retract the entire length of the cable extension when extended in any direction within 90 degrees from the axis of the cable outlet guide.

Cable latching mechanism. The reel shall be equipped with a latching mechanism to release and restore cable tension. After latching has occurred the cable shall remain in an extended position. Further extension of cable shall cause the latching mechanism to release and permit the cable to retract.

Cable. The Type I reel shall contain a minimum of 75 feet of cable. The Type II reel shall contain a minimum of 50 feet of cable. The cable for the Type I and Type II reels shall be made of 7x7 strand commercial corrosion resistant steel with a nominal outside diameter of 3/32 inch. The cable shall have a 920 pound minimum breaking strength and no more than 6.67 ohms electrical resistance per 75 feet. This cable is not for flight control use. The cable shall be sheathed with a yellow Dupont Hytrei jacket having a 5/32 inch nominal diameter.

Cable stop. A cable stop will be furnished with each unit which is capable of preventing the cable from being inadvertently withdrawn into the reel housing.

Cable end ground devices. A welder style grip clamp (per MIL-C-83413/7) and a grounding plug (Per MIL-C-83413/4) shall be furnished with each reel assembly. The cable end grounding devices shall not be attached to the cable.

A-A-50606

Color. The reel shall be color no. 24052 in accordance with FED-STD-595. Cleaning, painting, plating, anodic films, and chemical treatments shall be in accordance with MIL-STD-808.

Electrical resistance. The electrical resistance between the cable free end grounding device or end of cable if no grounding device is furnished (in either extended or retracted condition) and the contact surfaces on the mounting base or the reel frame shall not exceed 10 ohms. Metal components shall be electrically bonded together to prevent sparking during operation.

Repairability. The unit shall contain provisions for cable replacement under field conditions. Replacement of the cable and end attachments shall be accomplished using common hand tools.

Lubrication. The drum shaft bearings shall be permanently lubricated and sealed for the life of the unit. The use of grease fittings shall be limited only to the latching mechanism. Where lubricants are required, the reel shall so be designed that excess grease or oil cannot contaminate electrical contacts causing disruptions in continuity of the unit.

Reliability requirements. The unit provided by the contractor shall be capable of a minimum of 5000 cycles (full extensions and retractions) before failure.

Caution label. A caution label with Black lettering on a Yellow background shall be packaged with the reel and will read as follows:

'Grounding clamps/plugs shall not be allowed to drag across the ramp.
Clamps/plugs shall be carried to reels on equipment.'

Quality Assurance.

Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government.

Classification of inspection. The inspection requirements specified herein are classified as first article inspection and quality conformance inspection.

First article inspection. First article inspection shall be performed on one static discharge reel when a first article test is specified in the contract or order. This inspection shall determine whether the contractor's design meets all the salient characteristics specified herein and shall include examination and functional testing as specified herein.

Quality conformance inspection. Quality conformance inspection shall be performed on the sample static discharge reels selected in accordance with the inspection lot and sampling requirements. This inspection shall include examination and functional tests as specified herein.

A-A-50696

Inspection lot. All units of the same class and style offered to the Government at one time shall be considered a lot for purpose of inspection. No inspection lot shall exceed 500 units. The sample unit shall be one complete reel and the sample size shall be determined by the Government Quality Assurance Representative, except that the sample size chosen for reliability testing shall not exceed one reel from each inspection lot.

Examination. Each sample selected in accordance with the inspection lot and sampling requirements, as well as the first article, shall be examined for compliance with salient characteristic requirements specified herein. This element of inspection shall encompass all visual and dimensional measurements.

Functional Tests.

Electrical resistance. The sample reels shall be tested for compliance with the electrical resistance requirements specified herein.

Reliability. The sample reels shall be tested for compliance with the reliability requirements specified herein. Reels used for reliability testing shall not be included in any Government shipment or order, but shall be retained for two years beyond the completion of the contract along with all records of inspection and testing.

Certification.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Warranty.

Manufacturer/Contractor/Vendor warranty. The manufacturers' and suppliers' standard warranties shall be furnished at no additional cost to the Government.

Metric.

Metric products. Reels manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this Commercial Item Description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

A-A-50696

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation and packaging. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Notes.Ordering data.

The acquisition document should specify the following:

Title, number and date of this CID.

Part Identifying number as designated by (PIN).

First Article Inspection, when required.

Whether a commercial off-the-shelf operating manual is to be furnished.

Whether a commercial parts list is to be furnished.

Whether applicable manufacturers drawings are to be furnished.

Preservation, Packaging and markings to be as specified by the contract.

Standardization documents. Copies of MIL-C-83413/4, MIL-C-83413/7, FED-STD-376, FED-STD-595, and MIL-STD-808 are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

Part Identifying Number (PIN). The following PIN is developed for Government purposes and use with this CID. It does not constitute a requirement for the contractor:

SAMPLE: A-A - 50696 - 1

Table I. Codes for Cable Lengths.

1 = 75 foot cable length

2 = 50 foot cable length

A-A-50696

MILITARY INTERESTS:

Custodian:

Air Force - 99

Review Activities:

Air Force - 68, 79

DLA - CS

CIVIL COORDINATING ACTIVITY:

GSA-FSS

PREPARING ACTIVITY:

Air Force - 82

Agent:

DLA - CS

Project Number: 4930-F343

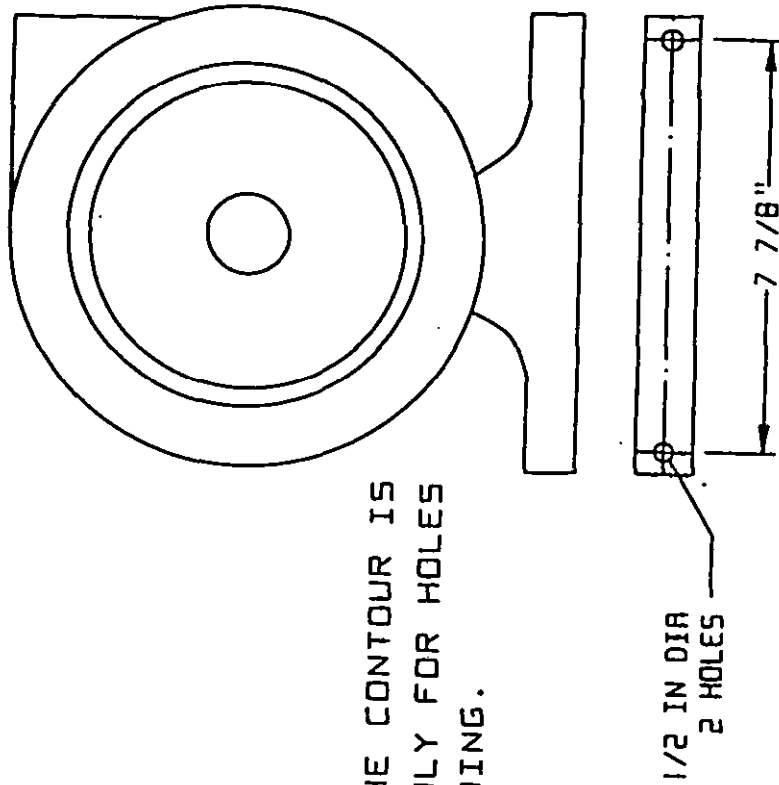


Figure 1. Mounting bolt hole locations.