A-A-55625 19 APRIL1997 SUPERSEDING MS51941B 28 FEB 85

COMMERCIAL ITEM DESCRIPTION

NUT, PLAIN, PLATE


THE GENERAL SERVICES ADMINISTRATION HAS AUTHORIZED THIS COMMERCIAL ITEM DESCRIPTION FOR ALL FEDERAL AGENCIES. THIS CID SUPERSEDES MS51941.

- 1. <u>SCOPE:</u> THIS COMMERCIAL ITEM DESCRIPTION (CID) DEPICTS THE REQUIREMENTS FOR A LOW-CARBON STEEL, PRONGED PLATE NUT.
- 2. SALIENT CHARACTERISTICS.
- 2.1 MATERIAL SHALL BE CARBON STEEL, GRADE 1008 OR 1010 (UNS G10080 OR G10100), IN ACCORDANCE WITH ASTM A109.
- 2.2 PROTECTIVE COATING SHALL BE:

 CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416. TYPE II, CLASS 3 OR ASTM B766, TYPE II, CLASS 5
 ZINC PLATE IN ACCORDANCE WITH ASTM B633, TYPE II, Fe/Zn 5.
- 2.3 CODES FOR PLATING:

 CADMIUM PLATE NO CODE

 ZINC PLATE "G" CODE
- 2.4 THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2.

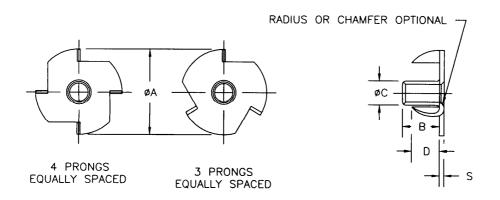

BENEFICIAL COMMENTS, RECOMMENDATIONS, ADDITIONS, DELETIONS, CLARIFICATIONS, ETC., AND DATA WHICH MAY IMPROVE THIS DOCUMENT SHOULD BE SENT TO: DEFENSE INDUSTRIAL SUPPLY CENTER. ATTN: DISC-EED, 700 ROBBINS AVENUE, PHILADELPHIA, PA 19111-5096.

ASMC N/A

1 OF 3

FSC 5310

A-A-55625

TABLE I. DASH NUMBERS AND DIMENSIONS


DASH NO.	NOMINAL THREAD SIZE	ØA BASE DIA ± .015	B PILOT HEIGHT	ØC PILOT DIA		D PRONG HEIGHT	S THICKNESS +.015	NUMBER OF
		1 .013	± .015	MAX	MIN	± .015	000	PRONGS
1	.1380-32UNC-2B	.562	.266	.164	.157	.125	.020	3
2	.1640-32UNC-2B	.500	.250	.213	.208	.141	.035	3
3	.1640-32UNC-2B	.750	.250	.213	.208	.188	.035	3
4	.1900-24UNC-2B	.500	.516	.235	.225	.141	.031	3
17	.1900-24UNC-2B	.500	.406	.235	.225	.141	.031	3
5	.1900-24UNC-2B	.750	.281	.232	.227	.203	.035	3
6	.1900-32UNF-2B	.500	.188	.232	.227	.141	.035	3
7	.1900-32UNF-2B	.500	.562	.235	.225	.141	.031	3
8	.1900-32UNF-2B	.750	.281	.232	.227	.203	.035	3
9	.2500-20UNC-2B	.750	.312	.311	.306	.234	.050	4
10	.2500-20UNC-2B	.750	.562	.311	.306	.438	.050	3
11	.2500-28UNF-2B	.750	.250	.320	.315	.265	.050	3
12	.2500-28UNF-2B	.750	.312	.320	.315	.234	.050	4
13	.3125-18UNC-2B	.875	.375	.391	.386	.281	.062	4
14	.3125-24UNF-2B	.875	.375	.400	.395	.281	.062	4
15	.3750-16UNC-2B	1.000	.438	.471	.466	.328	.075	4
16	.3750-24UNF-2B	1.000	.438	.485	.480	.328	075	4

3. QUALITY CONFORMANCE PROVISIONS:

- 3.1 THE SUPPLIERS SHALL BE RESPONSIBLE FOR THOSE IN PROCESS CONTROLS AND INSPECTIONS NECESSARY TO SUPPLY A PRODUCT CONSISTENTLY CONFORMING TO THE REQUIREMENTS OF THIS DOCUMENT.
- 3.2 UPON REQUEST, THE SUPPLIER WILL CERTIFY WITH DOCUMENTED TEST/INSPECTION EVIDENCE, THAT THE PARTS SUPPLIED MEET THE REQUIREMENTS OF THIS DOCUMENT.

4. NOTES:

- 4.1 ALL DIMENSIONS ARE IN INCHES.
- 4.2 INTERPRET DESIGN IN ACCORDANCE WITH FIGURE AND TABLE ABOVE.
- 4.3 THE PART IDENTIFICATION NUMBER (PIN) SHALL CONSIST OF THE BASIC CID NUMBER PLUS A DASH NUMBER TAKEN FROM TABLE I.



AA55625-10G IDENTIFIES A .2500-20 UNC-2B PLATE NUT WITH ZINC PLATING

A-A-55625

TABLE II. CROSS - REFERENCE TABLE.

CANCELLED MS PIN	REPLACEMENT CID PIN
MS51941 - * <u>1</u> /	AA55625 - * <u>1</u> /

1/ * REPRESENTS THE SAME DESIGNATION CODES FOR BOTH MS AND CID PINS.

MILITARY INTERESTS **CUSTODIANS** ARMY - AR

REVIEWER:

ARMY - ME, MI

PREPARING ACTIVITY DLA-IS

(PROJECT: 5310-2271)