

METRIC

A-A-59173A

29 October 2009

SUPERSEDING

A-A-59173

4 March 1998

COMMERCIAL ITEM DESCRIPTION

GREASE, SILICONE

The General Service Administration has authorized the use of this commercial item description, for all federal agencies.

1. **SCOPE.** This commercial item description (CID) covers two types of silicone greases that are intended for application as a lubricant, a sealant, and as a preservative in missile systems.

2. **CLASSIFICATION.** The silicone grease shall conform to the following types and sizes:

2.1 Types.

Type I – Light consistency.

Type II – Medium consistency.

2.2 Sizes.

Size A – 8 ounce (oz) tube.

Size B – 10 pound (lb) can.

Size C – 5.3 oz tube.

3. **SALIENT CHARACTERISTICS.**

3.1 Material. The silicone grease shall have an unctuous (oily, soapy) consistency that is free of lumps, crusts, or granular particles.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: STDZNMGT@dla.mil or mailed to Defense Supply Center Richmond, ATTN: DSCR-VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at http://assist.daps.dla.mil .

3.2 Penetration. The grease shall have the following penetration when tested in accordance with ASTM D217: type I – penetration (tenths of a millimeter) range of 300-340; type II – penetration (tenths of a millimeter) range of 260-300.

3.3 Foreign particles. The grease shall have the following foreign particle requirements when tested in accordance with FED-STD-791, Method 3005:

- a. There shall not be more than 7500 particles that are of size 25 microns or greater per cubic centimeter in the grease.
- b. There shall not be more than 1600 particles that are of size 75 microns or greater per cubic centimeter in the grease.
- c. There shall not be any particles that are of size 125 microns or greater in the grease.

3.4 Oxidation stability. The oxygen pressure shall not decrease more than 34.47 kilo-Pascals (kPa) during 50 hours of exposure of the material at a temperature of 150°C (302°F) when tested in accordance with ASTM D942 (an air bath may be substituted for the oil bath).

3.5 Dropping point. The grease shall have a dropping point greater than 190°C (374°F) when tested in accordance with ASTM D566 or ASTM D2265.

3.6 Evaporation. The grease shall not lose greater than 3.0 percent of its original weight by evaporation when tested in accordance with ASTM D2595.

3.7 Bleeding. Type I silicone grease shall not lose greater than 5.0 percent of its original weight by bleeding. Type II silicone grease shall not lose greater than 4.0 percent of its original weight by bleeding. The percentage of bleeding of oil from the material shall be determined in accordance with ASTM D6184 except that the heating of the entire test assembly will be maintained at 150°C (302°F) for a duration of 24 hours.

3.8 Solidification. The material shall show no evidence of solidification after exposure for 24 hours at a temperature of -55°C (-67°F). Evidence of solidification shall be tested in accordance with the following test procedure:

- Put 20 millimeters of grease in a 2.54 centimeter (1 in) diameter test tube.
- Immerse the test tube in a suitable bath and cool to -55°C (-67°F) for a period of 24 hours.
- Remove the sample from the test tube and examine for evidence of solidification such as lumps, crusts or granular particles.

4. **REGULATORY REQUIREMENTS**. The offerer/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR). Feasibility of using recovered materials must be considered for silicone grease with respect to contamination purposes and meeting the salient characteristics of this commercial item description.

A-A-59173A

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.


5.2 Market acceptability. The following market acceptability criteria are necessary to document the quality of the product provided under this CID.

- a. The company must have provided the silicone grease, meeting the salient characteristics of this CID, for at least 3 years.
- b. The company must be able to show test data or lab results of meeting the salient characteristics of the silicone grease.
- c. The company must provide a warranty of replacing the defective items.

6. PACKAGING. Preservation, packing and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Part identification number (PIN). The following part identification number procedure is for government purposes and does not constitute a requirement for the contractor.

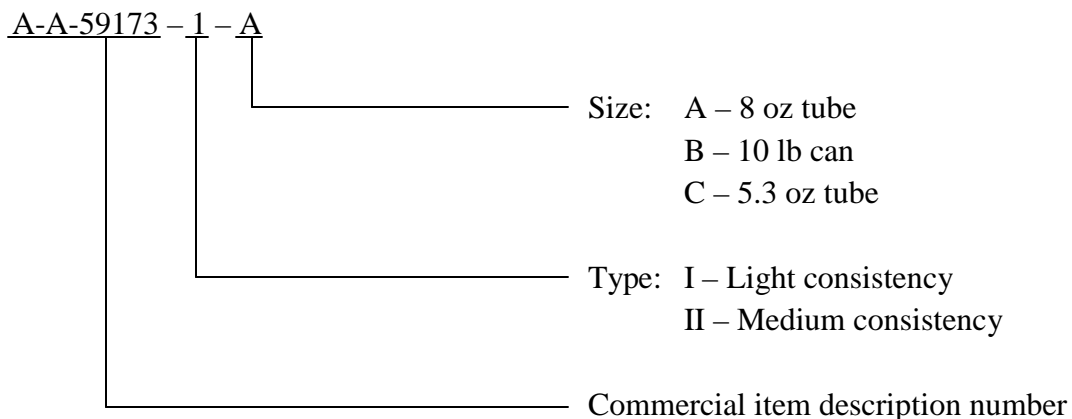

7.2 Source of documents.

7.2.1 Copies of the Federal Acquisition Regulation (FAR) may be obtained from the U.S. Government Printing Office, 732 North Capital Street NW, Washington, DC 20401-0001 or electronically at www.gpo.gov.

A-A-59173A

7.2.2 Copies of federal standards are available online at <http://assist.daps.dla.mil/quicksearch/> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.

7.2.3 Copies of ASTM documents are available from ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959 or electronically at www.astm.org.

7.3 Ordering data. Acquisition documents must specify the following:

- a. Title, number, and date of this document.
- b. Part identification number (PIN).
- c. Size of containers and quantity required.

7.4 National stock numbers (NSNs). The following is a list of NSNs assigned which correspond to this CID. This list may not be indicative of all possible NSNs associated with this document.

<u>NSN</u>	<u>Type</u>	<u>Container size</u>
9150-00-145-0161	I	8 oz tube
9150-01-228-3389	II	5.3 oz tube

Custodians:
 Army – MI
 Navy – OS
 DLA – GS

Preparing Activity:
 DLA-GS3

Reviewers:
 Army – CD
 DLA – PS

(Project 9150-2009-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at <http://assist.daps.dla.mil>.