

METRIC

A-A-59595

27 September 2000

SUPERSEDING

FF-B-171/9

30 November 1993

COMMERCIAL ITEM DESCRIPTION

BEARING, BALL, ANNULAR, SINGLE ROW, RADIAL, NON-FILLING SLOT, CARTRIDGE TYPE WITHOUT GREASE PLUG, DIMENSION SERIES 32

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. **SCOPE.** This commercial item description (CID) covers metric, single row, radial, non-filling slot, cartridge type, annular ball bearings for general-purpose use.
2. **CLASSIFICATION.** The ball bearings shall be classified by the class, sizes, cage materials, shield and snap ring configurations, precision tolerances, and lubricant and preservative compounds listed below:

Class 8 - dimension series 32

Sizes - bearing dimensions (see table I)

Cage materials (see table II)

Shield, seal, and snap ring configurations - (see table III)

Precision tolerances (see table IV)

Lubricant and preservative compounds (see table V)

3. SALIENT CHARACTERISTICS

3.1 Dimensions. Bearing boundary dimensions (and dynamic load ratings see 3.4) shall conform to the requirements specified in table I for each of the coded bearing sizes. The listed dimensions conform to the requirements specified for the listed bearing sizes from dimension series 32 in the American National Standards Institute/American Bearing Manufacturers Association (ANSI/ABMA) Standard 20, "Radial Bearings of Ball, Cylindrical Roller, and

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A

FSC 3110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

A-A-59595

Spherical Roller Types, Metric Design" (DoD adopted). The bearing size shall be as specified in the acquisition order (see 7.4(b)). For unlisted bearing sizes, the dimensional and dynamic load rating requirements should also be specified in the acquisition order.

TABLE I. Dimensional requirements (ABMA series 32).

Bearing size code	Bore Diameter (mm)	Outside diameter (mm)	Width (mm)	Chamfer r/min (mm)	Minimum shaft shoulder diameter* (mm)	Dynamic load rating (minimum) (lb)
00	10	30	14.3	0.6	15	1,140
01	12	32	15.9	0.6	17	1,520
02	15	35	15.9	0.6	20	1,710
03	17	40	17.5	0.6	22	2,150
04	20	47	20.6	1.0	26	2,920
05	25	52	20.6	1.0	31	3,390
06	30	62	23.8	1.0	36	4,680
07	35	72	27.0	1.1	42	5,960
08	40	80	30.2	1.1	47	7,310
09	45	85	30.2	1.1	52	8,150
10	50	90	30.2	1.1	57	7,890
11	55	100	33.3	1.5	63.5	8,920
12	60	110	36.5	1.5	68.5	9,050
13	65	120	38.1	1.5	73.5	14,000
14	70	125	39.7	1.5	78.5	14,000

* Listed for reference purposes only. Shoulder height shall be determined to provide sufficient clearance for the direct application of bearing removal force against the bearing inner ring. If the required minimum clearance is not available, an alternative non-destructive bearing removal capability shall be provided.

3.2 Materials.

3.2.1 Rings. The bearing ring material shall be chromium-alloy steel 52100 (UNS G52986) as specified in the American Society for Testing and Materials (ASTM) A 295, "Standard Specification for High-Carbon and Roller Bearing Steel" (DoD adopted). The finished rings shall not exceed the associated billet material inclusion rating, which is also specified in ASTM A 295. Ring hardness shall be at least 58 HRC as defined in ASTM E 18, "Standard Test Methods for Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials" (DoD adopted). The grain size of the ring material shall be determined in accordance with ASTM E 112, "Standard Methods for Determining Average Grain Size" (DoD adopted).

3.2.2 Balls. The bearing ball material shall be chromium-alloy steel 52100 (UNS G52986) as specified in ASTM A 295. The finished balls shall not exceed the associated billet material inclusion rating which is also specified in ASTM A 295. Balls shall be through-hardened no less than 60 HRC and no more than 67 HRC as defined in ASTM E 18. The grain size of the ball material shall be determined in accordance with ASTM E 112.

3.2.3 Cage. The bearing cage material shall be impervious to deterioration from any lubricant, preservative, solvent, or other chemical substance expected to contact the bearing during normal use or storage. Similarly, the material shall not cause any chemical deterioration of any other bearing component. Metallic and non-metallic cages shall meet the same bearing performance requirements. Unless otherwise specified in the acquisition order, the cage material shall be one of the optional coded types listed in table II (see 7.4(c)).

TABLE II. Cage materials.

Code	Material type
J	Pressed steel
M	Machined bronze or brass
P	Molded plastic (nylon 6/6 or equal)
T	Machined non-metallic (phenolic)
Y	Pressed brass
X	Other (specify in acquisition order)

3.2.4 Shields and seals. When used, the shield or seal material shall be as recommended by the manufacturer, unless otherwise specified in the acquisition order (see 7.4 (d)). The material shall be impervious to deterioration from any lubricant, preservative, solvent, or other chemical substance expected to contact the bearing during normal use or storage. Similarly, the material shall not cause any chemical deterioration of any other bearing component. The shield or seal material shall remain functionally effective at temperatures ranging from -65 to 230 °F (-54 to 110 °C). Unless otherwise specified in the acquisition order, the shield and seal configuration for the bearing shall be one of the coded options listed in table III, (see 7.4(e)).

TABLE III. Shield, seal, and snap ring configurations.

Code	Configuration option
A	Double contact seal
B	Double labyrinth seal
C	Double contact seal with snap ring
D	Double labyrinth seal with snap ring
E	Double shield
F	Double shield with snap ring
X	Other (specify in acquisition order)

A-A-59595

3.2.5 Snap ring. When used, the bearing snap ring and associated snap ring groove shall conform to the requirements specified in ANSI/ABMA Standard 20.

3.3 Precision tolerance. The bearing precision tolerance level shall conform to Annular Bearing Engineers Committee (ABEC) class ABEC-1, ABEC-3, ABEC-5, or ABEC-7 as defined in ANSI/ABMA Standard 20. The tolerance class and associated radial internal clearance shall be one of the coded options listed in table IV (see 7.4(f)).

TABLE IV. Precision tolerance requirements.

Code	Tolerance class	Radial internal clearance
A	ABEC-1	Symbol 2 (less than normal)
B		Symbol 0 (normal)
C		Symbol 3 (greater than normal)
D		Symbol 4 (greater than symbol 3)
E	ABEC-3	Symbol 2 (less than normal)
F		Symbol 0 (normal)
G		Symbol 3 (greater than normal)
H		Symbol 4 (greater than symbol 3)
J	ABEC-5	Symbol 2 (less than normal)
K		Symbol 0 (normal)
L		Symbol 3 (greater than normal)
M		Symbol 4 (greater than symbol 3)
N	ABEC-7	Symbol 2 (less than normal)
P		Symbol 0 (normal)
R		Symbol 3 (greater than normal)
S		Symbol 4 (greater than symbol 3)

3.4 Dynamic load rating. The listed ratings in table I conform to the requirements specified in ANSI/ABMA Standard 20, "Load Ratings and Fatigue Life for Ball Bearings" (DoD adopted).

3.5 Lubrication and preservation. Unless otherwise specified in the acquisition order, the bearing lubricant shall be selected from the approved coded options listed in table V (see 7.4(g)).

3.6 Grease fill requirements. The bearing shall be filled with lubricant in accordance with the coded options listed in table VI. The amount of grease fill shall be specified in the acquisition order (see 7.4(h)). The percentage of fill is based on the internal empty space of an assembled bearing.

TABLE V. Lubricant and preservative compounds.

Code	Lubricant or preservative compound
A	Grease in accordance with MIL-PRF-81322
B	Grease in accordance with DOD-G-24508
C	Grease in accordance with MIL-PRF-23827
D	Grease in accordance with SRI-2 or qualified equivalent
E	Preservation compound in accordance with MIL-DTL-197

TABLE VI. Grease fill requirement.

Code	Percentage (%) of fill
A	0 - 15.00
B	15.01 - 25.00
C	25.01 - 35.00
D	35.01 - 45.00
E	45.01 - 65.00
F	65.01 - 80.00
X	Other (specify in acquisition order)

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Unless otherwise indicated in the solicitation and resulting contract, the foreign acquisition restrictions in Section 225.7019 of the Defense Federal Acquisition Regulation Supplement (DFARS) apply to products described by this CID.

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.


A-A-59595

6. PACKAGING

6.1 Preservation, packing, and marking. For acquisition purposes, the bearings supplied shall be preserved, packed, and marked as specified in the acquisition order (see 6.4(h)).

7. NOTES

7.1 Part or identification number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

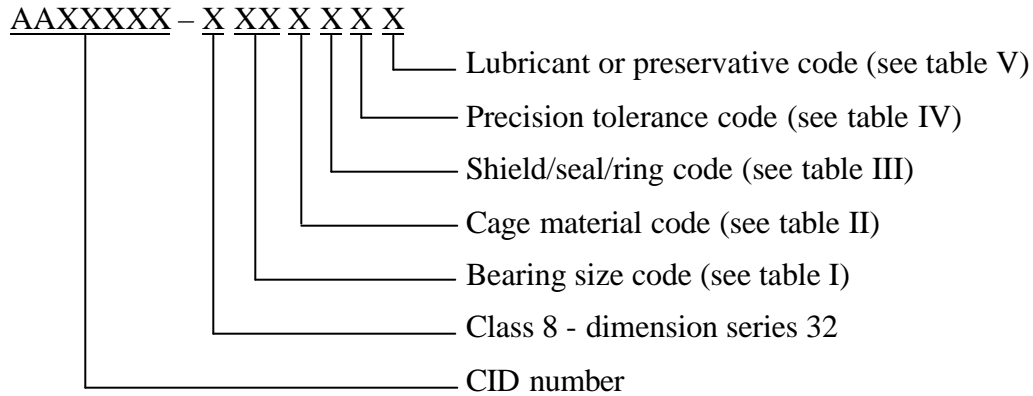

7.1 Sources of documents.

7.1.1 ANSI/ABMA standards. Copies of ANSI/ABMA standards may be obtained from the American Bearing Manufacturers Association, 1200 19th Street NW, Suite 300, Washington, DC 20036-2401.

7.1.2 ASTM standards. Copies of ASTM standards may be obtained from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.1.3 FAR and DFARS. The FAR and DFARS may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.

7.3 Sources of supply. The manufacturers and/or suppliers listed below are known to supply products that meet the salient characteristics requirements of this document. Competition is not limited to the listed firms.

MRC Bearings
Jamestown, NY 14702

The Torrington Company
Torrington, CT 06790

7.4 Ordering data. Acquisition documents shall specify the following information:

- a. CID document number, revision, and CID PIN
- b. Bearing size (with dimension/load requirements if size is unlisted) (see 3.1)
- c. Cage material type (see 3.2.3)
- d. Shield and seal material (see 3.2.4)
- e. Shield, seal, and snap ring configuration (see 3.2.4)
- f. Precision tolerance requirements (see 3.3)
- g. Lubricant (see 3.5)
- h. Grease fill requirement (see 3.6)
- i. Packaging and marking requirements (see 6.1)

7.5 Codes cross-reference. Tables VII, VIII, IX, and X contain cross-reference data for the part identification number information as listed in FF-B-171/9 and this CID.

TABLE VII. Cage codes.

FF-B-171/9 codes		A-A-59595 codes	
Code	Cage	Code	Cage
J	Pressed steel	J	Pressed steel
M	Machined bronze or brass	M	Machined bronze or brass
P	Molded plastic (nylon 66 or equal)	P	Molded plastic (nylon 66 or equal)
T	Machined non-metallic (phenolic)	T	Machined non-metallic (phenolic)
Y	Pressed brass	Y	Pressed brass
	Not listed	X	Other

TABLE VIII. Shield, seal, and snap ring codes.

FF-B-171/9 codes		A-A-59595 codes	
Code	Number of shield and seals	Code	Configuration option
A	Double contact seal	A	Double contact seal
B	Double labyrinth seal	B	Double labyrinth seal
C	Double contact seal with snap ring	C	Double contact seal with snap ring
D	Double labyrinth seal with snap ring	D	Double labyrinth seal with snap ring
	Not listed	E	Double shield
	Not listed	F	Double shield with snap ring
	Not listed	X	Other

A-A-59595

TABLE IX. Radial internal clearance and ABEC tolerance codes.

FF-B-171/9 codes			A-A-59595 codes		
Code	Radial internal clearance	Tolerance class	Code	Tolerance class	Radial internal clearance
1	Symbol 2	ABEC-1	A	ABEC-1	Symbol 2
2	Symbol 0		B		Symbol 0
3	Symbol 3		C		Symbol 3
4	Symbol 4		D		Symbol 4
	Not listed		E	ABEC-3	Symbol 2
	Not listed		F		Symbol 0
	Not listed		G		Symbol 3
	Not listed		H		Symbol 4
5	Symbol 2	ABEC-5	J	ABEC-5	Symbol 2
6	Symbol 0		K		Symbol 0
7	Symbol 3		L		Symbol 3
8	Symbol 4		M		Symbol 4
	Not listed		N	ABEC-7	Symbol 2
	Not listed		P		Symbol 0
	Not listed		R		Symbol 3
	Not listed		S		Symbol 4

TABLE X. Lubrication codes.

FF-B-171/9 codes		A-A-59595 codes	
Code	Lubricant or preservative compound	Code	Lubricant or preservative compound
A	Grease IAW MIL-PRF-81322	A	Grease IAW MIL-PRF-81322
B	Grease IAW DOD-G-24508	B	Grease IAW DOD-G-24508
C	Grease IAW MIL-PRF-23827	C	Grease IAW MIL-PRF-23827
D	Grease IAW SRI-2 or qualified equivalent	D	Grease IAW SRI-2 or qualified equivalent
E	Preservation compound IAW MIL-DTL-197	E	Preservation compound IAW MIL-DTL-197

A-A-59595

MILITARY INTERESTS:

Custodians:

Army - AT

Navy - OS

Air Force - 99

Reviewers:

Army - AR, EA, GL, MI

Navy - SH

Air Force - 11, 84

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:

DLA - GS

(Project 3110-1193)