

**NATIONAL IMAGERY
TRANSMISSION FORMAT STANDARD
(NITFS)**

**STANDARDS COMPLIANCE AND INTEROPERABILITY
TEST AND EVALUATION
PROGRAM PLAN**

Version ~~12.0~~

~~19 June 1998~~ Review Draft A
(Date)

N-0105/0198

~~25 August 1998~~ Review Draft (Date)


TBD/TBR Listing

Page Number	TBD/TBR	Description
1, 100	TBD001	Para 1.2, 6.0 and 6.1 Place holder for future interoperability testing criteria. Work on this section to commence once the compliance sections are completed.
47	TBD002	Para 5.5.13 Reduced Resolution Data Sets (RRDS). Determine specific test criteria for RRDS if/when a standardized approach for producing and handling RRDS is defined.
47, 93	TBD003	Para 5.4.26.4 Year 2000 (Y2K). Establish Y2K rules for data other than NITF header/subheader; i.e., product specific data fields which have only two digit year entries.
iii, 36, D-8	TBD004	<u>Effectivity Table and</u> Tables 5-1 and D-3. Multi-Component Compression. Test criteria <u>and effectivity date</u> to be developed once a multi-component compression standard is selected or developed.
<u>D-8</u>	<u>TBD004A</u>	<u>Table D-4.</u>
iii	TBD005	Effectivity Table. Insert effectivity date for PIAE Ver 3 once established in the USIGS Interoperability Profile.
74	TBD006	Para 5.15.2 Digital Signature RES criteria. Waiting for definition of Digital Signature RES specification from which test criteria will be extracted
75	TBD007	Para 5.18.3 SARSDE. Determine the test criteria for this set of tagged record extensions. Working with airborne programs to validate candidate test criteria.
75	TBD008	Para 5.18.4 VIMAS. Determine the test criteria for this set of tagged record extensions. Working with airborne programs to validate candidate test criteria.
75	TBD009	Para 5.18.5 GeoSDE. Determine the test criteria for this set of tagged record extensions. SAF/NSIF custodian recently funded these activities. Work in progress.
73	TBD011	Para 5.18.1 National SDE. Determine the test criteria for these SDE. Presently working to validate test criteria for for at least point positioning.
85	TBD012	Para 5.18.6 RPF Extensions. Determine the test criteria for this set of tagged record extensions.
85	TBD013	Para 5.18.15 DPPDB Extensions. Determine the test criteria for this set of tagged record extensions. Presently working to validate test criteria for point positioning.
86	TBD014	Para 5.18.17 HISTOA Extension. Determine the test criteria for this tagged record extension.
	<u>TBD015</u>	<u>Add criteria for para 5.4.18.3, Other Geospatial Information Data (Matrix)</u>
4	TBR001	Update reference to MIL-STD 2500A once Notice 3 is fully progressed.
4	TBR001a	Update reference to MIL-STD 2500B once Notice <u>34</u> is fully progressed.
5	TBR001b	Update reference to MIL-STD 2301A once final publication process is complete.
5	TBR001c	Update reference to Geospatial and Imagery Access Services Specification Version 3.2. Awaiting approval at the next scheduled NCCB meeting, 28Jul98.
5	TBR001d	Update reference to USIGS System Architecture Volume II, USIGS Interoperability Profile (UIP). Awaiting approval at the next scheduled NCCB meeting, 28Jul98.
6	TBR001e	Update reference to STANAG 4545, NATO Secondary Image Format (Version 1.0), Study Draft 2, once it is fully progressed.
	<u>TBR001f</u>	<u>Update reference to MIL-STD-188-198A when Notice 3 is published</u>
	<u>TBR001g</u>	<u>Update when Notice 1 of MIL-PRF-89034 is published</u>

N-0105/~~0198~~
~~25-August-1998~~ Review Draft (Date)

Page Number	TBD/TBR	Description
	TBR001h	Update when Cor 1:2001 of ISO/IEC 12087-5:1998 is published
	TBR001i	Update when ISO/IEC 15444-1 is published
2	TBR002	Update with agreed upon date, if different from the one currently listed

Change Log

Date	Pages Affected	Mechanism	
19 June 25 August 1998	All	Version 1.0, Initial Release	
(date)	All	Version 2.0, Review Draft A	
			

[illegible]

Foreword

The National Imagery Transmission Format Standard (NITFS) is the standard for the formatting and exchange of digital imagery and imagery-related products between members of the Intelligence Community. The Intelligence Community is made up of the Department of Defense (DOD) and other departments or agencies of the United States Government as defined by Executive Order 12333.

This Standards Compliance and Interoperability Test and Evaluation Program Plan has been developed by the Defense Information Systems Agency's (DISA's) Joint Interoperability Test Command (JITC) in coordination with the Geospatial and Imagery Standards Management Committee (G/ISMC) based upon current policies, procedures, and guidelines received from the DOD and the National Imagery and Mapping Agency (NIMA/ST/SES/OIP). The JITC is the responsible organization for execution of the NITFS Testing Program.

The DOD and members of the Intelligence Community are committed to interoperability of systems used for formatting, transmitting, receiving, exchanging, and processing imagery and imagery related information. This Test and Evaluation Program Plan describes the processes and procedures for obtaining testing of imagery implementations for compliance with the NITFS and for interoperability among systems within the United States Imagery and Geospatial System (USIGS). It also prescribes NITFS Test and Evaluation Program policies, defines roles and responsibilities of participating organizations, and provides test funding guidance.

The suite of standards ~~which that~~ comprise the NITFS has evolved over time to meet the requirements of user systems. This test program plan addresses the implementation test criteria for the NITFS associated with NITF version 1.1, NITF version 2.0, and NITF version 2.1.

Beneficial comments (recommendations, additions, deletions) and other pertinent data which may be of use in improving this document should be addressed to: Joint Interoperability Test Command, NITFS Test and Evaluation Facility, ATTN: JTDB, Fort Huachuca, AZ 85613-7020.

The North Atlantic Treaty Organisation (NATO) has established Standardization Agreement (STANAG) 4545, NATO Secondary Imagery Format (NSIF) version 1.0. NSIF version 1.0 was designed to technically mirror NITF version 2.1 such that the NSIF01.00 marker in NSIF files can be treated as an alias to the NITF02.10 marker in NITFS files. Effort is underway to set up an NSIF compliance test program within NATO. In the meantime, the JITC will provide NSIF compliance test services to the same degree specified within this Test and Evaluation Program Plan for NITFS.

Table Of Contents

Foreword	iv
Executive Summary	ix
1.0 INTRODUCTION	14
1.1 Purpose	14
1.2 Scope	14
1.3 Background	14
1.4 References	33
1.5 Applicability	9109
1.6 Authority	10109
1.7 Definitions	101110
1.8 Test Program Concept	151615
1.9 Test Program Policies	151615
1.10 Test Program Responsibilities	171817
1.11 Test Program Funding	192019
1.12 Points of Contact	202120
2.0 STANDARDS VALIDATION TESTING	222324
2.1 General	222324
2.2 Requirements Definition	222422
2.3 Test Funding/Planning	232422
2.4 Test Execution	232422
2.5 Test Reports	232422
3.0 COMPLIANCE TEST AND EVALUATION	242624
3.1 General	242624
3.2 Initial Compliance Testing Administrative Procedures	242624
3.3 Retesting Administrative Procedures	262826
3.4 Derived Registration Administrative Procedures	262826
3.5 Test Planning	272927
3.6 Test Execution	272927
3.7 Test Reports	283028
3.8 Reporting Modifications of NITFS Configuration Items	283028
3.9 Reporting Latent Functional Problems	283129
4.0 NITFS REGISTRATION	303230
4.1 General	303230
4.2 Register Access	313331
4.3 Expiration of Registration	313331

5.0 NITFS COMPLIANCE CRITERIA**323432**

5.1 General	323432
5.2 NITFS Complexity Levels	333533
5.3 Elements of NITFS Compliance	333533
5.4 NITFS Compliance Test Functional Requirements	394139
5.5 NITF 2.1 File Format Criteria - General	474946
5.6 Image Segment Criteria	515348
5.7 Multiple Image Segment Criteria	606357
5.8 Image Compression Criteria, JPEG	616357
5.9 Image Compression Criteria, Bi-Level	676963
5.10 Image Compression Criteria, ARIDPCM	677064
5.11 Image Compression Criteria, VQ	687064
5.12 Graphic Criteria, CGM Graphics	697266
5.13 Text Criteria	707266
5.14 Data Extension Segment Criteria	727568
5.15 Reserved Extension Segment (RES) Criteria	757771
5.16 Overlay and Display Level Criteria	757771
5.17 Attachment Level Criteria	757871
5.18 Tagged Record Extensions Criteria	767872
5.19 NITF 2.0 Criteria	999486
5.20 NITF 1.1 Criteria	1029789
5.21 Year 2000 Compliance Criteria
5.22 Usability Criteria	1049991
5.23 TACO2 Criteria	10610193

6.0 INTEROPERABILITY**10910496**

6.1 General	10910496
-------------------	----------

LIST OF APPENDICES

Appendix A List of Acronyms	A-1
Appendix B NITFS Forms	B-1
Appendix C Changes in NITF	C-1
Appendix D NITF 2.1 File Format Requirements	D-1
Appendix E Adaptive Recursive Interpolated Differential Pulse Code Modulation (ARIDPCM) Requirements	E-1
Appendix F Bi-Level Image Compression Requirements	F-1
Appendix G Joint Photographic Experts Group (JPEG) Requirements	G-1
Appendix H Vector Quantization (VQ) Requirements	H-1
Appendix I Computer Graphics Metafile (CGM) Requirements	I-1
Appendix J Tactical Communications Protocol 2 (TACO2) Requirements	J-1
Appendix K NITF 2.0 File Format Requirements	K-1
Appendix L NITF Version 1.1 Requirements	L-1

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

List of Figures

Figure 1-1 NITFS Test and Evaluation Program Organizational Relationships 101110

List of Tables

Table 5-1 NITFS 2.1 Compliance Criteria Summary	<u>353735</u>
Table 5-2 STEAMING_FILE_HEADER Data Extension Segment Data	<u>747670</u>
Table 5-3a Criteria that determine the GeoSDE's that accompany a file.	Error! Bookmark not defined.
Table 5-3b Auxiliary Data	<u>928780</u>
Table 5-4 NITFS 2.0 Compliance Criteria Summary	<u>1009587</u>
Table D-1 File Header (NITF 2.1)	D- <u>222</u>
Table D-2 Security Control Markings	D- <u>775</u>
Table D- <u>43</u> Image Subheader (NITF 2.1)	D- <u>10106</u>
Table D- <u>43</u> Image Data Mask Table	D- <u>161710</u>
Table D- <u>54</u> Tested Variations of IREP and Associated Fields	D- <u>171811</u>
Table D- <u>56</u> Graphic Subheader (NITF 2.1)	D- <u>202113</u>
Table D- <u>76</u> Text Subheader (NITF 2.1)	D- <u>222315</u>
Table D- <u>87</u> Registered and Controlled Tagged Record Extension Format	D- <u>242516</u>
Table D- <u>98</u> Data Extension Segment Subheader (NITF 2.1)	D- <u>242516</u>
Table D- <u>109</u> Reserved Extension Segment Subheader	D- <u>272918</u>
Table E-1 General ARIDPCM Requirements	E- <u>111</u>
Table F-1 General Bi-level Image Compression Requirements	F- <u>111</u>
Table G-1 General JPEG Requirements	G- <u>111</u>
Table G-2 8 bpp Lossy DCT JPEG Requirements	G- <u>222</u>
Table G-3 24 bpp Color Lossy DCT JPEG Requirements	G- <u>333</u>
Table G-4 12 bpp Lossy DCT JPEG Requirements	G- <u>444</u>
Table G-5 Lossless JPEG Requirements	G- <u>555</u>
Table G-6 Downsampled JPEG Requirements	G- <u>666</u>
Table H-1 General VQ Requirements	H- <u>111</u>
Table I-1 General CGM Requirements, MIL-STD-2301	I- <u>111</u>
Table I-2 General CGM Requirements, MIL-STD-2301A	I- <u>555</u>
Table J-1 General TACO2 Requirements	J- <u>111</u>
Table K-1 File Header (NITF 2.0)	K- <u>111</u>
Table K-2 Image Subheader (NITF 2.0)	K- <u>556</u>
Table K-3 Symbol Subheader (NITF 2.0)	K- <u>9910</u>
Table K-4 Label Subheader (NITF 2.0)	K- <u>101112</u>
Table K-5 Text Subheader (NITF 2.0)	K- <u>121314</u>
Table K-6 Data Extension Segment Subheader (NITF 2.0)	K- <u>131415</u>
Table L-1 NITF 1.1 Minimum Compliance	L- <u>111</u>

N-0105/~~0198~~
~~25 August 1998~~ Review Draft (Date)

(This page intentionally left blank.)

EXECUTIVE SUMMARY

This document establishes the National Imagery Transmission Format Standard (NITFS) Test and Evaluation Program for achieving and sustaining NITFS compliance and interoperability by all fielded and developmental digital imagery systems. It describes the processes and procedures for obtaining testing of imagery implementations for compliance with the NITFS and for interoperability within the United States Imagery and Geospatial System (USIGS). It also prescribes NITFS Test and Evaluation Program policies, defines roles and responsibilities of participating organizations, and provides test funding guidance.

The National Imagery and Mapping Agency (NIMA/[ST/SESQIP](#)) oversees the process whereby digital imagery systems achieve and sustain NITFS compliance and interoperability through the Test and Evaluation Program. Initial testing of an imagery implementation is achieved at the NITFS Test and Evaluation Facility located at the Joint Interoperability Test Command (JITC). Compliance and interoperability are sustained through retesting, as necessitated by validated changes to the NITFS, changes to (or problems with) registered NITFS configuration items, or when directed by NIMA/[ST/SESQIP](#), as long as the imagery system is operational.

As changes or additions are nominated for inclusion in the NITF Standard, they are validated through testing prior to being forwarded to the Geospatial and Imagery Standards Management Committee (G/ISMC) for approval for implementation and addition to the compliance requirements of the NITFS Test and Evaluation Program.

NITFS implementation requirements for compliance are detailed in this plan. The plan covers implementation test criteria for NITF1.1, NITF2.0, NITF2.1 and the related NITFS standards and specifications for imagery compression, [graphicsymbol \(graphic\)](#) annotation, data extensions, and tactical communications protocols. [Test services for STANAG 4545, NSIF1.0, are available to the same degree as specified in this plan for NITFS.](#)

Implementation sponsors request and sustain NITFS compliance using the procedures described herein. A register of completed NITFS tests is maintained by the JITC NITFS Test and Evaluation Facility at Fort Huachuca, Arizona.

N-0105/~~0198~~
~~25 August 1998~~ Review Draft (Date)

(This page intentionally left blank.)

1.0 INTRODUCTION

1.1 Purpose

This document establishes the National Imagery Transmission Format Standard (NITFS) Standards Compliance and Interoperability Test and Evaluation Program for achieving and sustaining NITFS based interoperability by all fielded and developmental digital imagery implementations. It describes the processes and procedures for obtaining testing of an imagery implementation for compliance with the NITFS and interoperability within the United States Imagery and Geospatial System (USIGS). It also prescribes NITFS Test and Evaluation Program policies, defines roles and responsibilities of participating organizations, and provides test funding guidance.

1.2 Scope

This document contains technical and administrative information regarding NITFS test planning, execution, and reporting. It provides details on:

- Testing Process
- Retesting Process
- Compliance Testing Criteria
- Compliance Test Planning
- Compliance Test Reporting
- Registration of Successful Test Results
- Interoperability [Compliance Certification](#) Testing (TBD001)
- Reporting Functional Problems With NITFS Compliant Implementations
- Reporting Changes to NITFS Configuration Items
- Validating Proposed Enhancements to NITFS

1.3 Background

1.3.1 NITF Version 1.1

The development of the National Imagery Transmission Format (NITF) was initiated in 1985 under the auspices of the Imagery Acquisition Management Plan (IAMP) Working Group of the Office of the Assistant Secretary of Defense, Command, Control, Communications, and Intelligence (OASD/C³I). Version 1.0 of the NITF was published, but not released, in 1988. This version served as the prototype for demonstrating that the format could be implemented. In 1988 and 1989, the NITF was successfully implemented and tested on six different systems using operational communications media with cryptographic and forward error correction devices. The specification for NITF Version 1.1 was approved and released by OASD/C3I on 1 March 1989 as the NITF baseline version. At the time, the Defense Intelligence Agency (DIA) was the executive agent for the test, evaluation, and validation of all

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

NITF related hardware, software, and their respective modifications. The DIA entered into a Memorandum of Agreement (MOA) with the Joint Interoperability Test Command (JITC) to provide technical oversight for all NITF certification testing and to operate a test facility designed exclusively for supporting the NITF program. NITF 1.1 testing was conducted from January 1990 through December 1993.

1.3.2 NITF Version 2.0

NITF version 2.0 was published along with a suite of military standards designated as the National Imagery Transmission Format Standard (NITFS) in June 1993. The major additions to NITF version 1.1 included the Tactical Communications Protocol 2 (TACO2) to enable transmission over tactical circuits; improved image compression using the Joint Photographic Experts Group (JPEG) compression algorithm; support for large images and color images; and symbolic annotations using Computer Graphics Metafile (CGM). The Central Imagery Office (CIO) had since been organized and became the NITFS Program Manager. The JITC continued to serve as the Executive Agent for execution of the NITFS testing program.

1.3.3 NITF Version 2.1

A number of factors have driven the changes made to NITF 2.0 during recent years. Among these are: the creation of the National Imagery and Mapping Agency (NIMA); the Department of Defense (DOD) mandate for the selection and implementation of commercial/international standards over government/military standards where possible; user requirements for improved fusion of information, whether imagery, geospatial, or other data types; and the ever increasing need to share data within and external to systems of the DOD/Intelligence Community. NITF 2.1 is based on extensive coordination among NITFS users within the USIGS community, North Atlantic Treaty ~~Organization~~ Organisation (NATO) and Allied Nations, national and international standards bodies, and with commercial vendors and groups dealing with related standards and technologies. Military Standard 2500B has been developed with the intention of it being the technical baseline for establishing an International ~~Standardized~~ Profile (ISP) of ISO/IEC 12087-5, Basic Image Interchange Format (BIIF). A summary of changes made to the existing NITF 2.0 baseline in support of the NITF 2.1 is included in Appendix C.

NITF Version 2.1 compliance testing ~~will be available beginning services began~~ 1 October 1998. ~~It will be done in parallel with NITF 2.0 testing until 1 October 1999 when the general need for testing of NITF 2.0 pack capabilities is anticipated to cease.~~ The capability to test NITF 2.0 will be maintained until all contractual requirements for NITF 2.0 ~~in place on 1 October 1999 have~~ been satisfied. The target for fielded systems to no longer produce NITF 2.0 formatted files is 1 October 2002 (TBR002). The need to unpack and interpret NITF 2.0 files will continue indefinitely.

1.3.4 NSIF Version 1.0



The Air Group IV under the NATO Air Forces Armaments Group (NAFAG) has developed STANAG 4545, NATO Secondary Imagery Format (NSIF) version 1.0. The aim of this agreement is to achieve interoperability for the exchange of electronic digital imagery among NATO C3I systems. The STANAG was developed based upon the International Organization for Standardization (ISO) 12087-5, Basic Image Interchange Format (BIIF) and NITF 2.1. NSIF version 1.0 was designed to technically mirror NITF version 2.1 such that the NSIF01.00 marker in NSIF files can be treated as an alias to the NITF02.10 marker in NITFS files.

Effort is underway to set up an NSIF compliance test program within NATO similar to that established by this test program plan. Pending establishment of the NSIF test program within NATO, the JITC will provide NSIF compliance test services to the same degree specified within this test program plan for NITFS.

1.4 References

(Note: TheseSome documents with version numbers designated as 0.9x are contain draft specifications that have not undergone validation testing as described in section 2.0. The implementation and test details of these specifications are subject to change based on the lessons learned by the first attempts to implement and test the features of these specifications. Implementers of these specifications are encouraged to coordinate their implementation efforts with the NITFS Test and Evaluation Facility personnel.)

1.4.1 Policy and Planning Documents

CJCSI 6212.01 <u>BA</u>	Compatibility, Interoperability, and Integration of Command, Control, Communications, Computers, and Intelligence Systems, 30 June 1995. <u>Interoperability and Supportability of National Security Systems, and Information Technology Systems, 8 May 2000.</u>
DOD/JTA V <u>3.1-0</u>	Department of Defense Joint Technical Architecture Version <u>3.1-0</u> , 22-August-1996 <u>31 March 2000</u> .
<u>DODD4630.5</u>	<u>Compatibility, Interoperability, and Integration of Command, Control, Communications, and Intelligence (C3I) Systems, November 12, 1992</u>
JIEO Circular 9002	Requirements Assessment and Interoperability Certification of C4I and AIS Equipment and  Systems, 23 January 1995.
JIEO Circular 9008*	NITFS Certification Test and Evaluation  gram Plan, 30 June 1993, with Errata Sheet dated 20 June 1997.

N-0105/~~0198~~
~~25 August 1998~~ Review Draft (Date)

JIEO Plan 9000 Department of Defense and Intelligence Community
 Imagery Information Technology Standards Management
 Plan, 01 November 1995.

NITF 1.1 Vol I* Department of Defense, National Imagery Transmission
 Format, Certification Plan Volume I, Policy,
 02 January 1990.

NITF 1.1 Vol II* Department of Defense, National Imagery Transmission
 Format, Certification Plan Volume II, Processes and
 Procedures, 02 January 1990.

(Requests for copies of the above policy and planning documents may be addressed
 to the Joint Interoperability Test Command, NITFS Test and Evaluation Facility,
 Building 57305, Fort Huachuca, AZ 85613-7020.)

* [Superseded by this Test and Evaluation Program Plan.](#)

1.4.2 Federal Information Processing Standards (FIPS)

FIPS PUB 10-4 Countries, Dependencies, Areas of Special Sovereignty,
 and Their Principal Administrative Divisions, April 1995

~~FIPS PUB 147~~ ~~Group 3 Apparatus for Document Transmission (DOD~~
~~adopted, 19 August 1981. Withdrawn July 29, 1997.~~
~~Federal Register Citation: 62FR-J-40502.~~

1.4.32 Military Standards (MIL-STDs) and Handbooks

MIL-HDBK-1300A Military Handbook for the National Imagery Transmission
 Format Standard (NITFS), 12 October 1994.

~~MIL-STD-2411~~ ~~Raster Product Format, 6 October 1994 with Notice 1,~~
~~17 January 1995.~~

[MIL-STD-2411-1](#) [Registered Data Values for Raster Product Format,](#)
[30 August 1994](#)

[MIL-STD-2411-2](#) [Integration of Raster Product Format Files into the](#)
[National Imagery Transmission Format, 26 August 1994](#)

MIL-STD-2500A National Imagery Transmission Format (Version 2.0) for
 the National Imagery Transmission Format Standard,
 12 October 1994 with [Notice 1, 07 February 1997](#), Notice
 2, 26 September 1997 [and Notice 3, 01 October 1998](#).
 (~~TBR001—Notice 3 is currently~~
~~being progressed; this reference needs to be updated~~
~~once the Notice is completed.~~)

MIL-STD-2500B	National Imagery Transmission Format (Version 2.1) for the National Imagery Transmission Format Standard, 22 August 1997- with Notice 1, 2 October 1998 and Notice 2, 1 March 2001. (TBR001a—With Change Notice 1 once it is fully progressed.)
MIL-STD-188-161	Interoperability and Performance Standards for Digital Facsimile Equipment, 30 October 1991.
MIL-STD-188-196	Bi-Level Image Compression for the National Imagery Transmission Format Standard, 18 June 1993 with Notice 1, 27 June 1996.
MIL-STD 188-197A	Adaptive Recursive Interpolated Differential Pulse Code Modulation (ARIDPCM) Compression Algorithm for the National Imagery Transmission Format Standard, 12 October 1994.
MIL-STD-188-198A	Joint Photographic Experts Group (JPEG) Image Compression for the National Imagery Transmission Format Standard, 15 December 1993 with Notice 1, 12 October 1994 and Notice 2, 14 March 1997. (TBR001f update when Notice 3 is published)
MIL-STD-188-199	Vector Quantization Decompression for the National Imagery Transmission Format Standard, 27 June 1994 with Notice 1, 27 June 1996.
MIL-STD-2301	Computer Graphics Metafile (CGM) Implementation Standard for the National Imagery Transmission Format Standard, 18 June 1993 with Notice 1, 12 October 1994.
MIL-STD-2301A	Computer Graphics Metafile (CGM) Implementation Standard for the National Imagery Transmission Format Standard, 05 June 1998. (DRAFT), (TBR001b—Currently being progressed for final publication; publication date is).
MIL-STD-2045-44500	-Tactical Communications Protocol 2 (TACO2) for the National Imagery Transmission Format Standard, 18 June 1993 with Notice 1, 29 July 1994 and Notice 2, 27 June 1996.
MIL-STD-6040	United States Message Text Format (MTF) Note: The baseline for this standard is updated frequently, but this has no impact within the context of its current use within the NITFS. Currency of the USMTF has potential impact

N-0105/~~0198~~
~~25 August 1998~~ Review Draft (Date)


when MTF data within NITF files is passed to external processes.

MIL-PRF-89034 Digital Point Positioning Database (DPPDB),
23 March 1999. (TBR001g update when Notice 1 is
published)

(Copies of the above military standards and handbooks are available from the
~~Standardization Document Order Desk~~ DODSSP, Building 4/Section D, 700 Robbins
 Avenue, Building 4D, Philadelphia, PA 19111-5098.)

1.4.~~43~~ NIMA Specifications and Publications

DIGEST	Digital Geographic Information Exchange Standard (DIGEST), Edition 2. 10 , June 1997 <u>September 2000</u> .
N0101- BE	Geospatial and Imagery Access Services (<u>GIAS</u>) Specification- (GIAS) , Version 3. 13 , 2205 June <u>February 1998</u> . (TBR001c-v3.2)
N0102- BE	USIGS System Architecture, Volume II , USIGS Interoperability Profile (UIP), <u>RFC NO1-0068</u> , 225 June 1998 . (TBR001d)
N-0106-97	National Imagery Transmission Format Standard (NITFS) Bandwidth Compression Standards and Guidelines, 25 August 199 8 7.
NSPIA	NIMA Standards Profile for Imagery Archive (NSPIA), 23 April 1997.
<u>NITFS NTER Register</u>	NITFS Tagged Extensions Registry (NTER), latest update as posted at: http://jltc.fhu.disa.mil/nitf/nitf.htm#tag_reg/mast.htm .
<u>NSDESTDI-0001</u>	NIMAational Support Data Extensions (SDE) (Version 1. 32) for the National Imagery Transmission Format Standard (NITFS), 132 March <u>October 1998</u> 7.
NUTA	NIMA USIGS Technical Architecture (NUTA), 28 October 1997.
<u>PIAE v2</u>	National Imagery Transmission Format Standard Profile for Imagery Archive Extension (PIAE), Version 2.0, 25 April 1996.

PIAE v3	National Imagery Transmission Format Standard Profile for Imagery Archive Extensions (PIAE), Version 3.0, 25 September 1997. (E001)
<u>STDI-0002</u>	<u>The Compendium of Controlled Extensions (CE) for the National Imagery Transmission Format (NITF), Version 2.0, 4 March 1999.</u>
RASG-9606-001**	Airborne Synthetic Aperture Radar (SAR) Support Data Extensions (SDE) for the National Imagery Transmission Format (Version 2.0) of the National Imagery Transmission Format Standard, Version 0.9, 20 May 1996. 
VIMAS**	Visible, Infrared, and Multispectral Airborne Sensor Support Data Extensions for the National Imagery Transmission Format of the National Imagery Transmission Format Standard Version 0.9, 25 September 1997.

(Requests for copies of the above NIMA Specifications and Publications may be made to the National Imagery and Mapping Agency, Attn.: NIMA/[ST/SES/OIP](#), MS-P-24, 12310 Sunrise Valley Drive, Reston, VA 20191-3449.)

** [Superceded by STDI-0002](#)

1.4.54 Standardized NATO Agreements

STANAG 4545	NATO Secondary Imagery Format (Version 1.0); Ratification Study Draft 2, 5 June 1998, currently being progressed (TBR001e)
-------------	---

(Requests for copies of the above STANAG may be made to SAF/AQIJ, 1060 AF Pentagon (5D156), Washington, DC 20330-1060.)

1.4.65 International Standards

ANSI X3.4	American National Standards Institute (ANSI), X3.4 - 1986, American National Standard Code for Information Interchange (ASCII), 1986.
CCITT	Recommendation T.4, Standardization of Group 3 Facsimile Apparatus or Document Transmission, 1998
ISO/IEC Directives	Procedures for the technical work of ISO/IEC JTC1 on Information Technology, Third Edition 1995.

N-0105/~~0198~~~~25 August 1998~~ Review Draft (Date)

ISO/IEC TR10000-1	Information technology - Framework and Taxonomy of International Standardized Profiles - Part 1: General principles and documentation framework, third edition, 1995.
ISO/IEC TR10000-2	Information technology - Framework and taxonomy of International Standardized Profiles - Part 2: Principles and Taxonomy for OSI Profiles, third edition, 1995.
ISO/IEC 8632-1:1994	Information Technology - Computer graphics metafile for the storage and transfer of picture description information - Part 1: Functional Specification, AMD 2, 01 July 1995.
ISO/IEC 8632-3:1994	Information Technology - Computer graphics metafile for the storage and transfer of picture description information - Part 3: Binary Encoding, AMD 2, 01 August 1995.
ISO/IEC 8632:1992	Information Technology - Computer graphics metafile for the storage and transfer of picture description information, AMD.1:1994 - Parts 1-4: Rules for Profiles.
ISO/IEC 9973:1994	1st Edition, Procedures for Registration of Graphical Items, 15 December 1994, AMD 1, 03 April 1998 . Web page: <u>http://jitc.fhu.disa.mil/nitf/nitf.htm</u> .
ISO/IEC 10646-1:1993	Information technology - Universal Multiple-Octet Coded Character Set (UCS) - Part 1: Architecture and Basic Multiple Plane, AMD 6, 15 Nov. 1996.
ISO/IEC 10918-1:1994	Information t Technology - Digital C ompression and C oding of C ontinuous- T one S still I images: Requirements and G uidelines First Edition , 15 December 1994.
ISO/IEC 10918-2:1995	Information T technology - Digital C ompression and C oding of C ontinuous- T one S still I images: Compliance T esting First Edition , 15 August 1995.
ISO/IEC 10918-3: DIS 1997	Information Technology, ;- Digital Compression and Coding of Continuous-Tone Still Images; Part 4: Extensions First Edition , 01 May 1997; Amendment 1: 01 Dec 1999 .
ISO/IEC 10918-4: DIS 1999	Information Technology, ;- Digital Compression and Coding of Continuous-Tone Still Images: Part 4; Registration Procedures for JPEG Profiles, SPIFF Profiles, SPIFF Tags, SPIFF Colour Spaces, APPn Markers, and SPIFF Profile ID Marker Compression

Types and Registration Authorities (REGAUT) First Edition, 1526 Dec-Aug 969.

ISO/IEC 11072:1993	Information technology - Computer graphics - Computer Graphics Reference Model, 01 Oct. 92.
ISO/IEC 12087-1:1995	Information technology - Computer graphics and image processing - Image processing and Interchange— Functional specification Part 1: Common architecture for imaging, 15 April 1995.
ISO/IEC 12087-2:1994	Information technology - Computer graphics and image processing - Image processing and Interchange— Functional specification Part 2: Programmer's imaging kernel system application program interface.
ISO/IEC 12087-3:1995	Information technology - Computer graphics and image processing - Image processing and Interchange— Functional specification Part 3: Image Interchange Facility (IIF), AMD 1, 15 December 1997.
ISO/IEC 12087-5: 1998	Information technology; Computer graphics and image processing; Image Processing and Interchange; Functional Specification - Part 5: Basic Image Interchange Format, <u>22 October 1998, Cor 1:2001, (TBR001h update when published).</u>
<u>ISO/IEC 15444-1:2001</u>	<u>Information technology - JPEG 2000 image coding system - Part I: Core coding (TBR001i update when published).</u>
ITU T.4 (1993:03)	Terminal Equipment and Protocols for Telematic Services - Standardization of Group 3 Facsimile Apparatus for Document Transmission, AMD2 08/95.

(Application for copies may be addressed to the American National Standards Institute, 13th Floor, 11 West 42nd Street, New York, NY 10036.)

1.5 Applicability

The NITFS is the designated standard for the formatting and exchange of digital imagery and imagery-related products between members of the Intelligence Community as defined by Executive Order 12333, the Department of Defense (DOD) and other Departments or Agencies of the United States Government as governed by Memoranda of Agreement (MOAs) with those Agencies and the Intelligence Community/DOD. Adherence to U.S. Federal and DOD standards is required before a particular system can be employed in joint or combined operations. The DOD Directive 4630.5 states that for purposes of compatibility,

N-0105/0198

25 August 1998 Review Draft (Date)

interoperability, and integration all command, control, communications, and intelligence (C³I) systems developed for use by U.S. forces are considered to be for joint use.

1.6 Authority

~~The Defense Information Systems Agency (DISA) is the DOD authority for NITFS validation testing.~~ The Director, Central Intelligence (DCI) is the Intelligence Community authority for mandatory NITFS compliance. The Assistant Secretary of Defense for Command, Control, Communications, and Intelligence (ASD/C³I) is the DOD authority requiring ~~Secondary Imagery Dissemination System (SIDS)~~ compliance with the NITFS. The NIMA/~~ST/SESOIP~~ is the Test Program Authority and provides management oversight for the NITFS Test and Evaluation Program. The JITC, an element of the DISA, is the Executive Agent to NIMA/~~ST/SESOIP~~ for execution of the NITFS Test and Evaluation Program. Figure 1-1 depicts these organizational relationships.

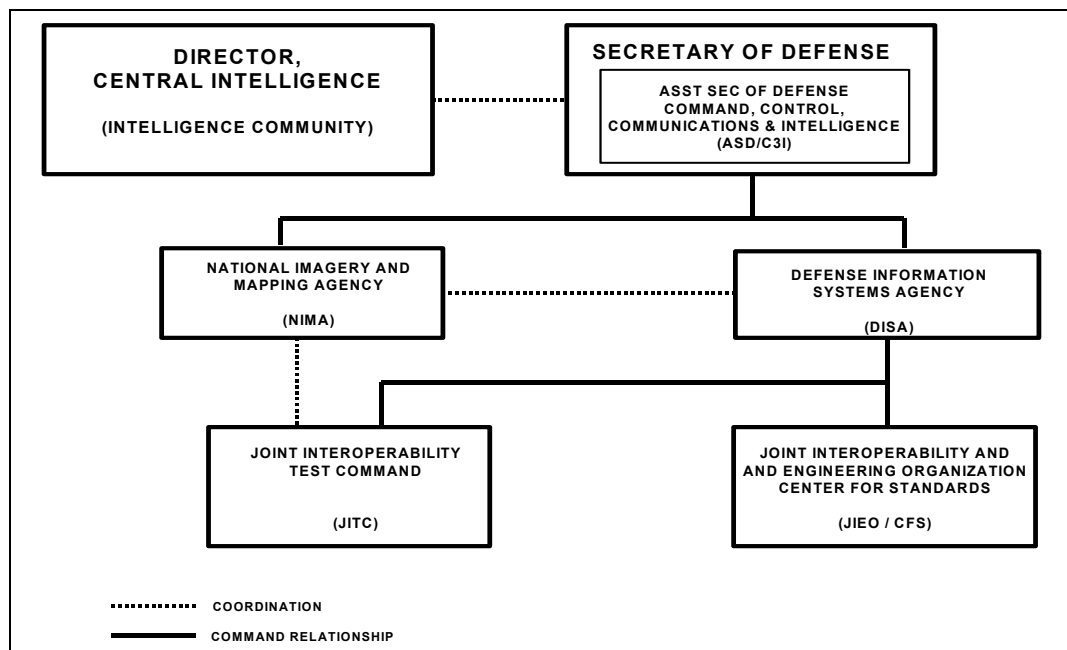


Figure 1-1. NITFS Test and Evaluation Program Organizational Relationships

1.7 Definitions

For the purpose of this plan, the following terms are defined as stated:

1.7.1 Certification (Interoperability)

Confirmation by DISA that a ~~Command, Control, Communications, Computer, and Intelligence (C4I)/Automated Information System (AIS)/National Security System and Information Technology System (NSS/IT)~~ system has undergone appropriate testing; that the applicable standards and requirements for compatibility, interoperability, and

integration have been met; and a system is ready for joint and/or combined use. See JCSI [6212A6212.01B](#).

(Note: For the [NITF 2.0 JIEO Circular 9008 defined](#) test program, the term 'System Certification' was used to designate those systems (hardware and software) which implemented both NITF 2.0 and TACO2 and successfully completed NITFS compliance testing.)

1.7.2 Compliance Registration (Standards Compliance)

A statement attesting to the fact that an implementation, product or component has been tested as meeting NITFS applicable compliance criteria. The degree of compliance is recorded in a registry.

1.7.3 NITFS Test and Evaluation Facility

The personnel, equipment, data, and facilities for conducting NITFS compliance testing and maintaining the NITFS [S test](#) program for NIMA along with [the](#) policies, procedures, planning, etc.

1.7.4 Common Coordinate System

The virtual row and column [indexed](#) coordinate [space-grid](#) against which all NITF file components are ultimately referenced. The location of NITF components with attachment level of zero are referenced to the origin of the Common Coordinate System. The extent of the common coordinate system is defined by the complexity level designation.

1.7.5 Compatibility, Interoperability, and Integration (CII)

A policy set by DOD and the Joint Staff defining the requirements certification process and identifying assessment criteria. See JCSI [6212A6212.01B](#) and JIEO Circular 9002.

1.7.6 Configuration Item

A specific component of hardware and/or software that has an impact on NITFS compliance.

1.7.7 Configuration Management

A discipline applying technical and administrative direction and monitoring to:

- Identify and document the functional and physical characteristics of a configuration item.
- Control changes to those characteristics.
- Record and report change processing and implementation status.

N-0105/0198

~~25 August 1998~~ Review Draft (Date)**1.7.8 Developmental System**

A system that has not been approved for use and/or production.

1.7.9 Digital Imagery System

The equipment and procedures used in the collection, storage, display, manipulation, analysis, annotation, exchange and/or transmission of imagery and imagery products.

1.7.10 Dissemination System

A system with functional requirements to distribute digital imagery via electronic communications facilities. Imagery processing is primarily focused on preparing the data for the eccentricities (e.g., constrained bandwidth, noise environment, etc.) of the communications channels across which it will be disseminated. [For example, a Representative systems include the Dissemination Element \(DE\), Global Broadcast System \(GBS\), etc.](#)

1.7.11 Exploitation System

A system with functional requirements to analyze, exploit, and extract information from digital imagery to produce an exploited imagery product. Representative systems include Image Data Exploitation System (IDEX), NIMA Softcopy Exploitation Systems as defined by the NIMA Imagery Information Exploitation Environment (NIIEE), Common Exploitation Workstation (CEW), etc.

1.7.12 Fielded System

A system that has been approved for use and/or production.

1.7.13 Implementation Under Test (IUT)

A candidate implementation of any portion of the NITFS suite of standards for which compliance testing is being performed. An implementation does not necessarily comprise a full imagery system.

1.7.14 Library System

A system with functional requirements to catalogue, store and retrieve digital imagery. Representative systems include Image Product Archive (IPA), Image Product Library (IPL), NIMA Libraries, etc.

1.7.15 NITFS Compliance

The ability of an implementation to create and output NITFS compliant files and/or to accept NITFS files and recognize the component parts as prescribed in the NITFS Test and Evaluation Program Plan.

1.7.16 NITFS Component Compliance

A statement to the fact that an item (as opposed to a full implementation) has been tested for compliance to a specific subset of the NITFS compliance criteria.

1.7.17 Native Mode

The intrinsic attributes and operational mode of an imagery system. When an imagery system's architecture, design, and/or internal representation for images, [graphicsymbol \(graphic\)](#)s, labels, text, and/or other data is not in accordance with the NITFS, its native mode is considered to be other than NITFS.

1.7.18 NITF

The National Imagery Transmission Format. The term NITF is often used to describe a file that is formatted according to the NITFS. The term usually inherits the context of the latest version of NITF when the version is not specifically identified.

1.7.19 NITFS

The National Imagery Transmission Format Standard (NITFS) is comprised of the suite of standards applicable to the formatting and exchange of digital imagery. The term is used when addressing the overall national imagery standardization effort.

1.7.20 NITF Version 1.1

The initial version of NITF implemented for which a formal testing program was established. Requirements for compliance with NITF Version 1.1 [are fully described described herein supercede those](#) in the NITF Version 1.1, Volume I, NITF Certification Plan Policy and Volume II, Certification Plan Processes and Procedures.

1.7.21 NITF Version 2.0

The second version of NITF implemented for which a formal testing program was established. Requirements for compliance with NITF Version 2.0 [are fully described herein supercede those](#) in Joint Interoperability and Engineering Organization (JIEO) Circular 9008, NITFS Certification Test and Evaluation Program Plan.

1.7.22 NITF Version 2.1

The third version of NITF for which this program plan establishes the formal compliance test program.

[1.7.23 NSIF Version 1.0](#)

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

STANAG 4545, NSIF version 1.0, is a technical equivalent of the NITF 2.1 format. The NSIF01.00 marker in NSIF files can be treated as an alias to the NITF02.10 marker in NITFS files.

1.7.234 Pack

To create or construct an NITF file within the set of conditions and constraints defined for compliance with the NITFS.

1.7.254 Primary Imagery System

The equipment and procedures used in the electronic collection, storage, and exchange of original quality, non-exploited imagery and imagery products.

1.7.265 Production System

A system with functional requirements to generate digital imagery from sensor sources. Representative systems include Common Imagery Processor (CIP), Digital Production System (DPS), Point Positioning Production System (PPPS), etc.

1.7.276 Secondary Imagery Dissemination System (SIDS)

The equipment and procedures supporting the process of post-collection electronic dissemination of Command, Control, Communications, and Intelligence (C³I) data, over a time interval ranging from near-real-time to a period of days, at a quality level determined by receiver requirements.

~~1.7.287 System Under Test (SUT)~~

~~A candidate imagery system for which NITFS compliance testing is being performed.~~

1.7.28 Tactical System

A system with requirements to operate when deployed into the battlefield; often characterized by the need to obtain data communications from military tactical communication channels vice fixed plant communications typical of commercial civilian organizations.

1.7.29 Unpack (further discussion)

To interpret and make appropriate use of the imagery, data, and associated information contained in an NITF compliant file. In most instances, this includes the capability to accurately display and/or print the contents of an NITF file.

1.7.30 USIGS Architecture Framework

The interrelated set of USIGS Architecture components which includes the Operational Architecture, the Technical Architecture, the Systems Architecture, and

the Data Architecture. The Operational Architecture identifies the operational element, activities, and information flows. The Technical Architecture identifies applicable standards and conventions that govern systems implementation and operation. The Systems Architecture overlays system capabilities onto requirements and identified standards to provide a map of current and future capabilities. The Data Architecture provides the common data modeling and terminology baseline needed to articulate and integrate the other component architecture views.

1.7.31 USIGS Interoperability Profile

The USIGS Interoperability Profile (UIP) defines the profile for software interface standards to be used to achieve interoperability between multiple clients and servers within the United States Imagery and Geospatial System architecture.

1.8 Test Program Concept

The NITFS Test and Evaluation Program is composed of the NITFS Test and Evaluation Facility, policies, procedures, and administrative and planning actions required to achieve and sustain an imagery implementation's compliance with the NITFS and interoperability within the USIGS through testing. The test program supports both the DOD and the Intelligence Community objectives for ensuring an interoperable format for the exchange of digital imagery products among heterogeneous systems.

1.8.1 National Imagery and Mapping Agency

The NIMA/[ST/SESOIP](#) oversees the process whereby imagery systems achieve and sustain NITFS compliance and interoperability through the NITFS Test and Evaluation Program. Initial compliance testing of an imagery system is achieved at the designated test facility, the JITC, or at alternate locations as approved by the JITC. Compliance to standards and interoperability within USIGS is sustained through retesting, as necessitated by changes to the NITFS, changes to (or problems with) tested NITFS configuration items, or when directed by NIMA/[ST/SESOIP](#), as long as the imagery system is operational.

1.8.2 Joint Interoperability Test Command

The JITC serves as NIMA/[ST/SESOIP](#)'s executive agent for execution of NITFS test related activities. The JITC has established [aan](#) NITFS testing facility that supports compliance testing of NITFS capable implementations, validation testing of proposed additions to NITFS, and other NITFS related test activities.

1.9 Test Program Policies

The following policies apply to the NITFS Test and Evaluation Program:

1.9.1 General

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

Those systems, subsystems, and components within the United States Imagery and Geospatial System which exchange digital imagery must achieve compliance with the NITFS as specified by the USIGS Architecture Framework, the USIGS Interoperability Profile (UIP), and the Joint Technical Architecture (JTA).

1.9.1.1 NITF Version 1.1. All NITFS imagery systems were to be NITF 2.0 compliant within two years of the January 1994 start date for the NITFS Test and Evaluation Program for NITF 2.0 as described in JIEO Circular 9008. To support interoperability during the transition, all NITF 2.0 compliant systems were required to allow for the proper interpretation and use of NITF Version 1.1 formatted files and the creation of NITF Version 1.1 compliant files. The requirement for NITF ~~2.0 capable~~ systems to ~~create support~~ NITF 1.1 files is now optional; ~~no~~ NITF 1.1 only systems should ~~no longer~~ be used in the field ~~following October 1998~~. ~~However, due to the extensive existence of legacy NITF 1.1 files, . In general, NITF 2.0 and NITF 2.1 systems must continue are no longer required to properly interpret NITF 1.1 files.~~

1.9.1.2 NITF Version 2.0. All currently fielded imagery systems must be at least NITF 2.0 compliant ~~by October 1998~~. Compliance testing for NITF 2.0 only systems will ~~cease in October 1999~~ be maintained until all contractual requirements for NITF 2.0 have been satisfied.

1.9.1.3 NITF Version 2.1. The goal is for all currently fielded imagery systems to be NITF 2.1 compliant or replaced by NITF 2.1 compliant systems ~~within at least two years of the start date of this NITFS Test and Evaluation Program Plan (1 October 1998). Since NITF 2.1 uses a four digit year field, implementation of NITF 2.1 prior to the end of 1999 will ease year 2000 compliance requirements and is highly encouraged.~~ To support interoperability during the transition period, all NITF 2.1 compliant systems must have a mode of operation that allows for proper interpretation and use of NITF Version 2.0 formatted files and that limits the creation of an NITF file content to the constraints of NITF version 2.0. Developmental systems must be tested for and achieve NITF 2.1 compliance prior to fielding. ~~NITF 2.1 capable systems must continue to properly interpret NITF Version 1.1 files.~~

1.9.1.4 Distributed Applications. Some developers may choose to implement systems that distribute NITFS functions across several processing platforms ~~that which~~ are networked together. In such cases, the systems will be evaluated as a whole in determining which NITFS attributes and associated compliance criteria apply to each component of the system. In any case, provision must be made for the system to fully satisfy the Complexity Level (CLEVEL) criteria for which registration is desired before the system will be registered as NITFS compliant.

1.9.1.5 NITFS Components. Developers may choose to submit components and/or products that implement only a portion of the NITFS compliance requirements for testing and registration. The component will be tested for compliance to the applicable standards. Component registration does not mean that any implementation which uses the registered component is deemed to be fully

compliant with NITFS. Use of the registered component may, however, expedite test and evaluation of the implementation for compliance registration.

1.9.1.6 TACO2. All imagery systems ~~deemed to be tactical within the USIGS Architecture, and those which with are~~ requirements ~~to directly communicate with tactical systems, must~~ support the TACO2 Protocol must support it via either a synchronous or asynchronous communications port.

1.9.2 Test Sponsorship

1.9.2.1 Government. Imagery systems can be sponsored for standards compliance and CII certification testing by any governmental department, service, or agency. (see paragraph 1.11 for funding considerations)

1.9.2.2 Non-government. Commercial developers or vendors may request NITFS compliance testing without government sponsorship on a fee-for-service basis with the JITC. Although commercial developers may not request Compatibility, Interoperability and Integration (CII) certification testing, they may request, on a fee-for-service basis, technical interoperability tests. The successful results of such tests may expedite an eventual government request for CII certification testing.

1.9.34 Test Location

Compliance testing will normally be conducted in the NITFS Test and Evaluation Facility. Testing at alternate locations may be granted on a case-by-case basis.

1.9.45 Retesting

Retesting of implementations may be directed by the NIMA/ST/SESQIP; or may be requested by sponsors and/or developers, depending on conditions such as:

1.9.45.1 Changes to the NITFS compliance requirements.

1.9.45.2 Latent functional problems discovered with previously tested implementations.

1.9.45.3 Any changes to a configuration controlled item of aan NITFS compliance tested implementation.

1.9.45.4 The expiration period for registration has elapsed.

1.10 Test Program Responsibilities

The following paragraphs describe the roles and responsibilities of principal organizations that assist in implementing the NITFS Test and Evaluation Program.

1.10.1 NIMA

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

NIMA/~~ST/~~SESOIP has the responsibility to:

- Serve as the Test Program Sponsor and oversee the execution of the NITFS Test and Evaluation Program.
- Provide funding and budget oversight for the establishment and general operation of the NITFS Test and Evaluation Program. (Individual test sponsors program and budget for compliance testing of their implementations.)
- Assist in the development, promulgation, and utilization of the NITFS.

Coordinate the resolution of functional and interoperability problems with NITFS compliant implementations.

1.10.2 JITC

The JITC has responsibility to:

- Establish, manage, and operate the NITFS Test and Evaluation Facility.
- Process test and retest requests.
- Arbitrate test scheduling conflicts. The JITC will attempt to coordinate schedule adjustments for urgent test requests.
- Plan, schedule, and execute compliance tests.
- Publish test results and forward certificates of registration.
- Maintain and publish a register of NITFS compliant systems, implementations and components.
- Maintain the NITFS Test and Evaluation Program Plan.
- Serve as an advisor to the Chairperson of the Geospatial and Imagery Standards Management Committee (G/ISMC) and the DISA Center for Standards (CFS).

1.10.3 Test Sponsors

Those sponsoring implementations for NITFS testing have the following Test and Evaluation Program Responsibilities.

- Request NITFS testing and/or retesting for compliance with the NITFS.
- Promptly report functional problems experienced with NITFS tested configuration items to the NITFS Test and Evaluation Facility.
- Provide primary and alternate points of contact for testing matters.
- Program and budget for the direct costs of NITFS testing (test fee), plus the associated equipment shipping, travel, and per-diem costs.

1.10.4 Geospatial and Imagery Standards Management Committee (G/ISMC)

The G/ISMC, chaired by the NIMA/~~ST/~~SESOIP, is the configuration management forum for the development and maintenance of the NITFS. The G/ISMC develops new imagery standards as appropriate. It is the Commanders In Chief (CINCs),

Services and Agencies (C/S/A) forum that reviews, analyzes, and evaluates NITFS requirements and proposed changes, and approves or disapproves their incorporation into appropriate standards. Supported by the DISA CFS, it maintains configuration control of the NITFS by deciding standardization issues arising during development, validation, testing, implementation, and operations impacting imagery system interoperability. Details regarding the G/ISMC are contained in JIEO Plan 9000, Supplement 1.

1.11 Test Program Funding

1.11.1 Test Funding Concept

1.11.1.1 DOD/Intelligence Community. Within the DOD/Intelligence Community, NITFS Test and Evaluation Program funding is shared by the NIMA/~~ST/SESOIP~~ and imagery system sponsors. The NIMA/~~ST/SESOIP~~ budgets and funds for all operational and maintenance expenses of the NITFS Test and Evaluation Facility (test equipment, software, test tool development, license fees, etc.). DOD/Intelligence Community and other system sponsors support NITFS testing by providing funding in the form of a fee for each test and/or retest.

1.11.1.2 Vendors. The JITC has been designated as a Major Range and Test Facility Base (MRTFB). As a result, commercial developers and vendors may obtain NITFS testing services on a reimbursable cost basis from the JITC.

1.11.2 Principal Funding Activities

1.11.2.1 Test sponsors must transfer [aan](#) NITFS test fee to the NITFS Test and Evaluation Facility prior to testing.

1.11.2.2 Sponsors will fund their own shipping costs, travel, per-diem, and consumable supplies associated with testing at the NITFS Test and Evaluation Facility.

1.11.2.3 Sponsors will fund the shipping, travel, per-diem, and consumable supplies incurred by the test team when tests are conducted at locations other than the NITFS Test and Evaluation Facility.

1.11.2.4 Commercial sponsors must enter into a "Terms and Conditions For Testing at the JITC Agreement" through the Fort Huachuca Directorate of Contracting prior to receiving test services.

1.11.3 Test Budgeting

Government sponsors must budget for NITFS testing of developmental imagery systems through the Planning, Programming, and Budgeting System (PPBS). Sponsors must ensure that a Military Service (or equivalent) Program Element Monitor (PEM) oversees their imagery system throughout its life-cycle to include NITFS testing through the programming and budgeting phases of the PPBS.

N-0105/~~0198~~
~~25 August 1998~~ Review Draft (Date)

1.12 Points of Contact

1.12.1 NITFS Test and Evaluation Program Management

National Imagery and Mapping Agency
ATTN: ~~Standards & Interoperability Div.~~
~~NIMA/ST/SESOIP~~ (Mail Stop P-24)
12310 Sunrise Valley Drive
Reston, VA 20191-3449
Phone: (703) 262-44~~1600~~
Fax: (703) 262-~~4404~~
URL: <http://www.nima.mil>

[National Imagery and Mapping Agency](#)
[ATTN: OIPS, \(Mail Stop L-66\)](#)
[3200 South Second Street](#)
[St. Louis, MO 63118-3399](#)
[Phone: \(314\) 263-4567](#)
[Fax: \(314\) 263-4813](#)

1.12.2 NITFS Test Information, Scheduling, Documents and Testing Request Forms

Joint Interoperability Test Command
NITFS Test and Evaluation Facility
ATTN: JTDB
Building 57305 ~~Brainard Road~~
Fort Huachuca, AZ 85613-7020
Phone: (520) 538-5458 or 5494
Fax: (520) 538-5257
STU: (520) 538-5458
URL: <http://jitc.fhu.disa.mil/nitf/nitf.htm>

1.12.3 Imagery Standardization and G/ISMC Information

DISA/JIEO/Center for Standards
10701 Parkridge Boulevard
Reston, VA 22091-4357
Phone: (703) 735-3535
Fax: (703) 735-3256
URL: <http://www.itsi.disa.mil>

1.12.4 Fort Huachuca Acquisition Services

[The Department of Interior](#)
[National Business Center, Acquisition Services Division](#)
[South West Branch](#)
[ATTN: DOI/NBC](#)

N-0105/~~9801~~

~~25 August 1998~~ Review Draft (Date)

P.O. Box 12924
Fort Huachuca, AZ 85670-2924
Phone: (520) 538-0418
Fax: (520) 533-1600

2.0 STANDARDS VALIDATION TESTING

2.1 General

2.1.1 Purpose

As changes or additions are nominated to the NITF Standard, they must be validated through testing prior to G/ISMC approval for implementation and addition to the compliance requirements of the NITFS Test and Evaluation Program. Validation testing ensures that the changes or additions to be included in the NITF Standard are technically correct, consistent, complete, and testable.

2.1.2 Validation Methodology

The process for validating a proposed standard or proposed change or addition to an existing standard is as follows:

2.1.2.1 Step 1. The service, functional, and/or performance requirements are fully identified and an appropriate authority ratifies that the requirements are valid. The test objectives and criteria are developed that will be used to ascertain whether the proposed solution satisfies the validated requirements.

2.1.2.2 Step 2. As the proposed standard is being written, compliance test objectives, criteria, and test cases are also written.

2.1.2.3 Step 3. A physical realization of the proposed standard must be implemented. The test procedures and tools needed to conduct compliance testing must also be developed independently of the developer, but in synchronization with the development of the sample implementation.

2.1.2.4 Step 4. The compliance test procedures and tools are used to verify that the sample implementation conforms to the proposed written standard. Based on compliance test results, the sample implementation is modified and re-tested until it adequately conforms with the proposed standard.

2.1.2.5 Step 5. Once the sample implementation has been verified as compliant to the proposed standard, the implementation is evaluated against the objectives and criteria defined in Step 1 to measure how well the proposed standard meets the original service, functional, and/or performance requirements. Upon successful completion of this step, the standard is considered to be validated. A natural outcome of the validation process is the creation of the Means of Testing (MOT), e.g. test procedures and tools, for testing products for compliance with the standard.

2.2 Requirements Definition

The technical, functional, and operational performance requirements, as applicable for any nominated changes or additions to the NITF Standard, must be clearly

defined and approved for validation testing by the G/ISMC. The requirements must be stated in sufficient detail to derive validation test objectives and evaluation criteria.

2.3 Test Funding/Planning

2.3.1 Funding

Based on the validation test objectives and evaluation criteria, the NITFS Test and Evaluation Facility will prepare a cost estimate to plan and conduct the validation test(s) and report the results of the validation. The NIMA/[ST/SESOIP](#) is responsible for obtaining any additional funding above that already budgeted/programmed for the NITFS Test and Evaluation Program.

2.3.2 Planning

The NITFS Test and Evaluation Facility will prepare the validation test plan for approval by the NITFS G/ISMC. The G/ISMC is responsible for establishing the performance requirements for the proposed capability and the criteria for measuring the adequacy of performance. A time-line within the validation test plan will provide milestones that outline the testing period to include the time that the test report should be published.

2.4 Test Execution

Standards validation testing will be conducted at the JITC NITFS Test and Evaluation Facility unless an alternate test site is approved by the NIMA/[ST/SESOIP](#). The NITFS G/ISMC is responsible for providing a sample implementation ~~which~~ that demonstrates the proposed change to the standard. The JITC will develop the test procedures and MOT required to test compliance to the proposed change or additions. Once the sample implementation has been tested as compliant to the new proposal, it will be tested and evaluated for adequacy of performance in accordance with the performance requirements established by the NITFS G/ISMC.

2.5 Test Reports

Upon completion of the validation testing, all accumulated test results will be integrated into a final validation test report. The final report will indicate the degree to which the proposed changes or additions met the requirement and performance criteria for validation. The test report will be forwarded to the G/ISMC with recommendation for addition to the NITF Standard or recommendation for disapproval.

N-0105/0198
~~25 August 1998~~ Review Draft (Date)

3.0 COMPLIANCE TEST AND EVALUATION

3.1 General

Imagery system sponsors request and sustain NITFS compliance using the procedures described in this section. Request and report formats are provided in Appendix B. Procedures are prescribed for the following activities:

- Initial Compliance Testing
- Compliance Retesting
- Derived Registrations
- Test Planning
- Test Execution
- Test Reporting
- Reporting Any Modifications To NITFS Configuration Items
- Reporting Latent Functional Problems with NITFS Tested Implementations

3.2 Initial Compliance Testing Administrative Procedures

3.2.1 Test Sponsor

The Test Sponsor will:

3.2.1.1 Prepare and submit the following items to the JITC:

- A letter, using the organization's letterhead, requesting the desired test
- NITFS Form CTR-1, Compliance Test Request (CTR)
- NITFS Form CTR-2, NITFS ~~System~~ Registration Data
- ~~NITFS Form CTR-3, NITFS Software Registration Data~~
- NITFS Form CTR-~~34~~, Alternate Test Site Request (if applicable)
- ~~NITFS Form CTR-5, Y2K System Awareness Checklist~~
- [JITC NITFS Customer Checklist \(see Appendix B\)](#)
- [Pack Capabilities Inventory \(see Appendix B\)](#)
- One copy of the implementation's technical manual(s) and operator manual(s)
- NITFS test fee

3.2.1.2 Submit the test request package to:

Joint Interoperability Test Command
 NITFS Test and Evaluation Facility
 ATTN: JTDB
 Building 57305 ~~Brainard Road~~
 Fort Huachuca, AZ 85613-7020

3.2.1.3 Transfer the NITFS Test fee to:

Joint Interoperability Test Command
 NITFS Test and Evaluation Facility
 ATTN: Financial Management Office (~~JTAF~~JTG)
 Building 57305 Brainard Road
 Fort Huachuca, AZ 85613-7020

3.2.1.4 Enter into a "Terms and Conditions For Tests" agreement with the Fort Huachuca ~~Contracting Office~~ Acquisition Services (commercial vendor sponsored tests only). Vendors may obtain a copy of the standardized "Terms and Conditions For Tests" agreement from the JITC. An official with the power to bind the company should sign in the space provided for Purchaser. A certification by a corporate officer that the agreement signature has the power to bind the firm to the agreement must also be provided. The signed "Terms and Conditions For Tests" should be returned to:

The Department of Interior
National Business Center, Acquisition Services Division
South West Branch
ATTN: DOI/NBC
P.O. Box 12924
Fort Huachuca, AZ 85670-2924
Phone: (520) 538-0418
Fax: (520) 533-1600

~~Directorate of Contracting~~
~~ATTN: ATZS-DKO-J~~
~~P.O. Box 12748~~
~~Fort Huachuca, AZ 85613-0748~~

3.2.2 JITC

The JITC NITFS Test and Evaluation Facility will:

- Review submitted documentation
- Provide a point of contact for coordination
- Schedule compliance testing
- Prepare test plan(s)
- Conduct compliance testing
- Prepare a test report and provide registration recommendations to the NIMA/~~ST/~~SESOIP
- Review and disseminate the test report to the test sponsor and/or implementation developer
- Prepare and disseminate a letter of registration to the test sponsor and/or implementation developer

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

3.3 Retesting Administrative Procedures

3.3.1 Test Sponsors

Test sponsors prepare and submit the following items to the JITC:

- A letter requesting retesting that includes the test sponsor's assessment of the impact on NITFS compliance of the changes made since the last test
- NITFS Form CTR-1, Compliance Test Request
- NITFS Form CTR-2, NITFS ~~System Test~~ Registration Data, noting changes since the last test
- ~~NITFS Form CTR-3, NITFS Software Registration Data, noting changes since the last test~~
- ~~NITFS Form CTR-4~~, Alternate Test Site Request (if applicable).
- One copy of each updated implementation technical manual(s) and operator manual(s)
- The test fee if it is determined that a retest is required

3.3.2 NITFS Test and Evaluation Facility

The NITFS Test and Evaluation Facility will:

- Review the retest request
- Provide a point of contact for coordination
- Determine if retesting is required
- Schedule, plan, and conduct testing, if required
- Prepare test report and compliance certificate, then forward the recommendations to the NIMA/~~ST/SESQIP~~
- Approve re-registration recommendations
- Prepare and disseminate a decision letter of re-registration

3.4 Derived Registration Administrative Procedures

System sponsors may request that registration be granted to a particular system in a derived manner based upon previous compliance tests of similar configurations. The derived certification may require a limited file exchange.

3.4.1 System Sponsors

In addition to the procedures outlined above for requesting system retesting, system sponsors desiring a derived system registration must also submit the following to the NITFS Test and Evaluation Facility:

- Written rationale for requesting derived registration including sponsor's assessment of impact on NITFS functionality of the proposed configuration.

- Brief report of any internal demonstration testing that has been done to substantiate that the proposed configuration is NITFS compliant.

3.4.2 NITFS Test and Evaluation Facility

The NITFS Test and Evaluation Facility will review the request for a derived registration and determine the level of testing required to register the system configuration. The level of testing required will generally be one of the following:

- If the new configuration is determined to be essentially identical to a previously tested implementation, a recommendation will be made to add the system to the NITFS Test Register.
- If the new configuration is slightly different from the previously tested implementation, an abbreviated test will be performed (over dial-up line when possible). If anomalies are identified during the abbreviated test, a full compliance test will be required. Otherwise, a recommendation will be made to add the system to the NITFS Compliance Register.
- If the new configuration is judged to pose a risk to NITFS compliance, a full compliance test will be required.

3.5 Test Planning

The JITC is responsible for developing a comprehensive test plan and associated procedures for fully testing compliance with the implementation requirements for the NITFS. The JITC will tailor the overall test plan for the specific test criteria, test procedures, and resources needed to conduct the testing for the implementation under test.

3.6 Test Execution

3.6.1 Location

Compliance testing will be conducted at the JITC NITFS Test and Evaluation Facility unless an alternate test site has been approved by NIMA/[ST/SESOIP](#).

3.6.2 Unpacking

All NITFS files received by the candidate implementation during the test will be displayed and visually examined for completeness and the correct placement of NITFS components. Large image viewing will be done through a random sampling of the full image focusing on areas of the image that have been annotated.

3.6.3 Packing

All NITFS test files created by the candidate implementation during the test will be examined visually and compared to control test files that have been processed by the NITFS Test and Evaluation Facility. Image, symbol, text and associated data will

N-0105/0198
~~25 August 1998~~ Review Draft (Date)

be checked for conformance with the standards. Field values will be checked for the appropriate values within the ranges allowed for compliant NITFS files.

3.7 Test Reports

Upon completion of testing, all accumulated results will be integrated into an individual NITFS compliance test report. The test report will indicate whether or not the implementation met the criteria for NITFS compliance. Items documented in the report include, but are not limited to: scope, methodology, test limitations, duration of each test, NITFS functional capabilities demonstrated, corrective actions taken during the tests, discrepancies observed, and overall conclusions and recommendations.

3.8 Reporting Modifications of NITFS Configuration Items

3.8.1 System Sponsors

System sponsors must report hardware and software modifications made to tested systems to the NITFS Test and Evaluation Facility by submitting the following items:

- One copy each of the system updated technical manual(s) and operator manual(s)
- NITFS Form CTR-2, NITFS ~~System~~ Registration Data, noting changes since the last submission
- ~~NITFS Form CTR-3, NITFS Software Registration Data, noting changes since the last submission~~
- A letter describing modifications and assessing the impact on NITFS compliance

3.8.2 NITFS Test and Evaluation Facility

The NITFS Test and Evaluation Facility staff will:

- Provide a point of contact for coordination
- Review the modification description
- Determine if re-testing is required
- Make recommendation to the NIMA/~~ST/~~[SESOIP](#)
- Schedule and conduct testing, if required
- Prepare the test report and forward the re-registration recommendation to the NIMA/~~ST/~~[SESOIP](#)
- Prepare and disseminate a letter of reregistration as warranted by the results of testing

3.9 Reporting Latent Functional Problems

3.9.1 System Sponsors

When functional or other problems are encountered with the NITFS or a specific implementation or component of the NITFS, system sponsors ~~shall~~will report the problem(s) to the NIMA/~~ST/SE~~SOIP using the following procedures:

- Prepare a letter identifying NITFS problems
- Submit two copies of the letter and any other supporting data for review

3.9.2 NIMA/~~ST/SE~~SOIP

The NIMA/~~ST/SE~~SOIP will coordinate the resolution of NITFS related problems

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

4.0 NITFS REGISTRATION

4.1 General

A registry of implementations successfully completing NITFS compliance tests is maintained by the NITFS Test and Evaluation Facility. The registry consists of a system register, a product register, a component register, and a register of available sample software. A register is also available listing those systems receiving CII Certifications.

4.1.1 NITFS System Compliance Register

The NITFS System Compliance Register identifies those systems that have successfully completed NITFS testing or have received a derived registration. It also contains the NITFS configuration items (identified by an '*') associated with the tested system. Any change to a system's NITFS configuration item(s) following registration must be reported to the NITFS Test and Evaluation Facility for assessment of impact on continued NITFS compliance and registration. The contents of the register reflect the information shown in Appendix B, [NITFS Form CTR-2](#).

4.1.2 NITFS Product Compliance Register

The NITFS Product Register will be maintained to expedite derived system registration requests based on product implementations that have previously been demonstrated to properly implement the attributes of the NITFS during a compliance test. The register will identify the software version and minimum hardware configuration items required to support the product. The fact that a software package or other product appears on the NITFS Product Register does not mean that any system which uses the product is NITFS compliant. Each time a software package or other product is ported to or loaded on a hardware configuration not listed in the System Compliance Register, the system developer/sponsor must submit a request for system registration. The contents of the register reflect the information shown in Appendix B, [NITFS Form CTR-3](#).

4.1.3 NITFS Component Compliance Register

The NITFS Component Register provides a means to register components and/or products that implement a portion of the NITFS system compliance requirements, but do not of themselves constitute a complete NITFS capable implementation. For example, a JPEG compression card, a CGM implementation, a TACO2 implementation, or a specialized Work Station may be tested for compliance with applicable portions of the NITFS and, if compliant, be added to the component register. The fact that a component appears on the NITFS component register does not mean that any system which uses the component is NITFS registered. System developers/sponsors must submit a request for NITFS compliance registration. The contents of the register will be determined by the specifics of those components

nominated for registration. Data elements of the component register will be appropriate extractions from the system compliance register.

4.1.4 NITFS Sample Software Register

The sample software register contains a list of software that has been made available to assist in implementing the NITFS. The sample software has been tested to determine the degree to which it is compliant with the NITFS. In some instances the purpose of developing the sample software was satisfied without resolving deficiencies identified during testing. A list of known deviations from the applicable portions of the NITFS suite of standards is available from the NITFS Test and Evaluation Facility.

4.1.5 NITFS CII Certification Register

The NITFS CII compliance register identifies those NITFS compliant systems which have been granted CII certification in accordance with CJCSI 6212.01 [AB](#), [Interoperability and Supportability of National Security Systems, and Information Technology Systems, 8 May 2000](#) [Compatibility, Interoperability and Integration of Command, Control, Communications, Computers, and Intelligence Systems, 30 June 1995](#). The CII Certification Test Program is described in JIEO Circular 9002, Requirements Assessment and Interoperability Certification of C4I and AIS Equipment and Systems, 23 January 1995.

4.2 Register Access

Copies of the registers are available by contacting the NITFS Test and Evaluation Facility. The registers are also available on the World Wide Web via the G/ISMC NITFS Technical Board (NTB) Home Page at URL <http://www.ismc.itsi-disanima.mil/ntb/ntb.html>.

4.3 Expiration of Registration

Entries in the system, product, and component registers expire two years from the date of entry. Sponsors must update their registration by submitting a request for reregistration. The NITFS Test and Evaluation Facility will review the requests and determine the degree of testing needed to update the register entry(s). The re-registration fee will be commensurate with the level of effort required to review the request, perform tests as necessary, and update the register entry.

N-0105/0198
~~25 August 1998~~ Review Draft (Date)

5.0 NITFS COMPLIANCE CRITERIA

5.1 General

5.1.1 Compliance Criteria

The NITFS compliance criteria are derived from the suite of NITFS documents. NITF file components, attributes, allowable field values, formats, and field lengths are fully described in the NITFS documents. Since the NITFS is very flexible, it has many options, the use of which must be constrained for implementation if file exchange interoperability is to be achieved. The criteria identify the features, capabilities, formats, field values, ranges, and associated boundary conditions of the NITFS against which an implementation is tested for compliance.

5.1.2 Pack/Unpack

For the purposes of this program plan, the term "pack" means to create or construct an NITF file within the set of conditions and constraints defined for compliance with the NITFS. The term "unpack" means to interpret and properly display imagery data (images and symbols) and accurately process associated information contained in [an](#) NITF file. In most instances, this includes the capability to accurately display and/or print the contents of an NITF file. Under some circumstances, unpacking a file results in a non-displayed product such as re-packing another file resulting from a translation or conversion process. For example, translation or conversion services may be supported by an imagery library or gateway server, often with no human involvement or intervention. In these cases, the resulting files will be evaluated using the applicable test criteria ~~which~~[that](#) pertain to the documented requirements of the specific interface involved. An implementation may be registered as having a pack-only capability, an unpack-only capability, or both a pack and unpack capability depending on the fielding intent and desire of the sponsor.

5.1.3 Compliance Principles

The NITFS compliance criteria contained herein are intended to strike a balance between fully implementing all the requirements in the standards and the planned operational requirements of the actual system(s) implementing the standard. The history of imagery systems is replete with examples of systems being deployed for use in environments for which they were not originally intended to operate. This fact drives the need to establish baseline requirements from the standards ~~that~~[which](#) are applicable to all implementations regardless of perceived operational requirements. Where clear USIGS Architectural guidance exists, the applicable test criteria for the required services and features will be selected from among the criteria established in this plan. The cardinal principles are:

5.1.3.1 The packing implementation ~~shall~~[will](#) ensure all produced NITF files are NITFS compliant within the bounds of the established complexity levels. When the

implementation also supports unpacking, it must be capable of properly unpacking (and portraying when applicable) any file that it is able to pack.

5.1.3.2 The unpacking implementation ~~shall~~will ensure the information from NITF files is presented as the originator intended, at least for the fundamental segments of the file (images, symbols (graphics), and text).

5.1.3.3 When unpacking NITF files with unrecognized content (e.g., content that cannot be properly interpreted or presented by the implementation, for example extension data), the implementation ~~shall~~will have a means to alert the system operator or administrator that the file(s) has unrecognized content in addition to what is being presented or interpreted.

5.1.4 Native Mode Rule

The Native Mode rule refers to the requirement that those implementations offering features or attributes in their native mode of operation that directly correlate with elements defined in NITF 2.1, such as supporting the creation of symbol annotation, will be required to support those features and attributes in accordance with NITFS.

5.2 NITFS Complexity Levels

Implementations of the NITFS are tested according to their ability to pack and/or unpack various CLEVELs of NITFS formatted files. This concept allows NITFS to be implemented on a wide range of hardware platforms with various levels of internal resources while maintaining a baseline level of interoperability between all compliance tested systems. For NITF 2.1, four CLEVELs have been defined, CL03, CL05, CL06, and CL07. A summary of the attributes of each CLEVEL is listed in Table 5-1. Files ~~shall~~will be marked at the lowest CLEVEL for which they qualify.

5.3 Elements of NITFS Compliance

Table 5-1 contains an overview summary of the NITF 2.1 compliance criteria for general reference; the specific attributes and compliance test requirements are described in the remainder of this chapter with additional details in the appendices. The specific field values, ranges, and boundary conditions of the NITF file format required for compliance testing are identified in Appendix D. The specific test conditions for ARIDPCM Compression, Bi-Level Compression, JPEG Compression, Vector Quantization Decompression, CGM, TACO2, and NITF version 1.1 and 2.0 backward compatibility are identified in Appendices E, F, G, H, I, J, and K respectively. ~~Tactical-Certain~~ systems may be required by program documents, and those systems with requirements to interface with tactical systems, must provide a means for exchanging (both transmit and receive) files using to support the TACO2 protocol, ~~even if they have pack only or unpack only capabilities.~~

Unpack applications ~~shall~~will be able to ~~fully interpret~~unpack any compliant files within the supported complexity level as noted in tables 5-1 and D-4. Pack applications ~~shall~~will ensure no files are produced which extend beyond the allowed

N-0105/~~0198~~

~~25 August 1998~~ Review Draft (Date)

features and ranges of the applicable complexity level of the file being packed.
Proper interpretation of ~~the~~ table 5.1 is further defined by the text of this chapter.

Table 5-1 is extracted from table A-10 of MIL-STD-2500B. The information is provided for convenience in the Test Program Plan, but the most current version in MIL-STD-2500B takes precedence over this document.

Table 5-1. NITFS 2.1 Compliance Criteria Summary*

Feature	Complexity Level			
	3	5	6	7
Common Coordinate System (CCS) Extent (origin) To max (row, column)	00000000, 00000000 To 00002047, 00002047	00000000, 00000000 To 00008191, 00008191	00000000, 00000000 To 00065535, 00065535	00000000,00000000 To 99999999,99999999
Maximum File Size	50 Mbyte - 1 byte (52,428,799 bytes)	1Gbyte -1 byte (1,073,741,823 bytes)	2 Gbyte -1 byte (2,147,483,647 bytes)	10 Gbyte-1 byte (10,737,418,239 bytes)
Image Size (Image(s) placed within CCS extent)	00000002-00002048 Rows X 00000002-00002048 Columns (R & C <= 2048)	00000002-00008192 Rows X 00000002-00008192 Columns (R or C > 2048)	00000002-00065536 Rows X 00000002-00065536 Columns (R or C > 8192)	00000002-99999999 Rows X 00000002-99999999 Columns (R or C > 65536)
Image Blocking (Rectangular blocks allowed)	Single and Multiple Blocks 00021 to -2048 Rows X 00021 to -2048 Columns	Single and Multiple Blocks 00021 to -8192 Rows X 00021 to -8192 Columns	Multiple blocking is mandatory for images that exceed 8192 pixels per row or column. 00021 to -8192 Rows X 00021 to -8192 Columns	
Monochrome (MONO) No Compression	Single Band 1, 8, 12, 16, 32, 64 Bits per pixel (NBPP) With and without LUT IC=NC, NM Image Mode (IMODE) = B			
Color 1 or 8-Bit (RGB/LUT) No Compression	Single Band 1, 8 Bits per pixel (NBPP) With LUT IC=NC, NM IMODE = B			
Color 24-Bit (RGB) No Compression	Three Bands 8 Bits per pixel per band (NBPP) No LUT IC=NC, NM IMODE = B,P,R,S			
Multispectral (MULTI) No Compression	2-9 bands 8, 16, 32, 64-bits per pixel per band -With and without LUT in each band IC= NC, NM IMODE =B, P, R, S	2-256 255 bands 8, 16, 32, 64-bits per pixel per band With and without LUT in each band IC = NC,NM IMODE =B, P, R, S		2- 999 bands 8, 16, 32, 64-bits per pixel per band With and without LUT in each band IC=NC,NM IMODE =B,P,R,S
JPEG DCT Compression Monochrome (MONO)	Single Band 8 & 12 Bit sample (NBPP) No LUT IC=C3, M3 IMODE B			

N-0105/0198
 25-August-1998 Review Draft (Date)

Table 5-1 NITFS 2.1 Compliance Criteria Summary* (cont'd.)

Feature	Complexity Level			
	3	5	6	7
JPEG DCT Compression Color 24-Bit (RGB)	Three Bands 8-Bit Sample per band (NBPP) No LUT IC=C3, M3 IMODE = P			
JPEG <u>DCT</u> Compression Color 24-Bit (YCbCr601)	Three Bands 8 Bit Sample per band (NBPP) No LUT IC=C3, M3 IMODE = P			
Downsampled JPEG DCT Monochrome (MONO)	Single Band Single Block Only 8-Bit sample (NBPP) No LUT IC=I1 IMODE = B (Image size may not exceed 2048 pixels per Row or Column)			
JPEG Lossless Compression Monochrome (MONO)	Single Band <u>Single Block Only</u> ♣ 8, 12 and 16 -Bit Sample (NBPP) ♣ No With or without LUT IC = I1 ♣ IMODE = B (Image size may not exceed 2048 Pixels per Row or Column. This feature is optional for implementation.) ♣			
JPEG Lossless Compression 24-Bit Color (RGB)	Three Bands 8-Bit Sample per band (NBPP) No LUT IC = C5, M5 <u>IMODE=P</u> (This feature is optional for implementation.)			
Bi-LEVEL Compression (MONO)	Single Band / Block 1-Bit per pixel (NBPP) With and without LUT IC = C1, M1 COMRAT = 1D, 2DS, 2DH IMODE = B (Image size may not exceed 2560 <u>8192</u> pixels per row by 8192 <u>2560</u> pixels per column) ♣			
Bi-LEVEL Compression (RGB/LUT)	Single Band / Block 1-Bit per pixel (NBPP) <u>With or without</u> LUT IC = C1, M1 COMRAT = 1D, 2D, 2DH IMODE = B (Image size may not exceed 2560 <u>8192</u> pixels per row by 8192 <u>2560</u> pixels per column)			
VQ Compression	Single Band/ <u>Block</u> 8 Bits per pixel (NBPP) 4x4 Kernel <u>organized in</u> 4 tables IC = C4, M4 IMODE = B			

Table 5-1 NITFS 2.1 Compliance Criteria Summary* (cont'd.)

Feature	Complexity Level			
	3	5	6	7
VQ Monochrome (MONO)	With and without LUT IMODE = B			
VQ 8-bit color (RGB/LUT)	With LUT IMODE = B			
Multispectral (MULTI) Individual Band JPEG Compression	2 to 9 bands 8, 12-bits per pixel per band No LUT IMODE =B, S IC = C3, M3	2 to 256-5bands 8, 12-bits per pixel per band No LUT IMODE =B, S IC = C3, M3		2 to 999 bands 8, 12-bits per pixel per band No LUT IMODE =B, S IC = C3, M3
Multispectral (MULTI) Multi-Component Compression (TBD004)	2 to 9 bands 8, 12-bits per pixel per band No LUT IMODE =B, P, S IC = C6, M6 (This feature is optional for implementation.)	2 to 2565 bands 8, 12-bits per pixel per band No LUT IMODE =B, P, S IC = C6, M6 (This feature is optional for implementation.)		2 to 999 bands 8, 12-bits per pixel per band No LUT IMODE =B, P, S IC = C6, M6 (This feature is optional for implementation.)
Elevation Data (NODISPLY)	Single Band 8, 12, 16, 32, and 64-Bits per pixel (NBPP) No LUT IC = NC, NM IMODE = B ICAT = DTEM, ISUBCATn = code from DIGEST Part 3-7-Annex B (or BCS-A spaces (0x20)) Applicable TREs:Standard Geospatial Support Data Extensions (GEOSDE), DIGEST Part 2 Annex D (This feature is optional for implementation.)			
Location Grid (NODISPLY)	Two Bands 8, 12, 16, 32, and 64-Bits per Pixel (NBPP) No LUT IC = NC, NM IMODE = B ICAT = LCGX, ISUBCATn = CGX, CGY or GGX, GGY Applicable TREs:Standard Geospatial Support Data Extensions (GEOSDE), DIGEST Part 2 Annex D (This feature is optional for implementation.)			
Matrix Data (NODISPLY)	12 to 9 Bands 8, 16, 32, and 64-bits per pixel per Band No LUT in any Band IC=NC,NM IMODE=B,P,R,S (This feature is optional for implementation.)	12 to 2565 Bands 8, 16, 32, and 64-bits per pixel per Band No LUT in any Band IC=NC,NM IMODE=B,P,R,S (This feature is optional for implementation.)		12 to 999 Bands 8, 16, 32, and 64-bits per pixel per Band No LUT in any Band IC=NC,NM IMODE=B,P,R,S (This feature is optional for implementation.)
Number of Image Segments Per File	0 to 20 Segments	0 to 100 Segments		
Number of CGM Graphic Symbol (Graphic) Segments Per File	0 to 100 Segments			

N-0105/0198

25 August 1998 Review Draft (Date)

Table 5-1 NITFS 2.1 Compliance Criteria Summary* (cont'd.)


Feature	Complexity Level													
	3	5	6	7										
Aggregate Size of GraphicSymbol (graphic) Segments Per File	1 Mbyte maximum	2 Mbyte maximum												
CGM GraphicSymbol (graphic) Profile	MIL-STD-2301A													
Number of Text Segments Per File	0 to 32 Segments													
Text Format Codes Supported	STA, UT1, MTF, U8S													
Text Data Per Segment	00001 to 99999 Characters Bytes													
Tagged Record Extensions (TRE)	Tagged Record Extensions may appear in the UDHD, XHD, UDID, IXSHD, SXSHD, and TXSHD fields and in the "TRE_OVERFLOW" DES regardless of CLEVEL. Only approved Tagged Record Extensions listed in the Data Extension Register are allowed.													
Number of Data Extension Segments (DESS) Per File	0 to 10 Only approved DES(s) listed in the Data Extension Register are allowed. 													
Currently Approved DESS	TRE_OVERFLOW STREAMING_FILE_HEADER													
Number of Reserved Extension Segments (RESS) Per File	None													
Currently Approved RESS	None													
<u>The following items are provided for information purposes</u>														
<u>CLEVEL Comparisons between NITF 2.0 and NITF 2.1</u>	All unpack capable implementations must properly interpret any compliant NITF 2.0 file of all comparable CLEVEL(s) as implemented for NITF 2.1. Implementations capable of packing NITF2.0 files must be able to create NITF 2.0 formatted files within the NITF2.0 constraints for the comparable CLEVEL(s) as implemented for NITF 2.1. <table><tr><th><u>NITF 2.1 CLEVEL</u></th><th><u>NITF 2.0 CLEVEL Equivalent</u></th></tr><tr><td>7</td><td>N/A</td></tr><tr><td>6</td><td>6</td></tr><tr><td>5</td><td>5, 4</td></tr><tr><td>3</td><td>3, 2, 1</td></tr></table>				<u>NITF 2.1 CLEVEL</u>	<u>NITF 2.0 CLEVEL Equivalent</u>	7	N/A	6	6	5	5, 4	3	3, 2, 1
<u>NITF 2.1 CLEVEL</u>	<u>NITF 2.0 CLEVEL Equivalent</u>													
7	N/A													
6	6													
5	5, 4													
3	3, 2, 1													

Table 5-1 NITFS 2.1 Compliance Criteria Summary* (cont'd.)

Feature	Complexity Level			
	3	5	6	7
NITF 1.1	All unpack capable implementations must properly interpret any compliant NITF 1.1 file.			
TACO2	Tactical systems, and those systems with requirements to interface with tactical systems.			

* Note: This table only provides an overview summary of compliance criteria. Proper interpretation of the table is specified in the text of this chapter and associated appendices.

♣ Items that need to be considered for change in 2500B, either changed in error or discovered to be wrong

5.4 NITFS Compliance Test Functional Requirements

5.4.1 NITF Pack

5.4.1.1 An implementation must be able to pack NITF compliant files within the constraints of the CLEVEL file types for which compliance is desired. An implementation must at least support packing the NITFS CLEVEL attributes corresponding with those available in its native mode of operation. For example, if the native mode supports annotation using [graphicsymbols \(graphics\)](#), the implementation must support [graphicsymbols \(graphics\)](#) annotation according to the NITFS.

5.4.1.2 If a system has an image capture or input device, the implementation must support the CLEVELs of the image size(s) that can be captured. Additionally, it must support the boundary conditions for the supported CLEVEL.

5.4.1.3 An implementation is not required to implement all NITF attributes available at any particular CLEVEL. The set of pack features implemented is somewhat at the discretion of the system sponsor. It is the responsibility of those acquiring or intending to use a particular implementation to ensure that the needed packing features are present. Whatever set of features are implemented, they must be done within the constraints of the appropriate CLEVEL and will be thoroughly tested.

5.4.1.4 An implementation that packs an NITF file must have a means to ensure that the file meets the specific complexity level intended and does not exceed the boundary conditions for that CLEVEL file type.

5.4.2 NITF Unpack

5.4.2.1 An implementation must be able to unpack any NITF compliant file at the CLEVEL for which compliance is being tested. The capability for unpack must be equal to or greater than the CLEVEL capability for packing. It must also unpack any NITF file packed at a lesser CLEVEL. Hence, there is a stringent requirement for an unpacker to be robust enough to handle all NITF file features (even if it can't pack

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

the feature) that may be invoked by any packing implementation of equal CLEVEL or below.

5.4.2.2 An implementation attempting to unpack a file packed at a higher CLEVEL may do its best to properly interpret and use the file. Upon detecting the unsupported CLEVEL of the file, the implementation must at least alert the system operator of the event and provide the option to abort continuation of the unpack process. This must be done without adversely disrupting the system operation (such as requiring a re-boot or re-initialization of the system). If the application allows the operator the option to proceed with the unpack operation, the operator must be alerted of the potential for disruption of operation and potential incompleteness of any resulting presentation.

5.4.2.3 As long as the segment offset lengths in the file header are accurate, the implementation must be able to skip past errored segments and any segments containing non-supported optional features or attributes. The implementation must otherwise properly interpret remaining file segments. The operator must be notified about segments which cannot be properly interpreted.

5.4.3 Nested CLEVELs

All NITF implementations must be capable of performing the basic NITFS file processing functions associated with each lower CLEVEL below that to which it is being tested/registered. All unpack implementations must be able to unpack any lower level compliant NITF file. All pack implementations must mark NITF files at the lowest CLEVEL that supports unpacking of the file, regardless of the maximum CLEVEL capability of the packing implementation. Generally, pack implementations should be able to pack NITF files of each CLEVEL below which it is capable in order to interchange files with other implementations of lower CLEVELs. When so required by the system sponsor, the system must be able to pack NITF files at each lower CLEVEL with contents that do not exceed the boundary conditions for each respective CLEVEL.

5.4.4 Common Coordinate System (CCS)

One of the differences between CLEVELs in Table 5-1 is the CCS size constraint. These constraints define the boundary rectangle of the combined displayable elements (image and [graphicsymbol \(graphic\)](#) segments) contained within an NITF file for each respective CLEVEL. All pack capable implementations must constrain the size and location of displayable elements within the boundary of the respective CLEVEL of the file being packed. All unpack capable implementations must support the full extent of the Common Coordinate System size of the CLEVELs for which compliance is sought and apply the background color as specified by the originator of the file.

5.4.5 Security Fields

The NITFS provides for security marking of NITF file headers and individual data segment headers within an NITF file. System sponsors and developers are encouraged to make full use of the inherent security features in NITF and help potential users and administrators meet security policy and procedural requirements. Implementations/products as well as operational sites may be required to obtain specific security accreditation(s) that are not within the scope of this document or NITFS compliance. However, there are certain commonly used marking procedures, that should be considered and adhered to. To facilitate good security practices, implementations should provide a means for "ultimate human control" over security markings of NITF files, while assisting them in validating classification markings.

5.4.5.1 Generate. Implementations provide users with assistance (through a combination of software interface mechanisms and software logic checks) in populating Security Fields in the NITF file header and segment subheaders.

NITF file header classification markings are set at an equal or higher classification of the data segment(s) in the file. I.e., an image cannot be marked a higher classification than the file header security markings. A file may be marked at a classification level higher than any single data segment as a result of "aggregate classification" of the data segments within the file.

When a user creates a new file, or alters an existing NITF file, implementations should actively alert the operator to check and verify the security markings of the file before final packing of the file is executed. For example: An operator unpacks a classified file, makes an alteration, and is then prompted by the application to review the security markings prior to final packing of the file.

Table xxxxx provides a guide on security fields inter-relationships based on commonly accepted security marking practices within the DoD community.

5.4.5.2 Interpret. For any file marked above "Unclassified," implementations interpret the internal NITF file security markings (fields) and present the information in a manner that is clearly rendered/displayed and made obvious to the user/operator.

Although these guidelines may vary based on specific regulations and local security policies, table xxxxx provides a guide as to how security fields are commonly populated.

5.4.65 JPEG Discrete Cosine Transform (DCT) Compression

All unpack capable implementations must support JPEG decompression using the DCT, Huffman Entropy Encoding, and 8-bit and 12-bit precision mode of operation. All pack capable implementations with requirements to support JPEG compression must implement JPEG DCT using the specifications and guidance contained within MIL-STD-188-198A and do so within the bounds of the criteria established for

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

unpacking. Implementations must support the use of restart markers in the compressed data.

5.4.76 Downsampled JPEG

All unpack capable implementations must support all features of Downsampled JPEG decompression. Pack capable implementations with requirements to support Downsampled JPEG compression must only pack these types of image segments within the bounds of the compliance criteria established for unpacking. All Downsampled JPEG image segments will be single band and single block; no larger than 2048 pixels per row and per column. (Note: These are constraints imposed by ~~the Downsampled JPEG specification~~ [N-0106-97](#)).

5.4.78 Lossless JPEG

Unpack capable systems may optionally support Lossless JPEG decompression. Pack capable implementations, with requirements to support Lossless JPEG compression, must only pack these types of image segments within the bounds of the compliance criteria established for unpacking.

5.4.89 Bi-Level Compression

All unpack capable implementations must support Bi-Level decompression using the Huffman Entropy Encoding. They must support unpacking in all three modes: One-Dimensional coding, Two-Dimensional coding with standard vertical resolution, and Two-Dimensional coding with high vertical resolution. Pack capable implementations with requirements to support Bi-Level compression must do so within the bounds of the criteria established for unpacking. All Bi-Level image segments will be single band and single blocked.

5.4.910 Vector Quantization (VQ) Compression

All unpack capable implementations must support VQ decompression and must comply with the specifications and guidance contained within ~~Mil-Std~~ [MIL-STD-188-199](#) and the criteria established for unpacking. Pack capable implementations with requirements to support VQ compression must only pack VQ compressed image segments within the bounds of the criteria established for unpacking. Producers of VQ compressed image segments are solely responsible for the means of generating code tables resulting in appropriate quality of the decompressed imagery.

5.4.101 ARIDPCM Compression

The use of ARIDPCM compression is limited to NITF 1.1 formatted files. ~~All~~ [Un](#)unpack capable implementations ~~may~~ [must](#) support decompression of ARIDPCM compressed image segments contained in NITF 1.1 formatted files. Pack capable implementations with requirements to support NITF 1.1 with ARIDPCM compression must do so within the bounds of the criteria established for unpacking.

5.4.1²⁴ CGM [GraphicSymbol \(graphic\)](#)s

All implementations must support unpacking NITF files that contain CGM [graphicsymbol \(graphic\)](#) segments. Those implementations that support annotation, using [graphiessymbols \(graphics\)](#) in their native mode, must support packing of CGM [graphicsymbol \(graphic\)](#) segments. The applicable profile of CGM for NITF2.1 is that described by MIL-STD-2301A. The applicable profile of CGM for NITF2.0 is that described by MIL-STD-2301.

5.4.1³² Bit-Mapped Symbols

The use of bit-mapped symbols is limited to legacy NITF 1.1 and 2.0 formatted files. All unpack capable implementations [required to support NITF 1.1 must support the unpacking and display of bit-mapped symbols \(graphic segments\)](#). All unpack capable implementations must support the unpacking and display of NITF version 1.1 and 2.0 files that contain bit-mapped symbols ([graphicsymbol \(graphic\)](#) segments). NITF 2.1 pack capable implementations supporting [graphiessymbols \(graphics\)](#) must only use CGM formatted [graphiessymbols \(graphics\)](#) unless they are re-packing (into NITF 2.0) legacy NITF 2.0 files with existing bit-mapped symbols.

5.4.1⁴³ Monochrome

All unpack implementations must support unpacking monochrome image segments with the following NBPP pixel depths: 1, 8, 12, 16, 32, and 64 bits per pixel with ABPP pixel depths of 1, 8, 12, 11-16, 32, and 64 bits per pixel. All pack capable implementations with the requirement to pack monochrome image data must do so within the bounds of the criteria established for unpacking. [Table D-4 has a representative listing of PVTYPES.](#)

5.4.1⁵⁴ Color

All unpack capable implementations must support the unpacking and display of color image segments. (The display device does not necessarily need to be a color display.) Both single band (NBPP=1 or 8) with look-up-table (LUT), and three band (NBPP=8 for each band, total of 24 bits) must be supported. All pack capable implementations with the requirement to pack color image data must do so within the bounds of the criteria established for unpacking. [Table D-4 has a representative listing of PVTYPES.](#)

5.4.1⁶⁵ Multispectral

All unpack capable implementations must support the unpacking and display of multispectral image segments containing up to nine bands for CLEVEL 3 implementations, 25⁶⁵ bands for CLEVEL 5 and 6, and 999 bands for CLEVEL 7 implementations. All pack capable implementations, with requirements to pack multispectral image data, must do so within the bounds of the criteria established for unpacking. [Table D-4 has a representative listing of PVTYPES.](#)

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

5.4.17 CIB/CADRG

5.4.186 NODISPLAY Image Representation

Unpack capable implementations may optionally support image segments with ~~matrix~~ data having an Image Representation (IREP) of NODISPLAY. When supported, the implementation must pass the data field content to the appropriate ~~matrix~~ data application according to the ICAT value for further processing. Implementations without a requirement to support nodisplay ~~matrix~~ data must not be adversely affected when image segments containing such data are encountered. At the very least the operator must be notified about segments that can not be properly interpreted. Pack capable implementations with requirements to support the NODISPLAY~~nodisplay~~ representation of ~~matrix~~ data must do so within the bounds of the criteria established for unpacking.

5.4.186.1 Elevation Data

Unpack capable implementations may optionally support exploitation of elevation ~~matrix~~ data contained within an image segment. Those systems that choose to implement this feature must do so in accordance with the criteria detailed in section 5.6.1.95-18.13, GeoSDE. In general, when a file contains an image segment with pixel data, a corresponding image segment with elevation ~~matrix~~ data and the appropriate Geospatial Support Data Extensions (GeoSDE), the implementation must be able to indicate the elevation for all pixels within the image pixel array that have elevation data associated with them. The implementation must also present the associated accuracy information given in the GeoSDE. All pack capable implementations with the requirement to pack elevation ~~matrix~~ data must do so within the bounds of the criteria established for unpacking.

5.4.186.2 Location Grid Data

Unpack capable implementations may optionally support exploitation of location grid data contained within an image segment. Those systems that choose to implement this feature must do so in accordance with the criteria detailed in section 5.18.135.6.1.10, GeoSDE. In general, if a file contains an image segment with pixel data, a corresponding image segment with location grid data and the appropriate GeoSDE, the implementation must be able to indicate the location coordinates for all pixels within the image pixel array that have location data associated with them. The implementation must also present the associated accuracy information given in the GeoSDE. All pack capable implementations with the requirement to pack location grid data must do so within the bounds of the criteria established for unpacking.

5.4.18.3 Other Geospatial Information Data (Matrix) (TBD015)

5.4.197 Image Data Masked Tables

All unpack capable implementations must properly interpret and use block and pixel mask tables. Unpack capable implementations must interpret and reconstruct the image upon display as called for by the masked tables properly use the pad pixel value when defined in masked tables.

5.4.19.1 A pad pixel value of zero must be treated as transparent.

5.4.19.2 A pad pixel value other than zero may be replaced with a user-defined value.

5.4.19.3 Pad pixel values may be ignored in histogram generation.

5.4.19.4 Pad pixels are not valid data and should not be used for interpretation or exploitation.

5.4.19.5 Pack capable implementations that insert block and/or pixel mask tables must populate them with accurate offset and related values.

5.4.2048 Tagged Record Extensions (TREs)

TREs may appear in the following fields: UDHD, XHD, UDID, IXSHD, SXSHD, TXSHD, and the "TRE_OVERFLOW" DES regardless of CLEVEL. Only G/ISMC approved Tagged Record Extensions are allowed as shown in the TRE portion of the NITFS ~~Tagged Extension Registry~~ Register. As a minimum, unpack capable implementations must at least ignore TREs and properly unpack the segment in which the TRE exists. If the implementation supports the interpretation of TREs, it must also do so when the TREs happen to be located in a TRE_OVERFLOW DES.

5.4.2149 Data Extension Segments (DESSs)

Only G/ISMC approved DESSs are allowed as shown in the DES portion of the NITFS ~~Tagged Extension Registry~~ Register. All unpack capable implementations must be able to interpret NITF files containing the STREAMING_FILE_HEADER DES (E003). If the implementation supports the interpretation of TREs, it must also support the TRE_OVERFLOW DES. As a minimum, unpack capable implementations must at least ignore other DESSs and properly unpack other supported file segments.

5.4.220 Reserved Extension Segments (RESSs)

Only G/ISMC approved RESSs are allowed as shown in the RES portion of the NITFS ~~Tagged Extension Registry~~ Register. As a minimum, unpack capable implementations must at least ignore RESSs and properly unpack other supported file segments.

5.4.234 TACO2

~~All tactical systems, and those s~~ Systems with requirements to interface with tactical systems implement TACO2 protocol, must provide a means for exchanging files

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

using the TACO2 protocol as well as demonstrate the capability to configure TACO2 parameter settings. ~~All such s~~Systems that support TACO2 must at least support and demonstrate point-to-point and Secure Telephone Unit-3rd Generation (STU-III) capability.

5.4.242 Communications Channels

All systems, and/or components within a system, must support the exchange of NITF files across whatever standard (ANSI, ISO, FIPS, Commercial, etc.) communication channel/protocol that is provided with the system/component. The file exchange capability must be supported between components within the system as well as between systems.

5.4.253 Physical Exchange Media

Systems with exchangeable media capability intended for distribution or exchange of imagery products, (e.g. magnetic disk, tape, optical disk, etc.) must be able to exchange NITF files via the media. All systems must provide some means to exchange NITF files for compliance test purposes. Most systems have some type of media peripheral(s) to at least support system operation and maintenance that can be used for this purpose. Alternative arrangements to complete compliance testing must be coordinated with the JITC Test and Evaluation Facility personnel when this is not the case.

5.4.264 NITF 1.1 Files

The requirement for NITF capable systems to unpack NITF 1.1 files is now optional. All NITF 2.1 unpack capable implementations must be able to unpack any NITF version 1.1 minimum compliant file (no waivers). All NITF ~~2.1~~ implementations are discouraged from packing NITF 1.1 files in order to limit the quantity of legacy 1.1 files that may have to be dealt with into the future.

5.4.275 NITF 2.0 Files

All NITF 2.1 unpack capable implementations must be able to unpack any NITF version 2.0 compliant file that falls within the equivalent NITF 2.1 CLEVEL definitions as defined in the JIEO Circular 9008. All pack capable implementations may optionally support the capability to pack NITF files within the constraints of NITF version 2.0 that fall within the equivalent NITF 2.1 CLEVEL structures as defined in JIEO Circular 9008. See Appendix K, Constraints for NITF 2.0 compliance.

5.4.286 ~~Year 2000 (Y2K)~~ Date and Time Fields

Implement~~ers~~ors must provide a statement summarizing their approach for resolving Y2K date and time associated issues. The summary must cover the NITF application, the operating system and the platform upon which the product resides.

~~5.4.26.1~~ The following is some primary examples of date usage:

- Calculate the duration between two dates
- Calculate date based on starting date and plus or minus duration
- Calculate day of week, day of month, week of year, and month of year
- Evaluate Leap Year correctly
- Compare two dates
- ~~convert~~ Convert between various date representations
- Reference same date data addressed with different variables
- Store, retrieve, and display date data
- Move date data into memory
- Move date data across all interfaces

~~5.4.26.2 NITFS Form CTR-5, Y2K System Awareness Checklist, in Appendix B provides the developer with questions that will assist in assembling the summary statement.~~

5.5 NITF 2.1 File Format Criteria - General

5.5.1 All fields designated for BCS-A alphanumeric character string information contained in the NITF header and subheader fields must be given in the printable BCS-A character set [space (0x20) through tilde (0x7E)] with eight bits (one byte) per character, the most significant bit always set to zero


5.5.2 Those header and subheader fields designated to allow ~~UT4~~ECS character strings must contain characters within the Basic Multilingual Plane (BMP) blocks Basic Latin and Latin-1 Supplement [0x20 through 0x7EF and 0xA0 through 0xFF] with eight bits (one byte) per character.

Note: A general agreement within the NITF community has been reached to not generate files with header values containing the ECS characters 0xA0 through 0xFF. However, implementations should be able to gracefully handle receiving files that contain the additional ECS characters.

5.5.3 All length sizes or character counts given in header and subheader fields must specify the number of eight-bit bytes.

5.5.4 All characters in fields designated as alphanumeric (BCS-A or ~~UT4~~ECS-A) must be left justified and padded with spaces as necessary to fill the field.

5.5.5 All characters in numeric fields (BCS-N) must be right justified and padded with leading zeroes as necessary to fill the field. The following characters are allowed in numeric fields only when designated in the field range definition: Numbers 0 to 9 (0x1 to 0x9), Slant bar (0x2F), plus (0x2B), minus (0x2D), and decimal point (0x2E).

5.5.6 The background color field must contain unsigned binary integers expressing the common coordinate system background color in red, green, blue order. 

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

Note: The value in the file background color is an unsigned binary integer and should not be identified as an UTF-8 character string. Implementors should be aware of this deviation from the ISO/IEC 12087-5, which identifies it as an UTF-8 character string.

5.5.7 All required fields must be present and must contain valid data within the specified ranges.

5.5.8 Conditional fields are present only if indicated by the value of one or more preceding fields. When a conditional field is present, it must contain valid data.

5.5.9 Coordinates for image and [graphicsymbol \(graphic\)](#) segments must be given as an ordered pair (r, c), where the first number (r) indicates the row and the second number (c) indicates the column within the common coordinate system. The positive row axis is oriented 90 degrees clockwise relative to the positive column axis. Each data segment's location coordinates (r, c) identify the location of its origin (0, 0) point relative to the location coordinates of the data segment to which it is attached. The location coordinates are relative to the origin of the common coordinate system when the segment ~~is attached to~~[has an](#) attachment level [of](#) 0 (unattached).

5.5.10 Data segments must be placed following the file header ~~fields~~ in the following order: image segment(s), [graphicsymbol \(graphic\)](#) segment(s), text segment(s), data extension segment(s), reserved extension segment(s). If one or more segments of a given data segment type is included, each segment must include the applicable segment subheader preceding the content data. If a data segment type is omitted, the subheader for that data segment type will also be omitted.

5.5.11 The following are the maximum file size constraints for each complexity level (CLEVEL).

5.5.11.1 For CLEVEL 3, unpack capable implementations must be able to unpack files with file sizes up to and including 50 Megabytes ([Mbytes](#)) minus one byte. Implementations capable of packing CLEVEL 3 files [shallwill](#) not pack files of size greater than 50 ~~Mega~~bytes minus one byte. (50 ~~Mega~~bytes - 1 = 52,428,799 bytes)

5.5.11.2 For CLEVEL 5, unpack capable implementations must be able to unpack files with file sizes up to and including one Gigabyte ([Gbyte](#)) minus one byte. Implementations capable of packing CLEVEL 5 files [shallwill](#) not pack files of size greater than one ~~Giga~~byte minus one byte. (1 ~~Giga~~byte - 1 = 1,073,741,823 bytes)

5.5.11.3 For CLEVEL 6, unpack capable implementations must be able to unpack files with file sizes up to and including 2 ~~Giga~~bytes minus 1 byte. Implementations capable of packing CLEVEL 6 files [shallwill](#) not pack files of size greater than 2 ~~Giga~~bytes minus one byte. (2 ~~Giga~~bytes - 1 = 2,147,483,647 bytes)

5.5.11.4 For CLEVEL 7, unpack capable implementations must be able to unpack files with file sizes up to and including 10 ~~Giga~~bytes minus 1 byte. Implementations

capable of packing CLEVEL 7 files ~~shall~~will not pack files of size greater than 10 Gbytes minus one byte. (10_Gbytes - 1 = 10,737,418,239 bytes)

5.5.12 ~~Y2K~~Date and Time Fields

5.5.12.1 All presentation to users of dates ~~will~~ use 4-digit year, regardless of internal or NITF file representation of the data.

5.5.12.2 All date sensitive manipulation or calculations will be done with due consideration for the appropriate century.

5.5.12.3 For NITF 2.0 and NITF 1.1 formatted files, the implementation must associate century according to the window date rules established by NIMA.

1. For NITF header and subheader date fields, the window date rule is:

- 00 to 59 indicates the century 2000
- 60 to 99 indicates the century 1900

2. The window date rule is product specific for dates within tagged record extensions. As a general rule, TREs have been adjusted through the versioning process to accommodate a four digit century. Where possible implementations should generate TREs using the latest version. When a TRE is generated or interpreted that contains a two-digit century the NIMA date rule can be applied with the following known exception: (TBD003 NIMA needs to define rules for dates other than those in NITF headers and subheaders.)

PIAPEA DOB (Date of Birth) field

3. Lacking a specific window date rule, the rule for NITF headers and subheaders will be applied.

5.5.13 ~~(TBD002)~~ Reduced and Enlarged Resolution ~~data sets~~Image Segments

Proper marking, identification and use of the image magnification/reduction factor value in the Image Magnification (IMAG) field of the Image Subheader are critical to a variety of image exploitation processes. This is particularly true, for example, when TREs containing support data referenced to the original source image row/column grid are preserved/copied into reduced (or enlarged) resolution image segments. To make proper use of the original (unmodified) support data, it is essential to maintain the correlation of the pixel value row/column indices in the magnified/reduced image array to their original row/column grid positions upon which the support data is based.

5.5.13.1 Unpack

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

5.5.13.1.1 Presentation of the pixel values in each image segment are aligned with the row/column reference grid of the Common Coordinate System (CSS) regardless of the individual image resolution as expressed in the IMAG field of each image segment. The first pixel of each image segment is located in the CSS at the row/column point indicated in the ILOC field relative to the attachment level reference point.

5.5.13.1.2 When using image support data (e.g., TREs) for image exploitation functions, the magnification (or reduction) factor, relative to the original source image resolution upon which the support data is based, must be included in the exploitation process.

5.5.13.1.3 When the IMAG field is populated with the designated default value, 1.0 (or 1.00), the image support data is interpreted as being directly correlated with the pixel array data in the image segment.

5.5.13.1.4 When decimal values (vice the /2, /4, /8, etc. convention) appear in the IMAG field to indicate the magnification (or reduction) factor, the potential impact of the available precision in the field must be considered in the 'error budget' of exploitation processes using the value.

5.5.13.1.5 When an ICHIPx TRE is available for the image segment, the reduction/magnification value in the SCALE_FACTOR field takes precedence over the corresponding, but potentially less precise, magnification/reduction value in the IMAG field. (Note: It is recommended that the implementation provide a means to alert the user if the values in the SCALE_FACTOR and IMAG fields are inconsistent when performing exploitation functions involving resolution considerations.

5.5.13.1.6 When exploiting JPEG 2000 compressed image data, multiple resolutions of the image data may be available for extraction from the compressed data stream. Some compressed data streams may not include all the data (code blocks) needed to extract the full resolution upon which the support data is based. The correlation of the pixel value row/column indices in the magnified/reduced image array to the row/column grid positions upon which the support data is based must be maintained regardless of which available resolution of the image data is extracted from the compressed data stream.

5.5.13.2 Pack

5.5.13.2.1 An NITF file may be packed with multiple image segments, some of which have different resolutions (different IMAG values). When doing so, the image segments are placed in the NITF Common Coordinate System (CCS) using the ILOC field values to identify the row/column position (relative to the attachment level reference point) of the first pixel of each image array in the CCS regardless of individual image segment resolution.

5.5.13.2.2 The value in the IMAG field of each image segment represents the resolution magnification (or reduction) factor of the segment's pixel array data as compared with the original source resolution of the image data upon which the image segment's support data is based.

5.5.13.2.3 When the resolution of the image pixel array data and associated support data directly correlate, the IMAG field is populated with the designated default value, 1.0 (followed by a space character), or alternatively, 1.00.

5.5.13.2.4 For reductions that are reciprocals of non-negative powers of two (2), the IMAG field is populated using the /2 (for 1/2), /4 (for 1/4), etc. convention. Otherwise, decimal values are used to indicate the magnification (or reduction) factor.

5.5.13.2.5 When the precision available in the IMAG field is not adequate to support the intended exploitation of the image and its support data, the ICHIPx TRE (SCALE FACTOR field) is used to contain the increased precision reduction /magnification value. The values placed in the IMAG and SCALE FACTOR fields must be consistent with one another, varying only in representation and precision. (Note: The factor value representation is the SCALE FACTOR field is the reciprocal of the value representation approach used in the IMAG field.

5.5.13.2.6 When the image data is JPEG 2000 compressed, the IMAG field value is populated with the highest resolution available for extraction from the compressed image data stream relative to the original source image data upon which the image segment's support data is based.

5.5.13.2.7 Alteration of pixels, such as anamorphic correction, is discouraged during generation of reduced or enlarged resolution segments. However, if warranted by programmatic or specification requirements, ICHIPx TRE will be employed to properly denote the alteration. HISTOx TRE will be used in the event the ICHIPx cannot properly document the change.

5.6 Image Segment Criteria

This section is used in conjunction with table 5-1 to establish criteria, based on CLEVEL, for each of the following:~~For all implementations:~~

5.6.1 Unpack

The implementation must be able to unpack NITF files containing single block image segment(s) and NITF files containing multiple-block image segment(s) comprised of the applicable pixel ranges for each respective CLEVEL. The implementation must support ~~block-size~~ block-single blocked images sizes from 2x2 pixels up to the maximum single block-size designated for the CLEVEL, and multiple-blocked images beginning at 1x1 pixel blocks up to the maximum image size designated for the CLEVEL. The single block pixel ranges for each CLEVEL are:

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

- 0002-2048 pixels by 0002-2048 pixels for CLEVEL 3
- 0002-8192 pixels by 0002-8192 pixels for CLEVELs 5, 6, and 7

Image segments are formatted as follows:

5.6.1.1 ~~Single band monochrome (shades of gray), single and multiple blocks, 1, 8, 12, 16, 32, and 64 bits per pixel, right justified, -with and without a LUT, compressed and uncompressed, with and without masking tables. ~~For 16 bits per pixel (NBPP=16):~~~~

- ~~□ 11 significant bits, right justified and left bits filled with zeros~~
- ~~□ 12 significant bits, right justified and left bits filled with zeros~~
- ~~□ 13 significant bits, right justified and left bits filled with zeros~~
- ~~□ 14 significant bits, right justified and left bits filled with zeros~~
- ~~□ 15 significant bits, right justified and left bit filled with a zero~~
- 16 significant bits

Note: LUTs are not allowed in a Lossy JPEG file.

5.6.1.2 Single band RGB color (RGB/LUT), single and multiple blocks, one and eight bits-per-pixel, with three LUTs (8 bits-per-pixel for each of R, G and B), uncompressed, with and without masking tables.

~~Note: Multiple blocks are not supported for one bit per pixel (Bi-Level) image segments.~~

5.6.1.3 Color (24-bit), three bands (RGB), Image representation (IREP) RGB, eight bits-per-pixel in each band, single and multiple blocks, without LUTs, JPEG compressed and uncompressed, with and without mask tables, image data ordered as follows:

- Band Interleaved by Block (IMODE B), uncompressed only
- Band Interleaved by Pixel (IMODE P)
- Band Sequential (Only valid for image segments with multiple blocks and multiple bands) (IMODE S), uncompressed only
- Band Interleaved by Row (IMODE R), uncompressed only

5.6.1.4 Color (24-bit), three bands (YCbCr), eight bits-per-pixel in each band, single and multiple blocks, without LUTs, with and without masking tables, JPEG compressed image data ordered as Band Interleaved by Pixel, IMODE P.

5.6.1.5 Bi-level compressed, single band, one bit-per-pixel, single block, with and without LUTs, with and without masking tables.

5.6.1.6 VQ compressed, single band, 8 bits-per-pixel, single and multiple blocks, with and without LUTs, with and without masking tables.

5.6.1.7 Multispectral, up to 999 bands (depending upon applicable CLEVEL, 8, 16, 32, or 64 bits-per-pixel for each band, single and multiple blocks with and without LUTs, uncompressed, with and without mask tables, image data ordered as follows:

- Band interleaved by block (IMODE B)
- Band interleaved by pixel (IMODE P)
- Band Interleaved by Row (IMODE R)
- Band Sequential (Only valid for image segments with multiple blocks and multiple bands) (IMODE S)

5.6.1.7.1 For the two band case, the implementation must be able to at least present either band of a two band multispectral image segment according to the value of the IREPBAND field. First priority must be given the band marked LU and the LUT must be applied for the presentation. If LU is not present, the implementation must present the band marked M. If neither LU nor M is present, the implementation must present may allow the first band as if it were marked M an operator the capability to select a specific band for display.

5.6.1.7.2 For the three band or greater case, the implementation must be able to present any three bands and any single band of a multispectral image as indicated by the values appearing in the IREPBANDn fields. First priority must be given to those bands marked R, G, and B. If no bandsbands are marked R, G, and B, the next priority goes to the first band marked LU. Lacking any bands marked LU, the implementation must present the first band marked M. When no bands are marked, the implementation must present may allow an operator the capability to select specific band(s) for display the first three bands as if they were marked R, G, and B.

5.6.1.7.3 Once the multispectral image is initially presented, the implementation may offer additional presentation options to the operator. For example, the operator may be allowed to select any of the bands, or combinations of the bands for display, print, or further processing.

5.6.1.7.4 Unpack capable implementations must support decompressing of JPEG DCT compressed multispectral image segments (IMODE B & S only).

5.6.1.7.5 Unpack capable implementations may optionally support decompressing of multi-component compressed multispectral image segments. (TBD004)

5.6.1.8 Downsampled JPEG, single band monochrome (shades of gray), single block, eight bits-per-pixel, without a LUT, JPEG compressed, without masking tables.

5.6.1.9 Elevation data

5.6.1.9.1 Support of image segments containing elevation data is optional. When supported, the implementation must be able to unpack and interpret the data in the single-band elevation data image segment as follows:

N-0105/0198

25-August-1998 Review Draft (Date)

1. The implementation will recognize that the image segment(s) contains elevation data when the ICAT field contains the value DTEM.
2. The ISUBCAT field value will be interpreted as the unit of elevation measure according to the codes identified in DIGEST [Table 7-1](#) [Part 3-7](#) Units of Measure Codes.
- ~~3. The implementation must interpret up to 20 elevation grid segments that are associated with a single image segment.~~
- ~~4.3. The implementation must interpret the ratio of image pixels to grid elements so that the appropriate grid element is identified with the appropriate pixel of the associated image segment.~~
- ~~4. The implementation must return an elevation value representative of each posting. If interpolation is used, the implementation must employ the interpolation algorithm defined in DIGEST Part 2, Annex D.1.2.4.~~
5. Calculation of elevation must not presume greater vertical and horizontal accuracy than the [support data provides for.](#) ~~within the support data of the image segment.~~
- ~~6. When elevation points are less frequent than pixel values of an image segment, the system must interpolate between grid points.~~
- ~~7.6. In the instance that two elevation grid segments overlap, the~~ [eat](#) ~~segment with the highest display level will have precedence when displaying elevation.~~

5.6.1.10 Location grid data. Support of image segments containing location grid data is optional. When supported, the implementation must be able to unpack and interpret the data in the two-band location grid data image segment as follows:

1. The implementation will recognize that the image segment(s) contains location data when the ICAT field contains the value DTEM.
2. The ISUBCAT field value will be interpreted as either CGY and CGX for cartographic or GGY and GGX for geographic location values.
3. The implementation must ~~i~~interpret up to [20-99](#) location grid segments that are associated with a single image segment.
4. The implementation must interpret the ratio of image pixels to grid elements so that the appropriate grid element is identified with the appropriate pixel of the associated image segment.
5. Calculation of location must not presume greater accuracy than the data within the support data of the image segment.

6. For each location grid the implementation must interpret both geographic and Cartesian location values.
7. When location points are less frequent than pixel values of an image segment, the system must interpolate between grid points as defined in DIGEST, part 2 Section 10.
8. In the instance that two elevation grid segments overlap, that segment with the highest display level will have precedence when displaying elevation.

5.6.1.11 Matrix data. The support of Matrix data is optional. Since there is no means to identify the meaning or significance of the matrix data, packers of such data must externally inform unpackers of the data as to the meaning of the data. Once community utility of specific types of matrix data has been established and documented, an explicit ICAT code for the data will be established.

5.6.1.11.12 Unpack. Upon receipt of files with image segments of ICAT = MATR, unpackers must at least be able to skip past this segment and unpack other segments within the file. The operator must be alerted that the file contained this type of image segment.

5.6.1.12 Pixel Value Type

An implementation must be able to unpack files with the following pixel value types:

(Note: Testing of some of the following depends on when they become available in the community; i.e., 7- and 16-bit imagery.)

1. Pixel value type B (Bi-Level); NBPP = 1; ABPP = 1.
2. Pixel value type INT (unsigned Integer); NBPP = ~~2 to~~ 8, 12, 16, 32, and 64; ABPP = 2 to ~~16, 32, and~~ 64. [Issue for Steve re: ABPP ranges](#)
3. Pixel value type SI (Signed Integer); NBPP = ~~2 to~~ 8, 12, 16, 32, and 64; ABPP = 2 to 16, 32, and 64.
4. Pixel value type R (Real); 32 bit and 64 bit floating point representation; NBPP = 32 and 64; ABPP = 32 and 64.
5. Pixel value type C (Complex); the values represented with real and imaginary parts; each in 32-bit floating point representation and appearing in adjacent blocks, first real, then imaginary. NBPP = 64; ABPP = 64.

5.6.1.13 ICORDS/IGEOL

5.6.1.13.1 Implementations that support geographic location information contained in the image segment subheader must be able to interpret one or more of the

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

coordinate representation types specified in the Image Coordinate Representation (ICORDS) field. The following are valid values found in the ICORDS field:

1. D indicates Geographic coordinates of Latitude and Longitude expressed in decimal degrees.
2. G indicates Geographic coordinates, Latitude and Longitude expressed in degrees, minutes, seconds.
3. U indicates UTM expressed in Military Grid Reference System (MGRS) form.
4. N indicates UTM coordinates, Northern ~~h~~Hemisphere.
5. S indicates UTM coordinates, Southern ~~h~~Hemisphere.

~~NOTE~~Note: The above values are different from those used in NITF 2.0, see Table IV in MIL-STD-2500A.

5.6.1.13.2 Implementations that support geographic location information must be able to interpret the four corner location data points in the following order, from the upper left corner of the image clockwise ending at the bottom left corner of the image.

5.6.1.13.3 Implementations must not infer, imply, or display pixel precision greater than that represented in the image segment IGEOLO field. Since no projection or accuracy is associated with the corner coordinates in the image subheader (the geodetic reference system is defined to be WGS84), the implementation must not use the data for other than determining approximate location. Systems must not use these coordinates for precise positioning or measurements.

5.6.1.13.4 Implementations must resolve instances ~~in UTM~~ where any of the four corner coordinates are not in the same hemisphere (Northern or Southern).

5.6.1.14 ICAT/ISUBCAT

Generally, code values in the ICAT and ISUBCAT have no defined significance when unpacking an image segment. They are simply informational (often used for cataloging purposes). In some cases, the code values in the ICAT and ISUBCAT fields have impact on the interpretation of data values during the unpack processes.

5.6.1.14.1 The following ICAT and associated ISUBCAT code values are generally provided for informational or cataloging purposes only. No specific handling or presentation requirements are specified when unpacking.

1. ICAT = VIS, SL, TI, FL, RD, EO, OP, HR, CP, BP, SAR, FP, VD, MAP, PAT, LEG; where ISUBCAT = Spaces.

2. ICAT = IR, MS or HS; where ISUBCAT = the wave length of the associated data in the band.
3. ICAT = MATR; where ISUBCAT contains FACC codes from DIGEST Part 4 Annex B ~~is undefined~~.

5.6.1.14.2 The following ICAT and associated ISUBCAT code values require special handling during the unpack process.

1. ICAT = LOCG, where ISUBCATn = CGX, CGY, GGX, GGY.
2. ICAT = BARO, DEPTH, or DTEM where ISUBCAT = unit of measure code from DIGEST part Part 3 annex B-7.
3. ICAT = SARIQ; where ISUBCATn = I, Q or M, P
4. ICAT = WIND or CURRENT, where ISUBCATn = SPEED and DIRECTION.

5.6.2 Pack

5.6.2.1 The implementation must be able to pack NITF files with either a monochrome image segment(s) or a color image segment(s) (if color capable in native mode, must be color capable in NITF mode) ~~that does not exceed the maximum pixel size and blocking constraints as identified in the Unpack paragraph 5.6.1. The implementation must ensure that the operator cannot create files that exceed the maximum unpack boundary conditions for the respective CLEVEL.~~ Optional pack implementations shall will follow the same test criteria as specified for unpack.

5.6.2.2 The implementation may optionally pack monochrome (1, 8, 12, 16, 32, 64bpp) single band (IREP) MONO imagery.

5.6.2.32 The implementation may optionally pack Single band RGB color (RGB/LUT) imagery.

5.6.2.43 The implementation may optionally pack Color (24-bit), three bands (RGB), Image representation (IREP) RGB, eight bits-per-pixel in each band.

5.6.2.54 When packing a 3-band 24-bit color image segment using JPEG compression, only IMODE P is allowed.

5.6.2.65 The implementation may optionally pack one bit-per-pixel image segments, with and without a LUT.

5.6.2.76 The implementation may optionally pack VQ compressed image segments. VQ reRe-compression of decompressed VQ image segments is prohibited; however, a decompressed VQ image segment may be packed in its uncompressed state (NC

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

or NM) or in its original compressed form (C4 or M4). Extracted portion(s) of a VQ compressed image may be repacked using the original code book and codes from the original coded pixel data.

5.6.2.87 The implementation may optionally pack multispectral image segments. A multispectral image segment must have at least two bands and no more than 999 bands. The IREPBANDn fields must be populated within the criteria established for unpacking multispectral images. The implementation may optionally compress multispectral image segments using JPEG DCT or the multi-component compression algorithm.

5.6.2.98 The implementation may optionally pack Downsampled JPEG compressed image segments.

5.6.2.109 Elevation grid data. The implementation may optionally pack image segments containing elevation data.

5.6.2.109.1 The generation of image segments containing elevation data is optional. When supported, the implementation must be able to pack elevation data in the single-band elevation data image segment as follows:

1. The implementation will enter the value DTEM to the ICAT field of the image subheader.
2. The implementation will enter the unit of elevation value (codes identified in DIGEST Table 7-1 Units of Measure Codes) to the ISUBCAT field of the image subheader.
3. The implementation must not exceed 20 elevation grid segments per single image segment.

5.6.2.110 Location grid data. The implementation may optionally pack image segments containing location grid data.

5.6.2.110.1 The generation of image segments containing location grid data is optional. When supported, the implementation must be able to pack location grid data image segment as follows:

1. The implementation will enter the value LOCG to the ICAT field of the image subheader.
2. The implementation will apply either CGY and CGX_i for cartographic_i or GGY and GGX_i for geographic_i location values in the ISUBCAT field of the image subheader.
3. The implementation must not exceed 20 elevation grid segments per single image segment.

5.6.2.124 Matrix data. The implementation may optionally pack image segments containing matrix data. Since there is no means to identify the meaning or significance of the matrix data, packers of such data must externally inform unpackers of the data as to the meaning of the data. Once community utility of specific types of matrix data has been established and documented, an explicit ICAT code for the data will be established.

5.6.2.124.1 Packers of image segments with ICAT = MATR data must do so in accordance with all criteria established for packing of imagery segments.

5.6.2.132 Pixel Value Type An implementation may pack files with any of the following pixel value type:

1. Pixel value type B (Bi-Level); NBPP = 1; ABPP = 1.
2. Pixel value type INT (unsigned Integer); NBPP = 2 to 8, 12, 16, 32, and 64; ABPP = 2 to 16, 32, and 64.
3. Pixel value type SI (Signed Integer); NBPP = 2 to 8, 12, 16, 32, and 64; ABPP = 2 to 16, 32, and 64.
4. Pixel value type R (Real); 32-bit and 64-bit floating point representation; NBPP = 32 and 64; ABPP = 32 and 64.
5. Pixel value type C (Complex); the values represented with real and imaginary parts; each in 32-bit floating point representation and appearing in adjacent blocks, first real, then imaginary; NBPP = 64; ABPP = 64.

5.6.2.143 ICORDS/IGEOL

5.6.2.143.1 Implementations that support geographic location information may populate the IGEOL field with the approximate geographic location corner points using any of the coordinate representations specified for the Image Coordinate Representation (ICORDS) field. The following are valid values for the ICORDS field:

1. D indicates Geographic coordinates of Latitude and Longitude expressed in decimal degrees.
2. G indicates Geographic coordinates, Latitude and Longitude expressed in degrees, minutes, seconds.
3. U indicates UTM expressed in Military Grid Reference System (MGRS) form.
4. N indicates UTM coordinates, Northern Hemisphere.
5. S indicates UTM coordinates, Southern Hemisphere.

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

~~NOTE~~Note: The above values are different from those used in NITF2.0.

5.6.2.1~~43~~.2 When populating the IGEOLO field, implementations must apply the four corner location points in the following order: from the upper left corner of the image (Row 0, Column 0) clockwise ending at the bottom left corner of the image (Max Row, Column 0).

5.6.2.1~~43~~.3 Implementations must not populate the IGEOLO fields with more precision than warranted, given the source of the information.

5.6.2.1~~54~~ ICAT/ISUBCAT

5.6.2.1~~54~~.1 An implementation may pack files using any of the following ICAT/ISUBCAT codes:

1. ICAT = VIS, SL, TI, FL, RD, EO, OP, HR, CP, BP, SAR, FP, VD, MAP, PAT, LEG; where ISUBCAT = Spaces.
2. ICAT = IR, MS or HS; where ISUBCAT = the wave length of the associated data in the band.
3. ICAT = LOCG, where ISUBCATn = CGX, CGY, GGX, GGY.
4. ICAT = SARIQ; where ISUBCATn = I, Q or M, P.
5. ICAT = BARO, DEPTH, or DTEM where ISUBCAT = unit of measure code from DIGEST.
6. ICAT = WIND or CURRENT, where ISUBCAT = SPEED and DIRECTION.

5.6.2.1~~65~~ When a file is created from a pre-existing uncompressed image segment that is going to be transmitted as it is being compressed (near real time compression), and all information in the file is known with the exception of the total file size and first image segment size (based on contents of the initial file, the lengths of all other data elements are known), only a completed file header will be contained in the "STREAMING_FILE_HEADER File Header, DES (E003)" and the file itself may contain other data elements. If the file results from a near real time collection process, it must contain only a single image, and the "STREAMING_FILE_HEADER, DES" will contain a completed file header, first image subheader and associated tag data included in the extension area if required. In either case, the Steaming File Header DES must be the last segment in the file.

5.7 Multiple Image Segment Criteria

5.7.1 For CLEVELS ~~S 3 and 5~~, the IUT interprets files with up to 20 image segments.

5.7.2 For CLEVELS ~~5, 6, and 7~~, the IUT interprets files with up to 100 image segments.

5.7.3 For CLEVELS ~~3 and 5~~, the IUT does not generate files which have more than 20 image segments.

5.7.4 For CLEVELS ~~5, 6,~~ and 7, the IUT does not generate files which have more than 100 image segments. These implementations must be able to create compliant files that are downward compatible (no more than 20 total image segments per file) with lower CLEVELS.

5.7.5 Image segments are properly positioned within the common coordinate system according to the coordinates identified in the image subheaders.

5.7.6 All image segments in a file must conform to the compliance criteria established for image segments in paragraph 5.6.

5.8 Image Compression Criteria, JPEG

All unpack capable implementations must support JPEG decompression using the DCT, Huffman Entropy decoding, with both 8-bit and 12-bit precision modes of operation. Implementations must support the use of restart markers in the compressed data. Similarly, all pack capable implementations with the requirement to support JPEG compression must implement JPEG DCT compression in accordance with the specifications and guidance contained within MIL-STD-188-198A and do so within the bounds of the criteria established for unpacking.

5.8.1 JPEG, Sequential DCT Lossy

5.8.1.1 The IUT must supports the Sequential DCT based modes of compression using Huffman Entropy encoding. The image compression field of the image subheader is set to C3 and/or M3 when the image has been compressed using JPEG DCT. The COMRAT field is used to identify the imbedded Q- and Huffman Tables per table D-4, COMRAT Field of the image subheader is set to 00.0.

5.8.1.2 The IUT must supports eight bit and 12 bit source sample precision for all CLEVELS. When the source sample precision is two through seven bits, the data must be converted to eight bits. If the source sample precision is 9 through 11 or more than 12 bits, the data must be converted to 12 bits-per-pixel for compression. A recommended but not mandatory conversion process is described in paragraph 6.2 of MIL-STD-188-198A.

5.8.1.3 The encoder must generate the full interchange format. Full interchange JPEG format is a data stream containing all the tables, markers and segments necessary to decode and render the compressed image. The use of default or pre-positioned tables to decompress an image is prohibited. Note: This restriction also applies to packing of NITF 2.0 files.

5.8.1.4 For monochrome imagery and color (RGB) imagery compressed as RGB, the quantized DCT coefficient accuracy from the DCT based encoder is within +/- 42 for each coefficient, when compared to reference test data created from a double

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

precision reference encoder. (ISO/IEC 10918-2 Digital Compression and Coding of Continuous-tone Still Images, Part II: Compliance Testing).

5.8.1.5 Once the criteria in paragraph 5.8.1.4 has been met, RGB color test images transformed into YCbCr color space and JPEG encoded by the IUT must have the same general appearance when decoded and displayed as the test images which were encoded, decoded, and displayed in RGB color space by the IUT.

5.8.1.6 The decoder interprets the full interchange format.

5.8.1.7 The decoder interprets the abbreviated interchange format (legacy NITF 2.0 only).

5.8.1.8 For monochrome and color (RGB) imagery compressed as RGB, the output of the DCT based decoder, when passed through a reference Forward DCT (FDCT) and Quantizer, is accurate to within +/- 42 for each coefficient, when compared to reference test data created from a double precision reference decoder. (ISO Draft CD 10918-2 Digital Compression and Coding of Continuous-tone Still Images, Part II: Compliance Testing).

5.8.1.9 Once the criterion in paragraph 5.8.1.8 has been met, JPEG encoded YCbCr test images decoded and displayed by the IUT must have the same general appearance as the RGB equivalent compressed images when decompressed and displayed in RGB color space by the IUT.

5.8.1.10 The encoder must include the applicable Quantization Tables (Q-Tables) as well as Huffman Tables (H-Tables) in the compressed data stream.

5.8.1.11 The decoder makes use of Q-Tables when included in the JPEG header.

~~5.8.1.12 The IUT supports recommended Q-Tables, Q1 through Q5, for data type 0 and for future image data types, as tables are approved by the NITFS G/ISMC.~~

5.8.1.123 The IUT makes use of the Binary Digits (BITS) and Huffman Values (HUFFVALS) tables included in the JPEG header.

5.8.1.134 If the IUT is capable of generating custom BITS and HUFFVALS tables, they are generated in accordance with Appendix C of the JPEG MIL-STD-188-198A.

5.8.1.145 If the Define Q-Table (DQT) marker is present in the compressed data, the table specified by the DQT marker takes precedence over any table specified by the Compression Rate Code (COMRAT) field in the NITF image subheader. Note: This restriction also applies to packing of NITF 2.0 files.

5.8.1.156 If an IUT can generate a custom quantization table, that Q-Table must be structured in accordance with MIL-STD-188-198A.

5.8.1.1~~67~~ The encoder includes restart marker code(s) in the entropy encoded data stream. The encoder must ~~be able to~~ place at least one restart marker code per ~~eight~~ pixel rows (one row of Neighborhoods). The encoder must place no more restart marker code(s) than one per neighborhood.

5.8.1.1~~78~~ The entropy decoder must re-synchronize the decompression at the next restart marker when data is corrupted in the entropy encoded stream.

5.8.1.1~~89~~ JPEG entropy decoders shall will be able to decode and display a JPEG compressed image in which no more than 10% of the restart intervals in the compressed data stream contain errors. JPEG entropy decoders shall will recognize the following as errors:

1. Restart Marker appearing too early in the data stream.
2. Restart Marker appearing too late in the data stream.
3. Restart Marker missing from the data stream.
4. Unknown Huffman code in the data stream.

5.8.1.1~~2019~~ When the entropy decoder detects any of these errors in the compressed JPEG data stream, the imagery implementation must identify the corrupted data in the decoded image. This can be accomplished by reporting or replacing the corrupted restart interval with a suitable pattern so that when the decoded image is displayed, it is apparent that the compressed data stream had an error. This pattern shall will be limited to the Re-Start Marker (RST) Interval(s) in which the error occurred. All RST intervals without errors must be decoded and displayed.

5.8.1.1~~204~~ The IUT uses default HUFFVALS & BITS tables when not found in the JPEG stream (legacy NITF 2.0 files only).

5.8.2 JPEG, Sequential DCT Lossy with Post Processing Extensions

5.8.2.1 An unpack implementation may optionally support post-processing of JPEG decompressed pixel data when the IOMAPA tagged record extension is indicated with the image segment. If the implementation supports this option, the criteria of paragraph 5.18.8 IOMAPA apply.

5.8.2.2 A pack implementation may optionally pre-process image pixel data prior to JPEG compression. When doing so, only the processes allowed in the IOMAPA tagged record extension are allowed. The IOMAPA extension must be associated with the image segment and its fields must be populated with the constraints established for the packing of the IOMAPA extension as detailed in para-graph 5.18.8.

5.8.3 JPEG, Downsampled JPEG

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

5.8.3.1 Compression. To verify that the IUT properly implements the downsampled phase of the downsample JPEG algorithm, the IUT must implement the JPEG DCT 8-bit per pixel compression in a manner to accept externally provided Huffman and Quantization tables. JITC will provide these tables during compliance testing. Alternately, the IUT must make available a file containing the actual downsampled pixel values before JPEG compression.

5.8.3.1.1 The IUT encoder must limit the use of Downsampled JPEG to monochrome image segments that are single blocked and are no larger than 2048 by 2048 pixels.

5.8.3.1.2 The IUT supports the sync based mode for downsampling.

5.8.3.1.3 The Image Compression (IC) field of the image subheader is set to I1 when the image has been compressed using the Downsampled JPEG compression algorithm.

5.8.3.1.4 The IUT supports 8-bit source sample precision for all CLEVELs and should specifically follow the CLEVEL range specification set by JPEG.

5.8.3.1.5 Downsampling supports anti-aliasing sampling.

5.8.3.1.6 Downsampling only uses sampling ratios that are greater than one.

5.8.3.1.7 Downsampling is performed twice, once for each respective dimension; rows and columns.

5.8.3.1.8 Downsampling clamps to an integer multiple of 8 pixels for both the horizontal and vertical dimensions.

5.8.3.1.9 Downsampling mirrors the edge of the original image before downsampling.

5.8.3.2 De-Compression. To verify that the IUT properly implements the upsample phase of the downsample JPEG algorithm, the IUT must implement the JPEG DCT 8-bit per pixel decompression in the following manner. The IUT must be able to save to an NITF file the output of the JPEG DCT decompressor module, and the output of the upsample algorithm before further processing to either takes place. ~~i.e.~~ i.e. remapping by the video driver for display.

5.8.3.2.1 The IUT supports the sync based mode for upsampling.

5.8.3.2.2 The bit depth (bits per pixel) remains the same throughout the process (downsampling->JPEG Compression->JPEG Decompression->upsampling).

5.8.3.2.3 When error(s) in the decompression process occurs in the data stream, the IUT must replace the encoded/decoded image file corrupted data with a pattern so that when the image is displayed it is apparent that the compressed image data

had an error. This pattern ~~shall~~will be limited to the upsampled pixels corresponding to the JPEG RST interval(s) in which the error occurred. All RST intervals without errors must be decoded and displayed.

5.8.3.2.4 Upsampling only uses sampling ratios that are less than one.

5.8.3.2.5 Upsampling is performed twice, once for each respective dimension; rows and column.

5.8.3.2.6 Frequency of the original signal matches the frequency of the upsampled signal.

5.8.3.3 File Compliance.

5.8.3.3.1 Files with Downsampled JPEG compressed image segments and overlay segments must adhere to location, display level and attachment level criteria.

5.8.3.3.2 Pixel locations will be the same before downsampling and after upsampling. (Visually it may appear that there has been some movement due to the JPEG compression/de-compression algorithm's use of neighborhoods).

5.8.3.3.3 IUT supports 8-bit monochrome images without LUT.

5.8.3.3.4 IUT supports downsampling/upsampling of both even and uneven image sizes.

5.8.3.3.5 IUT supports single blocked image segments.

5.8.3.3.6 The COMRAT field of the image subheader is set to 00.0 or 04.0, see Table D-4, COMRAT Field.

5.8.4 JPEG, Lossless

5.8.4.1 The IUT supports the lossless sequential mode of compression and decompression using Huffman Entropy encoding and decoding for 8, 12, 16 and 24-bpp source imagery. The compression field of the image subheader must be set to C5 or M5 when compressing the image using Lossless (sequential) JPEG-DPCM. The COMRAT field of the image subheader must be set to 00.0, see Table D-4, COMRAT Field.

5.8.4.2 The encoder must generate the full interchange JPEG format. The full interchange JPEG format is a data stream containing all the tables, markers and segments necessary to decode and render the compressed image. The use of prepositioned tables needed to decompress an image (abbreviated interchange JPEG format) is prohibited.

5.8.4.3 The decoder interprets the full interchange format.

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

5.8.4.4 The encoder must include the Huffman Tables (H-Tables) used to compress the image in the JPEG data stream.

5.8.4.5 The decoder must make use of the H-Tables found in the JPEG stream to decompress the entropy data. This includes split and short H- Tables.

5.8.4.6 Compression Accuracy. Implementations must accurately compress image data into an image segment so that the segment, when decompressed by a trusted lossless JPEG implementation, yields an image array identical to the original uncompressed image data.

5.8.4.7 Decompression Accuracy. Implementations must accurately decompress a lossless encoded JPEG image segment that was produced by a trusted encoder so that the resulting decompressed image array is identical to the original uncompressed image data.

5.8.4.8 If the IUT is capable of generating custom Huffman Tables, they must be generated in accordance with Appendix C of the JPEG MIL-STD-188-198A.

5.8.4.9 The encoder must be able to include restart marker codes in the entropy encoded data stream, at least one marker for every eight rows of image data per frame.

5.8.4.10 The entropy decoder must re-synchronize the decompression at the next restart marker when encountering corrupted data in the entropy encoded stream.

5.8.4.11 JPEG entropy decoders must be able to decode and display a JPEG compressed image in which no more than 10% of the restart intervals in the compressed data stream contain errors. JPEG entropy decoders must be able to recognize the following as errors:

1. Restart Marker appearing too early in the data stream
2. Restart Marker appearing too late in the data stream
3. Restart Marker missing from the data stream
4. Unknown Huffman code in the data steam

When the entropy decoder detects any of the errors in the compressed JPEG data steam, the imagery implementation must identify the corrupted data in the decoded image. The implementation must replace the corrupted restart interval with a suitable pattern so that when displaying the decoded image, the compressed data stream error is apparent. (A 2 by 2, 2 color checker board pattern per JPEG neighborhood is recommended for this replacement pattern.) This pattern must be limited to the Re-Start Marker (RST) interval(s) in which the error(s) occurred. All RST intervals without errors must also be decoded.

5.9 Image Compression Criteria, Bi-Level

5.9.1 The IUT supports Bi-level image compression with IC field value set to C1 or M1 with modes of operation as follows:

1. 1D for One Dimensional Coding (Encode is optional; decode is mandatory).
2. 2DS for Two Dimensional Coding, Standard Vertical Resolution, K=2 (Encode is optional; decode is mandatory).
3. 2DH for Two Dimensional Coding, High Vertical Resolution, K=4 (Encode is optional; decode is mandatory).

5.9.2 The IUT encoder supports compression of Bi-level images with horizontal scan lines containing up to and including 2560 pixels and containing up to and including 8192 scan lines as constrained by CLEVEL limits.

5.9.3 The IUT decoder supports decompression of Bi-level images with horizontal scan lines containing up to and including 2560 pixels and containing up to and including 8192 scan lines as constrained by CLEVEL limits.

5.9.4 Images compressed by the IUT encoder must compare bit-by-bit with the same images compressed by the test facility's trusted reference encoder [after decompression](#).

5.9.5 Images decompressed by the IUT decoder must compare bit-by-bit with the same images decompressed by the test facility's trusted reference decoder.

5.9.6 The IUT must support the use of synchronization and Huffman codes.

5.9.7 Bi-Level compressed images are always a single block; multiple blocks are not allowed with Bi-level compression.

5.9.8 Unpack capable implementations must be able to identify and properly present pad pixels when the pad output pixel code value is identified in mask table records.

5.10 Image Compression Criteria, ARIDPCM

5.10.1 The use of ARIDPCM image compression is limited to NITF 1.1 formatted files. The implementation must preclude the use of ARIDPCM when creating NITF 2.0 and NITF 2.1 formatted files.

5.10.2 The implementation [s that support NITF 1.1 files](#) must interpret and render minimum compliant NITF 1.1 files containing imagery that have been compressed using the ARIDPCM algorithm at all allowed rates (4.50, 2.30, 1.40, and 0.75).

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

5.10.3 The creation of NITF1.1 files is highly discouraged since it will prolong the requirement for systems to continue to read NITF1.1 files in addition to the newer versions. However, those implementations with a valid requirement may optionally pack compliant NITF1.1 files containing imagery compressed at any of the allowed rates of the ARIDPCM algorithm (4.5, 2.3, 1.4, and 0.75). The implementation will be tested for compliance to the ARIDPCM algorithm for all compression rates that the implementation claims to use.

5.11 Image Compression Criteria, VQ

5.11.1 When the image compression field is set to M4 or C4 as specified in MIL-STD-188-199.

5.11.1.1, For C4, the image data of the VQ compressed image segment shall will contain a VQ header followed by the compressed image data, as specified in MIL-STD-188-199.

5.11.1.2 For M4 the image data of the VQ compressed image segment will be preceded by an image data mask table followed by the VQ header.

5.11.2 The IUT shall will support both v x h kernel-by-kernel decompression and individual rows for all v x h kernels stored together such that the image can be decompressed line-by-line.

5.11.3 The first image code in the VQ compressed image segment (following VQ header) shall will be used to spatially decompress the v x h indices in the upper left corner of the image. The decompression shall will continue from left to right across the columns of the first row of image codes, then down each of the rows of image codes sequentially.

5.11.4 For RGB color or monochrome with LUT images that are compressed, each value in the spatially decompressed image represents an index into the output color table ~~output~~.

5.11.5 VQ implementations within NITFS are limited to 8-bit RGB with LUT, or monochrome with or without LUT.

5.11.6 The COMRAT field must be present in all NITFS VQ files and must contain a value given in the form n.nn representing the average number of bits-per-pixel for the image after compression. This entry is for informational purposes only and is not necessary for the decompression process.

5.11.7 The IC field shall will contain the value C4 if the image is not masked or M4 if the image is masked.

5.11.8 The NITFS VQ image data section shall will provide up to 4096 compression codes entries, organized in a 4x4 kernel configuration.

5.11.9 The current implementation of VQ within NITFS uses a single band with or without an associated LUT, and has an IMODE of B, band interleaved by block.

5.11.9.1. For current VQ NITFS applications, the number of spectral groups is 1.

5.11.9.2. The number of blocks per row and number of blocks per column fields within the NITFS image subheader define the number of image block tables in the spatial data subsection.

5.11.9.3. If the image is Red, Green, Blue (TGB/LUT), the pixels are indices into a color LUT. If the image is monochrome (MONO), the pixels can be indices into a grayscale LUT. ~~contains one or more spectral band table(s), the pixels within the image will correspond to a single value quantity such as a gray scale value or a single entry within a color table.~~

5.11.9.4. The image row level of organization in the NITFS image subheader shall will correspond to the image row level in the VQ header.

5.11.9.5. The number of bands in the NITFS image subheader shall will will correspond to the number of bands in the VQ header, which will be one.

5.11.10 Fields containing identification and origination information, file security information, and the number and size of the data items contained in the NITFS file shall will be located in the NITFS file header. Within the image data section, multi-byte fields are written in the "big endian" format.

5.11.11 The VQ header must have the structure identified in MIL-STD-188-199.

5.11.12 The implementation may optionally compress images using VQ, but may only do so within the bounds and constraints established for VQ decompression. VQ rRecompression of decompressed VQ images is prohibited; however, a decompressed VQ image may be packed in its uncompressed state (NC or NM) or in its original compressed form (C4 or M4). An extracted portion(s) of a VQ compressed image may be repacked using the original code book and codes from the original coded pixel data.

5.12 GraphicSymbol (graphic) Criteria, CGM Graphics

5.12.1 An implementation must be able to interpret and use an NITF file containing 0-100 CGM graphicsymbol (graphic) segments. For CLEVEL 03, the maximum aggregate size of the graphicsymbol (graphic) segments is one Mbyte (1,048,576 bytes). For CLEVELs 5,6, and 7, the maximum aggregate size of the graphicsymbol (graphic) segments is two Mbytes (2,097,152 bytes). (For NITF2.0, the maximum aggregate size of the graphicsymbol (graphic) segment is one Mbyte.)

5.12.2 If an implementation in its native mode of operation has the capability to generate any type of graphicsymbol (graphic) annotations, it must support the inclusion of CGM graphicsymbol (graphic) segments within NITF files that it creates.

N-0105/0198
~~25 August 1998~~ Review Draft (Date)

5.12.3 The implementation must preclude the generation of an NITF file containing CGM [graphicsymbol \(graphic\)](#) segments that exceed the maximum interpretation ranges for specific CLEVELs as stated above.

5.12.4 For all CLEVELs, the implementation must be able to interpret and use any CGM [graphicsymbol \(graphic\)](#) segment compliant with MIL-STD-2301A. (MIL-STD-2301 applies for NITF2.0.)

5.12.5 For all CLEVELs, the implementation must not create any CGM [graphicsymbol \(graphic\)](#) segment that is not compliant with MIL-STD-2301A. (MIL-STD-2301 applies for NITF2.0.)

5.13 Text Criteria

5.13.1 STA. The implementation must unpack and display text data in all text segments marked with the text format code for standard ASCII (STA).

For text segments formatted as STA:

1. Contents are composed of none other than the following BCS characters: Line Feed (0x0A), Form Feed (0x0C), Carriage Return (0x0D), and space (0x20) through tilde (0x7E).
2. All lines are separated by carriage return/line feed (CR/LF) pairs, where the first character of the next line (if present) immediately follows the line feed character.
3. Text data is presented as a contiguous file, with each permitted BCS character immediately following the other.
4. Text data begins with the first, or left-most character of the text, followed by subsequent characters, as read from left to right.
5. No field delimiters or special characters are used to designate the end of the text data.

If more than one text segment is included in the NITF file, the last character of the first segment is followed by the first character of the next segment's subheader.

5.13.2 The implementation must unpack and display text data in all text segments marked with the text format code for Universal Multiple [Octet Coded](#) Character Set (UCS) Transformation Format 1 (UT1) (single octet).

For text segments formatted as UT1:

1. Contents are composed of none other than the following characters: Line Feed (0x0A), Form Feed (0x0C), Carriage Return (0x0D), and space

(0x20) through tilde (0x7E) and No break space (0xA0) through small "y" with diaeresis (0xFF).

2. All lines are separated by carriage return/line feed (CR/LF) pairs, where the first character of the next line (if present) immediately follows the line feed character.
3. Text data is presented as a contiguous file, with each permitted character immediately following the other.
4. Text data begins with the first, or left-most character of the text, followed by subsequent characters, as read from left to right.
5. No field delimiters or special characters are used to designate the end of the text data.
6. If more than one text segment is included in the NITF file, the last character of the first segment is followed by the first character of the next segment's subheader.

5.13.3 MTF. For text segments identified by the text format code for Message Text Format (MTF), the implementation must be able to unpack and display the text data. The implementation may optionally pass the text data to an MTF capable application for further processing in accordance with [Mil-Std MIL-STD-6040](#).

For proper display of text files formatted as MTF:

1. Contents are composed of none other than the following characters: Line Feed (0x0A), Form Feed (0x0C) and space (0x20) through tilde (0x7E).
2. Line endings are identified by either a sixty nine character count or the use of double solious (0x2F), (// (end of set marker) may identifying CR/LF) , where the first character of the next line (if present) immediately follows the line feed character.
3. Text data is presented as a contiguous file, with each permitted character immediately following the other.
4. Text data begins with the first, or left-most character of the text, followed by subsequent characters, as read from left to right.
5. No field delimiters or special characters are used to designate the end of the text data, however, the // end of set marker is always present at the end of the text data.
6. If more than one text segment is included in the NITF file, the last character of the first segment is followed by the first character of the next segment's subheader.

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

5.13.4 Universal Multiple Octet Coded Character Set (UCS) Transformation Format 8 (UTF-8) Subset (U8S). For text segments identified by the text format code for U8S (either 1-byte or 2-byte encoded), the implementation must be able to unpack and display the text data.

1. Contents are composed of none other than the following BCS characters: Line Feed (0x0A), Form Feed (0x0C) Carriage Return (0x0D), and space (0x20) through tilde (0x7E), No break space (0xA0) through small "y" with diaeresis (0xFF), and Inverted exclamation mark (0xC2 A1) through small "y" with diaeresis (0x C3 BF)
2. All lines are separated by carriage return/line feed (CR/LF) pairs, where the first character of the next line (if present) immediately follows the line feed character.
3. Text data is presented as a contiguous file, with each permitted character immediately following the other.
4. Text data begins with the first, or left-most character of the text, followed by subsequent characters, as read from left to right.
5. No field delimiters or special characters are used to designate the end of the text data.
6. If more than one text segment is included in the NITF file, the last character of the first segment is followed by the first character of the next segment's subheader.

5.13.45.13.5 Other. For text files associated with any text format code other than STA, UT1, U8S, or MTF (e.g. UC2), the NITF implementation must not be adversely affected when attempting to display the text data field.

5.13.5-6 An implementation must be able to interpret a file containing 0-32 text segments. The maximum size of the text portion in any text segment must not exceed 99,999 characters.

5.13.6-7 Pack. Implementations that support the packing of text segments must do so within the criteria established for unpacking.

5.14 Data Extension Segment Criteria

5.14.1 DES Pack

Files packed by NITF compliant implementations that do not use DESs must fill the Number of Data Extension Segments (NUMDES) field with "000". Implementations that require the insertion of DESs shall/will fill the NUMDES field, Length of Nth DES Subheader (LDSHnnn) field, and the Length of Nth DES Reserved field (LDnnn) with the associated values determined by the length of the DES. Implementations that are required to pack NITF files with DESs shall/will be tested for the proper generation

of the associated data defined by the DES. Only G/ISMC approved DESs are allowed as shown in the DES portion of the NITFS [Tagged Extension Registry Register](#).

5.14.2 DES Unpack

5.14.2.1 All unpack capable implementations must be able to interpret NITF files containing the STREAMING_FILE_HEADER DES [once effectivity 003 has been reached](#).

5.14.2.2 Upon unpack of a file where the NUMDES field contains a count other than "000", and the DES is unknown, the implementation must at least properly interpret the other legal components of the file. Implementations that require the use of DES [shall will](#) be tested for the interpretation of the associated data defined by the DES. The structure and identifier for all allowed DESs is controlled by the G/ISMC.

5.14.3 Tagged Record Extension Overflow (TRE_OVERFLOW)

5.14.3.1 Pack. When tagged record extensions overflow the file header or any segment subheader user defined or extension area, the NITF compliant implementation must make use of the TRE_OVERFLOW DES. Implementations that require the use of TRE_OVERFLOW DESs [shall will](#) fill the NUMDES field, Length of Nth DES Subheader (LDSHnnn) field, and Length of Nth DES Data field (LDnnn) with the associated values determined by the length of the respective DESs. Implementations that require the use of DESs [shall will](#) be tested for the generation of the associated data defined by the DES. All overflow tags within the DES [shall will](#) be registered with the NITFS G/ISMC.

5.14.3.2 Unpack. Upon receipt of a file with TRE_OVERFLOW DESs, the implementation must at least otherwise properly interpret the other legal components of the file. Implementations that require the use of tagged record extensions [shall will](#) be tested for the interpretation of the associated data when placed in the DES.

5.14.4 STREAMING_FILE_HEADER DES ([E003](#))

5.14.4.1 Pack NITF 2.1. When using the STREAMING_FILE_HEADER DES, the NUMDES will be "001," the DESTAG Unique DES Type Identifier will be STREAMING_FILE_HEADER, and DESVER Version of the data field definition will be 01. The values populated in the length fields in the file header and first image subheader have no meaning, but must be within the allowable ranges specified by the standard. For consistency among applications, it is required that the length fields of the file header be populated with the maximum allowed value (for example, the File Length field would be populated with 999999999999) when valid data is not available as the file is being packed. Files using this DES must contain at least one image segment. The field values in the STREAMING_FILE_HEADER DES are subject to the same compliance constraints as if located in the main file header/first image subheader and [shall will](#) not extend beyond what is to be replaced in the main

N-0105/0198

25-August-1998 Review Draft (Date)

file header or by both the file header and first image subheader. The structure of the STREAMING_FILE_HEADER and main file header/first image header must be aligned, field by field, byte by byte, with the exception of tag data that may not be known until the image is either collected or compressed. The CLEVEL fielded in the file header of STREAMING_FILE_HEADER will be marked with the CLEVEL in accordance with CLEVEL 3-7 constraints. The reserved segment data for the STREAMING_FILE_HEADER will be as follows:

Table 5-2. STREAMING_FILE_HEADER Data Extension Segment Data

CFHD1-L	Length of Corrected File Header Data (CFHD) 1	7	0000404379-9999998	R
CFHD-DELIM1	CFHD Unique Delimiter 1	4	0x0A6E1D97	R
CFHD-RD	CFHD Replacement Data	**		R
CFHD-DELIM2	CFHD Unique Delimiter 2	4	0x0ECA14BF	R
CFHD2-L	Length of CFHD 2	7	0000379404-99999989	R

**unknown size (variable)

5.14.4.2 Unpack NITF 2.1. Unpack implementations must be able to interpret the file to the same degree as if the file header was properly populated with the information contained in the “DES” DES. The designated field values in the DES take priority over the same fields as in the main file header and the first image subheader if included. An implementation may repack the file to replace the headers with the contents of the “STREAMING_FILE_HEADER” DES. Implementations must verify file compliance ensuring the file is marked at the lowest CLEVEL needed to properly interpret the file when repacking. The “STREAMING_FILE_HEADER” DES will be removed if the file is repacked. When modifying the file for any reason, the implementation may not re-pack the file using the “STREAMING_FILE_HEADER” DES.

~~5.14.4.3 Pack NITF 2.0. Pack implementations that supports the generation of the STREAMING_FILE_HEADER must meet the same test criteria as specified for NITF 2.1 packers, but must always set the Compliance Level (CLEVEL) value to 07.~~

~~5.14.4.4 Unpack NITF 2.0~~

~~5.14.4.4.1 Upon receipt of a CLEVEL file, implementations that do not support the STREAMING_FILE_HEADER alert the operator that the file being received is not supported.~~

~~5.14.4.4.2 Implementations that support the STREAMING_FILE_HEADER will meet the same test criteria as specified for NITF 2.1.~~

5.15 Reserved Extension Segment (RES) Criteria

5.15.1 ~~Registered RESs~~

~~5.15.1.1~~ Only G/ISMC approved RESs are allowed as shown in the RES portion of the NITFS [Tagged Extension Registry](#) [Register](#). There are no approved RESs as the current version of this plan was published.

~~5.15.1.2~~ Upon receipt of a file where the NUMRES field contains a count other than "000," and the RES is unknown, the implementation must otherwise properly interpret the other legal components of the file.

~~5.15.2 DIGITAL SIGNATURE RES (TBD006)~~

5.16 Overlay and Display Level Criteria

5.16.1 The IUT must support non-destructive overlays. Overlays must not be merged with other displayable segments in a way that precludes them from being separated from it.

5.16.2 The IUT must render overlays in the order indicated by their display level, not by their relative position within the NITF structure.

5.16.3 The non-transparent pixel value of a higher numbered display level replaces the values of lower numbered display levels when rendered.

5.16.4 Overlays must be positioned at the correct row and column in the common coordinate system relative to the origin of the segment to which they are attached.

5.16.5 All display level values within a file are unique.

5.17 Attachment Level Criteria

5.17.1 The image or [graphicsymbol \(graphic\)](#) segment in the file having the lowest numerical display level must have attachment level zero.

5.17.2 IUTs capable of packing overlay segments within a file must at least support packing the segments using attachment level 000. Segments may have attachment levels of 000 or greater. Unpack capable IUTs must support attachment levels over the range of 000 - 998.

5.17.3 The attachment level of a segment must be equal to the display level of the segment to which it is attached, or it must be set to 000 (unattached).

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

5.17.4 The display level of a segment must always be numerically greater than its attachment level.

5.17.5 The IUT must properly display and position all segments based on the specified row and column offset from the segment's origin point to which it is attached.

5.17.6 As an option, the IUT may use the parent-child relationship among its attached segments so that the elements may be treated together as a group for certain operations such as, moving, rotating, and displaying. The IUT will be tested for each operation it supports that makes use of the attachment levels.

5.18 Tagged Record Extensions Criteria

The following criteria pertain to all implementations of the NITFS.

1. Upon receipt of a file which contains information in tagged record extensions, the implementation must at least properly interpret the other legal components of the file
2. Only those tagged record extensions registered with the G/ISMC may be used
3. Each tagged record extension consists of three required fields: TRETAG, (6 byte unique extension identifier), TREL (length of extension in bytes), and TREDATA (data according to the specification of the extension)
4. A sequence of tagged record extensions can appear in the User Defined Header Data (UDHD) and/or Extended Header field of the NITF file header or any segment subheader User Defined Data field and/or Extended Subheader data field. For NITF, 2.0 additional restrictions for placement of TREs applies. Controlled extension may appear in the Extended Header Data field of the NITF file header or in the Extended Sub-header Data field for any standard data type data item in the file.
5. A sequence of tagged record extensions can also appear in a TRE_OVERFLOW DES. This condition will be identified by the three byte numeric overflow field of the UDHD, XHD, UDID, IXSHD, SXSHD, or TXSHD field containing the sequence number of the DES into which the tags are placed. For NITF 2.0, Controlled extensions may appear in Controlled Extension DES. Registered extensions may appear in a Registered Extension DES.
6. When the tagged record extension carries data that is associated with the file as a whole, it must appear in the file header. If the extension carries data associated with a segment in the file, it must appear in the subheader of that segment or an associated TRE_OVERFLOW DES.

7. A tagged record extension must be included in its entirety within the specific header or subheader field selected to contain it, or it must be placed in its entirety in an overflow DES.

~~8. All information, including numbers, contained in TREs must be given in the printable ASCII character set [space (32) through tilde (126)] with eight bits (one byte per character).~~

~~9.8.~~ All data in fields designated as alphanumeric (BCS-A) must be left justified and padded with spaces as necessary to fill the field.

~~10.9.~~ All data in numeric (BCS-N) fields must be right justified and padded with leading zeroes as necessary to fill the field.

~~11.10.~~ All required fields must be present and must contain valid data as defined in the NITFS TRE documents.



5.18.1 National Support Data Extensions (NATSDE) (TBD011)

~~5.18.1.1 Implementations will generate the complete complement of NSDEs as provided in the NITF Benchmark file.~~

~~5.18.1.2 All NSDE field contents will be populated with the same values, and in the same format, as the NITF Benchmark file. Support data will not be recalculated or altered in any way. A single exception is NITF file creation date in the image identification NSDE. This date will reflect the actual implementation's date of creation and be identical to respective portions of the FDT field.~~

~~5.18.1.3 Image/Pixel Data.~~

~~5.18.1.3.1 Implementations decompressing the TFRD source image will produce pixels that are identical to those in the NITF Benchmark file. Histograms from both products will be identical, except for conditions noted in 6.1.1.2.3.2. File "diffs" of image data segments or histogram comparisons will be used to ascertain similarity. Image renditions of the implementation's files and Benchmark files will be visually identical when viewed on a "trusted" interpreter.~~

~~5.18.1.3.2 Corrections for asymmetry, "flat" dynamic ranges, etc., are discouraged; however, if required by a product specification or similar programmatic requirement, the alteration actions will be properly recorded in an appropriate/approved TRE such as HISTOx or ICHIPx.~~

~~5.18.1.4 File names will be the same as the original/unaltered NITF Benchmark file and its internal FTITLE contents.~~

~~5.18.1.2 Unpack criteria for TFRD to NITF conversion. If the implementation has interpret capabilities, it must be capable of unpacking and rendering its NITF~~

N-0105/0198

25 August 1998 Review Draft (Date)

products in the same manner as the corresponding NITF file from the National Producer.

5.18.1. National Technical Means (NTM)

5.18.1.1 TFRD-to-NITF Conversions

5.18.1.1.1 Systems creating files from Tape Requirements Document (TFRD)(D08P) imagery sources must be able to do so in a manner that is consistent with NITF compliant National production systems i.e.: Dissemination Element (DE). Imagery of this origin or state is considered primary imagery.

5.18.1.1.2 The converted image produced by the IUT will not be altered from its original TFRD array size (e.g., chipped). NOTE: To verify this functionality, the implementation will be exposed to a predefined TFRD test imagery suite and required to convert the TFRD products to NITF files. The TFRD test suite will be composed of imagery that is representative of the various National sensors and modes of operation. The converted NITF files from the generating system will be compared to NITF "Benchmark" files created a National Producer (typically DE) from the same TFRD source.

The following criteria apply to those implementations with requirements to generate NITF imagery products from TFRD imagery sources.

5.18.1.1.3 Pack criteria for TFRD-to-NITF conversions

5.18.1.1.3.1 NITF Headers. The implementation must generate main and image subheaders identical those of a National producer (whose products are compliant with the National Imagery Transmission Format Implementation Requirements Document (NITFIRD)), with the following exceptions:

- OSTAID. The OSTAID will be populated with information that readily and uniquely identifies the implementation creating the NITF file.
- FDT. The FDT of the implementation's NITF file will be that of the actual time of file creation.
- ONAME. May be optionally populated with an individual name or entity identifier. Optional NITF File Background Color will not be placed in the first 3 bytes of this field.
- OPHONE. May be optionally populated with an individual or entity phone number.
- XHD. May be optionally populated with Tagged Record Extensions (TREs) that are required by a product specification or similar programmatic requirement. For example, any library may insert appropriate Product Imagery Archive Extensions (PIAE) TREs in the XHD area.

- IGEOLO. Deviations between the implementation and the National Benchmark NITF file can be expected depending upon the manner in which the IGEOLO values are calculated/derived. When compared to RULER-derived (GEODPT or RGDPT functions) latitude and longitude values obtained from a "trusted" means, image corner points will be no greater than:

- +/- 10 seconds for implementations calculating/interpolating IGEOLOs from "reference-format" support data.

- +/- 1 second for implementations interpolating/transferring IGEOLOs from existing "corner point-format" support data.

- +/- 1 second for implementations deriving IGEOLOs from RULER "calls" during the course of file generation.

- IXSHD. May be optionally populated with any or all of PIAE-related, HISTOx, or ICHIPx Tagged Record Extensions (TREs) that compliment the implementation's concept of operations. If implementations include an ICHIPx TRE which reflects the location of the image within the original imaging operation's grid space, the ICHIPx image size and location must not conflict with other similar header information denoting chip size and location.

5.18.1.1.3.2 National Support Data Extensions (NSDEs).

5.18.1.1.3.2.1 Implementations that claim to support NSDE's will generate the complete complement of NSDEs (as provided in NITF Benchmark files).

5.18.1.1.3.2.2 All NSDE field contents will be populated with the same values, and in the same format, as the NITF Benchmark file. Support data will not be recalculated or altered in any way. A single exception is NITF file creation date in the image identification NSDE. This date will reflect the actual implementation's date of creation and be identical to respective portions of the FDT field.

5.18.1.1.3.3 Image/Pixel Data.

5.18.1.1.3.3.1 Implementations decompressing the TFRD source image will produce pixels that are identical to those in the NITF Benchmark file. Histograms from both products will be identical, except for conditions noted in the following paragraph. (Note: File "diffs" of image data segments or histogram comparisons will be used to ascertain similarity). Image renditions of the implementation's files and Benchmark files will be visually identical when viewed on a "trusted" interpreter.

5.18.1.1.3.3.2 Corrections for asymmetry, "flat" dynamic ranges, etc., are discouraged; however, if required by a product specification or similar programmatic requirement, the alteration actions will be properly recorded in an appropriate/approved TRE such as HISTOx or ICHIPx.

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

5.18.1.1.3.4 File names will be the same as the original/unaltered NITF Benchmark file and its internal FTITLE contents.

5.18.1.1.4 Unpack criteria for TFRD-to-NITF conversion. If the implementation has interpret capabilities, it must be capable of unpacking and rendering its NITF products in the same manner as the corresponding NITF file from the National Producer.

5.18.1.2 NTM/RULER Mensuration Engine (RME) implementations.

5.18.1.2.1 Implementations employing the RME for performing geospatial measurements upon National imagery will be evaluated for their ability to mensurate upon NITF or TFRD (D08P) files of varying degrees of complexity. Implementations must demonstrate proficiency in mensurating various National product formats such as:

- Full imagery
- Image products (IMPs)
- Fast Access Format (FAF) chips.

5.18.1.2.1.1 Secondary/Exploited chips of National products employing the ICHIPx TRE will also be assessed.

5.18.1.2.1.2 Imagery from the various National sensors with the following characteristics, and ascending levels of complexity, will be employed:

- Level 1 – Symmetrical Imagery – Scale 1:1, Unrotated
- Level 2 – Asymmetrical Imagery – Scale 1:1, Unrotated
- Level 3 – Multiple Scan Block Imagery – Scale 1:1, Unrotated
- Level x – (TBD: Reduced Resolution Data Sets, (selected) E305, etc.)

Implementations satisfying the requirements of this section will be deemed capable/registered as "NTM-Interoperable: Mensuration" for the levels and product formats demonstrated by the implementation.

5.18.1.2.2 Controlled Imagery. All testing will be performed with an established, controlled set of National Imagery NITF files. Within each NITF file selected sets of "target" pixels will be altered to distinguish them from surrounding pixels. Implementations will be required to return various values that are in consonance with pre-determined values. TFRD imagery used to generate the respective NITF test files will also be used to ascertain TFRD mensuration capabilities.

5.18.1.2.3 The focus of assessing an implementation's returned values are to determine "grid truth" and ascertain the adequacy of the RME interface. Grid truth assesses an implementation's ability to ascertain/assign the correct NITF ROW and COLUMN index values to a pixel and subsequently and properly pass it to RULER as a LINE and SAMPLE. Assessment of the RME interface assures parameters/files are properly passed to the RME by the implementation. (Note: It

should be emphasized that this assessment is not to evaluate the accuracy or precision of any National sensor, or the RME itself, with any ground truth standards. It is a "Black Box" approach that is only to ascertain that an implementation returns values from RULER functions that are in consonance with those returned as if the NITF file was ingested directly by RULER in a standalone/Graphical User Interface (GUI) mode). The following measurements/functions/parameters will be assessed:

- Echoed LINE
- Echoed SAMPLE
- Geo-points (GEODPT, RPCGDP)
- Azimuth (AZIMUTH, RAZIM)
- Distance (2-point) (DIST, RDIST)
- (TBD)

5.18.1.2.4 Implementations will return LINE and SAMPLE values that are within +/- 1 pixel of the expected value. When passing the LINE and SAMPLE values echoed by the implementation to RULER ingesting the same control file while in its standalone/GUI mode, the implementation's:

- Geo-points will be within +/- 0.03 seconds of the respective LATITUDE and LONGITUDE values returned from the RULER/GUI reference.
- Azimuth values will be within +/- 1 degree of the respective azimuth value returned from RULER/GUI reference.
- Two-point distance values will be within 1 unit of ground sample distance (GSD) of the respective distance value returned from RULER/GUI reference.

5.18.1.3 NTM Chipping

5.18.1.3.1 Implementations possessing the capability to process chips of National origin will comply with the requirements of this section. Implementations will be assessed for their ability to generate and interpret chips possessing various characteristics from either NITF or TFRD origin. For the purposes of this document, two methods of imagery chipping are recognized: Primary (Unexploited) and Secondary (Exploited). Implementations may support either or both forms of imagery chipping. Implementations satisfying the requirements of this section will be deemed capable/registered as "NTM-Interoperable: Image Chipping" for the methods, imagery sources, and degree to which the implementation supports chipping. It should be noted that this section provides the general overall requirements for chipping. When warranted and applied, associated ICHIPx generation and interpretation criteria, as described in NIMA STDI-0002, will be applied by the implementation and assessed as part of this section.

5.18.1.3.1.1 Controlled Imagery. All testing will be performed with an established, controlled suite of "reference Benchmark" National NITF and TFRD Imagery files. These "Benchmark" files will possess specific characteristics to assess chipping functions of an implementation. The test suite will be composed of imagery that is

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

representative of the various National sensors, modes of operation, and product packaging (full images, IMPs, chips). The NITF chipped imagery files from the implementation being assessed will be compared to NITF Benchmark files within the JITC suite.

5.18.1.3.2 Primary/Unexploited Imagery Chipping. Implementations supporting this form of chipping will cut chips on FAF or image tile boundaries. Chips cut in this manner will not have been exploited or altered in any way -- the resulting chip is simply a subset of pixels from the original unaltered image and will be the only image (IM) segment in the resulting NITF file. Chip files of this nature are characteristic of those produced by the DE. Producers of such chips are encouraged to also include a properly completed ICHIPx TRE in the image's IXSHD area.

5.18.1.3.3 Secondary/Exploited Imagery Chipping. Implementations supporting this form of chipping will cut chips from any location (pixel bound as opposed to FAF/tile bounds) within the original image. Chips of this nature are characteristic of those produced by the Electronic Light Tables (ELTs) or other similar exploitation applications.

5.18.1.3.4 Pack Criteria for Chipping. The following criteria apply to those implementations with requirements to generate NITF imagery chips from NITF and TFRD sources. This section also includes chips produced under a "chip of a chip" paradigm.

5.18.1.3.4.1 NITF Headers. Same as section 5.18.1.1.3.1, above, except as noted below.

5.18.1.3.4.1.1 Primary/Unexploited Image Chips.

5.18.1.3.4.1.1.1 FTITLE will contain the NITFIRD-prescribed image ID/string that indicates the FAF corners corresponding to those represented by the pixel data contained therein.

5.18.1.3.4.1.1.2 Implementations will ensure that all chip-related information is harmonious. For example, all chipping TREs (ICHIPx, I2MAPD, etc.) reflect corner points that are in consonance with FTITLE information; resolution/magnification information within the TREs is in consonance with the image's IMAG value, etc. If the implementation does not support/update a particular means of chipping (e.g., the I2MAPD TRE), and it is present when ingested, the implementation will remove the unsupported portion(s) from its resulting NITF product to avoid the presence of conflicting information within the image segment.

5.18.1.3.4.1.2 Secondary/Exploited Image Chips.

5.18.1.3.4.1.2.1 FTITLE will NOT contain any resemblance of a NITFIRD-prescribed image ID/string. FTITLE may be user or system defined.

5.18.1.3.4.1.2.2 Implementations will ensure that all chip-related information is harmonious. For example, all chipping TREs (ICHIPx, I2MAPD, etc.) reflect corner points that are in consonance with each other; resolution/magnification information within the TREs is in consonance with the image's IMAG value, etc. If the implementation does not support/update a particular means of chipping (e.g., the I2MAPD TRE), and it is present when ingested, it will remove the unsupported portion(s) from its resulting NITF product to avoid the presence of conflicting information within the image segment.

5.18.1.3.4.2 NITF Support Data Extensions (NSDEs).

5.18.1.3.4.2.1 Chips generated by the Implementation will possess the same complement of NSDEs as provided in the NITF Benchmark file, whether chipping from a NITF or TFRD source.

5.18.1.3.4.2.2 All NSDE field contents will be populated with the same values, and in the same format, as the NITF Benchmark file. No support data will be recalculated or reformatted to accommodate chipped imagery. A single exception may exist with the NITF file creation date in the image identification NSDE. If the chip is being generated directly from a TFRD imagery source, this date will reflect the actual implementation's date of creation and be identical to respective portions of the FDT field. If the chip is being generated from a NITF imagery source, this date will not be altered; the NITF file creation date in the image identification SDE of the chip will be identical to date of creation in the original NITF file that was the source for the chip.

5.18.1.3.4.3 Image/Pixel Data.

5.18.1.3.4.3.1 Primary/Unexploited Image Chips. Implementations decompressing a TFRD source image to generate chips will produce pixels that are identical to those in the corresponding NITF Benchmark files. Image renditions of the implementation's files and Benchmark files will be visually identical when viewed on a "trusted" interpreter. Histograms from both products will be identical, except for conditions noted in 5.18.1.3.4.1.1. File "diffs" of image data segments or histogram comparisons will be used to ascertain similarity.

5.18.1.3.4.3.1.1 Corrections for asymmetry, "flat" dynamic ranges, etc., are discouraged; however, if required by a product specification or similar programmatic document, such actions will be properly recorded in an appropriate/approved TRE such as HISTOx or ICHIPx.

5.18.1.3.4.3.2 Secondary/Exploited Image Chips. Implementations decompressing the a TFRD source image to generate chips may produce pixels that are identical to those in the corresponding NITF Benchmark files or altered/remapped as deemed necessary by the user or implementation. Image renditions of the implementation's files and Benchmark files will be visually identical when viewed on a "trusted" interpreter except when altered. If image pixels are purported to be unaltered,

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

histograms from both products will be identical. File "diffs" of image data segments or histogram comparisons will be used to ascertain similarity.

5.18.1.3.4.3.2.1 Corrections for asymmetry, "flat" dynamic ranges, etc., may be performed. Such actions will be properly recorded in an appropriate/approved TRE such as HISTOx or ICHIPx.

5.18.1.3.4.4 File Names

5.18.1.3.4.4.1 Primary/Unexploited Image Chips. File names will be the same as the original/unaltered NITF Benchmark file and its internal FTITLE contents.

5.18.1.3.4.4.2 Secondary/Exploited Image Chips. File names will NOT contain any resemblance of a NITFIRD-prescribed image ID/string. File name may be user or system defined.

5.18.1.3.4.5 Pixel coincidence. While using a "trusted" system, all chips will provide geo-positioning values that are identical to those obtained from the same points in the image from which the chips are extracted. Comparisons must be made on like pixels. That is, if the chip contains a "corrected" asymmetrical image, the original image must also possess "corrected" pixels and vice versa.

5.18.1.3.5 Unpack Criteria for Chipping. The following criteria apply to those implementations with requirements to interpret NITF imagery chips. This section also includes chips produced under a "chip of a chip" paradigm.

5.18.1.3.5.1 Image coincidence. If the implementation has interpret capabilities, it must be capable of unpacking and rendering its NITF products in the same manner as the corresponding NITF Benchmark file from the National Producer. Otherwise, a "trusted" system will be used to ascertain similarity.

5.18.2 Profile for Imagery Archive Extensions (PIAE)

The following criteria pertain to those implementations which support the creation and use of PIAEs. Refer to the [STDI-0002 for additional information on](#) NITFS PIAE, Version 2 ~~and Version 3, for additional information~~. Production sources that produce NITFS files with PIAEs must create these files in compliance with the NITFS, NITFS PIAEs, and the SPIA. ~~(E001, PIAE version 3 effectivity).~~

5.18.2.1 When used, PIAE tags ~~shall~~will appear in the following extended data fields or the TRE_OVERFLOW DES if overflowed:

1. PIAPR tag: XHD of file header; one per file
2. PIAIM tag: IXSHD of image subheader; one per each image in the file
3. PIATG tag: IXSHD of image subheader, SXSHD of [graphicsymbol](#) [\(graphic\)](#) subheader, TXSHD of text subheader; up to 250 per file

4. PIAPE tag: IXSHD of image subheader, SXSHD of [graphicsymbol \(graphic\)](#) subheader, TXSHD of text subheader; up to 250 per file
5. PIAEV tag: IXSHD of image subheader, SXSHD of [graphicsymbol \(graphic\)](#) subheader, TXSHD of text subheader; up to 250 per file
6. PIAEQ tag: IXSHD of image subheader, SXSHD of [graphicsymbol \(graphic\)](#) subheader, LXSHD of label subheader, TXSHD of text subheader; up to 250 per file
7. Any implementation modifying an NITF file will ensure that the FDT field has been updated
8. As a minimum, systems submitting NITF files to an archive must include a PIAPR tag and a PIAIM tag for each image in the file they create for submission

5.18.2.2 Receiving Archives:

Must review NITF files to ensure they are in compliance with NITFS and PIAE documentation. This will include:

1. Checking NITF header and subheader data
2. Checking PIAE tag data
3. Identifying missing tags
4. When problems with incoming NITF files are identified, the file will be queued for operator review and action
5. Must archive submitted files that have no format problems without operator interface
6. Must apply a unique ACCESSID to newly submitted files containing an existing PIAPR tag when the file is new to the archive
7. Must insert a PIAPR tag if the submitted file is new to the archive and contains no PIAE tags. All required fields will be filled out and an ACCESSID will be assigned

5.18.2.3 Disseminating Archives:

1. Must ensure that non-NITF formatted files converted to NITF format are in compliance with all applicable NITFS and PIAE requirements

N-0105/0198

25-August-1998 Review Draft (Date)

2. Must ensure NITFS compliance is maintained on output files resulting from data manipulation actions such as pixel subsampling, chipping, decompressing, compressing, etc.
3. Must ensure that files, originally archived as NITF files, have preserved the original data integrity of its segments and support data

NOTE: ~~A determination to implement GeoSDEs within NITF 2.1 has not yet been made. The candidate test criteria that follow in this paragraph are still under development and have not been validated. The candidate test criteria are subject to significant change and are provided for informational purposes only. Beneficial review and comment on these proposed criteria are welcome. Direct all comments the JTC.~~

5.18.3 Airborne ~~Synthetic Aperture Radar (SAR)~~ SDEs (TBD007)

The following criteria pertain to those implementations which support the creation and use of Airborne ~~Synthetic Aperture Radar (SAR)~~ SDEs. Refer to the NITFS Airborne ~~SAR~~ SDE, as specified in the RASG-9606-001-STD1-0002 document, for additional information. Production sources that produce NITFS files with Airborne ~~SAR~~ SDEs must create these files in compliance with the NITFS, ~~NITFS Airborne SAR~~ and the Airborne SDE documents specification.

Table 5-x. Airborne Support Data Extensions

<u>TITLE</u>	<u>TAG</u>	<u>SAR</u>	<u>EO</u>	<u>IR</u>	<u>MSI/HIS</u>	<u>MTI-ONLY</u>
<u>Aircraft Information</u>	<u>ACFTA</u>	<u>Req.</u>	<u>Req.</u>	<u>Req.</u>	<u>Req.</u>	<u>Req.</u>
	<u>ACFTB</u>					
<u>Additional Image Identification</u>	<u>AIMIDA</u>	<u>Req.</u>	<u>Req.</u>	<u>Req.</u>	<u>Req.</u>	<u>Opt.</u>
	<u>AIMIDB</u>					
<u>Multispectral/Hyperspectral Band Parameters</u>	<u>BANDSA</u>	<u>N/A</u>	<u>Opt.</u>	<u>Opt.</u>	<u>Opt.</u>	<u>N/A</u>
<u>Image Block Information</u>	<u>BLOCKA</u>	<u>Opt.</u>	<u>Opt.</u>	<u>Opt.</u>	<u>Opt.</u>	<u>N/A</u>
<u>Exploitation Usability Optical Information</u>	<u>EXOPTA</u>	<u>N/A</u>	<u>Opt.</u>	<u>Opt.</u>	<u>Opt.</u>	<u>N/A</u>
<u>Exploitation Related Information</u>	<u>EXPLTA</u>	<u>Opt.</u>	<u>N/A</u>	<u>N/A</u>	<u>N/A</u>	<u>Opt.</u>
	<u>EXPLTB</u>					
<u>Airborne SAR Mensuration Data</u>	<u>MENSRA</u>	<u>Opt.</u>	<u>N/A</u>	<u>N/A</u>	<u>N/A</u>	<u>N/A</u>
	<u>MENSRB</u>					
<u>Mensuration Data</u>	<u>MPDSRA</u>	<u>Opt.</u>	<u>N/A</u>	<u>N/A</u>	<u>N/A</u>	<u>N/A</u>
<u>Mission Target</u>	<u>MSTGTA</u>	<u>Opt.</u>	<u>Opt.</u>	<u>Opt.</u>	<u>Opt.</u>	<u>Opt.</u>
<u>Moving Target Information Report</u>	<u>MTIRPA</u>	<u>Opt.</u>	<u>N/A</u>	<u>N/A</u>	<u>N/A</u>	<u>Req.</u>
	<u>MTIRPB</u>					
<u>Patch Information</u>	<u>PATCHA</u>	<u>Opt.</u>	<u>N/A</u>	<u>N/A</u>	<u>N/A</u>	<u>N/A</u>
	<u>PATCHB</u>					
<u>Rapid Positioning Data</u>	<u>RPC00B</u>	<u>Opt.</u>	<u>Opt.</u>	<u>Opt.</u>	<u>Opt.</u>	<u>N/A</u>
<u>EO-IR Sensor Parameters</u>	<u>SENSRA</u>	<u>N/A</u>	<u>Req.</u>	<u>Req.</u>	<u>Req.</u>	<u>N/A</u>

Secondary Targeting Info	SECTGA	Opt.	Opt.	Opt.	Opt.	Opt.
Stereo Information	STEROB	N/A	Opt.	Opt.	Opt.	N/A

~~5.18.3.1 When used, Airborne SAR tags shall appear in the following user defined or extended data fields or the TRE_OVERFLOW DES if overflowed:~~

- ~~1. AIMIDA tag: UDID or IXSHD of the image header; one per each image in the file~~
- ~~2. EXPLTA tag: UDID or IXSHD of the image header; one per each image in the file.~~
- ~~3. BLOCKA tag: UDID or IXSHD of image subheader; one per each image in the file~~
- ~~4. SECTGA tag: UDID or IXSHD of the image subheader; up to 10 per NITF file~~
- ~~5. MPDSRA tag: UDID or IXSHD of image subheader, one per each image in the file~~
- ~~6. MENSRA tag: UDID or IXSHD of image subheader, one per each image in the file~~
- ~~7. ACFTA tag: UDID or IXSHD of image subheader, one per each image in the file~~
- ~~8.1. PATCHA tag: UDID or IXSHD of an image subheader, each patch of the scene may; be treated as an independent image and placed into a separate file, of the multiple patches (up to 999) of a scene may all be placed into a single file. There will always be 1 patch per file in spot mode~~
- ~~9.2. MTIRPA tag: UDID or IXSHD of the image subheader, 11 per NITF file.~~

~~5.18.4 Visible, Infrared, Multi-Spectral~~ Multispectral Airborne SDE (VIMAS) (TBD008)

~~5.18.45~~ 5.18.45 Geospatial Support Data Extensions (GeoSDE) (TBD009)

Note: The candidate test criteria that follow in this paragraph are still under development and have not been validated. The candidate test criteria are subject to significant change and are provided for informational purposes only. Beneficial review and comment on these proposed criteria are welcome. Direct all comments to the JITC.

The following criteria apply to those implementations which support files containing Geospatial Support Data Extensions.

~~5.18.45.1~~ 5.18.45.1 Pack criteria for GeoSDE Implementations

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

5.18.45.1.1 Implementations that produce files with GeoSDEs must pack these files in compliance with the NITFS and ~~DIGEST 2.0~~DIGEST 2.1. Table 5-3 identifies the criteria for determining the specific GeoSDE controlled extensions applicable to an image segment of a given category and representation. All criteria identified under the Criteria Sets must be met in order to identify the applicable set of controlled extensions to be used.

Table 5-3. Categories of Image/Matrix/Grid Data

<u>Categories of Image/Matrix/Grid Data</u>			<u>Data extension to be included in the image subheader</u>		
<u>Data Type</u>	<u>ICAT</u>	<u>IREF</u>	<u>ACCURACY</u>	<u>LOCATION</u>	<u>SOURCE</u>
<u>Raster Maps</u>	<u>MAP</u>	<u>MONO, RGB, RGB/LUT (YCbCr)</u>	<u>ACCPO and/or ACCHZ & ACCVT</u>	<u>GEOPS</u> + conditionally <u>PRJPS</u>	<u>sourc</u>
<u>Matrix Data (Digital Terrain Elevation Models and Others)</u>	<u>DTEM, MATR</u>	<u>NODISPLY, MONO, RGB/LUT</u>		+ one of: <u>GEOLO, MAPLO, GRDPS, REGPT</u>	<u>SOURC or SNSPS</u>
<u>Geo-referenced Imagery</u>	<u>VIS, SL, TI, FL, RD, EO, OP, HR, HS, CP, BP, SAR, IR, MS</u>	<u>MONO, RGB, RGB/LUT, MULTI (YCbCr)</u>		+ optionally <u>BNDPL</u>	<u>SNSPS</u>
<u>Auxiliary Data (Legend, colour patch, Location grid)</u>	<u>LEG, PAT</u>	<u>MONO, RGB, RGB/LUT</u>		<u>GRDPS</u>	
	<u>LOCg</u>	<u>NODISPLY</u>			

Table 5-3. Criteria that determine the GeoSDE's that accompany a file


Criteria, Categories and Representations Applicable for Raster Map, Elevation, Image, and Matrix Data			Required Controlled Extensions to be included in the NITF Image Subheader		
CRITERIA SET A1 (Raster Maps & Elevation Data)	ICAT	IREP	ACCURACY	LOCATION	SOURCE
1—Horizontal and Vertical Accuracy are consistent across a region	MAP	MONO RGB RGB/LUT	ACCPO	GEOPS GEOLO	SOURC
2—The raster is rectified consistently with geographicsymbol (graphic) (lat/long) coordinated systems	DTEM	NODISPLY	ACCPO	GEOPS GEOLO	SOURC
CRITERIA SET A2 (Raster Maps & Elevation Data)	ICAT	IREP	ACCURACY	LOCATION	SOURCE
1—Horizontal and Vertical Accuracy are consistent across a region	MAP	MONO RGB RGB/LUT	ACCPO	GEOPS MAPLO	SOURC
2—The raster is rectified consistently with cartographic (E, N) coordinate systems	DTEM	NODISPLY	ACCPO	GEOPS MAPLO	SOURC
CRITERIA SET A3 (Raster Maps & Elevation Data)	ICAT	IREP	ACCURACY	LOCATION	SOURCE
1—Horizontal and Vertical Accuracy are consistent across a region	MAP	MONO RGB RGB/LUT	ACCPO	GEOPS or GRDPS and REGPT	SOURC
2—The raster is non-rectified and positioned using a location grid 3—Registration points are provided in either geographic or cartographic systems	DTEM	NODISPLY	ACCPO	GEOPS or GRDPS and REGPT	SOURC
CRITERIA SET A4 (Raster Maps & Elevation Data)	ICAT	IREP	ACCURACY	LOCATION	SOURCE
1—Horizontal accuracy for when vertical accuracy varies across the region for which horizontal accuracy is constant	MAP	MONO RGB RGB/LUT	ACCHZ and ACCVT	GEOPS MAPLO	SOURC

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

2—Vertical accuracy when the horizontal accuracy varies across the region for which vertical is constant 3—The raster is rectified consistently with cartographic (E, N) coordinate systems	DTEM	NODISPLY	ACCHZ and ACCVT	GEOPS MAPLO	SOURC
--	------	----------	-----------------------	----------------	-------

**Table 5-3. Criteria that determine the GeoSDE's that accompany a file
(continued)**

Criteria, Categories and Representations Applicable for Raster Map, Elevation, Image, and Matrix Data			Required Controlled Extensions to be included in the NITF Image Subheader		
CRITERIA SET A5 (Raster Maps & Elevation Data)	ICAT	IREP	ACCURACY	LOCATION	SOURCE
1—Horizontal accuracy for when vertical accuracy varies across the region for which horizontal accuracy is constant 2—Vertical accuracy when the horizontal accuracy varies across the region for which vertical is constant	 MAP	MONO RGB RGB/LUT	ACCHZ and ACCVT	GEOPS or GRDPS and REGPT	SOURC
3—The raster is non-rectified and positioned using a location grid 4—Registration points are provided in either geographic or cartographic systems	DTEM	NODISPLY	ACCHZ and ACCVT	GEOPS or GRDPS and REGPT	SOURC
CRITERIA SET B1 (Image Data)	ICAT	IREP	ACCURACY	LOCATION	SOURCE
1—Horizontal accuracy for when vertical accuracy varies across the region for which horizontal accuracy is constant 2—The image is rectified consistently with geographic (E, N) coordinate systems	VIS, SL, FL, RD, HR, HS, CP, SAR, IR, MS	MONO RGB RGB/LUT MULTI	ACCHZ	GEOPS GEOLO	SNSPS
CRITERIA SET B2 (Image Data)	ICAT	IREP	ACCURACY	LOCATION	SOURCE
1—Horizontal accuracy for when vertical accuracy varies across the region for which horizontal accuracy is constant 2—The image is rectified consistently with cartographic (E, N) coordinate systems	VIS, SL, FL, RD, HR, HS, CP, SAR, IR, MS	MONO RGB RGB/LUT MULTI	ACCHZ	GEOPS MAPLO	SNSPS

N-0105/0198

25-August-1998 Review Draft (Date)

Criteria, Categories and Representations Applicable for Raster Map, Elevation, Image, and Matrix Data			Required Controlled Extensions to be included in the NITF Image Subheader		
CRITERIA SET B3 (Image Data)	ICAT	IREP	ACCURACY	LOCATION	SOURCE
1—Horizontal accuracy for when vertical accuracy varies across the region for which horizontal accuracy is constant 2—The image is non-rectified and positioned using a location grid 3—Registration points are provided in either geographic or cartographic systems	VIS, SL, FL, RD, HR, HS, CP, SAR, IR, MS	MONO RGB RGB/LUT MULTI	ACCHZ	GEOPS or GRDPS and REGPT	SNSPS
CRITERIA SET C (Matrix Data)	ICAT	IREP	ACCURACY	LOCATION	SOURCE
The criteria for A1 thru A5 apply to other matrix data. At this point, definition of types of matrix data and applicable subcategories for matrix data is lacking. Test criteria for this category will be developed as the sub-category information is defined.	MATR	NODISPLY	TBD009	TBD009	TBD009

5.18.64.1.2 Table 5-3a identifies auxiliary data and the related GeoSDE. An image segment containing raster map, elevation, image, or matrix data may be associated with one or more image segments in the file containing auxiliary data. Auxiliary data may consist of the legend (LEG), the colour-patch of a map (PAT), or a location grid (LOGG). The associated image segments contain no GeoSDEs themselves, but rather refer to the information in the associated image segment's GeoSDEs (for example, the coordinates of a location grid are expressed in the absolute reference system defined by the GEOPS SDE of the image segment to which it is associated).

Table 5-3a Auxiliary Data

Auxiliary Data	ICAT	IREP	Related Extension	Comment
Legend	LEG	MONO RGB RGB/LUT	SOURC	TBD009
Colour-Patch	PAT	MONO RGB RGB/LUT	SOURC	TBD009

Auxiliary Data	ICAT	IREP	Related Extension	Comment
Location Grid (Cartographic)	LOGG	NODISPLY	GRDPS	ISUBCAT1 = CGX ISUBCAT2 = CGY
Location Grid (Geodetic)	LOGG	NODISPLY	GRDPS	ISUBCAT1 = GGX ISUBCAT2 = GGY

5.18.54.2 Unpack criteria for GeoSDE Implementations

The following are the unpack criteria for the GeoSDE extensions when they appear in the file.

5.18.54.2.1 ACCPO Extension Criteria. The implementation must process all required fields in the ACCPO extension that contain valid data as defined in [DIGEST 2.0](#)[DIGEST 2.1](#).

5.18.54.2.1.1 The implementation must interpret the number of positional accuracy sets within a given file and allow the user to access and exploit the information contained in each accuracy set.

5.18.54.2.1.2 The implementation must correctly interpret and exploit the following information to the precision defined in the extension:

- Absolute Horizontal Accuracy
- Absolute Vertical Accuracy
- Relative Horizontal Accuracy
- Relative Vertical Accuracy

5.18.54.2.1.3 The implementation must not display or mensurate using precision values greater than those provided in the ACCPO extension.

5.18.54.2.1.4 The implementation must correctly display the units of measure for the different accuracy values as defined by the ACCPO extension.

5.18.54.2.1.5 The implementation must recognize and correctly associate accuracy information, both horizontal and vertical, as defined by the NOO-COO and LON and LAT coordinate pairs for up to 20 accuracy sets.

5.18.54.2.1.6 The implementation must allow the user to display and/or exploit the positional accuracy data if , and only if, that information is contained in the extension.

5.18.54.2.2 GEOPS Extension Criteria. The implementation must process all required fields in the GEOPS extension that contain valid data as defined in [DIGEST 2.0](#)[DIGEST 2.1](#).

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

5.18.54.2.2.1 The implementation must process the information contained in the required name fields and present the user, upon request, with the:

- Coordinate System Type
- Ellipsoid Name
- Vertical Datum Name
- Geodetic Datum Name
- Cartographic Grid Code
- Grid Description
- Grid Zone Number
- Projection Name

5.18.54.2.2.2 The implementation must exploit the coded values, if the name field is null, for the:

- Ellipsoid
- Vertical Datum
- Geodetic Datum
- Projection

This information must be presented to the user upon request.

5.18.54.2.2.3 For each projection parameter, the implementation will define what the parameter is, using ~~DIGEST 2.0~~[DIGEST 2.1](#), Part 3, and the false Easting and Northing of that parameter.

5.18.54.2.2.4 The implementation must display the units of measure for the coordinates in the data set.

5.18.54.2.3 GEOLO Extension Criteria. The implementation must process all required fields in the GEOLO extension that contain valid data as defined in ~~DIGEST 2.0~~[DIGEST 2.1](#), Annex D.

5.18.54.2.3.1 The implementation must exploit the GEOLO extension for all image, raster or matrix data rectified consistently with geographic coordinate systems.

5.18.54.2.3.2 TBD009

5.18.54.2.3.3 The implementation must allow the user to access and exploit the Reference Origin information contained in the GEOLO Extension.

5.18.54.2.3.4 The implementation must return a coordinate pair for any pixel in the image. The precision with which the coordinate pair is returned must not exceed that of the extension itself.

5.18.54.2.4 MAPLO Extension Criteria. The implementation must process all required fields in the MAPLO extension that contain valid data as defined in [DIGEST 2.0](#)[DIGEST 2.1](#).

5.18.54.2.4.1 The implementation must exploit the MAPLO extension for all image, raster or matrix data rectified consistently with cartographic coordinate systems.

5.18.54.2.4.2 The implementation must allow the user to access and exploit the Data Density for the E-W and N-S direction.

5.18.54.2.4.3 The implementation must denote the units of measurement for the Data Density.

5.18.54.2.4.4 The implementation must allow the user to access and exploit the Easting and Northing of the Reference Origin.

5.18.54.2.4.5 The implementation must return a coordinate pair for any pixel in the image. The precision with which the coordinate pair is returned must not exceed that of the extension itself.

5.18.54.2.5 SOURC Extension Criteria. The implementation must process all required fields in the SOURC extension that contain valid data as defined in [DIGEST 2.0](#)[DIGEST 2.1](#).

5.18.54.2.5.1 The implementation must identify and allow the user access to the Number of Source Descriptions.

5.18.54.2.5.2 The implementation must, for each source:

- Identify and allow the user access to the Image ID
- Identify and allow the user access to the number of Legend Images
- Identify and allow the user access to the number of insets
- Identify and allow the user access to the Series Designator
- Identify and allow the user access to the Source Edition Number
- Identify and allow the user access to the full name of the Source Document

5.18.54.2.5.3 Additional TBD009

5.18.54.2.6 GRDPS Extension Criteria. The implementation must process all required fields in the GRDPS extension that contain valid data as defined in [DIGEST 2.0](#)[DIGEST 2.1](#).

5.18.54.2.6.1 The implementation must allow the user to process the information contained in the NUMGRDS field and make the information available to the user for processing.

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

5.18.54.2.6.2 For each location grid the implementation will:

- Define the elevation of the location grid in meters
- Identify the correct Grid Image file and allow the user to read in the image file and have it available for processing
- Identify the ratio of image pixels to grid elements for each column
- Identify the ratio of image pixels to grid elements for each row
- Identify the column and row number of the origin of the location grid
- Identify the number of rows and columns in the location grid
- Allow the user to exploit all of the information contained in the extension.

5.18.54.2.6.3 The implementation must allow the user to exploit all of the information in the extension (what is mandatory and what is optional as far as functionality required?).

5.18.54.2.6.4 The implementation must allow the user to derive the geographic location of each pixel in the Grid Image.

5.18.54.2.6.5 The implementation must notify the user of the density of the Grid Image File.

5.18.54.2.6.6 The implementation must allow the user to “thin” the density of the Grid Image File.

5.18.54.2.7 REGPT Extension Criteria. The implementation must process all required fields in the REGPT extension that contain valid data as defined in ~~DIGEST 2.0~~[DIGEST 2.1](#).

5.18.54.2.7.1 The implementation must inform the user of the number of registration points available.

5.18.54.2.7.2 For each registration point present, the implementation must:

- Provide a point identification number
- Provide the Lat/Long or Easting/Northing of the Registration Point
- Provide the elevation of the Registration Point
- Provide the row and column number of the Registration Point
- Provide the Local Z coordinate of the Registration Point

5.18.54.2.7.3 The implementation must allow the user to exploit the Registration Points in order to adjust the overall image and improve accuracy of the data.

5.18.54.2.8 ACCHZ Extension Criteria. The implementation must process all required fields in the ACCHZ extension that contain valid data as defined in ~~DIGEST 2.0~~[DIGEST 2.1](#).

5.18.54.2.8.1 The implementation must interpret the number of horizontal accuracy sets within a given “frame file” and allow the user to access and exploit the information contained in each accuracy set.

5.18.54.2.8.2 The implementation must correctly interpret and exploit:

- Absolute Horizontal Accuracy
- Relative Horizontal Accuracy

5.18.54.2.8.3 The implementation must correctly display the units of measure for the different accuracy values as defined by the ACCHZ extension.

5.18.54.2.8.4 The implementation must recognize and correctly associate accuracy information as defined by the NOO-COO and LON and LAT coordinate pairs for up to 20 accuracy sets.

5.18.54.2.8.5 The implementation must allow the user to display and/or exploit the horizontal accuracy data if , and only if, that information is contained in the extension.

5.18.54.2.8.6 The implementation must display the horizontal accuracy values only to the precision to which it is defined by the extension.

5.18.54.2.9 ACCVT Extension Criteria. The implementation must process all required fields in the ACCVT extension that contain valid data as defined in [DIGEST 2.0](#)[DIGEST 2.1](#).

5.18.54.2.9.1 The implementation must interpret the number of vertical accuracy sets within a given “frame file” and allow the user to access and exploit the information contained in each accuracy set.

5.18.54.2.9.2 The implementation must correctly interpret and exploit:

- Absolute Vertical Accuracy
- Relative Vertical Accuracy

5.18.54.2.9.3 The implementation must correctly display the units of measure for the different accuracy values as defined by the ACCVT extension.

5.18.54.2.9.4 The implementation must recognize and correctly associate accuracy information as defined by the NOO-COO and LON and LAT coordinate pairs for up to 20 accuracy sets.

5.18.54.2.9.5 The implementation must allow the user to display and/or exploit the vertical accuracy data if , and only if, that information is contained in the extension.

5.18.54.2.9.6 The implementation must display the vertical accuracy values only to the precision to which it is defined by the extension.

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

5.18.54.2.10 SNSPS Extension Criteria. The implementation must process all required fields in the SNSPS extension that contain valid data as defined in ~~DIGEST 2.0~~DIGEST 2.1.

5.18.54.2.10.1 TBD009

5.18.65 Raster Product Format (RPF) Extensions (TBD012)

5.18.76 Digital Point Positioning Data Base (DPPDB) Extensions (TBD013)

5.18.87 IOMAPA

5.18.87.1 To verify that the implementation properly interprets and implements the IOMAPA post processing tag data the implementation must be able to save, to an NITF file, the output of the extended sequential JPEG DCT module, and the output of the post processing module before further processing takes place. ~~i.e. i.e.,~~ Remapping by the video driver for display. Test personnel will pass the output of the DCT module through a trusted post processing routine and compare its output to that of the IUT's post processing module. The two outputs ~~shall~~will be identical for IOMAPA method 0 and 1, and within + ~~or - (TBD)~~ for each pixel value for IOMAPA 2 and 3.

The following criteria apply to those implementations with requirements to pack or interpret the IOMAPA tag data extension.

5.18.87.2 Pack criteria for IOMAPA

- Implementations creating NITF files, with the IOMAPA extension, must only do so in conjunction with 12 bit/pixel extended sequential JPEG DCT compression
- Implementation creating an NITF image segment, with an IOMAPA extension, must include the NITF APP6/0001 Block Minimum Value application data segment in the JPEG stream of that image segment
- Implementations may optionally pack any of the four types of IOMAPA extensions

5.18.87.3 Unpack criteria for IOMAPA

- Implementations must be able to correctly use the included IOMAPA extension values to post process a decompressed extended sequential JPEG stream, when the IOMAPA extension is associated with that extended sequential JPEG stream. (~~i.e. i.e.,~~ same image segment)
- Implementations must be able to interpret and use all four variations of the IOMAPA extension

5.18.98 HISTOA ~~(TBD014)~~ (E004)

The HISTOA TRE is described in STDI002. As of this printing of N0105/98, the HISTOA TRE has not been implemented by any producers. Development of further criteria will occur after this TRE becomes effective for implementation and testing. The following general implementation guidance is provided and will be tested once the effectivity has been reached.

Implementations that receive an NITF file with a HISTOx TRE have one of two options if they alter the file.

Update the processing history in the TRE (preferred method)

Remove the HISTOx TRE if any alterations were made to the file that makes the HISTOx TRE have stale information.

5.19 NITF 2.0 Criteria

~~5.19.1~~ CLEVELS 1 through 6 JIEO Circular 9008 dated 30 June 93 (with errata sheet dated 20 June 97) defines the NITF 2.0 criteria for digital imagery products. The following table provides a summary of NITF 2.0 compliance test criteria. Appendix K contains the file format constraints for NITF 2.0 compliance.

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

Table 5-4. NITFS 2.0 Compliance Criteria Summary

Compliance Level	* 1	2	3	4	5	6
Common Coordinate System Size (Pixels)	00 3264 -1024 V X 00 3264 -1024 H	00 3264 -1024 V X 00 3264 -1024 H	00 3264 -2048 V X 00 3264 -2048 H	00 3264 -4096 V X 00 3264 -4096 H	00 3264 -8192 V X 00 3264 -8192 H	00 3264 -65536 V X 00 3264 -65536 H
Image Blocking	Single	Single	Single and Multiple 32 ² , 64 ² , 128 ² , 256 ² , 512 ² , 1024 ²	Single and Multiple 32 ² , 64 ² , 128 ² , 256 ² , 512 ² , 1024 ²	Single and Multiple 32 ² , 64 ² , 128 ² , 256 ² , 512 ² , 1024 ²	Multiple 32 ² , 64 ² , 128 ² , 256 ² , 512 ² , 1024 ²
Monochrome (uncomp)	8 Bits\Pixel With & w/o LUT IMODE = B	8 Bits\Pixel With & w/o LUT IMODE = B	8 Bits\Pixel With & w/o LUT IMODE = B	8 & 16 Bits\Pixel With & w/o LUT IMODE = B	8 & 16 Bits\Pixel With & w/o LUT IMODE = B	8 & 16 Bits\Pixel With & w/o LUT IMODE = B
JPEG (mono)	8 Bit sample IMODE B	8 Bit sample IMODE B	8 Bit sample IMODE B	8 & 12 Bit sample IMODE B	8 & 12 Bit sample IMODE B	8 & 12 Bit sample IMODE B
Color 8 Bit (RGB/LUT) No Compression	No	Single Band W/LUT IMODE=B	Single Band W/LUT IMODE=B	Single Band W/LUT IMODE=B	Single Band W/LUT IMODE=B	Single Band W/LUT IMODE=B
Color 24 Bit (RGB) uncomp	No	Three Bands No LUT IMODE=B,P,S	Three Bands No LUT IMODE=B,P,S	Three Bands No LUT IMODE=B,P,S	Three Bands No LUT IMODE=B,P,S	Three Bands No LUT IMODE=B,P,S
JPEG (color RGB)	No	8 Bit Sample IMODE=P	8 Bit Sample IMODE=P	8 Bit Sample IMODE=P	8 Bit Sample IMODE=P	8 Bit Sample IMODE=P
JPEG (YCbCr)	No	8 Bit Sample IMODE=P	8 Bit Sample IMODE=P	8 Bit Sample IMODE=P	8 Bit Sample IMODE=P	8 Bit Sample IMODE=P

* 01 File < 1,213,000 bytes so that it fits on a 3.5" or 5.25" floppy disk.

Note: This table only provides an overview summary of certification criteria. Proper interpretation of the table is specified in the text of this chapter. CLEVEL "99" is used to designate an NITF 2.0 file not within the 1 to 6 CLEVEL definition.

Table 5-4 NITFS 2.0 Certification Criteria Summary (cont'd.)

Compliance Level	* 1	2	3	4	5	6
Bi-Level Image	1bpp image w/wo LUT	1bpp image w/wo LUT	1bpp image w/wo LUT	1bpp image w/wo LUT	1bpp image w/wo LUT	1bpp image w/wo LUT
Bi-LEVEL Compression	COMRAT= 1D,2DS,2DH IMODE = B	COMRAT= 1D,2DS,2DH IMODE = B	COMRAT= 1D,2DS,2DH IMODE = B	COMRAT= 1D,2DS,2DH IMODE = B	COMRAT= 1D,2DS,2DH IMODE = B	COMRAT= 1D,2DS,2DH IMODE = B
Inset Image Overlays	0-4	0-4	0-19	0-19	0-19	0-19
Symbols	0-100	0-100	0-100	0-100	0-100	0-100
Aggregate Size	128 Kbyte max	128 Kbyte max	0.5 Mbyte max	1 Mbyte max	1 Mbyte max	1 Mbyte max
Bit Map Symbol Colors (1 BPP)	N,K,W	N,K,W, R,O,B,Y	N,K,W, R,O,B,Y	N,K,W, R,O,B,Y	N,K,W, R,O,B,Y	N,K,W, R,O,B,Y
Object Symbols	Not Allowed	Not Allowed	Not Allowed	Not Allowed	Not Allowed	Not Allowed
CGM SYMBOLS	PREFERRD	PREFERRED	PREFERRED	PREFERRED	PREFERRED	PREFERRED
Labels 1-320 characters each; color options same as for Bit-map Symbols	0-100 2,048 char max	0-100 2,048 char max	0-100 2,048 char max	0-100 2,048 char max	0-100 2,048 char max	0-100 2,048 char max
Text	0-32 Files 100,000 chars max. aggregate	0-32 Files 100,000 chars max. aggregate	0-32 Files 100,000 chars max. aggregate	0-32 Files 100,000 chars max. aggregate	0-32 Files 100,000 chars max. aggregate	0-32 Files 100,000 chars max. aggregate
Controlled Tags	Controlled tags may appear in the following fields: XHD, IXSHD, SXSHD, LXSHD, TXSHD, and 'Controlled Extensions' DES regardless of CLEVEL.					
Registered Tags	Registered tags may appear in the following fields: UDHD, UDID, and 'Registered Extensions' DES regardless of CLEVEL.					
Data Extension Segment	FUTURE USE Only for Systems that require use.	FUTURE USE Only for Systems that require use.	FUTURE USE Only for Systems that require use.	FUTURE USE Only for Systems that require use.	FUTURE USE Only for Systems that require use.	FUTURE USE Only for Systems that require use.
Reserved Segment	FUTURE USE Only for Systems that require use.	FUTURE USE Only for Systems that require use.	FUTURE USE Only for Systems that require use.	FUTURE USE Only for Systems that require use.	FUTURE USE Only for Systems that require use.	FUTURE USE Only for Systems that require use.

N-0105/0198
25-August-1998 Review Draft (Date)

Table 5-4 NITFS 2.0 Certification Criteria Summary (cont'd.)

Compliance Level	* 1	2	3	4	5	6
VQ Compression	4x4 Kernel 4 table w/wo masking	4x4 Kernel 4 table w/wo masking	4x4 Kernel 4 table w/wo masking	4x4 Kernel 4 table w/wo masking	4x4 Kernel 4 table w/wo masking	4x4 Kernel 4 table w/wo masking
VQ Monochrome	w/wo LUT IMODE = B	w/wo LUT IMODE = B	w/wo LUT IMODE = B	w/wo LUT IMODE = B	w/wo LUT IMODE = B	w/wo LUT IMODE = B
VQ 8-bit color	No	with LUT IMODE = B	with LUT IMODE = B	with LUT IMODE = B	with LUT IMODE = B	with LUT IMODE = B
TACO2	ALL SYSTEMS MUST SUPPORT NITF FILE EXCHANGE USING TACO2 PROTOCOL					

* 01 File < 1,213,000 bytes so that it fits on a 3.5" or 5.25" floppy disk.

Note: This table only provides an overview summary of certification criteria. Proper interpretation of the table is specified in the text of this chapter. CLEVEL "99" is used to designate an NITF 2.0 file not within the 1 to 6 CLEVEL definition.

~~5.19.2 CLEVEL 7. Notice 2 to MIL-STD 2500A added CLEVEL 07 to mark NITF 2.0 files that use STREAMING_FILE_HEADER DES. In some operational circumstances (e.g. those with critical time or storage constraints) all the information (incomplete length fields) needed to populate the header fields may not be available at the start of file creation and transfer. STREAMING_FILE_HEADER, Data Extension Segment shall will be used to provide the data needed to complete the file header. Incomplete length fields shall will be populated with the character "9" (0x39) as a place holder. Systems receiving a file with an incomplete header shall will locate the DES and interpret the data in the DES as though it is actually located at the beginning of the file. The system may restore the file header fragment from the DES to populate the header. Any modification of this file shall will result in the file being stored with a fully compliant and complete header.~~

~~5.19.3 NITF 2.1 and 2.0 STREAMING_FILE_HEADER Differences CLEVEL 07, has been added to mark NITF 2.0 files that use the STREAMING_FILE_HEADER DES. The STREAMING_FILE_HEADER DES for NITF 2.1 files is non-CLEVEL specific. Each of the four NITF 2.1 CLEVELs (03, 05, 06 and 07) are required to interpret the DES.~~

5.20 NITF 1.1 Criteria

5.20.1 Minimum Compliant NITF Field Values and Ranges. The following subset of NITF capabilities has been prescribed to ensure a common level of functionality with systems using NITF version 1.1. Related message parameters are described below.

1. Image/Sub-image Parameters. Imagery will be gray scale and may be from 8 x 8 to 512 x 512 pixels, 8 bits-per-pixel. Images may be either uncompressed or compressed using ARIDPCM. Since sub-images may be overlaid on a base image, there may be from 0 to 5 images per message. The size of the largest image in the message may be up to 512 columns by 512 rows. The aggregate size of all remaining images within a message must not exceed 50 percent of the base image.
2. Symbol Parameters. Symbols will be bit-mapped and may be 1 to 512 lines of 1 to 512 pixels per line, 1 bit-per-pixel, in white foreground on black background (N), black foreground on transparent background (K), or white foreground on transparent background (W). There may be 0 to 100 symbols per message. The maximum aggregate size of all symbols within a message must not exceed 262,144 bits.
3. Label Parameters. Labels will be in STA between 0 and 320 characters long. They may be white foreground (text) on transparent background, white on black, black on transparent or black on white. There may be 0 to 100 labels per message. The aggregate size of all labels within a message must not exceed 2,000 STA characters.
4. Text Parameters. Text files will be composed of STA characters. There may be 0 to 5 text files per message. The aggregate size of all text files within a message must not exceed 10,000 STA characters.

5.20.2 Minimum Compliance Capabilities:

5.20.2.1 Receive (Unpack) Capabilities. An NITF compliant Receive (unpack) capable system must be able to receive and unpack any minimum compliant NITF file.

5.20.2.2 Transmit (Pack) Capabilities. An NITF compliant Transmit (Pack) system must be able to pack and transmit a minimum compliant NITF file which will include selected combinations of:

- 0 images per message
- At least 1 image per message
- Compressing imagery with ARIDPCM using at least 1 rate (optional)
- 0 symbols per message
- At least 1 symbol per message, if there is no symbol waiver
- 0 labels per message
- At least 1 label per message, if there is no label waiver
- 0 text files per message
- At least 1 text file per message, if there is no text waiver

N-0105/0198

~~25 August 1998~~ Review Draft (Date)**~~5.21 Year 2000 Compliance Criteria:~~**~~5.21.1 All presentation to users of dates will use four digit year regardless of internal or NITF file representation of the date.~~~~5.21.2 All date sensitive manipulation or calculations will be done with due consideration for the appropriate century.~~~~5.21.3 For NITF 2.0 and NITF 1.1 formatted files, the implementation must associate century according to the Window Date Rule established by NIMA.~~~~1. For NITF header and subheader date fields,~~~~2. For product specific data fields (TBD003)~~**5.212 Usability Criteria**

The NITFS documents do not currently identify requirements for the usability of systems which implement NITFS. A system can be in technical compliance with the standards, yet not be well suited for use in its targeted user environment. The following usability criteria are based upon observations made during past NITF compliance tests. These criteria will be evaluated by the NITFS Test and Evaluation Facility and will be discussed in the test report, but they will not be considered compliance criteria for successful test completion. The purpose is to raise the sponsor's awareness of human factors considerations. Sponsors are encouraged to provide the NITFS Test and Evaluation Facility additional usability test criteria that they would like to have evaluated during compliance testing of their system.

5.212.1 Target Audience Description

The developer has prepared a target audience description for the system and used it in the design and development of the system. An appropriate Human Factors Engineering (HFE) and Safety evaluation has been conducted.

5.212.2 Operator's Manual

An up-to-date operator's manual for the system was available at the time of compliance testing.

5.212.3 Consistent User Interface

The system has a consistent user interface with the appearance of a single integrated application. There is no perception of needing to exit and enter multiple routines to handle NITF operations. There is no need to enter commands at the operating system prompt once the application is started.

5.212.4 Header/Subheader Defaults

The system does not require an operator entry for each and every NITF file header or subheader field value. It provides some mechanism for establishing default values and automatic calculation of values where appropriate.

5.212.5 Header/Subheader Edit

The system does not use hard coded header/subheader defaults that cannot be changed without re-coding and recompiling the program. The system provides edit capabilities for header/subheader values in a controlled manner depending on the access privilege of different levels of users.

5.212.6 Screen and Imagery Board Correspondence

A method is provided to handle the circumstance when the screen or other rendering device does not have the same pixel display capacity as the imagery processing board. There are clear procedures for setting up the appropriate parameters for proper image display. There is some means to alert the operator that the rendered image may be cropped because the display device doesn't handle the full image size as received (when no roaming or panning capability is provided).

5.212.7 Automatic Rendering

NITF message components are automatically displayed according to the NITF file header values without operator intervention; i.e. i.e., the operator is not required to read NITF header values and manually place components of the file for display.

5.212.8 Direct Text Entry

The system allows for the entry of text without the operator needing to be aware of special procedures for insuring only the NITFS STA, UT1, U8S, and MTF set of characters (without special word processing control codes, but with proper CR/LF line terminators) are entered into the NITF file.

5.212.9 User Alerts

There is some method to alert the operator that text or image comment fields are included within the NITF file being viewed and there is a convenient means to view the contents. The operator is alerted to other aspects regarding the file being viewed that are not readily apparent from the image display (such things as: user defined or extended data is included in the file; the image has color components but has been modified for display on a monochrome system; the file is in NITF 1.1, 2.0 or 2.1 format; security code words are included in the file headers; particular components could not be properly parsed or interpreted, etc.).

5.212.10 Automatic Assist

The implementation assists the operator in preparing NITF files that do not exceed the established boundary conditions for a specific CLEVEL. There is no excessive

N-0105/0198
~~25 August 1998~~ Review Draft (Date)

dependence on operator knowledge or procedures to insure only compliant files are packed.

5.223 TACO2 Criteria

5.223.1 Point-To-Point Operation

The TACO2 IUT operates over a point-to-point channel.

5.223.2 Timing

The IUT operates over either synchronous or asynchronous circuits, or both.

5.223.3 Modes of Operation

The IUT supports full duplex (FDX), half duplex (HDX), and simplex (SDX) modes of operation. The IUT must not transmit or key a transmitter while in simplex receive mode.

5.223.4 Channel Data Rates

The IUT at least supports the following communications channel data rates:

- For synchronous links, rates of 1,200, 2,400, 4,800, 9,600, 16,000, 19,200, and 32,000 bps must be supported (using an external clock source).
- For asynchronous links, rates of 1,200, 2,400, 4,800, 9,600, and 19,200 bps must be supported.

5.223.5 NETBLT Data Packet Sizes

The IUT supports setting Network Block Transfer (NETBLT) Data Packet sizes ranging from 64 bytes to 512 bytes. (Note: Any size packet less than or equal to the setting may appear.)

5.223.6 NETBLT Buffer Sizes

The IUT supports NETBLT Buffer sizes from 64 bytes through 4096 bytes.

5.223.7 NETBLT Burst Sizes

The IUT supports NETBLT Burst sizes 1 through 32.

5.223.8 ICMP Echo Response

The IUT interprets Internet Control Message Protocol (ICMP) Echo messages and responds with the appropriate ICMP Echo Reply message in full and half duplex operation.

5.223.9 Configurable Parameters

The IUT allows the operator to modify TACO2 configuration parameters.

5.223.10 Operation With STU-III Encrypted Channel

The IUT interfaces with a STU-III and performs full duplex TACO2 transfers with a distant system.

5.223.11 Checksums

The IUT checksums all DATA and LDATA packets. Upon receipt of bad checksums, full and half duplex receivers must request retransmission; simplex receivers may retain the data or replace it with nulls and provide an alert that the file was received with errors.

5.223.12 RS-232 (or compatible) Interface

The IUT must support data transfer using an RS-232 (or compatible) interface. The IUT must support the following operation, delays and waits for RS-232C (or equivalent) control signals as specified. (For the purposes of the test criteria in the following sub-paragraphs, a "transmission burst" is defined as a sequence of one or more packets transmitted contiguously. It does not necessarily correspond to a NETBLT burst, although it may.)

5.223.12.1 RTS (Request-To-Send). RTS must be held high while data is being transmitted. The IUT must have a means to wait a configurable amount of time after raising RTS and before transmitting data (RTS turn-on-delay). The IUT must also have a means to wait a configurable amount of time before lowering RTS after transmitting data (RTS turn-off delay). All delays (i.e., RTS turn-on delay, RTS turn-off delay, and half duplex turn-around delay) must be configurable from zero (0) to at least ten (10) seconds in intervals no larger than 200 milliseconds. The physical control lead response must have an accuracy of plus or minus 200 milliseconds of the delay setting.

5.223.12.1.1 Full Duplex. In full duplex mode, RTS may either be kept high throughout the transfer or lowered between transmission bursts.

5.223.12.1.2 Half Duplex. In half duplex mode, RTS must be kept low between transmission bursts to allow for incoming packets to be received. In half duplex mode, the IUT must wait a configurable amount of time before checking for DCD to be dropped low (if the DCD check is enabled) and raising RTS.

5.223.12.1.3 Simplex. In simplex transmit mode, RTS may either be kept high throughout the transfer or lowered between transmission bursts. In simplex receive mode, RTS must remain low.

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

5.223.12.2 CTS (Clear-To-Send). The IUT may have an option, which can be disabled, to check and wait for CTS to be high before transmitting each packet or transmission burst. When enabled, the check for CTS must occur after RTS is raised and before initiating the RTS turn-on delay.

5.223.12.3 DCD (Data-Carrier-Detect). The IUT may have an option, which can be disabled, to check and wait for DCD to be either high or low before transmitting.

5.223.12.3.1 Full Duplex. When enabled, in full duplex mode, the IUT must check and wait for DCD to be high. In full duplex mode, the check for DCD must occur after raising RTS and before checking for CTS to be high (if the CTS check is enabled) and before initiating the RTS turn-on delay.

5.223.12.3.2 Half Duplex. When enabled, in half duplex mode, the IUT must check and wait for DCD to be low before waiting the half duplex turn-around delay and before raising RTS.

5.223.12.3.3 Simplex. When enabled, in simplex mode, the IUT may check and wait for DCD to be either high or low. If the IUT is set to check and wait for DCD to be low, the check must occur before raising RTS. If the IUT is set to check and wait for DCD to be high, the check must occur after raising RTS and before checking for CTS to be high (if the CTS check is enabled) and before initiating the RTS turn-on delay.

5.223.12.4 DTR (Data-Terminal-Ready). The IUT must have the option to hold DTR high while in receive mode and while transmitting a file. The IUT must also have ~~the an~~ option to pulse DTR (i.e., drop DTR for at least 20 milliseconds and then raise it) between transmission bursts. (This latter option allows DTR to be used as an encryption device resynchronization line. The pulse duration must be sufficient to cause the encryption equipment to resync. Note that when the DTR output signal is used in this manner, the DTR input on the communications equipment may need to be tied high.)

5.223.13 Transfer File Size

At a minimum, IUT must support the transmission and reception of the largest CLEVEL 03 file allowed in Table 5-1. This is currently 50 Mbytes. The test file must be handled under a single file transfer, not split among multiple transfer sessions.

5.223.14 Transfer Status

The IUT must have an option to display status information indicating the progress of data transfers.

5.223.15 Abbreviated Headers

The IUT must support abbreviated headers in addition to the standard IP and NETBLT headers.

5.23.16 BERT

The IUT may, as an option, support the TACO2 Bit Error Rate Test (BERT) feature.

5.23.17 FEC-1

The IUT may, as an option, support the TACO2 Forward Error Correction 1 (FEC-1) features. Reception of FEC-1 encoded packets must not cause a non-FEC capable system to crash.

6.0 INTEROPERABILITY

6.1 General

This chapter is TBD001. This is a place holder for establishing a chapter to deal with interoperability testing of systems based on their intended use within the USIGS Architecture as detailed by the USIGS Architecture Framework (UAF) and the USIGS Interoperability Profile (UIP).

For those systems managed by/under the DODIIS management board refer to the following publications for additional guidance on interoperability testing.

- DODIIS Migration System Instructions, to DODIIS Executive Agent, Program Managers, and Developers, February 1997
- DISA/JITC Interoperability Certification Test Program Plan, For the Department of Defense Intelligence Information Systems, DODIIS Migration Systems (DRAFT) Version 2.0, May 1998
- United States Imagery and Geospatial Information System Architecture Volume II, USIGS Interoperability profile, June 1998

N-0105/~~0198~~
~~25 August 1998~~ Review Draft (Date)

(This page intentionally left blank.)

Appendix A -- List of Acronyms

ACCESSID	Access ID
AIS	Automated Information System
ANSI	American National Standards Institute
ARIDPCM	Adaptive Recursive Interpolated Differential Pulse Code Modulation
ASCII	American Standard Code for Information Interchange
ASD/C ³ I	Assistant Secretary of Defense for Command, Control, Communications, and Intelligence
BCS	Basic Character Set
BCS-A	Basic Character Set - Alphanumeric
BCS-N	Basic Character Set - Numeric
BERT	Bit Error Rate Test
BIIF	Basic Image Interchange Format
BIT	Binary Digit
BPP	Bits-per-pixel
BPS	Bits Per Second
BWC	Bandwidth Compression
C ³ I	Command, Control, Communications, and Intelligence
C ⁴ I	Command, Control, Communications, Computers, and Intelligence
CADRG	Compressed ARC Digitized Raster Graphic
CCE	Continuous Comprehensive Evaluation
CCITT	Consultative Committee for International Telegraph and Telephone
CCS	Common Coordinate System
CEDATA	Controlled Extension Data
CEL	Controlled Extension Length
CETAG	Controlled Extension Tag
CEW	Common Exploitation Workstation
CFHD	Corrected File Header
CFS	Center For Standards
CGM	Computer Graphics Metafile
CIB	Controlled Image Base
CII	Compatibility, Interoperability, and Integration
CINC	Commander In Chief
CINCS	Commanders In Chief
CIO	Central Imagery Office
CIP	Common Imagery Processor
CJCSI	Chairman, Joint Chiefs of Staff Instruction
CLEVEL	Compliance Level (for NITF 2.0)
	Complexity Level (for NITF 2.1)
CMY	Cyan, Magenta, Yellow
COMSEC	Communications Security
COMRAT	Compression Rate Code

Appendix A: List of Acronyms (cont'd.)

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

C/S/A	CINCs/Services/Agencies
CR	Carriage Return
CR/LF	Carriage Return/Line Feed
CTE	Compliance Test and Evaluation
CTS	Clear to Send
CY	Calendar Year
DATA	Data Buffer Sequence
DBMS	Database Management System
DCD	Data Carrier Detect
DCI	Director, Central Intelligence
DCT	Discrete Cosine Transform
DDN	Defense Data Network
DE	Dissemination Element
DES	Data Extension Segment
DIA	Defense Intelligence Agency
DIRINT	Director of Intelligence
DIS	Draft International Standard
DISA	Defense Information Systems Agency
DMA	Defense Mapping Agency
DOD	Department of Defense
DPPDB	Digital Point Positioning Data Base
DPS	Digital Production System
DQT	Define Q-Table
DSPO	Defense Support Project Office
DTR	Data Terminal Ready
EHD	Extended Header Data
EIA	Electronic Industries Association
FDCT	Forward Discrete Cosine Transform
FDX	Full Duplex
FEC	Forward Error Correction
FBKGC	File Background Color
FIPS	Federal Information Processing Standard
FPU	Floating Point Unit
FTP	File Transfer Protocol
GBS	Global Broadcast System
GeoSDE	Geospatial Support Data Extension
GIAS	Geospatial and Imagery Access Specification
G/ISMC	GSMC and ISMC
GOSIP	Government OSI Profile

Appendix A: List of Acronyms (cont'd.)

GSMC	Geospatial Standards Management Committee
GUI	Graphical User Interface

H-TABLE	Huffman Table
HDLC	High-Level Data Link Control
HDX	Half Duplex
HFE	Human Factors Engineering
HUFFVALS	Huffman Values
IAMP	Imagery Acquisition Management Plan
IAS	Imagery Access Specification
IC	Image Compression
ICAT	Image Category
ICMP	Internet Control Message Protocol
ICS	Intelligence Community Standard
IDEX	Image Data Exploitation System
IEC	International Electrotechnical Commission
I/O	Input/Output
IFDCT	Inverse Forward Discrete Cosine Transform
IITSMP	Imagery Information Technology Standards Management Plan
IMODE	Image Mode
IP	Internet Protocol
IPA	Image Product Archive
IPL	Image Product Library
IR	Infra red
IREP	Image Representation
ISMC	Imagery Standards Management Committee
ISO	International Organization for Standards
ISP	International Standardized Profile
IUT	Implementation Under Test
JIEO	Joint Interoperability and Engineering Organization
JINTACCS	Joint Interoperability Tactical Command and Control System
JITC	Joint Interoperability Test Command
JPEG	Joint Photographic Experts Group
JTA	Joint Technical Architecture
LAN	Local Area Network
LBC	Label Background Color
LDATA	Last Data (packet of every buffer)
LF	Line Feed
LTC	Label Text Color
LUT	Look-up Table

Appendix A: List of Acronyms (cont'd.)

MBZ	Must Be Zero
MIL-HDBK	Military Handbook
MIL-STD	Military Standard
MMU	Memory Management Unit
MOA	Memoranda of Agreement

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

MOT	Means of Testing
MRTFB	Major Range and Test Facility Base
MTF	Message Text Format
NATO	North Atlantic Treaty Organization Organisation
NBPP	Number of Bits Per Pixel
NCCB	NITF Configuration Control Board
NETBLT	Network Block Transfer
NIIEE	NIMA Imagery Information Exploitation Environment
NIMA	National Imagery and Mapping Agency
NITF	National Imagery Transmission Format
NITFS	National Imagery Transmission Format Standard
NSA	National Security Agency
NSDE	National Support Data Extension
NSIF	NATO Secondary Imagery Format
NTB	NITFS Technical Board
NUMDES	Number of Data Extension Segments
NUMRES	Number of Reserved Extension Segments
OASD/C ³ I	Office of the Assistant Secretary of Defense for C ³ I
ODASD/I	Office of the Deputy Assistant Secretary of Defense for Intelligence
ODCSINT	Office of the Deputy Chief of Staff for Intelligence
ODNI	Office of the Director of Naval Intelligence
OJCS	Organization of the Joint Chiefs of Staff
OSI	Open Systems Interconnection
PIAE	Profile for Imagery Archive Extensions
POC	Point of Contact
PPBS	Planning, Programming, and Budgeting System
PEM	Program Element Monitor
POSIX	Portable Operating System Interface for Computer Environments
PPPS	Point Positioning Production System
Q-Table	Quantization Table
RAM	Random Access Memory
REDATA	Registered Extension Data
REL	Registered Extension Length
RES	Reserved Extension Segment

Appendix A: List of Acronyms (cont'd.)

RETAG	Registered Extension Tag
RFC	Request for Change
RGB	Red Green Blue
RST	Re-Start Marker
RTS	Request To Send

SAMI	Symbology and Annotation for Mapping and Imagery
SAR	Synthetic Aperture Radar
SDE	Support Data Extensions
SIDS	Secondary Imagery Dissemination System
SLIP	Serial Line Internet Protocol
SPIA	Standards Profile for Imagery Archives
STA	Standard ASCII
STANAG	Standardized NATO Agreement
STU-III	Secure Telephone Unit-3rd Generation
SUT	System Under Test
TACO2	Tactical Communications Protocol 2
TBD	To Be Determined
TBR	To Be Researched
TBP	To Be Published
TCP	Transmission Control Protocol
TD	Transmit Data
TIS	Technical Interface Specification
TMDE	Test, Measurement and Diagnostic Equipment
TRE	Tagged Record Extension
<u>U8S</u>	<u>Universal Multiple Octet Coded Character Set (UCS) Transformation Format 8 (UTF-8) Subset</u>
UAF	USIGS Architecture Framework
UCS	Universal Multiple Octet Coded Character Set
UDHD	User Defined Header Data
UDID	User Defined Image Data
UIP	USIGS Interoperability Profile
USA	United States Army
USAF	United States Air Force
USIGS	United States Imagery and Geospatial System
USMC	United States Marine Corps
USN	United States Navy
<u>UT1</u>	<u>Universal Multiple Octet Coded Character Set (UCS) Transformation Format 1</u>
UTC	Coordinated Universal Time (i.e. <u>i.e.</u> , ZULU)
VIMAS	Visible, Infrared, and Multispectral Airborne Sensor
VQ	Vector Quantization

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

Appendix A: List of Acronyms (cont'd.)

WAN	Wide Area Network
Y2K	Year 2000
YCbCr	Y=Brightness of signal. Cb=Chrominance (blue). Cr=Chrominance (red).
YCM	Yellow, Cyan, Magenta
YIQ	Intensity, Inphase, Quadrature

Appendix B -- NITFS Forms

<u>Form</u>	<u>Page</u>
CTR-1 NITFS Test Request	B-23
CTR-2 NITFS System Registration Data	B-34
CTR-3 NITFS Software Registration Data	B-4
CTR-4 Alternate Test Site Request	B-5
CTR-5 Y2K System Awareness Checklist	B-6
JITC NITFS Customer Checklist	B-
Pack Capabilities Inventory	B-

N-0105/~~0198~~
~~25 August 1998~~ Review Draft (Date)

(This page intentionally left blank.)

COMPLIANCE TEST REQUEST

<u>FROM Sponsoring Organization:</u>		<u>Date:</u>	
<u>Mailing Address:</u>			
<u>Primary Point of Contact:</u>			
<u>Phone:</u>		<u>Fax:</u>	
<u>E-mail:</u>			
<u>Alternate Point of Contact:</u>			
<u>Phone:</u>		<u>Fax:</u>	
<u>E-mail:</u>			
<u>TO: Joint Interoperability Test Command</u> <u>NITFS Test and Evaluation Facility</u> <u>Bldg 57305</u> <u>Fort Huachuca, AZ 85613-7020</u>			
<u>Imagery System Name & Version:</u>			
<u>Security Classification:</u>		<u>Unclassified Confidential Secret Top Secret</u>	
<u>Type of Testing Requested:</u>		<u>Initial Test Re-Test Derived Registration</u>	
<u>Desired Location of Testing:</u>		<u>NITFS Test and Evaluation Facility</u>	
		<u>Other Location (Include NITFS Form CTR-3)</u>	
<u>Desired Test Dates:</u>			
<u>Number of Disparate System Configurations:</u> <u>NOTE: Complete CTR-2 for EACH configuration.</u>	<u>Hardware</u>	<u>OS/Software</u>	
<u>Software Developer</u>			
<u>Mailing Address</u>			
<u>Point of Contact</u>			
<u>Phone:</u>		<u>Fax:</u>	
<u>E-mail:</u>			

N-0105/0198

25 August 1998 Review Draft (Date)

FROM: Sponsoring Organization	Date:
Mailing Address	
Primary Point of Contact —Phone —FAX —Email	
Alternate Point of Contact —Phone —FAX —Email	
TO: Joint Interoperability Test Command NITFS Test and Evaluation Facility BLDG 57305 Fort Huachuca, Az 85613-7020	
Imagery System	
Security Classification	<input type="checkbox"/> Unclassified <input type="checkbox"/> Confidential <input type="checkbox"/> Secret <input type="checkbox"/> Top Secret
Type of Testing Requested	<input type="checkbox"/> Initial Test <input type="checkbox"/> Re Test <input type="checkbox"/> Derived Registration
Desired Location of Testing	<input type="checkbox"/> NITFS Test and Evaluation Facility <input type="checkbox"/> Other Location (Include NITFS Form CTE-4.)
Desired Test Dates	
Enclosures: <input type="checkbox"/> NITFS Form CTR-2 NITFS System Registration Data (Mandatory) <input type="checkbox"/> NITFS Form CTR-3 NITFS Software Registration Data (Mandatory) <input type="checkbox"/> NITFS Form CTR-4 Alternate Test Site Request <input type="checkbox"/> NITFS Form CTR-5 NITF Applicaiton Y2K Summary (Mandatory) <input type="checkbox"/> Technical Manual(s) <input type="checkbox"/> Operator Manual(s) <input type="checkbox"/> Other (e.g., additional testing desired)	
NAME & TITLE	SIGNATURE (Sponsor)

NITFS FORM CTR-1 (June 19982001)

NITFS ~~SYSTEM~~ REGISTRATION DATA

<u>System Name</u>	
<u>System Configuration, (i.e., SunSPARC Ultra 60, Solaris 2.6)</u>	
<u>Complexity Level Supported:</u>	<u> 3 5 6 7 Other</u>
<u>Implementation Language(s):</u>	
<u>Compiler(s)/Assembler(s) used for NITFS Software:</u>	
<u>Hardware Requirements</u>	
<u>Processor(s):</u>	
<u>RAM:</u>	
<u>File Storage:</u>	
<u>Display Adapter(s):</u>	
<u>Network Interface(s):</u>	
<u>TACO2 Interface(s):</u>	
<u>Other:</u>	
<u>Software Requirements</u>	
<u>Operating System:</u>	
<u>Network Software:</u>	
<u>Drivers:</u>	
<u>Other:</u>	
<u>Sync Comms Port(s):</u>	
<u>Async Comms Port(s):</u>	
<u>Other Required Hardware</u>	
<u>Tagged Record Extensions Supported, Generate/Interpret:</u>	
<u>Data Extension Segments Supported, Generate/Interpret:</u>	
<u>Required NITFS Functions Not Supported:</u>	
<u>Optional Functions and/or Data Types Supported:</u>	
<u>Miscellaneous:</u>	
<u>Enclosures</u>	
<u>NITFS Form CTR-3, Alternate Test Site Request</u>	
<u>Technical Manual(s)</u>	
<u>Operator Manual(s)</u>	
<u>Other (e.g., additional testing desired)</u>	
<u>NAME & TITLE:</u>	<u>SIGNATURE (Sponsor)</u>

N-0105/~~0198~~~~25 August 1998~~ Review Draft (Date)

System Name		Date
NITFS Imagery Software		
TACO2 Software		
Test Sponsor		
Mailing Address		
Point of Contact		
Phone		FAX
Email		
Test Item Developer		
Mailing Address		
Point of Contact		
Phone		FAX
Email		
Complexity Level Supported	<u> 3 </u> <u> 5 </u> <u> 6 </u> <u> 7 </u> <u> Other </u>	
Hardware Platform		
Processor(s)		
RAM		
Local File Storage		
Network Interface(s)		
Display Adapter(s)		
Sync Comms Port(s)		
Async Comms Port(s)		
Other Required Hardware		
Operating System		
Other Required Software/Drivers		
Miscellaneous		

NITFS FORM CTR-2 (June ~~1998~~2001)

NITFS SOFTWARE REGISTRATION DATA

System Name	Date	
NITFS Imagery Software		
TACO2 Software		
Complexity Level Supported	<u> 3 </u> <u> 5 </u> <u> 6 </u> <u> 7 </u> Other	
Software Developer		
Mailing Address		
Point of Contact		
Phone		FAX
Email		
Implementation Language(s)		
Compiler(s)/Assembler(s) used for NITFS Software		
Hardware Requirements <u> </u> Processor(s) <u> </u> RAM <u> </u> File Storage <u> </u> Display Adaptor(s) <u> </u> Network Interface(s) <u> </u> TACO2 Interface(s) <u> </u> Other		
Software Requirements <u> </u> Operating System <u> </u> Network Software <u> </u> Drivers <u> </u> Other		
NITFS Functions not Supported		
Optional Functions and/or Data Types Supported		
Miscellaneous		

NITFS FORM CTR-3 (June 1998)

N-0105/0198
~~25 August 1998~~ Review Draft (Date)

ALTERNATE TEST SITE REQUEST

System Name			Date
Proposed Test Site			
Address			
Point of Contact			
Phone		FAX	
Email			
Personnel Clearances Required			
Security POC		SCIF	_ Yes _ No
Address			
Phone		FAX	
Servicing SSO			
Diagram of Test Space(s)			
Available Work Space			
Network connectivity Available			
Interface Cables Available			
Power Available (Include number and type of sockets, and distance from work space.)			
Miscellaneous			

NITFS FORM CTR-34 (June 1998)

JITC NITFS Customer Checklist

The following is a summary of actions needed to schedule and conduct a test at the Joint Interoperability Test Command (JITC) National Imagery Transmission Format Standard Test Facility.

9 Sponsor/Developer contacts JITC: (520) 538-5154/5458/5494.

9 Complete NITFS Test Submission forms (CTR Forms) and the Pack Capabilities inventory and send to:

Joint Interoperability Test Command fax: (520) 538-5257 (DSN 879)
Bldg 57305, Attn: JTDB/Steve Kerr voice: (520) 538-5154 (DSN 879)
Ft. Huachuca, AZ 85613-7020

9 Schedule test: desired date- primary _____ secondary _____
Test sponsor must contact the NITFS lab to confirm availability
(520) 538-5458 or (520) 538-5494

9 Review Test Plan, Cost Estimate, and Test Logistical Requirements

9 If applicable, complete the appropriate requirement:

9 Terms & Conditions For Tests Conducted & Furnished by the JITC (if vendor sponsored)

9 Review and complete Test Agreement & License (if government sponsored using vendor equipment)

send to:

Department of The Interior
National Business Center, Acquisition Services Division
Southwest Branch fax: (520) 533-1600 (DSN 821)
Attn: DOI/NBC voice: (520) 538-0418 (DSN 879)
PO BOX 12924
Ft. Huachuca, AZ 85670-2924

9 Payment (must be received prior to test): MIPR, check, or money order:

Joint Interoperability Test Command
Bldg 57305, Attn: JTG
Ft. Huachuca, AZ 85613-7020

9 Clearance information when running a classified test:

Joint Interoperability Test Command fax: (520) 538-4345 (DSN 879)
Bldg 57305, Attn: Security voice: (520) 538-5200 (DSN 879)
Ft. Huachuca, AZ 85613-7020

9 Send serial numbers of all equipment to lab if test is classified

9 Send equipment so that it arrives before scheduled test

Joint Interoperability Test Command
Bldg 57305, Attn: NITFS Lab (JTDB)
Ft. Huachuca, AZ 85613-7020

N-0105/0198

~~25-August-1998~~ Review Draft (Date)**Pack Capabilities Inventory**Note: This table is included for information purposes and is subject to change.

<u>Pack Capabilities Inventory</u>			
<u>General</u>			
<u>Complexity Level (CLEVEL)</u> <u>Determining Factors:</u> <u>Common Coordinate System Extent</u> <u>Maximum File Size</u> <u>Image Size</u> <u>Number of Images</u> <u>Number of Bands</u>		CL 03	CL 05 CL 06 CL 07
<u>Maximum image size</u>		Row (y)	Column (x)
<u>Maximum file size (in bytes)</u>		bytes	
<u>Image blocking:</u> <u>Single Block per image</u> <u>Multiple Blocks per image</u> <u>List block sizes/ranges supported:</u>		Yes _____ No _____ Yes _____ No _____ _____ _____ _____	
<u>Monochrome (MONO) No Compression (IMODE B)</u>			
<u>Supported data types</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>1 bit/pixel, PVTYP E B</u>			
<u>8 bit/pixel, PVTYP E INT</u>			
<u>12 bit/pixel, PVTYP E INT</u>			
<u>16 bit/pixel, PVTYP E INT</u>			
<u>32 bit/pixel, PVTYP E R</u>			
<u>Look-Up-Tables supported (NLUTSn=1) with above data types</u>			
<u>Image Data Mask Supported</u>			
<u>Blocked Image Masking</u>			
<u>Pad Pixel Masking (including Transparency)</u>			

<u>Pack Capabilities Inventory</u>			
<u>Color (RGB/LUT) No Compression, IMODE B</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>Single band, PVTYPE B; 1-bit/pixel</u>			
<u>Single band, PVTYPE INT; 8-bits/pixel:</u>			
<u>Image Data Mask Supported</u>			
<u>Blocked Image Masking</u>			
<u>Pad Pixel Masking (including Transparency)</u>			
<u>Other</u>			
<u>Color (RGB) No Compression, No LUT</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>Three bands, 8 bits/pixel per band, No LUT, PVTYPE INT:</u>			
<u>IMODE B</u>			
<u>IMODE P</u>			
<u>IMODE R</u>			
<u>IMODE S</u>			
<u>Image Data Mask Supported</u>			
<u>Blocked Image Masking</u>			
<u>Pad Pixel Masking (including Transparency)</u>			
<u>Multispectral (MULTI), Uncompressed</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>IREF = MULTI Supported</u>	<u>Number and range of bands supported</u>		
<u>8-bits/pixel, PVTYPE INT:</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>IMODE B</u>			
<u>IMODE P</u>			
<u>IMODE R</u>			
<u>IMODE S</u>			
<u>16-bits/pixel, PVTYPE INT:</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>IMODE B</u>			
<u>IMODE P</u>			
<u>IMODE R</u>			
<u>IMODE S</u>			

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

<u>Pack Capabilities Inventory</u>			
<u>32-bits/pixel, PVTYP E R:</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>IMODE B</u>			
<u>IMODE P</u>			
<u>IMODE R</u>			
<u>IMODE S</u>			
<u>64-bits/pixel, PVTYP E C:</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>IMODE B</u>			
<u>IMODE P</u>			
<u>IMODE R</u>			
<u>IMODE S</u>			
<u>Look-Up-Tables supported (NLUTSn=1) with above data types</u>			
<u>Image Data Mask Supported</u>			
<u>Blocked Image Masking</u>			
<u>Pad Pixel Masking (including Transparency)</u>			
<u>Other</u>			
<u>JPEG DCT Compression Monochrome (IMODE B)</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>JPEG DCT Compression:</u>			
<u>8-bit sample</u>			
<u>12-bit sample</u>			
<u>Supported Q/H Tables</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>General purpose (00.X)</u>			
<u>VIS (01.X)</u>			
<u>IR (02.X)</u>			
<u>SAR (03.X)</u>			
<u>DS (04.X)</u>			
<u>Image Data Mask Supported - Blocked Image Masking</u>			
<u>JPEG DCT Compression 24-Bit Color (RGB) (IMODE P)</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>24-bit JPEG DCT Compression, 8 bits-per-sample:</u>			
<u>RGB</u>			
<u>YCbCr</u>			
<u>Supported Q/H Tables</u>			
<u>General purpose (00.X)</u>			
<u>Color (00.X)</u>			

Pack Capabilities Inventory			
Image Data Mask Supported - Blocked Image Masking			
Downsampled JPEG DCT Monochrome (IMODE B)	Yes	No	Answers/Comments
Downsampled JPEG, single band, 8-bit			
Image Data Mask Supported - Blocked Image Masking			
JPEG Lossless Compression Monochrome (IMODE B)	Yes	No	Answers/Comments
MONO JPEG Lossless Compression:			Identify sample size(s) supported (2 - 16-bit sample)
Look-Up-Tables supported (NLUTSn=1) with above data type			
Image Data Mask Supported			
Blocked Image Masking			
Pad Pixel Masking (including Transparency)			
JPEG Lossless Compression 24-bit Color (IMODE P)	Yes	No	Answers/Comments
JPEG Lossless Compression, 24-bit RGB Color			
Image Data Mask Supported			
Blocked Image Masking			
Pad Pixel Masking (including Transparency)			
Bi-Level Compression (IMODE B)	Yes	No	Answers/Comments
Without LUT			
Grayscale LUT			
RGB/LUT			
Compression Rate			
1D			
2DS			
2DH			
Image Data Mask Supported			
Blocked Image Masking			
Pad Pixel Masking (including Transparency)			
Vector Quantization (VQ) Compression (IMODE B)	Yes	No	Answers/Comments
VQ compression, Single Band, IMODE B (4 X4 kernel in 4 tables)			
Without LUT			
Grayscale LUT			
RGB/LUT			

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

<u>Pack Capabilities Inventory</u>			
<u>Image Data Mask Supported</u>			
<u>Blocked Image Masking</u>			
<u>Pad Pixel Masking (including Transparency)</u>			
<u>Multispectral Individual Band JPEG Compression</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>Multispectral Individual Band JPEG, 2 bands up to 255 bands</u>			<u>Identify the number of bands supported</u>
<u>8-bit, IMODE B</u>			
<u>8-bit, IMODE S</u>			
<u>12-bit, IMODE B</u>			
<u>12-bit IMODE S</u>			
<u>Image Data Mask Supported - Blocked Image Masking</u>			
<u>NODISPLAY - Data not intended for display (generally matrix data)</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>Elevation data, 1 Band, No Compression, No LUT, IMODE B ICAT = DTEM:</u>			
<u>12-bit/pixel, PVTYP E SI</u>			
<u>16-bit/pixel, PVTYP E SI</u>			
<u>32-bit/pixel, PVTYP E R</u>			
<u>Location grid data, 2-band, 8-bits/pixel, PVTYP E INT No Compression, No LUT ICAT = LOCG, ISUBCATn = CGX, CGY or GGX, GGY:</u>			
<u>IMODE B</u>			
<u>IMODE P</u>			
<u>Location grid data, 2-band, 12-bits/pixel, PVTYP E INT No Compression, No LUT ICAT = LOCG, ISUBCATn = CGX, CGY or GGX, GGY:</u>			
<u>IMODE B</u>			
<u>IMODE P</u>			
<u>Location grid data, 2-band, 16-bits/pixel, PVTYP E INT No Compression, No LUT ICAT = LOCG, ISUBCATn = CGX, CGY or GGX, GGY:</u>			
<u>IMODE B</u>			
<u>IMODE P</u>			

Pack Capabilities Inventory			
Location grid data, 2-band, 32-bits/pixel, PVTTYPE INT No Compression, No LUT ICAT = LOCG, ISUBCATn = CGX, CGY or GGX, GGY:			
IMODE B			
IMODE P			
Location grid data, 2-band, 32-bits/pixel, PVTTYPE R No Compression, No LUT ICAT = LOCG, ISUBCATn = CGX, CGY or GGX, GGY:			
IMODE B			
IMODE P			
Other matrix data (1-999 bands):			
8-bit/pixel, PVTTYPE INT			
IMODE B			
IMODE P			
IMODE R			
IMODE S			
16-bit/pixel, PVTTYPE INT			
IMODE B			
IMODE P			
IMODE R			
IMODE S			
16-bit/pixel, PVTTYPE SI			
IMODE B			
IMODE P			
IMODE R			
IMODE S			
32-bit/pixel, PVTTYPE R			
IMODE B			
IMODE P			
IMODE R			
IMODE S			

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

<u>Pack Capabilities Inventory</u>			
<u>64-bit/pixel, PVTTYPE C</u>			
<u>IMODE B</u>			
<u>IMODE P</u>			
<u>IMODE R</u>			
<u>IMODE S</u>			
<u>Image Data Mask Supported</u>	<u>Supported</u>		
<u>Blocked Image Masking</u>			
<u>Pad Pixel Masking (including Transparency)</u>			
<u>Other NODISPLAY (matrix)</u>			
<u>CGM Graphic Segments</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>Number of CGM graphic segments supported per file (Maximum number of Symbol segments per file = 100):</u>	<u>Number of segments</u>		
<u>Elements common to MIL-STDs 2301 and 2301A</u>			
<u>Single element CGM (1 element per segment)</u>			
<u>Multiple element CGM (multiple elements per segment)</u>			
<u>CGM file size (aggregate size)</u>	<u>Aggregate size</u>		
<u>CGM colors supported (List)</u>			
<u>Text</u>			
<u>Fonts supported</u>	<u>List:</u>		
<u>Fonts height supported (List)</u>	<u>List:</u>		
<u>Polygon</u>	<u>Yes</u>	<u>No</u>	
<u>Interior Style Solid (1)</u>			
<u>Interior Style Empty (4)</u>			
<u>Edge Type Solid (1)</u>			
<u>Edge Type Dashed (2)</u>			
<u>Ellipse</u>	<u>Yes</u>	<u>No</u>	
<u>Interior Style Solid (1)</u>			
<u>Interior Style Empty (4)</u>			
<u>Edge Type Solid (1)</u>			
<u>Edge Type Dashed (2)</u>			
<u>Polyline:</u>	<u>Yes</u>	<u>No</u>	
<u>Line Type Solid (1)</u>			
<u>Line Type Dashed (2)</u>			

<u>Pack Capabilities Inventory</u>				
<u>Elliptical Arc:</u>	<u>Yes</u>	<u>No</u>		
<u>Line Type Solid (1)</u>				
<u>Line Type Dashed (2)</u>				
<u>Elliptical Closed Arc</u>	<u>Yes</u>	<u>No</u>		
<u>Close Type Pie (0)</u>				
<u>Close Type Chord (1)</u>				
<u>Interior Style Solid (1)</u>				
<u>Interior Style Empty (4)</u>				
<u>Edge Type Solid (1)</u>				
<u>Edge Type Dashed (2)</u>				
<u>Rectangle</u>	<u>Yes</u>	<u>No</u>		
<u>Interior Style Solid (1)</u>				
<u>Interior Style Empty (4)</u>				
<u>Edge Type Solid (1)</u>				
<u>Edge Type Dashed (2)</u>				
<u>Circle</u>	<u>Yes</u>	<u>No</u>		
<u>Interior Style Solid (1)</u>				
<u>Interior Style Empty (4)</u>				
<u>Edge Type Solid (1)</u>				
<u>Edge Type Dashed (2)</u>				
<u>Circular Arc Center</u>	<u>Yes</u>	<u>No</u>		
<u>Line Type Solid (1)</u>				
<u>Line Type Dashed (2)</u>				
<u>Circular Arc Center Closed</u>	<u>Yes</u>	<u>No</u>		
<u>Close Type Pie (0)</u>				
<u>Close Type Chord (1)</u>				
<u>Interior Style Solid (1)</u>				
<u>Interior Style Empty (4)</u>				
<u>Edge Type Solid (1)</u>				
<u>Edge Type Dashed (2)</u>				

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

<u>Pack Capabilities Inventory</u>			
<u>Elements specific to MIL-STD 2301A</u>			
<u>Polygon</u>	<u>Yes</u>	<u>No</u>	
<u>Interior Style Hatch (3)</u>			
<u>Horizontal (1)</u>			
<u>Vertical (2)</u>			
<u>Positive Slope (3)</u>			
<u>Negative Slope (4)</u>			
<u>Horizontal/Vertical Cross Hatch (5)</u>			
<u>Positive/Negative Slope Cross (6)</u>			
<u>Edge Visibility On (1)</u>			
<u>Edge Visibility Off (0)</u>			
<u>Edge Type Dotted (3)</u>			
<u>Edge Type Dash-Dot (4)</u>			
<u>Edge Type Dash-Dot-Dot (5)</u>			
<u>Polygon Set</u>			
<u>Interior Style Hatch (3)</u>			
<u>Horizontal (1)</u>			
<u>Vertical (2)</u>			
<u>Positive Slope (3)</u>			
<u>Negative Slope (4)</u>			
<u>Horizontal/Vertical Cross Hatch (5)</u>			
<u>Positive/Negative Slope Cross (6)</u>			
<u>Edge Visibility On (1)</u>			
<u>Edge Visibility Off (0)</u>			
<u>Edge Type Dotted (3)</u>			
<u>Edge Type Dash-Dot (4)</u>			
<u>Edge Type Dash-Dot-Dot (5)</u>			

<u>Pack Capabilities Inventory</u>			
<u>Ellipse</u>	<u>Yes</u>	<u>No</u>	
<u>Interior Style Hatch (3)</u>			
<u>Horizontal (1)</u>			
<u>Vertical (2)</u>			
<u>Positive Slope (3)</u>			
<u>Negative Slope (4)</u>			
<u>Horizontal/Vertical Cross Hatch (5)</u>			
<u>Positive/Negative Slope Cross (6)</u>			
<u>Edge Visibility On (1)</u>			
<u>Edge Visibility Off (0)</u>			
<u>Edge Type Dotted (3)</u>			
<u>Edge Type Dash-Dot (4)</u>			
<u>Edge Type Dash-Dot-Dot (5)</u>			
<u>Polyline</u>	<u>Yes</u>	<u>No</u>	
<u>Line Type Dotted (3)</u>			
<u>Line Type Dash-Dot (4)</u>			
<u>Line Type Dash-Dot-Dot (5)</u>			
<u>Elliptical Arc</u>	<u>Yes</u>	<u>No</u>	
<u>Line Type Dotted (3)</u>			
<u>Line Type Dash-Dot (4)</u>			
<u>Line Type Dash-Dot-Dot (5)</u>			
<u>Elliptical Closed Arc</u>	<u>Yes</u>	<u>No</u>	
<u>Interior Style Hatch (3)</u>			
<u>Horizontal (1)</u>			
<u>Vertical (2)</u>			
<u>Positive Slope (3)</u>			
<u>Negative Slope (4)</u>			
<u>Horizontal/Vertical Cross Hatch (5)</u>			
<u>Positive/Negative Slope Cross (6)</u>			
<u>Edge Visibility On (1)</u>			
<u>Edge Visibility Off (0)</u>			
<u>Edge Type Dotted (3)</u>			
<u>Edge Type Dash-Dot (4)</u>			
<u>Edge Type Dash-Dot-Dot (5)</u>			

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

<u>Pack Capabilities Inventory</u>			
<u>Rectangle</u>	<u>Yes</u>	<u>No</u>	
<u>Circle</u>	<u>Yes</u>	<u>No</u>	
<u>Circular Arc Center</u>	<u>Yes</u>	<u>No</u>	

<u>Pack Capabilities Inventory</u>			
<u>Circular Arc Center Close</u>	<u>Yes</u>	<u>No</u>	
<u>Interior Style Hatch (3)</u>			
<u>Horizontal (1)</u>			
<u>Vertical (2)</u>			
<u>Positive Slope (3)</u>			
<u>Negative Slope (4)</u>			
<u>Horizontal/Vertical Cross Hatch (5)</u>			
<u>Positive/Negative Slope Cross (6)</u>			
<u>Edge Visibility On (1)</u>			
<u>Edge Visibility Off (0)</u>			
<u>Edge Type Dotted (3)</u>			
<u>Edge Type Dash-Dot (4)</u>			
<u>Edge Type Dash-Dot-Dot (5)</u>			
<u>Text Segments</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>Text formats</u>			
<u>STA</u>			
<u>UT1</u>			
<u>MTF</u>			
<u>U8S</u>			
<u>Data Extension Segment (DES)</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>Number of DES segments (up to 10 allowed)</u>			
<u>TRE_OVERFLOW DES</u>			
<u>Controlled Extension DES</u>			
<u>Registered Extensions DES</u>			
<u>STREAMING FILE HEADER DES:</u>			
<u>File Header</u>			
<u>File Header and First Image Subheader</u>			
<u>File Header, First Image Subheader and JPEG Header</u>			
<u>Tagged Record Extensions (TRE)</u>	<u>Yes</u>	<u>No</u>	<u>Answers/Comments</u>
<u>PIAE</u>			
<u>Create</u>			<u>List:</u> _____
<u>Retain</u>			

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

<u>Pack Capabilities Inventory</u>				
<u>NAT SDE</u>				
<u>Create</u>				<u>List:</u> _____
<u>Retain</u>				
<u>Chipping</u>				
<u>Block/FAF Boundaries</u>				
<u>ICHIPB</u>				
<u>Airborne SDE</u>				<u>List:</u> _____
<u>EO/Visual</u>				
<u>Create</u>				
<u>Retain</u>				
<u>Infra Red</u>				
<u>Create</u>				
<u>Retain</u>				
<u>SAR image</u>				<u>List:</u> _____
<u>Create</u>				
<u>Retain</u>				
<u>SAR complex data</u>				
<u>Create</u>				
<u>Retain</u>				
<u>RPF Extensions</u>				
<u>CIB</u>				
<u>Create</u>				
<u>Retain</u>				
<u>CADRG</u>				
<u>Create</u>				
<u>Retain</u>				
<u>DPPDB Extensions</u>				
<u>Create</u>				
<u>Retain</u>				

<u>Pack Capabilities Inventory</u>				
<u>Digest GEOSDE</u>				
<u>Raster Maps & Elevation Data</u>				
<u>ACCURACY</u>				
<u>ACCPO</u>				
<u>ACCHZ</u>				
<u>ACCVT</u>				
<u>LOCATION</u>				
<u>GEOPS</u>				
<u>GEOLO</u>				
<u>MAPLO</u>				
<u>GRDPS</u>				
<u>REGPT</u>				
<u>SOURCE</u>				
<u>SOURC</u>				
<u>Image Data</u>				
<u>ACCURACY</u>				
<u>ACCHZ</u>				
<u>LOCATION</u>				
<u>GEOPS</u>				
<u>GEOLO</u>				
<u>MAPLO</u>				
<u>GRDPS</u>				
<u>REGPT</u>				
<u>SOURCE</u>				
<u>SOURC</u>				
<u>SNSPS</u>				
<u>Matrix Data</u>				
<u>Create</u>				
<u>Retain</u>				
<u>Other TREs Supported (Comment Required)</u>				

N-0105/0198

~~25 August 1998~~ Review Draft (Date)**NITF Y2K Compliance Summary****Hardware**

Enter the Hardware Platform the NITF application is presently running.

Operating System

Enter the Operating System and version the NITF application is running on.

NITF Application

Enter the NITF applicaiton and version.

Comment: Provide a summary of your ~~your~~ approach for resolving Y2K associated issues. (CRT Forms 5a through 5c provide an informative guide and checklist for Y2K areas of consideration).

NITFS FORM CTR-5 (June 1998)

Y2K SYSTEM AWARENESS CHECKLIST

ITEM	YES	NO	N/A
System Hardware Platform Tests			
Does BIOS rollover to 2000 and display correctly?			
Does Real Time Clock rollover to 2000 on power up?			
Set date to 2000 turn the power off, does, Real Time Clock maintain the correct date when power up is applied?			
Operating System Tests			
Does 1999 rollover to 2000 using OS date setting commands?			
Does 2000-01-09 rollover to 2000-01-10 using 7 digit date?			
Does 2000-02-28 rollover to 2000-02-29 for year 2000 leap year day?			
Does 2000-10-09 rollover to 2000-10-10 using 8 digit date?			
Does the OS identify the date 2000-12-31?			
Is the Julian date conversion for 2000-02-29 00060 (if supported)?			
Is the Julian date conversion for 2000-12-31 00366 (if supported)?			
Software Development System Tests			
Does the software allow for setting the date to 2000-01-01?			
Does the software allow for setting the first 7 digits 2000-01-10?			
Does the software allow for setting the first 8 digits 2000-10-10?			
Does the software allow for setting the date to 2000-02-29?			
Does the software allow for setting the date to 2000-12-31?			
Does the software convert 2000-02-29 to the Julian date 00066?			
Does the software convert 2000-12-31 to the Julian date 00366?			
With the system clock set to 1999, does the software do calculations that span 1999 and 2000?			
Does the software calculate days between 1999 and 2000?			
Does the software calculate dates from 1999+n days into 2000?			
With the system clock set to 2000, does the software do calculations that span 2000?			
Does the software calculate days between two 2000 dates?			
Does the software calculate dates between two 2000 and 2000 +n dates?			
With the system clock set to 2000, does the software do calculations that span 2000 back to 1999?			

NITFS FORM CTR-5a (June 1998)

N-0105/0198

25-August-1998 Review Draft (Date)

Y2K SYSTEM AWARENESS CHECKLIST(cont)

ITEM	YES	NO	N/A
Does the software calculate dates between 2000 and 1999+n?			
With the system clock set to 2000, does the software do calculations that span within 1999?			
Does the software calculate days between 1999 and 2000?			
Does the software calculate dates between 1999+n and 2000?			
NIMA Window Date Rule			
Does software identify an NITF 2.0 FDT with YY of 60 as 1960?			
Does software identify an NITF 2.0 FDT with YY of 99 as 1999?			
Does software identify an NITF 2.0 FDT with YY of 00 as 2000?			
Does software identify an NITF 2.0 FDT with YY of 59 as 2059?			
Does software identify an NITF 2.0 IDATIM with YY of 60 as 1960?			
Does software identify an NITF 2.0 IDATIM with YY of 99 as 1999?			
Does software identify an NITF 2.0 IDATIM with YY of 00 as 2000?			
Does software identify an NITF 2.0 IDATIM with YY of 59 as 2059?			
General Information			
Are dates embedded as parts of other fields?	-	-	-
If dates are used as part of a sort key, are they in the proper sequence?	-	-	-
If the program uses any sort/merge utilities, does it correctly order file contents on date fields or correctly use indexed file structures keyed on date fields?	-	-	-
Does the date arithmetic correctly calculate the duration (difference) between dates?	-	-	-
Does the date arithmetic correctly calculate date based on starting date and duration?	-	-	-
Does the date arithmetic correctly calculate day of week, day within a year, week within a year?	-	-	-
For date key variables, does the program correctly search, sort, merge, and index on internal tables, linked lists or other data structures based on date variable?	-	-	-
For key indexes including a date field, does the program produce the correct sequence across dates in 19nn and 20nn?	-	-	-
Does the program truncate any century portion of date values during any assignment?	-	-	-

NITFS FORM CTR-5b (June 1998)

Y2K SYSTEM AWARENESS CHECKLIST(cont)

ITEM	YES	NO	N/A
Does the program correctly convert date values from one representation to another (e.g., YMD to Julian (YYDDD) to base and offset internal)?	-	-	-
Does the program correctly convert between date representations according to the Gregorian calendar?	-	-	-
Does the program correctly compare dates in any of its branching logic or calculation of Boolean values?	-	-	-
Does the program store and retrieve dates accurately?	-	-	-
Have all event horizon failure dates been identified?	-	-	-
Is there any processing dependent upon embedded system (firmware/microprocessor) provided date/time input?	-	-	-
Are date related random number generators used in processing?	-	-	-
Are all date variables in the program initialized to the same convention for null values?	-	-	-
If the program supports a user interface (input or inquiry), is the century date field four characters and unambiguous to a user for all possible date values in each field?	-	-	-
If the program generates output, or a report, does the output correctly and consistently display a four character century date field?	-	-	-
Has usage of values in date fields for special purposes that are not dates (e.g., using 99999 or 99 to mean, "never expire") been eliminated?	-	-	-

NITFS FORM CTR-5c (June 1998)

N-0105/~~0198~~
~~25 August 1998~~ Review Draft (Date)

(This page intentionally left blank.)

Appendix C -- Changes in National Imagery Transmission Format (NITF)

C.1 Changes in NITF 2.0

The following is a summary of changes made to NITF 2.0 since its original publication.

C.1.1 ~~Down-Sampled~~Downsampled JPEG

A new compression option, code I1, is added to indicate when an image has been ~~down-sampled~~downsampled prior to JPEG compression. This capability complements the current Lossy JPEG compression algorithm by providing for the down sampling of ~~a NITF~~ an NITF image prior to JPEG compression. The down sampling reduces the size of the image such that compression rates above 20:1 (up to 128:1) can be realized while still maintaining utility. Users who do not require high quality "exploitable" imagery, but do require recognizable imagery for transmission over reduced bandwidth communications links will appreciate ~~of~~ this capability.

C.1.2 12-Bit JPEG Post-Processing Extension

The Tagged Record Extension (TRE), IOMAPA, is added to specify the output mapping function to be applied to the image data following 12-bit JPEG decompression.

C.1.3 Vector Quantization (VQ)

A pair of compression codes, C4 and M4 are added to indicate that an image has been compressed using Vector Quantization (VQ) according to MIL-STD-188-199.

C.1.4 Lossless JPEG

A pair of compression codes, C5 and M5, are added to indicate that an image has been compressed using the lossless JPEG mode.

C.1.5 Message Text Format (MTF)

In the text subheader, a new Text Format -(TXTFMT) field value, MTF, is added to indicate that the ASCII text has been formatted according to MIL-STD-6040, United States Message Text Format (USMTF).

C.1.6 File Background Color

In the file header, a field, FBKGC, is added to define the background color to be used behind displayable segments. Without this feature an originator could inadvertently select a presentation color that is the same as a receiver's selected background color. The FBKGC field eliminates this potential visual information loss.

~~C.1.7 STREAMING_FILE_HEADER~~

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

~~A Data Extension Segment (DES), STREAMING_FILE_HEADER, is added to allow initiation of NITF file transmission before the file header is completely populated. The Streaming File Header DES is used during time critical or storage constrained operations.~~

~~C.1.8 Compliance Level (CLEVEL) 07.~~

~~A Compliance Level, CLEVEL 07, has been is added to mark NITF 2.0 files that use the Streaming File Header DES.~~

C.1.79 Year 2000 Guidance

NITF 2.0 date fields express the year with two digits. The format is updated to prescribe the date windowing approach to determine the century.

C.2 Changes in NITF 2.1 from NITF 2.0

C.2.1 Deleted Features, Capabilities, and Constraints of NITF 2.0

The following paragraphs identify the features, capabilities, and implementation constraints of NITF 2.0 implementations that resulted in the development of NITF 2.1

C.2.1.1 NITF1.1 compatibility. There is no longer a mandatory requirement for full NITF1.1 backward compatibility. NITFS implementations are no longer required to demonstrate the capability to pack NITF 1.1 files. However, NITF 2.1 implementers must continue support for the interpretation of legacy NITF 1.1 files that may be archived.

C.2.1.2 Adaptive Recursive Interpolated Differential Pulse Code Modulation (ARIDPCM) Compression support (MIL-STD-188-197(A)). The ARIDPCM compression algorithm is no longer used, except as it may appear in archived NITF 1.1 files.

C.2.1.3 Display Level Constraint. In NITF 2.1 files, the segment (image or graphicsymbol (graphic)) with the lowest Display Level (DLVL) does not need to be positioned at the origin of the Common Coordinate System (CCS).

C.2.1.4 Pre-Positioned Default Joint Photographic Experts Group (JPEG) Tables Implementation. The Compression Rate Code (COMRAT) field is not used to designate pre-positioned default Quantization and Huffman tables in NITF 2.1. JPEG tables are included as part of the JPEG compressed image. Implementations that cannot generate tables customized for specific images, use a set of 'default tables' for different image types (VIS, SAR, IR, Color) that are defined in the standard. When custom tables are not available, the appropriate default tables are included in the JPEG stream.

C.2.1.5 GraphicSymbol (graphic) Segments use. GRAPHIC segment (previously known as Symbol segment) use is constrained to Computer Graphics Metafile (CGM) encoded [graphicsymbol \(graphic\)](#). Bit-mapped symbol segments are eliminated. The use of OBJECT SYMBOLS is no longer anticipated so its reference is removed. Since Bit-mapped symbol segments are no longer supported, the equivalent functional capability can be accomplished by using the Bi-level (single bit-per-pixel) raster image capability of the "IMAGE" segment construct. This also allows for Bi-Level compression of a bit-mapped raster not previously supported for bit-mapped symbols.

C.21.1.7 Label Segments use. The "LABEL" segment construct has been eliminated in NITF 2.1. A place holder in the file header is retained to preserve header structure compatibility with NITF 2.0, but its use is now reserved for future purposes.

C.2.2 Modified Features, Capabilities, and Constraints of NITF 2.1

The following paragraphs identify the NITF 2.0 features, capabilities, and implementation constraints that have been modified for NITF 2.1.

C.2.2.1 Header Field Types. The NITF header and subheader fields are designated Required or Conditional rather than Required, Optional, and Conditional. Since more definitive field value ranges are designated, the need for optional fields is obviated.

C.2.2.2 File Profile Name and Version. A modified convention is added to mark files with the applicable NITF version. This aligns nitf 2.1BIIF and NSIF. The first four characters (bytes) of a BIIF, NITF 2.1 and NSIF 1.0 file (FHDR field) portrays the profile name and the next five characters (bytes) (FVER field) portrays the version. The previously unused System Type (STYPE) field [was renamed Standard Type and](#) is populated with BF01 to indicate that the file is formatted using ISO/IEC IS 12087-5 (BIIF). NITF 2.1 implementations process the following:

- "NITF01.10" Legacy NITF Version 1.1 files [\(optional\)](#).
- "NITF02.00" Legacy NITF Version 2.0 files.
- "NITF02.10" NITF Version 2.1 files.
- "NSIF01.00" NSIF Version 1.0 files.

Note: The intent is for "NITF02.10" and "NSIF01.00" to be treated as aliases.

C.2.2.3 Compliance/Complexity Level. The field previously called 'Compliance Level' is now called 'Complexity Level'. Whereas NITF 2.0 was implemented with seven compliance level codes (01, 02, 03, 04, 05, 06, 07, and 99); NITF 2.1 (and NSIF 1.0) will initially use four complexity level codes (03, 05, 06, and 07).

C.2.2.5 Date and Time. The file header and segment subheaders date and time fields include century information to cope with the year 2000 transition. To keep the

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

field length the same as that used in NITF 2.0, the month is designated as a numeric (01-12) vice an alphabetic (Jan - Dec) representation. The 'Z' indicator for UTC (ZULU) time is no longer included in the field, but all time is expressed using the UTC time zone.

C.2.2.6 Modified Security Fields. The security fields of the file header and segment subheaders comply with the recent Executive Order for security markings.

C.2.2.7 Block Shape and Size. In the past, NITF implementations were limited to using square blocks in multi-blocked images. Additionally, allowable block sizes were constrained to discrete sizes (32x32, 64x64, ... 1024x1024). With NITF 2.1 block shapes can be rectangular and of variable size across the ranges designated for each complexity level.

C.2.2.8 Image Coordinate Representation. The image coordinate representation fields (ICORDS and IGEOLO) in the image segment subheader are modified to improve clarity of use.

C.2.2.9 Transparent Pixels. To better reflect the intended concept, 'transparent pixel' is renamed 'pad pixel'. A new concept of designating a specific pixel value as being 'transparent' is added.

C.2.2.10 JPEG Compression. JPEG Application Markers structure is aligned with international profile registration constraints. The various JPEG Application Markers associated with NITF will be defined under Application Marker 6.

C.2.2.11 JPEG Compression (12-bit). All NITFS read capable implementations support 12-bit JPEG decompression of single band images.

C.2.2.12 VQ Decompression. All NITFS read capable implementations support decompression of Vector Quantization (VQ) compressed image segments. Implementations may optionally pack VQ.

C.2.2.13 Tagged Record Extensions (TREs). In the file header and image subheader, a physical separation for "registered tags" and "controlled tags" between "user defined" and "extended" fields not required. Either type of TRE may appear in either area, thus doubling the space available to contain TREs. Removal of this NITF 2.0 restriction allows registered tags to appear in [graphicsymbol \(graphic\)](#) and text subheaders that do not have user defined fields. As in NITF 2.0, TREs must be placed in the subheader of the segment for which the extension pertains or in the file header if the extension pertains to multiple segments or to the entire file.

C.2.2.14 Overflow Data Extension Segment (DES). A new DES is added to replace NITF 2.0 "Registered Extensions" and "Controlled Extensions" DES that held overflow registered and controlled tags. "TRE_OVERFLOW" is the designated DES for containing overflow TREs, regardless if they are registered or controlled extensions. As with NITF 2.0, there must be a separate DES for the file header and for each subheader that need overflow space for TREs.

C.2.2.15 Additional CGM Features. Additional features are added to the CGM profile (MIL-STD-2301A), for use with NITF 2.1. These additional features include:

- The capability for edge visibility to be set either on or off rather than the current default of always on
- An increased range of allowed line widths from 2, 4 and 6 pixels to the range of 1 to at least 100 pixels
- The specification for the control of degeneracy that were not addressed in NITF 2.0
- Allowing for the explicit declaration of defaults currently only done implicitly
- Allowing for the presence of the null character in non-graphical character strings
- An updated metafile description structure
- Added capability for Auxiliary Color and Transparency control commands
- Added definition for consistent rendering of lines and edges
- Increased allowed range of font sizes
- Additional line and fill types
- A new [graphicsymbol \(graphic\)](#) primitive for polygon sets

C.2.3 New Features and Capabilities for NITF 2.1

The following is a summary of features considered to be new to NITF 2.1.

C.2.3.1 Universal Multiple Octet Coded Character Set (UCS). NITF 2.1 allows the selection and use of UCS character set(s) within the text segment's text data field. As in NITF 2.0, the character codes in the file header and subheader fields are constrained to eight bit codes. However, the constraint to only use 7-bit ASCII characters in the file header and subheader fields is removed from many fields.

C.2.3.2 Number of Bands. A conditional field (5 bytes) is established to allow for ~~multi-spectral~~[multispectral](#) images that contain more than 9 bands.

C.2.3.3 Multiple 'Base' Images in a Single File. The NITF 2.0 paradigm of only allowing a single base image per NITF file is expanded. Through the appropriate placement of images within the common coordinate system and the proper association of attachment and display levels, the single base image per file paradigm has been expanded to allow multiple base images, each with its own set of associated overlays.

C.2.3.4 Multiple File Products. NITFS products consisting of multiple cross correlated NITF files are now being produced (e.g. Compressed ARC Digitized Raster Graphic (CADRG), Controlled Image Base (CIB), Digital Point Positioning Data Base (DPPDB), files split at 2GB boundaries, Rsets, and etc.) in NITF 2.0 format. As a minimum, NITF 2.0 interpreters are expected to read single files from these products. NITF 2.1 implementations should look toward full interpretation and user presentation of multiple file products. Further multiple file product paradigm expansion is anticipated.

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

C.2.3.5 GraphicSymbol (graphic) Bounding Rectangles. Unused fields in the graphicsymbol (graphic) subheader fields are redefined to allow for definition of a virtual bounding rectangle within which all visible components of a CGM graphicsymbol (graphic) are contained.

C.2.3.6 GraphicSymbol (graphic) Color. The graphicsymbol (graphic) color field is redefined to express whether the CGM graphicsymbol (graphic) is entirely monochrome or if it has color components.

C.2.3.7 STREAMING FILE HEADER Extension Concept. An ability to allow initiation of NITF file transmission prior to having all the information needed to complete the file header is added. This is done using the DES with identifier "STREAMING_FILE_HEADER" and is applicable to all Complexity Levels (CLEVELS). ~~STREAMING_FILE_HEADER DES in a NITF 2.0 file is identified with the CLEVEL 07.~~

C.2.3.8 Geospatial Extensions. A set of Geospatial Support Data Extensions (GeoSDE) is added. These elements are defined based on agreement among a number of activities within and external to the National Imagery and Mapping Agency (NIMA), including NATO, the FGDC, and commercial entities.

C.2.3.9 Addition of New JPEG Huffman and Quantization Tables. Red Green Blue (RGB) Color and optimized 8-bit and 12-bit JPEG Quantization and Huffman tables for the three image types: Infra Red (IR), Synthetic Aperture Radar (SAR), and visible (VIS), are provided. As per the new NITF 2.1 requirement to always embed tables into the NITF/JPEG stream, these tables are defined as "recommended" tables, vice "default" tables as in NITF 2.0. The specific are ~~at~~ on the web at http://164.214.2.51/ntb/jpg_tbls.html.

C.3 Changes in TACO2

C.3.1 The requirement for all NITF 2.0 system certification to undergo TACO2 Protocol testing has been relaxed. TACO2 testing ~~for a system certification~~ is optional for both NITF 2.1 as well as 2.0 imagery systems. ~~however~~ However, all imagery systems deemed to be tactical within the USIGS Architecture, and those which are required to directly communicate with tactical systems, ~~must support may~~ be required by program documents to support the TACO2 Protocol via either a synchronous or asynchronous ~~c~~ communications port.

C.3.2 The minimum transmission file size tested was 1.2 ~~Mb~~ Mbyte. The minimum file size for both NITF 2.1 and 2.0 has been increased to 50 ~~Mb~~ Mbyte.

C.3.3 Required data rate support has changed from a sweeping range of 300 bps to 32 Kbps for synchronous and 300 bps to 19.2 Kbps for asynchronous to a selected rate evaluation. Those rates are

1. 1.2, 2.4, 4.8, 9.6, 16.0, 19.2 and 32.0 Kbps for synchronous

2. 1.2, 2.4, 4.8, 9.6 and 19.2 Kbps for synchronous

C.3.4 Additional features that were not defined in NITF 2.0 TACO2 testing that are optional for NITF 2.1 and 2.0 TACO2 testing are:

3.1. Bit Error Rate Test (BERT)

4.2. Forward Error Correction (FEC) - transmission and reception of TACO2 FEC-I

5.3. Abbreviated Headers - transmission and reception of abbreviated NETBLT/IP headers

N-0105/~~0198~~
~~25 August 1998~~ Review Draft (Date)

(This page intentionally left blank.)

Appendix D -- National Imagery Transmission Format (NITF) 2.1 File Format Requirements

D.1 NITF 2.1 Compliance Tables

The following tables contain the file format constraints for NITF Version 2.1 compliance [based on CLEVEL definitions](#) and must be used [in conjunction](#) with the NITF Version 2.1 military standard (~~Mil-Std~~[MIL-STD-2500B](#)). [The information in this appendix is provided for convenience in the Test Program Plan, but the most current version in MIL-STD-2500B takes precedence over this document.](#)

- The term "NA" under Format Values indicates that this field is not applicable to a minimum compliant NITF 2.1 file.
- The letters R and C in the Type column correspond to "Required" or "Conditional," respectively.

N-0105/0198

25-August-1998 Review Draft (Date)

Table D-1 File Header (NITF 2.1)

R = Required; C = Conditional

Field	Description	Size	Format Values	Type
FHDR	File Type & Version	49 BCS-A	NITF02.10 or NSIF01.00	R
EVER	File Version	5 BCS-A	02.10	R
CLEVEL	Complexity Level	2 BCS-N positive integer	03, 05, 06, 07 (Others Reserved)	R
STYPE	Standard Type	4 BCS-A	BF01	R
OSTAID	Originating Station ID	10 BCS-A	BCS-A (May not be all spaces)	R
FDT	File Date & Time	14 BCS-N integer	CCYYMMDDhhmmss	R
FTITLE	File Title	80 ECS	UT-1 (default is all spaces)	R
FSCLAS	File Security Classification	4	T, S, C, R, or U	R
FSG	File Security Group	167 ECS	See table D-3 for XSCLAS through XSCTLN, replacing X with F	R
FSCLSY	File Security Classification System	2	BCS-A (For the DOD/Intelligence Community, the value is US. Default is all spaces)	R
FSCODE	File Codewords		BCS-A (see codes in Table D-2, default is all spaces)	R
FSCTLH	File Control and Handling	2	BCS-A (see codes in Table D-2, default is all spaces)	R
FSREL	File Releasing Instructions	20	BCS-A (default is all spaces, FIPS10-4 or DIAM65-19)	R
FSDCTP	File Declassification Type	2	BCS-A (Valid values are DD, DE, GD, GE, O, or X. Default is all spaces)	R
FSDCDT	File Declassification Date	8	CCYYMMDD or all spaces	R
FSDCXM	File Declassification Exemption	4	BCS-A (Valid values are X1-X8 and X251-X259. Default is all spaces)	R
FSDG	File Downgrade	4	BCS-A (Valid values are S, C, or R. Default is all spaces)	R
FSDGDT	File Downgrade date	8	CCYYMMDD or all spaces	R
FSCLTX	File Classification Text	43	UT-1 (Default is all spaces)	R
FSCATP	File Classification Authority type	4	BCS-A (Valid values are O, M, or D. Default is all spaces)	R
FSCAUT	File Classification Authority	40	UT-1 (default is all spaces)	R

Field	Description	Size	Format Values	Type
FSCRSN	File Classification Reason	4	BCS-A (Valid values are A-G. Default is all spaces)	R
FSSRDT	File Security Source Date	8	CCYYMMDD or all spaces	R
FSCCTLN	File Security Control Number	15	BCS-A (default is all spaces)	R
FSCOP	File Copy Number	5 BCS-N positive integer	00000 default, or actual copy #number	R
FSCPYS	File Number of Copies	5 BCS-N positive integer	00000 default, or actual count	R
ENCRYP	Encryption	1 BCS-N positive integer	0 = Not Encrypted (This field must contain the value 0)	R
FBKGC	File Background Color	3	Unsigned Binary integer (0x00-0xFF, 0x00-0xFF, 0x00-0xFF in Red, Green, Blue order)	R
ONAME	Originator's Name	24 ECS	UT-1 (default is all spaces)	R
OPHONE	Originator's Phone Number	18 ECS	BCS-A (default is all spaces)	R

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

Table D-1. File Header (NITF 2.1) (cont'd.)

Field	Description	Size	Format Values	Type
FL	File Length	12 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N -000000000388-999999999999 <u>CLEVEL</u> <u>MAX FILE SIZE</u> 03 50 mM byte - 1 05 1 Gbyte - 1 06 2 Gbyte - 1 07 10 Gbyte - 1	R
HL	NITF Header Length	6 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N -000388-999999	R
NUMI	Number of Images	3 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N 000- 999 100 All CLEVELs must pack at least 1 image <u>CLEVEL</u> <u>REQUIREMENT</u> 03 & 05 pack no more than 20 images 03 & 05 must unpack 0 to 20 images <u>05</u> , <u>06</u> , & <u>07</u> pack no more than 100 images <u>05</u> , <u>06</u> , & <u>07</u> must unpack 0 to 100 images	R
LISH nn	Length of Nth Image Subheader	6 <u>BCS-N</u> <u>positive</u> <u>integer</u>	000439-999999	C
LIn nn	Length of Nth Image	10 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N -0000000001-9999999999	C
NUMS	Number of <u>GraphicSymbol</u> (graphic) Segments	3 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N -000-100	R
LSSH nn	Length of Nth <u>GraphicSymbol</u> (graphic) SubHeader	4 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N -0258-9999	C
L Ss nn	Length of Nth <u>GraphicSymbol</u> (graphic)	6 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N -000001-999999 <u>CLEVEL</u> <u>MAX AGGREGATE</u> 03 1 mM byte 05-07 2 mM byte 5 mM byte	C
NUMX	Reserved for Future Use	3 <u>BCS-N</u> <u>positive</u> <u>integer</u>	000	R

Table D-1 File Header (NITF 2.1) (cont'd.)

Field	Description	Size	Format Values	Type
NUMT	Number of Text Segments	3 BCS-N positive integer	BCS-N -000-032	R
LTSHn AA	Length of Nth Text Subheader	4 BCS-N positive integer	BCS-N -0282-9999	C
L T tn AA	Length of Nth Text File	5 BCS-N positive integer	BCS-N -00001-99999	C
NUMDES	Number of Data Extension Segments (DES)	3 BCS-N positive integer	BCS-N -000- 010999 When receiving other than 0 Data	R
LDSHn AA	Length of Nth data extension segment subheader	4 BCS-N positive integer	0200-9999 Extension Segments, the	C
LDn AA	Length of Nth DES Data	9 BCS-N positive integer	BCS-N -000000001-999999999 system must at least adjust itself to move past data and unpack the remainder of the file correctly	C
NUMRES	Number of Reserved Extension Segments (RES)	3 BCS-N positive integer	BCS-N -000	R
LRESHn AA	Length of Nth RES Subheader	4 BCS-N positive integer	BCS-N -0 200001 -9999 (omitted)	C
LREn AA	Length of Nth RES Data Field	7 BCS-N positive integer	BCS-N -0000001-99999999 (omitted)	C
UDHDL	User Defined Header Data Length	5 BCS-N positive integer	BCS-N -00000 or 00003-99999	R

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

UDHOFL	User Defined Header Overflow	3 BCS-N positive integer	BCS-N-000-999 ¹	C
UDHD	User Defined Header Data	*	Tagged Record Extension(s) User-defined	C
XHDL	Extended Header Data Length	5 BCS-N positive integer	BCS-N-00000 or 00003-99999	R
XHDLOFL	Extended Header Data Overflow	3 BCS-N positive integer	BCS-N-000-999 ²	C
XHD	Extended Header Data	**	Tagged Record Extension(s)	C

* As specified by User Defined Header Data Length minus 3 bytes

** As specified by Extended Header Data Length minus 3 bytes

¹ If present, this field [shall/will](#) contain "000" if the tagged record extensions in UDHD do not overflow into a DES, or [shall/will](#) contain the sequence number of the DES into which they overflow. This 3-byte field must be included in the total byte count of UDHDL, above. The UDHOFL field [shall/will](#) be omitted if the UDHDL field contains a value of zero.

² If present, this field [shall/will](#) contain "000" if the tagged record extensions in XHD do not overflow into a DES, or [shall/will](#) contain the sequence number of the DES into which they overflow. This 3-byte field must be included in the total byte count of XHDL, above. The XHOFL field [shall/will](#) be omitted if the XHDL field contains a value of zero.

Table D-2. Security Control Markings

(The digraphs shown in this table are exemplary of those used at the time of publication. These codes are subject to change. Consult current security directives when implementing.)

Codeword	Digraph
ATOMAL	AT
CNWDI	CN
<u>CONFIDENTIAL</u>	<u>C</u>
COPYRIGHT	PX
COSMIC	CS
CRYPTO	CR
EFTO	TX
FORMREST DATA	RF
FOUO	FO
<u>GENERAL SERVICE (GENSER)</u>	<u>GS</u>
LIM OFF USE (UNCLAS)	LU
LIMDIS	DS
<u>NATO</u>	<u>NS</u>
<u>NO CONTRACT</u>	<u>NC</u>
NONCOMPARTMENT	NT
ORCON	OR
<u>OTHER CODEWORDS</u>	<u>USE APPROPRIATE DIGRAPH</u>
PERSONAL DATA	IN
PROPIN	PI
RESTRICTED DATA	RD
SAO	SA
SAO-1	SL
SAO-2	HA
SAO-3	HB
SAO-SI-2	SK
SAO-SI-3	HC
SAO-SI-4	HD
<u>SECRET</u>	<u>S</u>
SIOP	SH
SIOP/ESI	SE
SPECIAL CONTROL	SC
SPECIAL INTEL	SI
<u>TOP SECRET</u>	<u>TS</u>
<u>UNCLASSIFIED</u>	<u>U</u>
US ONLY	UO
WARNING NOTICE - SEC CLAS IS BASED ON THE FACT OF EXISTENCE AND AVAIL OF THIS <u>GRAPHICSYMBOL</u> (<u>GRAPHIC</u>)	WN
<u>WNINTEL</u>	<u>WI</u>

N-0105/0198

~~25 August 1998~~ Review Draft (Date)**Table D-3. Header Security Field Relationships**

<u>FIELD*</u>	<u>Description</u>	<u>Size</u>	<u>Testable Field Relationships</u> (Note: default when individual fields are not populated is spaces)	<u>Type</u>
<u>XSCLAS</u>	<u>Security Classification</u>	<u>1</u> <u>ECS</u>	<u>U= Unclassified, T = Top Secret, S= Secret, R = Restricted, C=Classified</u>	<u>R</u>
<u>XSCLSY</u>	<u>Classification system</u>	<u>2</u> <u>ECS</u>	<u>US or country code from FIPS 10-4, when XCLAS contains U and no other security fields are populated</u>	<u><R></u>
<u>XSCODE</u>	<u>Code-words</u>	<u>11</u> <u>BCS</u>	<u>If code-word apply then use Digraph from table D-2</u>	<u><R></u>
<u>XCTLH</u>	<u>Control and handling</u>	<u>2</u> <u>ECS</u>	<u>- May use a digraph from table D2 applicable security policy</u>	<u><R></u>
<u>XSREL</u>	<u>Releasing instructions</u>	<u>20</u> <u>ECS</u>	<u>- If used should contain valid country codes from FIPS PUB 10-4 or codes identifying multilateral entities</u> <u>- If left blank no release authorized outside US channels.</u> <u>- The value in this field must reflect the marking of the most restrictive XSREL field of any file segment or be set higher based on aggregation of information</u>	<u><R></u>
<u>XSDCTP</u>	<u>Declassification type</u>	<u>2</u> <u>ECS</u>	<u>- If DD then XSDCDT must contain date of declassification</u> <u>- If DE then FSCLTX must contain the event</u> <u>- If GD then a date must be in the XSDGDT and XSDG must have the lowered classification level</u> <u>- If GE then FSCLTX must contain the event and XSDG must have the lowered classification level</u> <u>- If O = OADR (Originating Agency's Determination (is required))</u> <u>- If X Exempt from declassification, If X then XSDCXM must be populated with exemption code</u>	<u><R></u>
<u>XSDCDT</u>	<u>Declassification date</u>	<u>8</u> <u>ECS</u>	<u>If DD is in the XSDCTP then the date of declassification must be here</u>	<u><R></u>
<u>XSDCXM</u>	<u>Declassification exemption</u>	<u>4</u> <u>ECS</u>	<u>If X is in the XSDCTP field this field will contain the declassification exemption code</u>	<u><R></u>
<u>XSDG</u>	<u>Downgrade</u>	<u>1</u> <u>ECS</u>	<u>If XSDCTP indicates GD or GE the down grade classification level will appear here.</u>	<u><R></u>
<u>XSDGDT</u>	<u>Downgrade Date</u>	<u>8</u> <u>ECS</u>	<u>A date must be in this field if GD is in the XSDCTP field</u>	<u><R></u>
<u>XSCLTX</u>	<u>Classification Text</u>	<u>43</u> <u>ECS</u>	<u>This field will contain declassification or downgrade event if XSDCTP contains DE or GE. Other security related information is allowed in this field ie: multiple classification sources.</u>	<u><R></u>
<u>XSCATP</u>	<u>Classification authority type</u>	<u>1</u> <u>ECS</u>	<u>If XCLASS contains S,T then this field must contain O, D or M based on classification type</u>	<u><R></u>

XSAUT	Classification authority	40 ECS	If XSCATP contains O, D or M then this field will contain the authority ie: if O is in the XSCATP then the classification guide or document used to classify the file should be in this field.	<R>
XSCRSN	Classification Reason	1 ECS	If XCLASS contains S, T then this field must contain the reason for classification per Executive Order 12958	<R>
XSSRDT	Security Source date	8 ECS	If XSCATP contains a D then this field will contain the date of the source the classification was derived.	<R>
XSCTLN	Security Control number	15 ECS	For use in using local security control tracking numbers	<R>

* Where possible recommend drop-down menus be used to help reduce user error within the community of operation. For example, U, R, C, S, and T used in a drop down select menu to prevent erroneous user entries

N-0105/0198

25-August-1998 Review Draft (Date)

Table D-43. Image Subheader (NITF 2.1)Type "R"=Required, "C"=Conditional, "<>"=BCS spaces allowed for entire field

Field	Description	Size	Format Values	Type
IM	File Part Type	2 <u>BCS-A</u>	IM	R
IID1	Image ID1	10 <u>BCS-A</u>	<u>BCS-A</u> -non-blank; User defined	R
IDATIM	Image Date & Time	14 <u>BCS-N</u>	CCYYMMDDhhmmss	R
TGTID	Target ID	17 <u>BCS-A</u>	BBBBBBBBBBBOOOOCC BCS-A (Default is spaces <u>for all or any sub-part of this field</u>)	<R>
IID2	Image IID2	80 <u>ECS</u>	<u>BCS-A</u> (Default is <u>ECS</u> spaces (0x20))	<R>
<u>ISG</u>	<u>Image Security Group</u>	167 <u>ECS</u>	See table D-44 for XSCLAS through XSCTLN, replacing X with I	
<u>ISCLAS</u>	<u>Image Security Classification</u>	4	<u>T, C, R, or U</u>	R
<u>ISCLSY</u>	<u>Image Security Classification</u>	2	<u>BCS-A</u> (For DOD/Intelligence Community, value is US. Default is all spaces)	R
<u>ISCODE</u>	<u>Image Codewords</u>	44	<u>BCS-A</u> (see codes in Table D-2, default is all spaces)	R
<u>ISCTLH</u>	<u>Image Control and Handling</u>	2	<u>BCS-A</u> (see codes in Table D-2, default is all spaces)	R
<u>ISREL</u>	<u>Image Releasing Instructions</u>	20	<u>BCS-A</u> (default is all spaces, FIPS 10-4 or DIAM65-19)	R
<u>ISDCTP</u>	<u>Image Declassification Type</u>	2	<u>BCS-A</u> (Valid values are DD, DE, GD, GE, O, or X. Default is all spaces)	R
<u>ISDCDT</u>	<u>Image Declassification Date</u>	8	CCYYMMDD or all spaces	R
<u>ISDCXM</u>	<u>Image Declassification Exemption</u>	4	<u>BCS-A</u> (Valid values are X1-X8 and X251-X259. Default is all spaces)	R
<u>ISDG</u>	<u>Image Downgrade</u>	4	<u>BCS-A</u> (Valid values are S, C, or R. Default is all spaces)	R
<u>ISDGBT</u>	<u>Image Downgrade Date</u>	8	CCYYMMDD or all spaces	R
<u>ISCLTX</u>	<u>Image Classification Text</u>	43	<u>BCS-A</u> (Default is all spaces)	R
<u>ISCATP</u>	<u>Image Classification Authority Type</u>	4	<u>BCS-A</u> (Valid values are O or D. Default is all spaces)	R
<u>ISCAUT</u>	<u>Image Classification Authority</u>	40	<u>BCS-A</u> (default is all spaces)	R
<u>ISCRSN</u>	<u>Image Classification Reason</u>	4	<u>BCS-A</u> (Valid values are A-G. Default is all spaces)	R
<u>ISSRDT</u>	<u>Image Security Source Date</u>	8	CCYYMMDD or all spaces	R
<u>ISCTLN</u>	<u>Image Security Control Number</u>	45	<u>BCS-A</u> (Default is spaces)	R
ENCRYP	Encryption	1 <u>BCS-N</u> positive integer	0=Not Encrypted	R

Field	Description	Size	Format Values	Type
ISORCE	Image Source	42 ECS	BCS-A (Default is spaces)	<R>
NROWS	Number of Significant Rows in image	8 BCS-N positive integer	BCS-N 00000002-99999999	R
NCOLS	Number of Significant Columns in image	8 BCS-N positive integer	BCS-N 00000002-99999999	R
PVTYPE	Pixel value type	3 BCS-A	INT, B, SI, R, C	R

N-0105/0198

25-August-1998 Review Draft (Date)

Table D-43. Image Subheader (NITF 2.1) (cont'd.)

Field	Description	Size	Format Values	Type
IREP	Image Representation	8 BCS-A	<p>MONO, RGB, RGB/LUT, NODISPLY, MULTI, YCbCr601, NVECTOR, POLAR, VPH</p> <p>RGB/LUT: Pack Optional</p> <p>RGB(24 bit color): Pack only if native</p> <p>YCbCr(3 bands) compress only (JPEG): Pack if native mode is color</p> <p>NODISPLY: CLEVELS 3, 5, 6, 7 for ICAT DTEM, Unpack 1 band for ICAT LOCG, Unpack 2 bands for ICAT MATR, Unpack 1-999 bands Pack is Optional</p> <p>MULTI Unpack CLEVELS 3 (Pack optional), 2-9 bands, 8bpp/band Unpack CLEVELS 5&6 (Pack optional), 2- 255 bands, 8bpp/band Unpack CLEVELS 7 (Pack optional), 2- 999 bands, 8bpp/band</p>	R
ICAT	Image Category	8 BCS-A	<p>VIS, SL, TI, FL, RD, EO, OP, HR, HS, CP, BP, SAR, SARIQ, IR, MS, FP, MRI, XRAY, CAT, MAP, PAT, LEG, DTEM, MATR, LOCG, VD, BARO, CURRENT, DEPTH, WIND (Default is VIS)</p>	R
ABPP	Actual Bits-per-pixel Per Band	2 BCS-N positive integer	BCS-N 1, 8, 11, 12, 13, 14, 15, 16, 32 , 64	R
PJUST	Pixel Justification	1 BCS-A	R	R
ICORDS	Image Coordinate System	1 BCS-A	U, G, N, S, D or (Default is spaces)	R

Table D-43. Image Subheader (NITF 2.1) (cont'd.)

Field	Description	Size	Format Values	Type
IGEOLO	Image Geographicsymbol (graphic) Location	60 BCS-A	+dd.ddd+ddd.ddd (four times) ddmmssXdddmmssY(four times) or zzBJKeeeeennnnn (four times) or zzzzzzzennnnnnn (four times)	C
NICOM	Number of Image Comments	1 BCS-N positive integer	BCS-N 0-9	R
ICOMn	Image Comment nN	80 ECS	BCS-A User defined	C
IC	Image Compression	2 BCS-A	NC/NM - No Compression, C1/M1- Bi-Level C3/M3 - JPEG, DCT Lossy C4/M4 - VQ C5/M5 - JPEG, Lossless C6/M6 - Multi Component Compression (TBD004) C7/M7 - Complex SAR Compression (TBD004A) C8/M8 - JPEG 2000 (TBD004A) I1 - Downsampled JPEG	R
COMRAT	Compression Rate Code	4 BCS-A	IC COMRAT C1/M1 1D, 2DS, 2DH C3/M3 00.0, 00.1, 00.2, 00.3, 00.4, 00.5XX.Y C4/M4 n.nn C5/M5 00.0XX.Y C6/M6 00.0 (TBD004) C7/M7(TBD004A) C8/M8(TBD004A) I1 00.0XX.Y XX: 00 General Purpose 01 VIS 02 IR 03 SAR 04 Downsample JPEG Y: 0 if customized tables are used	C
NBANDS	Number of Bands	1 BCS-N positive integer	BCS-N 0, 1 to 9	R
XBANDS	Number of Multi-Spectral Multispectral Bands	5 BCS-N positive integer.	BCS-N 00010-00999	C

N-0105/0198

25-August-1998 Review Draft (Date)

Field	Description	Size	Format Values	Type
IREPBANDn	Anth Band Component Representation	2 <u>BCS-A</u>	<u>BCS-A</u> , (Default is <u>BCS</u> spaces), R, G, B, Y, Cb, Cr, LU, <u>LX</u> , <u>M</u> , <u>MX</u> , <u>EL</u> , ♦	<u><R></u> <u><G</u>
ISUBCATn	Anth Band Subcategory	6 <u>BCS-A</u>	<u>BCS-A</u> , (Default is <u>BCS</u> spaces), <u>I</u> , <u>Q</u> , <u>M</u> , <u>P</u> , <u>SPEED</u> , <u>DIRECT</u> , user defined (see table A-3, 2500B) When ICAT contains MS, HS, or IR the value range is the wave length When ICAT contains LOCG the value range is CGX, CGY (Cartographic), GGX, GGY (Geographic) Standard values for the matrix are FACC codes from DIGEST Part 4, Annex B. Standards values for DTEI units of length from DIGEST Parts 3 - 7	<u><R></u>
IFCn	Anth Band Image Filter Condition	1 <u>BCS-A</u>	N (<u>N=none</u>)	R
IMFLTn	Anth Band STD Image Filter Code	3 <u>BCS-A</u>	Fill with BCS spaces	C
NLUTS	Anth Band Number of LUTS	1 <u>BCS-N</u> positive integer	<u>BCS-N-0-4</u> (Default is <u>BCS</u> zero (0x30) if no LUTs are included) Currently 4 is reserved for future use	<u><R></u>
NELUT	Anth Band Number of LUT Entries	5 <u>BCS-N</u> positive integer	<u>BCS-N-0000</u> 1-65536	<u><C></u>
LUTDn	Anth Band Data of the mth LUT	*	<u>Unsigned binary integer</u> , LUT Values	C
ISYNC	Image Sync Code	1 <u>BCS-N</u> positive integer	0= <u>No Sync Code</u>	P
IMODE	Image Mode	1 <u>BCS-N</u> positive integer	B, P, R, S	
NBPR	Number of blocks per row	4 <u>BCS-N</u> positive integer	<u>BCS-N-0001-9999</u>	R
NBPC	Number of blocks per column	4 <u>BCS-N</u> positive integer	<u>BCS-N-0001-9999</u>	R
NPPBH	<u>Number</u> # of pixels per block (horiz.)	4 <u>BCS-N</u> positive integer	<u>BCS-N-00012-8192</u>	R

Field	Description	Size	Format Values	Type
NPPBV	<u>Number#</u> of pixels per block (vert.)	4 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N 00012-8192	R
NBPP	<u>Number#</u> of bits-per-pixel per band	2 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N 01, 08, 12, 16, 32, 64	R
IDLVL	<u>Image</u> Display Level	3 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N 001-999	R
IALVL	Attachment Level	3 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N 000-998 (Default is 000)	R
ILOC	Image Location	10 <u>BCS-N</u>	RRRRRCCCC relative to AL origin	R
IMAG	Image Magnification	4 <u>BCS-A</u> <u>decimal</u> <u>value</u>	BCS-A Default = 1.0, Followed by 2 spaces: /2-, /4-, /8-, Followed by a space: /16-, /32-, /64-, /128-, or decimal value (Default is 1.0 followed by a BCS space)	R
UDIDL	User defined Image data length	5 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N 00000 or 00003-99999	R
UDOFL	User defined overflow	3 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N 000-999	C
UDID	User defined image data	**	Tagged Record Extensions	C
IXSHDL	<u>Image</u> Extended Subheader Data Length	5 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N 00000 or 00003-99999	R
IXSOFL	<u>Image</u> Extended Subheader overflow	3 <u>BCS-N</u> <u>positive</u> <u>integer</u>	BCS-N 000-999	C
IXSHD	<u>Image</u> Extended Subheader Data	***	Tagged Record Extension(s)	C

* One byte each entry A value as specified in the NELUTn field (in bytes)

** A value as specified ~~by~~ in the UDIDL field minus 3 (in bytes)

*** A value as specified ~~by~~ in the IXSHDL field minus 3 (in bytes)

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

Table D-43A. Image Data Mask Table

TYPE "R" = Required, "C" = Conditional, "<>" = BCS spaces allowed for entire field)

Fields	Description	Size	Format Values	Type
IMDATOFF	Blocked Image Data Offset	4 <u>Unsigned binary integer</u>	Binary integer; 0x00000000 to 2³²-1 0x00000000 to 0xFFFFFFFF	C
BMLNTH	Block Mask Record Length	2 <u>Unsigned binary integer</u>	Unsigned binary integer; 0x0000=No Block mask record; 0x0004=Block mask records (4 bytes each) are present	C
TMLNTH	Pad Pixel Mask Record Length	2 <u>Unsigned binary integer</u>	Unsigned binary integer; 0x0000=No Pad pixel mask records; 0x0004=Pad pixel mask records (4 bytes each) are present	C
TPXCDLNT H	Pad Output Pixel Code Length	2 <u>Unsigned binary integer</u>	Unsigned binary integer; 0x0000=No pad pixels; 0x0001 to 0x0010=pad pixel code length in bits (Length must be as specified in NBPP)	C
TPXCD	Pad Output Pixel Code	* <u>Unsigned binary integer</u>	Binary integer; 0 to 2 ⁿ - 1 where n=TPXCDLNT	C
BMRnBNDm	Block n, Band m <u>Offset</u>	4 <u>Unsigned binary integer</u>	Binary integer Increment n prior to m 0 ≤ n ≤ NBPR * NBPC - 1 0 ≤ m ≤ max(NBANDS, XBANDS) (Default is 0xFFFF if the block is not recorded)	C
TMRnBNDm	Pad Pixel n, Band m	4 <u>Unsigned binary integer</u>	Binary integer Increment n prior to m 0 ≤ n ≤ NBPR * NBPC - 1 0 ≤ m ≤ max(NBANDS, XBANDS) (Default is 0xFFFFFFFF if the block is not recorded)	C

* The length of the TPXCD field is the next highest number of bytes that can contain the number of bits identified in the TPXCDLNT field. For example, a TPXCDLNT value of 12 would be stored in a TPXCD field of two bytes.



Table D-54. Tested Variations of IREP and Associated Fields

IREF	PVTYPE	NBPP	ABPP	NBANDS/ XBANDS	IREFBANDn	NLUTSn	IMODE
MONO	B	1	1	1	M	0	B
	B	1	1	1	LU	1	B
	INT	8	8	1	M	0	B
	INT	8	8	1	LU	1	B
	INT	12	8 , 12	1	M	0	B
	INT	12	12	1	LU	1	B
	INT	16	11-16	1	M	0	B
	INT	16	11-16	1	<u>LU</u>	1	B
	R	32	32	1	M	0	B
<u>future variation</u>	<u>GR</u>	64	64	1	M	0	B
	<u>INT</u>	<u>16</u>	<u>16</u>	<u>1</u>	<u>LU</u>	<u>2</u>	<u>B</u>
RGB/LUT	B	1	1	1	LU	3	B
	INT	8	8	1	LU	3	B
	INT	12	8 , 12	1	LU	3	B
	INT	16	11-16	1	LU	3	B
RGB	INT	8	8	3	R, G, B	0	B, P, R, S
YCbCr601 (JPEG only)	INT	8	8	3	Y, Cb, Cr	0	P
MULTI	INT	8	8	2-999	M, R, G, B, <u>LU</u> , or Spaces	0, <u>1, or 3</u>	B, P, R, S
	INT	8	8	2-999	M, R, G, B, LU, or Spaces	3	B, P, R, S
	INT	8 <u>12</u>	8 <u>12</u>	2-10-256, 257-999	M, R, G, B, or Spaces	3	B, P, R, S
	INT	8 <u>16</u>	8 <u>11-16</u>	2-9-10-256, 257-999	M, R, G, B, <u>LU</u> , or Spaces	0 <u>3</u>	B, P, R, S
	<u>SI</u>	<u>8</u>	<u>8</u>	<u>2-999</u>	<u>M, R, G, B, or</u> <u>Spaces</u>	<u>0</u>	<u>B, P, R, S</u>
	<u>SI</u>	<u>16</u>	<u>11-16</u>	<u>2-999</u>	<u>M, R, G, B, or</u> <u>Spaces</u>	<u>0</u>	<u>B, P, R, S</u>

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

IREP	PVTYPE	NBPP	ABPP	NBANDS/ XBANDS	IREPBANDn	NLUTSn	IMODE
	<u>R</u>	<u>32</u>	<u>32</u>	<u>2-999</u>	<u>M, R, G, B, or Spaces</u>	<u>0</u>	<u>B, P, R, S</u>
	<u>R</u>	<u>64</u>	<u>64</u>		<u>Spaces-only</u>		
<u>future variation</u>	<u>INT</u>	<u>16</u>	<u>11-16</u>	<u>2-999</u>	<u>M, R, G, B, LU, or Spaces</u>	<u>0, 1, 2, or 3</u>	<u>B, P, R, S</u>
	<u>INT</u>	<u>32</u>	<u>17-32</u>	<u>2-999</u>	<u>M, R, G, B, LU, or Spaces</u>	<u>0, 1, 2, or 3</u>	<u>B, P, R, S</u>
	<u>INT</u>	<u>64</u>	<u>33-64</u>	<u>2-999</u>	<u>M, R, G, B, LU, or Spaces</u>	<u>0, 1, 2, or 3</u>	<u>B, P, R, S</u>
	<u>SI</u>	<u>32</u>	<u>17-32</u>	<u>2-999</u>	<u>M, R, G, B, or Spaces</u>	<u>0</u>	<u>B, P, R, S</u>
	<u>SI</u>	<u>64</u>	<u>33-64</u>	<u>2-999</u>	<u>M, R, G, B, or Spaces</u>	<u>0</u>	<u>B, P, R, S</u>
	<u>R</u>	<u>64</u>	<u>64</u>	<u>2-999</u>	<u>M, R, G, B, or Spaces</u>	<u>0</u>	<u>B, P, R, S</u>
	<u>C</u>	<u>64</u>	<u>64</u>	<u>2-999</u>	<u>M, R, G, B, or Spaces</u>	<u>0</u>	<u>B, P, R, S</u>

Table D-54. Tested Variations of IREP and Associated Fields (Cont'd)

IREF	PVTYPE	NBPP	ABPP	NBANDS/ XBANDS	IREFBANDn	NLUTSn	IMODE
NODISPLY	SI	16	11-16	1	BCS Spaces	0	B
future variation	INT	8	8	1	BCS Spaces	0	B
	INT	8	8	2-999	BCS Spaces	0	B, P, R, S
	INT	12	12	1	BCS Spaces	0	B
	INT	12	12	2-999	BCS Spaces	0	B, P, R, S
	INT	16	11-16	1	BCS Spaces	0	B
	INT	16	11-16	2-999	BCS Spaces	0	B, P, R, S
	INT	32	17-32	2-999	BCS Spaces	0	B, P, R, S
	INT	64	33-64	2-999	BCS Spaces	0	B, P, R, S
	SI	8	8	1	BCS Spaces	0	B
	SI	8	8	2-999	BCS Spaces	0	B, P, R, S
	SI	16	11-16	2-999	BCS Spaces	0	B, P, R, S
	SI	32	17-32	2-999	BCS Spaces	0	B, P, R, S
	SI	64	33-64	2-999	BCS Spaces	0	B, P, R, S
	R	32	32	1	BCS Spaces	0	B
	R	32	32	2-999	BCS Spaces	0	B, P, R, S
	R	64	64	1	BCS Spaces	0	B
	R	64	64	2-999	BCS Spaces	0	B, P, R, S
	C	64	64	1	BCS Spaces	0	B
	C	64	64	2-999	BCS Spaces	0	B, P, R, S
NVECTOR (future)							
POLAR (future)							
VPH (future)							

N-0105/0198

25-August-1998 Review Draft (Date)

Table D-65 GraphicSymbol (graphic) Subheader (NITF 2.1)TYPE "R" = Required, "C" = Conditional, "<>" = BCS spaces allowed for entire field)

Fields	Description	Size	Format Values	Type
SY	File part type	2 <u>BCS-A</u>	SY	R
SID	<u>GraphicSymbol (graphic)</u> identifier	10 <u>BCS-A</u>	BCS-A User defined (May not be all spaces)	R
SNAME	<u>GraphicSymbol (graphic)</u> name	20 <u>ECS</u>	BCS-A (Default is <u>ECS</u> spaces)	<u><R></u>
<u>SSG</u>	<u>Symbol (graphic) security group</u>	167 <u>ECS</u>	<u>See table D-3 for XSCLAS through XSCTLN, replace X with S</u>	
<u>SSCLAS</u>	<u>Graphic security classification</u>	4	<u>T,S,C,R, or U</u>	<u>R</u>
<u>SSCLSY</u>	<u>Graphic Security Class System</u>	2	<u>BCS-A (Default is spaces)</u>	<u>R</u>
<u>SSCODE</u>	<u>Graphic codewords</u>	11	<u>BCS-A (Default is spaces)</u>	<u>R</u>
<u>SSCTLH</u>	<u>Graphic control and handling</u>	2	<u>BCS-A (Default is spaces)</u>	<u>R</u>
<u>SSREL</u>	<u>Graphic releasing instruct</u>	20	<u>BCS-A (Default is spaces)</u>	<u>R</u>
<u>SSDCTP</u>	<u>Graphic Declassification Type</u>	2	<u>BCS-A (Default is spaces)</u>	<u>R</u>
<u>SSDCDT</u>	<u>Graphic Declassification Date</u>	8	<u>CCYYMMDD or all spaces</u>	<u>R</u> ♦
<u>SSDCXM</u>	<u>Graphic Declass Exemption</u>	4	<u>BCS-A (Default is spaces)</u>	<u>R</u>
<u>SSDG</u>	<u>Graphic Downgrade</u>	4	<u>BCS-A (Default is spaces)</u>	<u>R</u>
<u>SSDGD</u>	<u>Graphic Downgrade Date</u>	8	<u>CCYYMMDD or all spaces</u>	<u>R</u> ♦
<u>SSCLTX</u>	<u>Graphic Classification Text</u>	43	<u>BCS-A (Default is spaces)</u>	<u>R</u>
<u>SSCATP</u>	<u>Graphic Class Authority Type</u>	1	<u>BCS-A (Default is spaces)</u>	<u>R</u>
<u>SSCAUT</u>	<u>Graphic classification authority</u>	40	<u>BCS-A (Default is spaces)</u>	<u>R</u>
<u>SSCRSN</u>	<u>Graphic Classification Reason</u>	4	<u>BCS-A (Default is spaces)</u>	<u>R</u>
<u>SSSRDT</u>	<u>Graphic Security Source Date</u>	8	<u>CCYYMMDD or all spaces</u>	<u>R</u>
<u>SSCTLN</u>	<u>Graphic security control number</u>	15	<u>BCS-A (Default is spaces)</u>	<u>R</u>
ENCRYP	Encryption	1 <u>BCS-N</u> positive integer	0=Not encrypted	R
SFMT	<u>GraphicSymbol (graphic)</u> format type	1 <u>BCS-A</u>	C for CGM	R

Table D-65 GraphicSymbol (graphic) Subheader (NITF 2.1) (cont'd)

Fields	Description	Size	Format Values	Type
<u>SRES1-STR</u> <u>UCT</u>	Reserved for future use	13 <u>BCS-N</u> <u>positive</u> <u>integer</u>	<u>BCS-N-0000000000000 to</u> <u>9999999999999 (Default is BCS zeros</u> <u>(0x30))</u>	R
SDLVL	<u>Symbol (graphic)</u> Display level	3 <u>BCS-N</u> <u>positive</u> <u>integer</u>	<u>BCS-N-001-999</u>	R
SALVL	<u>Symbol (graphic)</u> Attachment level	3 <u>BCS-N</u> <u>positive</u> <u>integer</u>	<u>BCS-N-000-998 (Default is 000)</u>	R
SLOC	<u>GraphicSymbol (graphic)</u> location	10 <u>BCS-N</u>	<u>BCS-N-RRRRRCCCCC</u> <u>Positive row and column values in the</u> <u>range 00000 to 99999</u> <u>Negative values in the range of: -0001 to -</u> <u>9999-9999-rrrrr-99999 to 9999-cccccc-99999</u> <u>(Default is 00000000000)</u>	R
SBND1	First <u>graphicsymbol (graphic)</u> bound location	10 <u>BCS-N</u>	<u>rrrrrcccc with</u> <u>-9999-rrrrr-99999</u> <u>9999-cccccc-99999</u> <u>(Default is 00000000000)</u>	R
SCOLOR	<u>GraphicSymbol (graphic)</u> color	1 <u>BCS-A</u>	C, M	R
SBND2	Second <u>GraphicSymbol (graphic)</u> bound location	10 <u>BCS-N</u>	<u>rrrrrcccc</u> <u>-9999-rrrrr-99999</u> <u>-9999-cccccc-99999</u> <u>(Default is 00000000000)</u>	R
SRES2	Reserved for future use	2 <u>BCS-N</u> <u>positive</u> <u>integer</u>	<u>BCS-N-00 to 99 (Default is BCS zeros</u> <u>(0x30))</u>	R
SXSHDL	Extended Subheader data length	5 <u>BCS-N</u> <u>positive</u> <u>integer</u>	<u>BCS-N-00000 or 00003-09741</u> <u>(Default is BCS zeros (0x30))</u>	R
SXSOFL	Extended Subheader overflow	3 <u>BCS-N</u> <u>positive</u> <u>integer</u>	<u>BCS-N-000-999</u>	C
SXSHD	Extended Subheader Data	**	Tagged Record Extensions	C

** A value as specified by Header Record Length-SHSHDL field minus 3 (in bytes)

N-0105/0198

25-August-1998 Review Draft (Date)

Table D-76. Text Subheader (NITF 2.1)TYPE "R" = Required, "C" = Conditional, "<>" = BCS spaces allowed for entire field)

Fields	Description	Size	Format Values	Type
TE	File part type	2 <u>BCS-A</u>	TE	R
TEXTID	Text Identifier	7 <u>BCS-A</u>	BCS-A (User defined, non-blank)	R
TXTALVL	Text attachment level	3 <u>BCS-N</u> positive integer	BCS-N 000-998 (Default is <u>BCS zeros</u> (0x30))	R
TXTDT	Text date and time	14 <u>BCS-N</u> positive integer	CCYYMMDDhhmmss	R
TXTITL	Text title	80 <u>ECS</u>	BCS-A (Default is <u>ECS</u> spaces)	<u><R></u>
<u>TSG</u>	<u>Text security group</u>	167 <u>ECS</u>	See table D-3 for XSCLAS through XSCTLN, replace X with T	
TSGLAS	Text security classification	4	T,S,C,R, OR U	R
TSGLSY	Text security classification system	2	BCS-A (Default is spaces)	R
TSCODE	Text codewords	11	BCS-A (Default is spaces)	R
TSGTLH	Text control and handling	2	BCS-A (Default is spaces)	R
TSREL	Text releasing instructions	20	BCS-A (Default is spaces)	R
TSDCTP	Text declassification type	2	BCS-A (Default is spaces)	R
TSDCDT	Text declassification date	8	CCYYMMDD (Default is spaces)	R
TSDCXM	Text declassification exemption	4	BCS-A (Default is spaces)	R
TSDG	Text downgrade	1	BCS-A (Default is spaces)	R
TSDGDT	Text downgrade date	8	CCYYMMDD (Default is spaces)	R
TSQLTX	Text classification text	43	BCS-A (Default is spaces)	R
TSCATP	Text classification authority type	1	BCS-A (Default is spaces)	R
TSCAUT	Text classification authority	40	BCS-A (Default is spaces)	R
TSCRSN	Text classification reason	1	BCS-A (Default is spaces)	R
TSSRDT	Text security source date	8	CCYYMMDD (Default is spaces)	R
TSCTLN	Text security control number	15	BCS-A (Default is spaces)	R
ENCRYP	Encryption	1 <u>BCS-N</u> positive integer	0=Not encrypted (This value must be 0)	R
TXTFMT	Text format	3 <u>BCS-A</u>	STA, MTF, UT1, <u>U8S</u>	R

TXSHDL	Text Extended Subheader data length	5 BCS-N positive integer	00000 or 00003-09717 (Default is BCS zero (0x30))	R
TXSOFL	Text Extended Subheader overflow	3 BCS-N positive integer	BCS-N (000-999)	C
TXSHD	Text Extended Subheader data	**	BCS-A	C

** A [value as](#) specified by the value in the TXSHDL field minus 3 [\(in bytes\)](#)

N-0105/0198

25-August-1998 Review Draft (Date)

Table D-78. Registered and Controlled Tagged Record Extension Format

TYPE "R" = Required, "C" = Conditional, "<>" = BCS spaces allowed for entire field)(TYPE "R" = Required, "C" = Conditional)

Fields	Description	Size	Format Values	Type
RETAG or CETAG	Unique Extension type identifier	6 <u>BCS-A</u>	<u>BCS-A</u>	R
REL or CEL	Length of REDATA fields	5 <u>BCS-N</u> <u>positive integer</u>	<u>BCS-N</u> (00001-9998 <u>58</u>)	R
REDATA or CEDATA where appropriate	User-defined data	*	User defined	R

* A value as indicated in the REL field or the CEL field (in bytes)

Table D-98. Data Extension Segment Subheader (NITF 2.1)

TYPE "R" = Required, "C" = Conditional, "<>" = BCS spaces allowed for entire field)

Fields	Description	Size	Format Values	Type
DE	File part type	2 <u>BCS-A</u>	DE	R
DESTAGID	Unique DES type identifier	25 <u>BCS-A</u>	<u>BCS-A</u> (Registered value only)	R
DESVR	Version of the data <u>field</u> definition	2 <u>BCS-N</u> <u>positive integer</u>	<u>BCS-N</u> (01 to 99)	R
DESSG	<u>Data Extension Segment</u> Security group	167 <u>ECS</u>	<u>See table D-3 Same as for File Header, XFSCLAS through FXSCNTLCTLN, replace X with DE</u>	R
DESOFLW	<u>DES</u> Overflowed header type This field only appears when DESTAG=TRE_OVERFLOW. Otherwise omitted.	6 <u>BCS-A</u>	<u>BCS-A</u> (UDHD, XHD, UDID, IXSHD, SXSHD, TXSHD)	C
DESITEM	<u>DES</u> data item overflowed	3 <u>BCS-N</u> <u>positive integer</u>	<u>BCS-N</u> (000 TO 999)	C
DESSLH	<u>DES</u> Length of user-defined subheader <u>fieldslength</u>	4 <u>BCS-N</u> <u>positive integer</u>	<u>BCS-N</u> (0000-9999)	R
DESSHf	<u>DES</u> User-defined subheader fields	*	BCS-A (User defined)	C
DESDATA	<u>DES</u> User-defined data <u>field</u>	**	User defined	R

* Value specified in of the DESSHL (in bytes)

** Determined by user. If DESTAGID = "TRE-OVERFLOW" or Controlled Extensions," this signifies the sum of the lengths of the tagged records included TRE.

Table D-98A. TRE_OVERFLOW DES (NITF 2.1)

TYPE "R" = Required, "C" = Conditional, "<>" = BCS spaces allowed for entire field)

Fields	Description	Size	Format Values	Type
DE	<u>File part type</u> <u>Data Extension Subheader</u>	2 <u>BCS-A</u>	DE	R
DESTAGID	Unique DES type identifier	25 <u>BCS-A</u>	TRE_OVERFLOW	R
DESVR	Version of the data <u>field</u> definition	2 <u>BCS-N positive integer</u>	01	R
DESSG	<u>Data Extension Segment</u> Security group	167 <u>ECS</u>	See table D-3 for XSCLAS through XSCTLN, replace X with DE Refer to (Table IA8) of MIL-STD-2500B NITF Version 2.0	R
DESOFLW	Overflowed header <u>type</u>	6 <u>BCS-A</u>	UDHD, XHD, UDID, IXSHD, SXSHD, TXSHD; <u>otherwise, field is omitted</u>	<u>RC</u>
DESITE	Data item overflowed	3 <u>BCS-N positive integer</u>	000 to 999	<u>RC</u>
DESSHL	Length of <u>user</u> DES-defined subheader fields	4 <u>BCS-N positive integer</u>	0000	R
DESDATA	<u>User</u> DES-defined data field	**	User defined <u>TRE with no intervening octets</u>	R

** Profile defined.

Table D-98B. STREAMING_FILE_HEADER DES Subheader (NITF 2.1)

TYPE "R" = Required, "C" = Conditional, "<>" = BCS spaces allowed for entire field)

Fields	Description	Size	Format Values	Type
DE	<u>File part type</u> <u>Data Extension Subheader</u>	2 <u>BCS-A</u>	DE	R
DESTAGID	Unique DES type identifier	25 <u>BCS-A</u>	STREAMING_FILE_HEADER	R
DESVR	Version of the data <u>field</u> definition	2 <u>BCS-N positive integer</u>	01	R
DESSG	<u>Data Extension Segment</u> Security group	167 <u>ECS</u>	See table D-3 for XSCLAS through XSCTLN, replace X with DE Refer to (Table IA8) of MIL-STD-2500B NITF Version 2.	R

N-0105/0198

25-August-1998 Review Draft (Date)

Fields	Description	Size	Format Values	Type
DESSL	Length of user DES-defined subheader fields	4	BCS-N positive integer 0000	R
SFH_L1	SFH Length 1	7	BCS-N positive integer 0 to 9999999	R
SFH_DELI M1	SFH Delimiter 1	4	BCS-A 0x0A6E1D97	R
DES DATAS FH DR	User-defined Replacement data field	**	User-defined	R
SFH_DELI M2	SFH Delimiter 2	4	BCS-A 0x0ECA14BF	R
SFH_L2	SFH Length 2	7	BCS-N positive integer 0 to 9999999	R

Table D-109. Reserved Extension Segment (RES) SubheaderTYPE "R" = Required, "C" = Conditional, "<>" = BCS spaces allowed for entire field)

Fields	Description	Size	Format Values	Type
RE	File part type	2 <u>BCS-A</u>	RE	R
RESTAGID	Unique RES type identifier	25 <u>BCS-A</u>	<u>BCS-A</u> (Registered value only, non-blank)	R
RESVER	Version of the data field definition	2 <u>BCS-N</u> positive integer	<u>BCS-N</u> (01 to 99)	R
RESSG	<u>Reserved Extension Segment</u> Security group	167 <u>ECS</u>	See table D-3 for XSCLAS through XSCTLN, replace X with DE Same as for File Header, FSCLAS through FSCNTL	R
RESSHL	<u>RES Length of</u> user-defined subheader fields <u>length</u>	4 <u>BCS-N</u> positive integer	<u>BCS-N</u> (0000-9999)	R
RESSHF	<u>RES</u> User-defined subheader fields	*	BCS-A (User defined)	C
RESDATA	<u>RES</u> User-defined data field	**	User defined	R

* Value of the RESSHL field (in bytes)** Determined by the definition of the specific RES as registered and controlled with the ISMC

Appendix E -- Adaptive Recursive Interpolated Differential Pulse Code Modulation (ARIDPCM) Requirements

Table E-1. General ARIDPCM Requirements

O=Optional M=Mandatory

Item	Feature	Predicate	Status Pack/Unpack	Reference MIL-STD-188-197
E-1	Operates ARIDPCM Type 1; 8 bits/pixel.	NITF 1.1 files only	M / M	1.5
E-2	Operates ARIDPCM Type 2; 11 bits/pixel.	Not used	O / O	1.5
E-3	Image Compression (IC) field of the image subheader is set to C2.	See note Note 1	M / M	1.2, 3.7
E-4	ARIDPCM algorithm is defined with these four selectable compression rates (4.5, 2.3, 1.4 and 0.75 bits-per-pixel, bpp) for eight bit gray scale images.	Item E-1 See note Note 1	M / M	4.2
E-5	ARIDPCM algorithm is defined with these four selectable compression rates (6.4, 4.5, 2.3 and 1.4 bpp) for 11 bit gray scale images.	Item E-2 See note Note 1	O / O	4.2
E-6	Compression rate is specified in the COMRAT (compression rate code) field in the NITFS image subheader.	Items E-4, E-5 See note Note 1	M / M	4.2
E-7	Compression algorithm operates in the Non-driven mode. In the Non-driven mode the ARIDPCM algorithm is a one pass operation where the busyness class is determined for a neighborhood based upon the selected compression rate.	See Note 2	O / M	4.6.1, 5.2.2
E-8	Compression algorithm operates in the Driven mode. The Driven ARIDPCM algorithm is a two pass operation that guarantees a specific average number of bits-per-pixel over the entire image.	See Note 2	O / M	4.6.2, 5.2.3
E-9	Compression algorithm operates in the Composite mode. The Composite mode of the ARIDPCM algorithm combines the driven and non-driven techniques to compress areas of little interest as specified by the operator to a greater degree than those areas the operator specifies as high interest.	See Note 2	O / M	4.6.3, 5.2.4, 4.5.3(1)

Note 1: Although the use of ARIDPCM by an image packer is optional, if used, the IC field must be set to C2 and the COMRAT field must contain a valid entry. At least one of the four compression rates must be supported by a packer. Unpackers must support all four rates.

Note 2: Any 3 options may be used for compression as receive side must handle all three cases. If ARIDPCM is supported, then at least one mode must be supported.

N-0105/~~0198~~
~~25 August 1998~~ Review Draft (Date)

(This page intentionally left blank.)

Appendix F -- Bi-Level Image Compression Requirements**Table F-1. General Bi-level Image Compression Requirements**

Item	Feature	Predicate	Status Pack/Unpack	Reference (MIL-STD 188-196)
F-1	Encoding Method is consistent with applicable standards and requirements documents.	See Note 1	M / M	1.1
F-2	The image compression field of the image header is set to C1 to invoke Bi-level data compression.		M / M	4.3
F-3	The mode of operation is specified in the Compression Rate Code section of the image header, using codes:, 1D, 2DS and 2DH.	Items F-4, F- 5, F-6	M / M	1.5
F-4	Operates in Bi-level compression Mode 1.	See Note 2	O / M	1.5
F-5	Operates in Bi-level compression Mode 2.	See Note 2	O / M	1.5
F-6	Operates in Bi-level compression Mode 3.	See Note 2	O / M	1.5
F-7	Each coded image line is embedded within synchronization codes.	Items F-4, F-5, F-6	O / M	4.2
F-8	Uses Huffman Codes - As specified in MIL-STD-188-196 for one and two dimensional Bi-Level encoding.	Items F-4, F-5, F-6	M / M	5.1, 5.2, 5.3

Note 1: The NITF application of Bi-Level Image Compression will be consistent with the following:

- MIL-STD-188-161C for Group 3 (G3) facsimile devices.
- FIPS 147 G3 facsimile apparatus for document transmission.
- CCITT recommendations for T.4.
- ANSI X3,4-1986 standard.

Note 2: If Bi-Level is supported on pack side, at least one mode must be supported.

N-0105/~~0198~~
~~25 August 1998~~ Review Draft (Date)

(This page intentionally left blank.)

Appendix G -- Joint Photographic Experts Group (JPEG) Requirements**Table G-1. General JPEG Requirements**

O = Optional, M = Mandatory, N/A = Not Applicable

Item	Feature	Predicate	Status Pack/Unpack	Reference (MIL-STD 188-198A)
G1-1	Uses the full interchange JPEG format.		M/M	5.2.2.4.2, 5.2.2.5.1.9
G1-2	Uses the Q and H Tables found in the compressed JPEG stream versus any tables that may be specified by the COMRAT field of the NITF Imagery subheader.		NA/M	5.2.3.3.5
G1-3	Decompresses the abbreviated interchange JPEG format associated with NITF 2.0 files.	Only required for unpacking NITF2.0 files.	NA/M	5.2.2.4.1 , 5.2.2.5.1.8
G1-4	Implementations must include restart markers in entropy encoded data stream.		M/NA	5.2.3. 3.1.4 , 5.2.3.3.2
G1-5	Implementations must re-synchronize decompression at the next restart interval when the corrupted data is encountered in the entropy encoded data stream.		NA/M	6.3
G1-6	Implementation must replace any restart interval containing corrupted data with a pattern so that when the decoded data is displayed it is apparent that an error was encountered in that restart interval.		NA/M	5.2.3.3.1.4
G1-7	Implementation must be able to decode and display a JPEG compressed image in which no more than 10% of the restart intervals in the compressed data stream contain errors.		NA/M	5.2.3.3.1.4
G1-8	Implementations generating custom Huffman tables must build those tables according to MIL-STD-188-198A		M/NA	5.2.2.5.1.9

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

Table G-2. 8-bpp Lossy DCT JPEG Requirements

O = Optional M = Mandatory

Item	Feature	Predicate	Status Pack/Unpack	Reference MIL-STD 188-198A
G2-1	Operates in Sequential DCT based mode.		M / M	4.11.1, 5.2
G2-2	Uses Huffman Entropy encoding.		M / M	4.12, 5.2.2.5.1
G2-3	Uses 8 bit sample precision		M / M	4.13.1
G2-4	Converts 2 thru 7bpp imagery to 8bpp before JPEG compression.	Conversion is not required but only recommended.	O / NA	6.2
G2-5	Compression Accuracy: The quantized DCT coefficients, from the DCT based encoder, are within +/- 24 for each coefficient, when compared to reference test data.		M / NA	IEC SO-Draft IS 10918-2
G2-6	Decompression Accuracy: The output of the DCT based decoder, when passed through a reference FDCT and Quantizer, is accurate to within +/- 24 when compared to reference test data for each coefficient.		NA / M	IEC SO-Draft IS 10918-2

Table G-3. 24-bpp Color Lossy DCT JPEG Requirements

O = Optional M = Mandatory

Item	Feature	Predicate	Status Pack/Unpack	Reference MIL-STD 188-198A
G3-1	Operates in Sequential DCT based mode.		M / M	4.11.1, 5.2
G3-2	Implementation processes 24-bit RGB color imagery as IMODE S	Not allowed in defined CLEVELs.	ONA / ONA	4.14.1,
G3-3	Implementation processes 24-bit RGB color imagery as IMODE P		M / M	4.14.2,
G3-4	Implementation processes 24-bit RGB color imagery as IMODE B	Not allowed in defined CLEVELs.	ONA / NAO	4.14.2,
G3-5	A 24bpp RGB color image translated to 24bpp YCbCr color space, then JPEG encoded and decoded, must have the same general appearance as the original RGB image when JPEG encoded then decoded.		M / M	5.1.1.2.1.3
G3-6	Implementation processes YCbCr color imagery as IMODE P with no subsampling.		M / M	5.1.1.2.1.2
G3-7	Implementation processes YCbCr imagery as IMODE P with horizontal subsampling.		O / M	5.1.1.2.1.3
G3-8	Implementation processes YCbCr imagery as IMODE P with vertical subsampling.		O / M	5.1.1.2.1.3
G3-9	Implementation processes YCbCr imagery as IMODE P with both horizontal and vertical subsampling.		O / M	5.1.1.2.1.3
G3-10	Compression Accuracy: The quantized DCT coefficients, from the DCT based encoder, are within +/- 42 for each coefficient, when compared to reference test data. Mono & RGB		M / NA	IECSO Draft IS 10918-2
G3-11	Decompression Accuracy: The output of the DCT based decoder, when passed through a reference FDCT and Quantizer, is accurate to within +/- 42 when compared to reference test data for each coefficient. Mono & RGB		NA / M	IECSO Draft IS 10918-2

N-0105/~~0198~~
~~25 August 1998~~ Review Draft (Date)

Table G-4. 12-bpp Lossy DCT JPEG Requirements

O = Optional M = Mandatory

Item	Feature	Predicate	Status Pack/Unpack	Reference MIL-STD 188-198A
G4-1	Operates in Extended Sequential DCT based mode.		M / M	4.11.1, 5.2
G4-2	Uses Huffman Entropy encoding.		M / M	4.12, 5.2.2.5.1
G4-3	Implementation processes 12 bit monochrome imagery as IMODE B		M / M	4.13.1
G4-4	Converts greater than 8-9 to 11 bpp imagery to 12bpp before JPEG compression.		M-O / NA	6.2
<u>G4-5</u>	<u>Converts -13 to 16 bpp imagery to 12bpp before JPEG compression.</u>		<u>O / NA</u>	
G4- <u>65</u>	Compression Accuracy: The quantized DCT coefficients, from the DCT based encoder, are within +/- 2 for each coefficient, when compared to reference test data.		M / NA	<u>IECSO Draft</u> <u>IS</u> 10918-2
G4- <u>67</u>	Decompression Accuracy: The output of the DCT based decoder, when passed through a reference FDCT and Quantizer, is accurate to within +/- 2 when compared to reference test data for each coefficient.		NA / M	<u>IECSO Draft</u> <u>IS</u> 10918-2

Table G-5. Lossless JPEG Requirements

O = Optional M = Mandatory

Item	Feature	Predicate	Status Pack/Unpack	Reference MIL-STD 188-198A
G5-1	Operates in lossless sequential encoding mode.		M / M	4.10.1, 5.2
G5-2	Uses Huffman Entropy encoding.		M / M	4.12, 5.2.2.5.1
G5-3	Uses 8-bpp sample imagery, single band. IMODE B	Note 1	O / M	4.13. 24
G5-4	Uses 12-bpp sample imagery, single band. IMODE B	Note 1	O / M	4.13. 24
G5-5	Uses 16-bpp sample imagery, single band. IMODE B	Note 1	O / M	4.13.2
G5-6	Uses 8 bpp Multi-component spectral (8-12 bits per 3-band RGB, two or more bands) imagery. IMODE B or SP	Note 1	O / M	4.14
G5-7	Compression Accuracy: Implementation must accurately compress image data into an NITF formatted file so that the NITF file, when decompressed by a trusted lossless JPEG implementation, yields an image array exactly equal to the original image data.		M / NA	IECSO Draft 10918-2
G5-8	Decompression Accuracy: Implementations must accurately decompress a NS ITF lossless encoded JPEG stream, created by a trusted lossless, so that the resulting decompressed image array is exactly equal to the original image data.		NA / M	IECSO Draft 10918-2

Note 1 - If the implementation does Lossless JPEG, it must compress using at least one of the allowed pixel depths: 8,12 or 16.

N-0105/0198

25-August-1998 Review Draft (Date)

Table G-6. Downsample JPEG Requirements

O = Optional M = Mandatory

Item	Feature	Predicate	Status Pack/Unpack	Reference MIL-STD 188-198A
G6-1	Operates in Sequential DCT based mode.		M / M	4.11.1, 5.2
G6-2	Uses Huffman Entropy encoding.		M / M	4.12, 5.2.2.5.1
G6-3	Uses 8bpp sample precision, single band.		M / M	4.13.1
G6-4	Converts 2 thru 7bpp imagery to 8bpp before JPEG compression.		<u>OM</u> / NA	6.2
G6-5	Implementation compresses images no larger than 2048 x 2048 pixels, single block.		M / NA	N-0106-987 5.2.2.2.1.1
G6-6	Implementation downsamples image to dimensions that are multiples of 8.		M / NA	N-0106-987 5.2.1.1
G6-7	Implementation supports sync based mode of downsampling.		M / NA	N-0106-987 5.2.13
G6-8	Implementation mirrors edge pixels prior to downsampling.		M / NA	N-0106-987, 5.2.1.3.1
G6-9	Implementation downsamples/upsamples images according to methods and guidelines in NITFS Bandwidth Compression Standards and Guidelines document, N-0106-978		M / M	

Table G-7. Multispectral Individual Band JPEG RequirementsO = Optional M = Mandatory

<u>Item</u>	<u>Feature</u>	<u>Predicate</u>	<u>Status Pack/Unpack</u>	<u>Reference MIL-STD 188-198A</u>
<u>G7-1</u>	<u>Operates in Sequential DCT based mode</u>		<u>M / M</u>	<u>4.11.1, 5.2</u>
<u>G7-2</u>	<u>Operates in Extended Sequential DCT based mode</u>		<u>M / M</u>	<u>4.11.1, 5.2</u>
<u>G7-3</u>	<u>Uses Huffman Entropy encoding.</u>		<u>M / M</u>	<u>4.12, 5.2.2.5.1</u>
<u>G7-4</u>	<u>Converts 9 to 11bpp imagery to 12bpp before JPEG compression.</u>		<u>O / NA</u>	<u>6.2</u>

G7-5	Converts 13 to 16bpp imagery to 12bpp before JPEG compression.		O / NA	6.2
G7-6	Compress up to 999 image bands	Limited by CLEVEL	O / NA	
G7-7	Decompress up to 999 image bands	Limited by CLEVEL	NA / O	
G7-8	Compression Accuracy: The quantized DCT coefficients, from the DCT based encoder, are within +/- 2 for each coefficient, when compared to reference test data.		M / NA	IEC 10918-2:1995
G7-9	Decompression Accuracy: The output of the DCT based encoder, when passed through a reference FCT and Quantizer, is accurate to within +/- 2 when compared to reference test data for each coefficient.		NA / M	IEC 10918-2:1995

Appendix H -- Vector Quantization (VQ) Requirements**Table H-1. General VQ Requirements**

Item	Feature	Predicate	Status Pack/Unpack	Reference (MIL-STD-188-199)
H-1	VQ compressed image segment contains VQ header when IC field is set to C4 or M4.		M / M	5.2.1, 5.2.3.2
H-2	Supports kernel-by-kernel compression/decompression and individual kernel rows for line-by-line compression/decompression.	Packer must support at least one of the options.	M / M	5.2.1.a
H-3	The first image code in the VQ image data field is used to spatially decompress the v x h indices in the upper left corner of image, continuing left to right across the columns of the first row of image codes, then down each of the image code rows sequentially.		M / M	5.2.1.b
H-4	Each value in a spatially decompressed image represents an index to the color table output (color compressed images only).		M / M	5.2.1.b
H-5	VQ implementations within NITFS are limited to 8-bit RGB with LUT, or monochrome with or without LUT.	Unpackers must support both options.	M / M	5.2.2
H-6	The compression ratio (COMRAT) field is present and contains a value in n.nn format.		M / M	5.2.3.1
H-7	The image compression (IC) field contains C4 if image is not masked; M4 if masked.	Packers must support at least one option.	M / M	5.2.3.2
H-8	The VQ image data section provides compression codes, utilizing a 4x4 kernel, organized in 4 tables.		M / M	5.2.3.3
H-9	Implementation utilizes a single band with associated LUT, IMODE B.		M / M	5.2.3.4
H-10	The number of spectral groups is 1.		M / M	5.2.3.4.a

N-0105/0198

~~25 August 1998~~ Review Draft (Date)**Table H-1. General VQ Requirements (cont.)**

Item	Feature	Predicate	Status Pack/Unpack	Reference (MIL-STD-188-199)
H-12	Pixels within the image correspond to a single-valued quantity such as a gray scale value or single entry within a color table (for images with 1 or more spectral band tables).		M / M	5.2.3.4.c
H-13	The image row level of organization in the NITFS image subheader corresponds to the image row level in the VQ header.		M / M	5.2.3.4.d
H-14	The number of bands in the NITFS image subheader corresponds to the number of bands in the VQ header.	Always a single band.	M / M	5.2.3.4.e
H-15	Fields containing identification, origination, security, and the number and size of data items in the NITFS file are located in the NITFS file header.		M / M	5.3
H-16	Multi-byte fields within the image data section are written in the "big endian" format.		M / M	5.3
H-17	The VQ header follows the structure identified in MIL-STD-188-199.		M / M	5.2.3

Note 1. VQ recompression of decompressed VQ images is prohibited. The original codes and code tables must be used if the image is to be repacked as a VQ compressed image, even if only a portion of the image is repacked.

Appendix I -- Computer Graphics Metafile (CGM) Requirements**Table I-1. General CGM Requirements, MIL-STD-2301**

O = Optional M = Mandatory

Item	Feature	Predicate	Status Pack/Unpack	Reference (MIL-STD-2301)
I1-1	Binary Encoding Format		M/M	4.2, 5.1.2.6, 5.1.1.6.1
I1-2	Begin Metafile		M/M	5.1.1.1.1, 5.1.2.1.1, 5.2.1.1.1, 5.2.1.2.1, 5.2.2.2.3
I1-3	Metafile Version	Item I1-2	M/M	5.1.1.2.1, 5.1.2.2.1
I1-4	Metafile Description	Item I1-2	M/M	5.1.1.2.2, 5.1.2.2.2, 5.2.1.1.6, 5.2.2.1.2, 5.2.2.2.2,
I1-5	Metafile Element List	Item I1-2	M/M	5.1.1.2.3, 5.1.2.2.3
I1-6	Font List	Item I1-2	O/M	5.1.1.2.4, 5.1.2.2.4, 5.2.2.1.4, 5.2.2.2.12, 5.2.2.2.13
I1-7	Begin Picture	Item I1-2	M/M	5.1.1.1.2, 5.1.2.1.2, 5.2.1.1.2, 5.2.1.2.2, 5.2.2.2.3
I1-8	Color Selection Mode	Item I1-7	M/M	5.1.1.3.1, 5.1.2.3.1, 5.2.2.1.10, 5.2.2.2.9
I1-9	Edge Width Specification Mode	Item I1-7	O/M	5.1.1.3.2, 5.1.2.3.2, 5.2.2.1.8, 5.2.2.2.7
I1-10	Line Width Specification Mode	Item I1-7	O/M	5.1.1.3.3, 5.1.2.3.3, 5.2.2.1.9, 5.2.2.2.8
I1-11	VDC Extent	Item I1-7	M/M	5.1.1.3.4, 5.1.2.3.4, 5.2.2.1.7
I1-12	Begin Picture Body	Item I1-7	M/M	5.1.1.1.3, 5.1.2.1.3, 5.2.1.1.3, 5.2.1.2.3, 5.2.2.1.5, 5.2.2.2.5
I1-13	Text Color	Item I1-12	O/M	5.1.1.4.1, 5.1.2.4.1
I1-14	Character Height	Item I1-12	O/M	5.1.1.4.2, 5.1.2.4.2, 5.2.2.1.21, 5.2.2.2.20
I1-15	Text Font Index	Item I1-12	O/M	5.1.1.4.3, 5.1.2.4.3, 5.2.2.1.14, 5.2.2.2.13
I1-16	Character Orientation	Item I1-12	O/M	5.1.1.4.4, 5.1.2.4.4, 5.2.2.1.11, 5.2.2.2.10
I1-17	Text	Item I1-12	O/M	5.1.1.5.1, 5.1.2.5.1, 5.2.2.1.20, 5.2.2.2.19, 5.2.2.1.25, 5.2.2.2.24
I1-18	Fill Color	Item I1-12	O/M	5.1.1.4.5, 5.1.2.4.5

N-0105/0198
~~25 August 1998~~ Review Draft (Date)

Item	Feature	Predicate	Status Pack/Unpack	Reference (MIL-STD-2301)
I1-19	Interior Style	Item I1-12	O/M	5.1.1.4.6, 5.1.2.4.6, 5.2.2.1.19, 5.2.2.2.18
I1-20	Edge Visibility	Item I1-12	O/M	5.1.1.4.7, 5.1.2.4.7
I1-21	Edge Width	Item I1-12	O/M	5.1.1.4.8, 5.1.2.4.8
I1-22	Edge Type	Item I1-12	O/M	5.1.1.4.9, 5.1.2.4.9

Table I-1. General CGM Requirements, MIL-STD-2301 (cont'd.)

O = Optional M = Mandatory

Item	Feature	Predicate	Status Pack/Unpack	Reference (MIL-STD-2301)
I1-23	Edge Color	Item I1-12	O/M	5.1.1.4.10, 5.1.2.4.10
I1-24	Polygon	Item I1-12**	O/M	5.1.1.5.2, 5.1.2.5.2, 5.2.2.1.23, 5.2.2.2.22, 5.2.2.1.26, 5.2.2.2.25
I1-25	Ellipse	Item I1-12	O/M	5.1.1.5.3, 5.1.2.5.3, 5.2.2.1.27, 5.2.2.2.26
I1-26	Line Width	Item I1-12	O/M	5.1.1.4.11, 5.1.2.4.11, 5.2.2.1.16, 5.2.2.2.15
I1-27	Line Type	Item I1-12	O/M	5.1.1.4.12, 5.1.2.4.12, 5.2.2.1.18, 5.2.2.2.17
I1-28	Line Color	Item I1-12	O/M	5.1.1.4.13, 5.1.2.4.13
I1-29	Polyline	Item I1-12**	O/M	5.1.1.5.4, 5.1.2.5.4, 5.2.2.1.22, 5.2.2.2.21, 5.2.2.1.28, 5.2.2.2.27
I1-30	Elliptical Arc	Item I1-12	O/M	5.1.1.5.5, 5.1.2.5.5, 5.2.2.1.29, 5.2.2.2. 28
I1-31	Elliptical Arc Close	Item I1-12	O/M	5.1.1.5.6, 5.1.2.5.6, 5.2.2.1.30, 5.2.2.2.29
I1-32	Rectangle	Item I1-12	O/M	5.1.1.5.7, 5.1.2.5.7, 5.2.2.1.31, 5.2.2.2.30
I1-33	Circle	Item I1-12	O/M	5.1.1.5.8, 5.1.2.5.8, 5.2.2.1.32, 5.2.2.2.32
I1-34	Circular Arc Center	Item I1-12	O/M	5.1.1.5.9, 5.1.2.5.9, 5.2.2.1.33, 5.2.2.2.32
I1-35	Circular Arc Center Close	Item I1-12	O/M	5.1.1.5.9, 5.1.2.5.9, 5.2.2.1.34, 5.2.2.2.33
I1-36	End Picture	Item I1-36	M/M	5.1.1.1.4, 5.1.2.1.4, 5.2.1.1.4, 5.2.1.2.4, 5.2.2.1.6, 5.2.2.2.6
I1-37	End Metafile	Item I1-36	M/M	5.1.1.1.5, 5.1.2.1.5, 5.2.1.1.5, 5.2.1.2.5

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

Item	Feature	Predicate	Status Pack/Unpack	Reference (MIL-STD-2301)
I1-38	CGM Output required elements	Item I1-2, I1-3, I1-4, I1-5, I1-7, I1-8, (I1-9 or I1-10), I1-11, I1-12, (I1-24 or I1-31 with associated attributes), I1-39, I1-40	M/NA	5.2.2.2.1, 5.2.2.2.7, 5.2.2.2.8, 5.2.2.2.25, 5.2.2.2.27
I1-39	CGM Command		M/M	4.1
I1-40	Defaults colors for unsupported text.		NA/M	5.2.2.1.36
I1-41	CGM element substitution		NA/M	5.2.2.1.37
I1-42	CGM error message		NA/M	5.2.2.1.38
I1-43	Defaults		M/M	5.2.2.1.35, 5.2.2.2.34

** Must do either polygon or polyline with associated features as a minimum.

Table I-2. General CGM Requirements, MIL-STD-2301A

O = Optional M = Mandatory

Item	Feature	Predicate	Status Pack/Unpack	Reference (MIL-STD-2301A)
I2-1	Binary Encoding Format		M/M	4.2, 5.1.2.7, 5.1.1.7.1
I2-2	Begin Metafile		M/M	5.1.1.1.1, 5.1.2.1.1, 5.2.1.1.1, 5.2.1.2.1, 5.2.2.2.3
I2-3	Metafile Version	Item I2-2	M/M	5.1.1.2.1, 5.1.2.2.1
I2-4	Metafile Description	Item I2-2	M/M	5.1.1.2.2, 5.1.2.2.2, 5.2.1.1.6, 5.2.2.1.2, 5.2.2.2.2,
I2-5	Metafile Element List	Item I2-2	M/M	5.1.1.2.3, 5.1.2.2.3
I2-6	Font List	Item I2-2	O/M	5.1.1.2.4, 5.1.2.2.4, 5.2.2.1.4, 5.2.2.2.12, 5.2.2.2.13
I2-7	Begin Picture	Item I2-2	M/M	5.1.1.1.2, 5.1.2.1.2, 5.2.1.1.2, 5.2.1.2.2, 5.2.2.2.3
I2-8	Color Selection Mode	Item I2-7	M/M	5.1.1.3.1, 5.1.2.3.1, 5.2.2.1.10, 5.2.2.2.9
I2-9	Edge Width Specification Mode	Item I2-7	O/M	5.1.1.3.2, 5.1.2.3.2, 5.2.2.1.8, 5.2.2.2.7
I2-10	Line Width Specification Mode	Item I2-7	O/M	5.1.1.3.3, 5.1.2.3.3, 5.2.2.1.9, 5.2.2.2.8
I2-11	VDC Extent	Item I2-7	M/M	5.1.1.3.4, 5.1.2.3.4, 5.2.2.1.7
I2-12	Begin Picture Body	Item I2-7	M/M	5.1.1.1.3, 5.1.2.1.3, 5.2.1.1.3, 5.2.1.2.3, 5.2.2.1.5, 5.2.2.2.5
I2-13	Text Color	Item I2-12	O/M	5.1.1.4.1, 5.1.2.4.1,
I2-14	Character Height	Item I2-12	O/M	5.1.1.4.2, 5.1.2.4.2, 5.2.2.1.21, 5.2.2.2.20
I2-15	Text Font Index	Item I2-12	O/M	5.1.1.4.3, 5.1.2.4.3, 5.2.2.1.14, 5.2.2.2.13
I2-16	Character Orientation	Item I2-12	O/M	5.1.1.4.4, 5.1.2.4.4, 5.2.2.1.11, 5.2.2.2.10
I2-17	Text	Item I2-12	O/M	5.1.1.5.1, 5.1.2.5.1, 5.2.2.1.20, 5.2.2.2.19, 5.2.2.1.25, 5.2.2.2.24
I2-18	Fill Color	Item I2-12	O/M	5.1.1.4.5, 5.1.2.4.5

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

Table I-2. General CGM Requirements, MIL-STD-2301A (cont'd)

O = Optional M = Mandatory

Item	Feature	Predicate	Status Pack/Unpack	Reference (MIL-STD-2301A)
I2-19	Interior Style	Item I2-12	O/M	5.1.1.4.6, 5.1.2.4.6, 5.2.2.1.19, 5.2.2.2.18
I2-20	Edge Visibility	Item I2-12	O/M	5.1.1.4.7, 5.1.2.4.7
I2-21	Edge Width	Item I2-12	O/M	5.1.1.4.8, 5.1.2.4.8
I2-22	Edge Type	Item I2-12	O/M	5.1.1.4.9, 5.1.2.4.9
I2-23	Edge Color	Item I2-12	O/M	5.1.1.4.10, 5.1.2.4.10
I2-24	Polygon	Item I2-12**	O/M	5.1.1.5.2, 5.1.2.5.2, 5.2.2.1.23, 5.2.2.2.22, 5.2.2.1.26, 5.2.2.2.25
I2-25	Ellipse	Item I2-12	O/M	5.1.1.5.3, 5.1.2.5.3, 5.2.2.1.27, 5.2.2.2.26
I2-26	Line Width	Item I2-12	O/M	5.1.1.4.11, 5.1.2.4.11, 5.2.2.1.16, 5.2.2.2.15
I2-27	Line Type	Item I2-12	O/M	5.1.1.4.12, 5.1.2.4.12, 5.2.2.1.18, 5.2.2.2.17
I2-28	Line Color	Item I2-12	O/M	5.1.1.4.13, 5.1.2.4.13
I2-29	Auxiliary Color	Item I2-12	O/M	5.1.1.6.1, 5.1.2.6.1, 5.2.2.1.35, 5.2.2.2.34
I2-30	Transparency	Item I2-12	O/M	5.1.1.6.2, 5.1.2.6.2, 5.2.2.1.36, 5.2.2.2.35
I2-31	Polyline	Item I2-12**	O/M	5.1.1.5.4, 5.1.2.5.4, 5.2.2.1.22, 5.2.2.2.21, 5.2.2.1.28, 5.2.2.2.27
I2-32	Elliptical Arc	Item I2-12	O/M	5.1.1.5.5, 5.1.2.5.5, 5.2.2.1.29, 5.2.2.2.28
I2-33	Elliptical Arc Close	Item I2-12	O/M	5.1.1.5.6, 5.1.2.5.6, 5.2.2.1.30, 5.2.2.2.29
I2-34	Rectangle	Item I2-12	O/M	5.1.1.5.7, 5.1.2.5.7, 5.2.2.1.31, 5.2.2.2.30
I2-35	Circle	Item I2-12	O/M	5.1.1.5.8, 5.1.2.5.8, 5.2.2.32, 5.2.2.2.31
I2-36	Polygon Set	Item I2-12	O/M	5.1.1.5.2.1, 5.1.2.5.2.1, 5.2.2.1.26, 5.2.2.2.25
I2-37	Circular Arc Center	Item I2-12	O/M	5.1.1.5.9, 5.1.2.5.9, 5.2.2.1.33, 5.2.2.2.33

N-0105/~~9801~~
~~25-August-1998~~ Review Draft (Date)

Item	Feature	Predicate	Status Pack/Unpack	Reference (MIL-STD-2301A)
I2-38	Circular Arc Center Close	Item I2-12	O/M	5.1.1.5.9, 5.1.2.5.9, 5.2.2.1.34, 5.2.2.2.33
I2-39	End Picture	Item I2-36	M/M	5.1.1.1.4, 5.1.2.1.4, 5.2.1.1.4, 5.2.1.2.4, 5.2.2.1.6, 5.2.2.2.6
I2-40	End Metafile	Item I2-36	M/M	5.1.1.1.5, 5.1.2.1.5, 5.2.1.2.5,
I2-41	CGM Output required elements	Item I2-2, I2-3, I2-4, I2-5, I2-7, I2-8, (I2-9 or I2-10), I2-11, I2-12, (I2-24 or I2-31 with associated attributes), I2-39, I2-40	M/N/A	5.2.2.2.1, 5.2.2.2.7, 5.2.2.2.8, 5.2.2.2.25, 5.2.2.2.27
I2-42	CGM Command		M/M	4.1
I2-43	Defaults colors for unsupported text.		N/A/M	5.2.2.1.38
I2-44	CGM element substitution		N/A/M	5.2.2.1.39
I2-45	CGM error message		N/A/M	5.2.2.1.40
I2-42	Degeneracy		M/N/A	5.2.2.2.37
I2-43	Defaults		M/M	5.2.2.1.37, 5.2.2.2.46

** Must do either polygon or polyline with associated features as a minimum.

Appendix J -- Tactical Communications Protocol 2 (TACO2) Requirements**Table J-1. General TACO2 Requirements**

O = Optional M = Mandatory

Item	Feature	Predicate	Status Xmit/Rcv	Reference (MIL-STD-2045-44500)
J-1	Protocol operates in a point to point configuration		M/M	
J-2	Protocol operates in point to multi-point configuration		O/O	
J-3	Protocol operates across a LAN		O/O	
J-4	Protocol operates across a WAN		O/O	
J-5	Protocol operates in simplex mode		M/M	5.2.8.1
J-6	Protocol operates in half-duplex mode		M/M	5.2.8.2
J-7	Protocol operates in full duplex mode		M/M	5.2.8.3
J-8	TACO2 operates using HDLC framing for synchronous communication	When equipped with sync port	M/M	5.4.3 (1)
J-9	TACO2 operates using SLIP framing for asynchronous communication	When equipped with async port	M/M	5.4.3. (2)
J-10	TACO2 uses Forward Error Correction (FEC)		O/O	5.4.2 (1)
J-11	TACO2 includes the FEC sublayer		O/O	5.4.2
J-12	Implementation checksums all DATA and LDATA packets		M/M	5.2.8.6.2 (1)
J-13	TACO2 implementation can be configured to interface and operate with a KY-57/58 as described in JIEO Specification 9137.		O/O	

N-0105/0198

~~25 August 1998~~ Review Draft (Date)**Table J-1. General TACO2 Requirements (cont'd.)**

O = Optional M = Mandatory

Item	Feature	Predicate	Status Xmit/Rcv	Reference (MIL-STD-2045-44500)
J-14	TACO2 implementation can be configured to interface and operate with a KG-84 as described in JIEO Specification 9138		O/O	
J-15	TACO2 implementation can be configured to interface and operate with a KY-68 as described in JIEO Specification 9139		O/O	
J-16	TACO2 implementation can be configured to interface and operate with a STU-III as described in JIEO Specification 9140		M/M	
J-17	TACO2 implementation provides a mechanism for compressed packet headers		O/O	5.4.1
J-18	TACO2 implementation generates Echo reply messages in response to Echo request messages (Ping)		M/M	5.3.4.3.2
J-19	TACO2 Implementation shall will provide the upper protocol layers with a Bit Error Rate Test facility		O/O	5.4.2.3.1
J-20	Bit Error Rate Test frame is formatted according to ref. paragraph 5.4.2.3.2		O/O	5.4.2.3.2
J-21	TACO2 implementation transfers the largest CLEVEL 3 file ~ 50 MBMBYTE		O/M	

Appendix K -- NITF 2.0 File Format Requirements

K.1 NITF 2.0 Compliance Tables

The following tables contain the file format constraints for minimum NITFS compliance and must be used with the NITF Version 2.0 military standard (~~Mil-Std~~[MIL-STD-2500A](#)).

- The term "NA" under Format Values indicates that this field is not applicable to a minimum compliant NITF 2.0 file.

Table K-1. File Header (NITF 2.0)

R = Required, O = Optional, C = Conditional

Field	Description	Size	Format Values	Type
FHDR	File Type & Version	9	NITF02.00	R
CLEVEL	Compliance Level	2	01-07, 00 & 08-99 Reserved	R
STYPE	System Type	4	4 Spaces (Reserved)	O
OSTAID	Originating Station ID	10	Alphanumeric (May not be all spaces)	R
FDT	File Date & Time	14	DDHHMMSSZMONYY	R
FTITLE	File Title	80	Alphanumeric	O
FSCLAS	File Security Classification	1	T, S, C, R, or U	R
FSCODE	File Codewords	40	Alphanumeric	O
FSCTLH	File Control and Handling	40	Alphanumeric	O
FSREL	File Releasing Instructions	40	Alphanumeric	O
FSCAUT	File Classification Authority	20	Alphanumeric	O
FSCTLN	File Security Control Number	20	Alphanumeric	O
FSDWNG	File Security Downgrade	6	Alphanumeric "_____", YYMMDD, 999998, 999999	O
FSDEVT	File Downgrading Event	40	Alphanumeric If FSDWNG="999998"	C
FSCOP	File Copy Number	5	00000 default, or actual copy number#	O
FSCPYS	File Number of Copies	5	00000 default, or actual count	O
ENCRYP	Encryption	1	0 = Not Encrypted (This field must contain the value 0)	R
FBK CGC	File Background Color	3	0x020 to 0X#7E, Default 0x7E, 0x7E, 0x7E	R
ONAME	Originator's Name	274	Alphanumeric	O
OPHONE	Originator's Phone Number	18	Alphanumeric	O

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

Table K-1. File Header (NITF 2.0) (cont'd.)

R = Required, O = Optional, C = Conditional

Field	Description	Size	Format Values	Type
FL	File Length	12	000000000388-1213000 for CLEVEL 1 000000000388-999999999998 999999999999 for STREAMING_FILE_HEADER	R
HL	NITF Header Length	6	000388-002736	R
NUMI	Number of Images	3	000-020 All <u>CLEVELs</u> must pack at least 1 image <u>CLEVEL</u> <u>REQUIREMENT</u> 01-02 pack no more than 5 images 03-06 pack no more than 20 images 01-02 must unpack 0 to 5 images 03-06 must unpack 0 to 20 images	R
LISH001	Length of 1st Image Subheader	6	000439-202060	C
LI001	Length of 1st Image	10	Values calculated in bytes from image sizes ranging from 64 x 64 pixels to: <u>CLEVEL</u> <u>REQUIREMENT</u> 01 1K x 1K pixels by 1 & 8 bits (total file size not to exceed 1,213 kbs) 02 1k X 1k pixels by 1,8 & 24 bits 03 2K x 2K pixels by 1,8, & 24 bits 04 4K x 4K pixels by 1,8,12,16 & 24 bits 05 8K x 8K pixels by 1,8,12,16 & 24 bits 06 64K x 64K pixels 1,8,12 & 16 bits/pixel 07 9999999999 (CLEVEL 2-6 MAX FILE SIZE NOT TO EXCEED 2 GBYTES)	C

LISHn	Length of Nth Image Subheader	6	000439-202060	C
LIn	Length of Nth Image	10	Maximum aggregate of pixels of the 2nd to Nth Image must not exceed that of the maximum common coordinate system allowed per the respective CLEVEL	C
NUMS	Number of Symbols	3	000-100	R
LSSH001	Length of 1st Symbol Subheader	4	0258-0298	C
LS001	Length of 1st Symbol	6	Symbol data <u>CLEVEL</u> <u>MAXIMUM AGGREGATE</u> 01-02 131,072 (128k) 03 524,288 (.5 Meg) 04-06 1,048,576 (1 Meg)	C

Field	Description	Size	Format Values		Type
LSSn	Length of Nth Symbol Subheader	4	0258-0298		C
LSn	Length of Nth Symbol	6	Symbol data		C
NUML	Number of Labels	3	000-100 Labels are discouraged, CGM text capability in GraphicSymbol (graphic) Segment is encouraged.		R
LLSH001	Length of 1st Label Subheader	4	0212-0252		C
LL001	Length of 1st Label	3	Maximum aggregate size of all 100 labels: 2048 characters		C

LLSHn	Length of Nth Label Subheader	4	0212-0252		C
LLn	Length of Nth Label	3	Label data (1-320 characters)		C.
NUMT	Number of Text Segments	3	000-005 CLEVEL 01-02 000-032 CLEVEL 03-06		R
LTSH001	Length of 1st Text Subheader	4	0282-0322		C
LT001	Length of 1st Text Segment	5	Text data (1-99,999 characters) Maximum aggregate size of all text files: 100,000 characters		C

LTSHn	Length of Nth Text Subheader	4	0282-0322		C
LTn	Length of Nth Text Segment	5	Text data		C
NUMDES	Number of Data Extension Segments (DES)	3	000 (Will be 000 unless needed for TRE_OVERFLOW or STREAMING_FILE_HEADER data) 0200-9999	However, if receiving other than 0 DES, the system must adjust itself to move past data and unpack the remainder of the file correctly	R
LDSH001	Length of 1st Data Extension Segment (DES) subheader	4			C
LD001	Length of 1st DES Data Field	9			C
LDSHn	Length of Nth data extension segment subheader	4			C
LDn	Length of Nth DES Data Field	9			C

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

Field	Description	Size	Format Values		Type
NUMRES	Number of Reserved Extension Segments (RES)	3	000	However, if receiving other than 0 Data Extension segments, the system must adjust itself to move past data and unpack the remainder of the file correctly	R
LRSH001	Length of 1st RES subheader	4	0000-9999		C
LR001	Length of 1st RES	7	00000000-99999999		C
LRSHnnn	Length of Nth RES subheader	4	0000-9999		C
LRnnn	Length of Nth RES	7	00000000-99999999		C
UDHDL	User Defined Header Data Length	5	00000		R
UDHOFL	User Defined Header Overflow	3	000-999 ³	If receiving user defined data, system must at least move past user data and unpack the remainder of the file correctly	C
UDHD	User Defined Header Data	*	NA		C
XHDL	Extended Header Data Length	5	00000	If receiving Extended Data, the system must at least to move past Extended Data and unpack the remainder of the file correctly	R
XHOFL	Extended Header Overflow	3	000-999 ⁴		C
XHD	Extended Header Data	**	NA		C

* As specified by User Defined Header Data Length

** As specified by Extended Header Data Length

³ If present, this field shall/will contain "000" if the tagged record extensions in UDHD do not overflow into a DES, or shall/will contain the sequence number of the DES into which they overflow. This 3-byte field must be included in the total byte count of UDHDL, above. The UDHOFL field shall/will be omitted if the UDHDL field contains a value of zero.

⁴ If present, this field shall/will contain "000" if the tagged record extensions in XHD do not overflow into a DES, or shall/will contain the sequence number of the DES into which they overflow. This 3-byte field must be included in the total byte count of XHDL, above. The XHOFL field shall/will be omitted if the XHDL field contains a value of zero.

Table K-2. Image Subheader (NITF 2.0)

Field	Description	Size	Format Values	Type
IM	File Part Type	2	IM	R
IID	Image ID	10	Must not be all spaces	R
IDATIM	Image Date & Time	14	DDHHMMSSZMONYY	O
TGTID	Target ID	17	BBBBBBBBBBBFFFFFFCC	O
ITITLE	Image Title	80	Alphanumeric	O
ISCLAS	Image Security Classification	1	T, S, C, R, or U	R
ISCODE	Image Codewords	40	Alphanumeric	O
ISCTLH	Image Control and Handling	40	Alphanumeric	O
ISREL	Image Releasing Instructions	40	Alphanumeric	O
ISCAUT	Image Classification Authority	20	Alphanumeric	O
ISCTLN	Image Security Control Number	20	Alphanumeric	O
ISDWNG	Image Security Downgrade	6	Alphanumeric "_____", YYMMDD, 999999, 999998	O
ISDEVT	Image Downgrading Event	40	Alphanumeric, IF ISDWNG=999998	C
ENCRYP	Encryption	1	0= Not Encrypted (This value must be 0)	R
ISORCE	Image Source	43	Alphanumeric	O
NROWS	Number of Significant Rows in image	8	00000064-00065536 (Based on CLEVEL) 00000064-00065536 (Based on CLEVEL)	R
NCOLS	Number of Significant Columns in image	8	INT,B	R
PVTYPE	Pixel value type	3	Alphanumeric Mono, RGB, RGB/LUT, YCbCr601	R
IREP	Image Representation	8	Monochrome: Pack and Unpack all CLEVELs RGB/LUT: Unpack CLEVELs 2-6 Pack Optional RGB(24 bit color): Unpack CLEVELs 2-6 Pack only if native YCbCr(3 bands) compress only (JPEG): Unpack CLEVELS 2-6 Pack if native color Multispectral: (MULTI)	R

N-0105/0198

~~25-August-1998~~ Review Draft (Date)**Table K-2. Image Subheader (NITF 2.0) (cont'd.)**

Field	Description	Size	Format Values	Type
ICA†	Image Category	8	This field shall <u>will</u> contain a valid indicator of the specific category (often revealing the nature of the collector or intended use) of imagery. Valid categories include: VIS, Visible imagery; SL, Side-looking radar; TI, Thermal Infrared, FL, Forward-Looking Infrared; RD, Radar; EO, Electro-Optical; OP, Optical; HR, High Resolution Radar; HS, Hyperspectral; VD, Video; CP, Frame Photography; BP, Black/White Frame Photography; MAP, for maps; SAR, Synthetic aperture Radar; MS, Multispectral; FP, Fingerprints; MRI, Magnetic Resonance Imagery; XRAY, for X-rays; and CAT, Computerized Axial Tomography.	R
ABPP	Actual Bits-per-pixel Per Band	2	01,08,11,12,13,14,15,16	O
PJUST	Pixel Justification	1	R	O
ICORDS	Image Coordinate System	1	U, G, C, or N	R
IGEOL	Image Geographic Location	60	ddmmssXdddmmssY (4 times) or ggXYZmmmmmmmmmm (4 times)	C
NICOM	Number of Image Comments	1	0-9	R
ICOM1	Image Comment 1	80	Alphanumeric	C

ICOMn	Image Comment N	80	Alphanumeric	C
IC	Image Compression	2	NC - No Compression, C1- Bi-Level, C3 - JPEG, C4 - VQ(not masked), M4 - VQ(masked), NM, M0, M3	R
COMRAT	Compression Rate	4	<u>IC</u> <u>COMRAT</u> C1 1D, 2DS, 2DH C3 00.0, 00.1, 00.2, 00.3, 00.4, 00.5 C4 nn.n M4 nn.n	C

Table K-2. Image Subheader (NITF 2.0) (cont'd.)

Field	Description	Size	Format Values	Type
NBANDS	Number of Bands	1	1, 2 or 3, or 4 CLEVEL NBANDS 1 1 2-6 1 or 3	R
IREPBAND1	1st Band Component Representation	2	Alphanumeric "___" (2 spaces), 1 or "R_", "B_" or "Y_"	R
ISUBCAT1	1st Band Significance for Image Representation	6	Alphanumeric - (Default 6 spaces)	R
IFC1	1st Band Image Filter Condition	1	N	R
IMFLT1	1st Band STD Image Filter Code	3	Reserved - 3 spaces	R
NLUTS1	1st Band Number of LUTS	1	0 (mono w/o LUT), 1 (mono w/LUT), 3 (RGB/LUT)	R
NELUT1	1st Band Number of LUT Entries	5	Calculated	C
LUTD1	1st Band Data of 1st LUT	◆	LUT data	C

LUTDmm	1st Band Data of mmth LUT	◆	LUT data	C

IREPBANDn	nnth Band Component Representation	2	For N=2 G or Cb, For N=3 B, R , or Cr; <u>N=4 BGRN, N=Near IR</u>	C
ISUBCATn	nnth Band Significance for Image Representation	6	6 spaces	C
IFCn	nnth Band Image Filter Condition	1	N	C
IMFLTn	nnth Band STD Image Filter Code	3	Reserved - 3 Spaces	C
NLUTSn	nnth Band Number of LUTS	1	0 (No LUT except in band 1)	C
NELUTn	nnth Band Number of LUT Entries	5	Calculated	C
LUTD1	nnth Band Data of 1st LUT	◆	LUT Data	C

LUTDm	nnth Band Data of mmth LUT	◆	LUT Data	C

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

Table K-2. Image Subheader (NITF 2.0) (cont'd.)

Field	Description	Size	Format Values	Type
ISYNC	Image Sync Code	1	0	R
IMODE	Image Mode	1	B (Band interleaved by block), P (Band interleaved by pixel), S (Band sequential (only valid for multiple block images and multiple bands))	R
NBPR	Number of blocks per row	4	0001-0256	R
NBPC	Number of blocks per column	4	0001-0256	R
NPPBH	#Number of pixels per block (horiz.)	4	0032-8192	R
NPPBV	#Number of pixels per block (vert.)	4	0032-8192	R
NBPP	#Number of bits-per-pixel per band	2	01,08,12,16	R
IDLVL	Display Level	3	001-999	R
IALVL	Attachment Level	3	000-998	R
ILOC	Image Location	10	RRRRRCCCCC relative to AL origin	R
IMAG	Image Magnification	4	Alphanumeric 1.0, /2 for 1/2, /4 for 1/4, /8 for 1/8, /16 for 1/16, /32 for 1/32, /64 for 1/64, /128 for 1/128	R
UDIDL	User def. Img. data length	5	00000-99999	R
UDOFL	User def overflow	3	000-999	C
UDID	User defined image data	*	Registered tagged record extensions	C
IXSHDL	Extended Subheader data	5	00000-99999	R
IXSOFL	Extended Subheader overflow	3	000-999	C
IXSHD	Extended Subheader data	**	Controlled tagged record extensions	C

- ◆ One byte each entry
- * As specified by UDIDL
- ** As specified by IXSHDL

Table K-3. Symbol Subheader (NITF 2.0)

Fields	Description	Size	Format Values	Type
SY	File part type	2	SY	R
SID	Symbol id	10	Alphanumeric (May not be all spaces)	R
SNAME	Symbol name	20	Alphanumeric	O
SSCLAS	Symbol security classification	1	T, S, C, R, or U	R
SSCODE	Symbol codewords	40	Alphanumeric	O
SSCTLH	Symbol control and handling	40	Alphanumeric	O
SSREL	Symbol releasing instruct	40	Alphanumeric	O
SSCAUT	Symbol classification authority	20	Alphanumeric	O
SSCTLN	Symbol security control number	20	Alphanumeric	O
SSDWNG	Symbol security downgrade	6	Alphanumeric "_____", YYMMDD, 999999, 999998	O
SSDEVT	Symbol downgrading event	40	Alphanumeric If FSDWNG="999998"	C
ENCRYP	Encryption	1	0=NOT ENCRYPTED (This value must be 0)	R
STYPE	Symbol type	1	B=Bit-mapped C=CGM O=Object (not used)	R
NLIPS	Number of lines per symbol	4	0000-9999	R
NPIXPL	Number of pixels per line	4	0000-9999	R
NWDTH	Line width	4	0000-9999 (Not used, default=0000)	R
NBPP	Number of bits-per-pixel	1	1 for Bit Mapped 0 for CGM symbols	R
SDLVL	Display level	3	001-999	R
SALVL	Attachment level	3	000-998	R
SLOC	Symbol location	10	RRRRRCCCCC	R
SLOC2	Second symbol location	10	RRRRRCCCCC	O
SCOLOR	Symbol color	1	N, K, W, R, O, B, & Y (Not applicable for CGM use space)	R
SNUM	Symbol number	6	000000 for Bit-map & CGM	O
SROT	Symbol rotation	3	000	R
NELUT	Number of LUT entries	3	000	R
DLUT	Symbol LUT data	*	(NEVER APPEAR)	C
SXSHDL	Extended Subheader data length	5	00000	R
SXSOFL	Extended Subheader overflow	3	000-999	C
SXSHD	Extended Subheader Data	**	NA	C

* As specified by number of LUT entries

** As specified by Header Record Length

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

Table K-4. Label Subheader (NITF 2.0)

Fields	Description	Size	Format Values	Type
LA	File part type	2	LA	R
LID	Label ID	10	Alphanumeric (May not be all spaces)	R
LSCLAS	Label security classification	1	T, S, C, R, or U	R
LSCODE	Label codewords	40	Alphanumeric	O
LSCTLH	Label control and handling	40	Alphanumeric	O
LSREL	Label releasing instruct	40	Alphanumeric	O
LSCAUT	Label classification authority	20	Alphanumeric	O
LSCTLN	Label security control number	20	Alphanumeric	O
LSDWNG	Label security downgrade	6	Alphanumeric "_____", YYMMDD, 999999, 999998	O
LSDEVT	Label downgrading event	40	Alphanumeric	C
ENCRYP	Encryption	1	0=Not encrypted (value must be 0)	R
LFS	Label font style	1	`Default "Space"	R
LCW	Label cell width	2	00 (Note: May provide font size if label fits in CLEVEL display area)	O
LCH	Label cell height	2	00-99 (Note: May provide font size if label fits in CLEVEL display area)	O
LDLVL	Display level	3	001-999	R
LALVL	Attachment level	3	000-998	R
LLOC	Label location	10	RRRRRCCCCC	R
LTC	Label text color	3	For CLEVEL 01 1,1,1 (Black) 255,255,255 (White) For CLEVEL 02-06 1,1,1 (Black) 255,255,255 (White) 255,0,0 (Red) 250,125,0 (Orange) 0,0,255, (Blue) 0,255,0 (Green) 250,250,0 (Yellow)	R
LBC	Label background color	3	1 byte R,G and B 0,0,0 (Transparent) 1,1,1 (Black) & 255,255,255 (White)	R

Fields	Description	Size	Format Values	Type
LXSHDL	Extended subheader data length	5	00000	R
LXSOFL	Extended subheader overflow	3	000-999	C
LXSHD	Extended Subheader data	**	NA	
			If receiving Extended Data, the system must at least move past the data and unpack the remainder of the file correctly	

** As specified by Header Record Length

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

Table K-5. Text Subheader (NITF 2.0)

Fields	Description	Size	Format Values	Type
TE	File part type	2	TE	R
TEXTID	Text ID	10	Alphanumeric (May not be all spaces)	R
TXTDT	Text date and time	14	DDHHMMSSZMONYY	R
TXTITL	Text title	80	Alphanumeric	O
TSCLAS	Text security classification	1	T,S,C,R, OR U	R
TSCODE	Text codewords	40	Alphanumeric	O
TSCTLH	Text control and handling	40	Alphanumeric	O
TSREL	Text releasing instructions	40	Alphanumeric	O
TSCAUT	Text classification authority	20	Alphanumeric	O
TSCTLN	Text security control number	20	Alphanumeric	O
TSDWNG	Text security downgrade	6	Alphanumeric "_____", yymmdd,999999,999998	O
TSDEVT	Text downgrading event	40	Alphanumeric	O
ENCRYP	Encryption	1	0=Not encrypted (This value must be 0)	R
TXTFMT	Text format	3	STA or MTF	R
TXSHDL	Extended Subheader data length	5	00000	R
TXSOFL	Extended Subheader overflow	3	000-999	C
TXSHD	Extended Subheader data length	**	NA	C

** As specified by Header Record Length

Table K-6. Data Extension Segment Subheader (NITF 2.0)

Fields	Description	Size	Format Values	Type
DE	FILE PART TYPE	2	DE	R
DESTAG	UNIQUE DES TYPE IDENTIFIER	25	Alphanumeric	R
DESVR	VERSION OF THE DATA FIELD DEFINITION	2	01-99	R
DESSG	SECURITY GROUP	♦	Refer to (table xviii) of MIL-STD-2500 NITF Version 2.0	R
DESOFLW	OVERFLOWED HEADER TYPE	6	Alphanumeric	C
DESITEM	DATA ITEM OVERFLOWED	3	000 TO 999	C
DESSHL	LENGTH OF USER-DEFINED SUBHEADER FIELDS	4	0000-9999	R
DESSHf	USER DEFINED SUBHEADER FIELDS	*	Alphanumeric	C
DESDATA	USER-DEFINED DATA FIELD	**	User defined	R

♦ 167 OR 207- Refer to Table XVII of MIL-STD-2500 NITF VERSION 2.0

* Value specified in DESSHL

** Determined by user. If DESTAG = "Registered Extensions" or Controlled Extensions," this signifies the sum of the lengths of the tagged records

**Table K-6A. Data Extension Segment Subheader (NITF 2.0)
Controlled Extensions**

Fields	Description	Size	Format Values	Type
DE	FILE PART TYPE	2	DE	R
DESTAG	UNIQUE DES TYPE IDENTIFIER	25	Controlled Extensions	R
DESVR	VERSION OF THE DATA FIELD DEFINITION	2	01-99	R
DESSG	SECURITY GROUP	†	Refer to (table xviii) of MIL-STD-2500 NITF Version 2.0	R
DESOFLW	OVERFLOWED HEADER TYPE	6	"XHD, IXSHD, SXSHD, TXSHD	R
DESITEM	DATA ITEM OVERFLOWED	3	000 TO 999	R
DESSHL	LENGTH OF USER-DEFINED SUBHEADER FIELDS	4	0000	R
DESDATA	USER-DEFINED DATA FIELD	**	Controlled Extensions	R

N-0105/0198

25-August-1998 Review Draft (Date)

**Table K-6B. Data Extension Segment Subheader (NITF 2.0),
Registered Extensions**

Fields	Description	Size	Format Values	Type
DE	FILE PART TYPE	2	DE	R
DESTAG	UNIQUE DES TYPE IDENTIFIER	25	"Registered Extensions "	R
DESVR	VERSION OF THE DATA FIELD DEFINITION	2	01-99	R
DESSG	SECURITY GROUP	†	Refer to (table xviii) of MIL-STD-2500 NITF Version 2.0	R
DESOFLW	OVERFLOWED HEADER TYPE	6	UDHD, UDID	R
DESITEM	DATA ITEM OVERFLOWED	3	000 TO 999	R
DESSHL	LENGTH OF USER-DEFINED SUBHEADER FIELDS	4	0000	R
DESDATA	USER-DEFINED DATA FIELD	**	Registered Extensions	R

**Table K-6C. Data Extension Segment Subheader (NITF 2.0)
STREAMING_FILE_HEADER**

Fields	Description	Size	Format Values	Type
DE	FILE PART TYPE	2	DE	R
DESTAG	UNIQUE DES TYPE IDENTIFIER	25	STREAMING_FILE_HEADER	R
DESVR	VERSION OF THE DATA FIELD DEFINITION	2	01	R
DESSG	SECURITY GROUP	†	Refer to (table xviii) of MIL-STD-2500 NITF Version 2.0	R
DESSHL	LENGTH OF USER-DEFINED SUBHEADER FIELDS	4	0000	R
SFHL	Length of SFHDR field	7	0000000-9999999	R
SFHDELIM1	Unique Delimiter 1	4	0x0A6E1D97	R
SFHDR	Replacement Data			R
SFHDELM2	Unique Delimiter 2	4	0x0ECA14BF	R
SFHL	Length of SFHDR field	7	0000000-9999999	R

† 167 OR 207- Refer to TABLE XVII of MIL-STD-2500A NITF VERSION 2.0

** DESTAG = "Registered Extensions" or Controlled Extensions," this signifies the sum of the lengths of the tagged records.

(This page intentionally left blank.)

Appendix L -- NITF Version 1.1 Requirements**Table L-1. NITF 1.1 Minimum Compliance**(See ~~note~~Note 1)

Message Constraints for NITF 1.1 Compliance Header				
Field	Description	Size	Format Values	Type
MHDR	Message Type & Version	9	NITF01.10	R
STYPE	System Type	6	6 spaces	O
OSTAID	Originating Station ID	10	ASCII	R
MDT	Message Date & Time	14	DDHHMMSSZMONYY	
MTITLE	Message Title	80	ASCII	O
MSCLAS	Message Security Classification	1	T, S, C R, or U	R
MSCODE	Message Codewords	40	Alphanumeric	O
MSCTLH	Message Control and Handling	40	Alphanumeric	O
MSREL	Message Releasing Instructions	40	Alphanumeric	O
MSCAUT	Message Classification Authority	20	Alphanumeric	O
MSCTLN	Message Security Control Number	20	Alphanumeric	O
MSDWNG	Message Security Downgrade	6	Alphanumeric	O
MSDEVT	Message Downgrading Event	40	Alphanumeric	C
MSCOP	Message Copy Number	5	0-99999	O
MSCPYS	Message Number of Copies	5	0-99999	O
ONAME	Originator's Name	27	ASCII	O
OPHONE	Originator's Phone Number	18	ASCII	O
ML	Message Length	12	Calculated	R
HL	NITF Header Length	6	Calculated	R
NUMI	Number of Images	3	0-5	R
LISH001	Length of 1st Image Subheader	6	Calculated	C
LI001	Length of 1st Image	10	Values obtained from image sizes 8x8 to 512x512 by 1-8 bits	C
LISHnnn	Length of Nth Image Subheader	6	Calculated	C
Linnn	Length of Nth Image	10	Maximum aggregate size of 2nd to Nth Image is 50% of 512 ² X 8 bits (uncompressed)	C

Note 1: This table is taken directly from NITF version 1.1 Certification Plan Volume II, January 1990. Shaded areas indicate a constrained format value which deviates from the NITF version 1.1 document.

N-0105/0198

~~25-August-1998~~ Review Draft (Date)

Message Constraints for NITF 1.1 Compliance Header (cont'd.)				
Field	Description	Size	Format Values	Type
NUMS	Number of Symbols	3	000-100	R
LSSH001	Length of 1st Symbol Subheader	4	Calculated	C
LS001	Length of 1st Symbol	6	Max aggregate size for all 100 symbols is 512 ² bits	

LSSHnnn	Length of Nth Symbol Subheader	4	Calculated	C
LSnnn	Length of Nth Image	6	Superseded by LS001	
NUML	Number of Labels	3	000-100	R
LLSH001	Length of 1st Label Subheader	4	Calculated	C
LL001	Length of 1st Label	3	Max aggregate size for all 100 labels is 2000 characters	C

LLSHnnn	Length of Nth Label Subheader	4	Calculated	C
LLnnn	Length of Nth Label	3	Superseded by LL001	C
NUMT	Number of Text Files	3	0-5	R
LTSH001	Length of 1st Text Subheader	4	Calculated	C
LT001	Length of 1st Text File	5	Max aggregate size for all 5 text files is 10,000 characters	

LTSHnnn	Length of Nth Text Subheader	4	Calculated	C
LTnnn	Length of Nth Text File	5	Superseded by LT001	
NUMA	Number of Audio Segments	3	000	R
LASH001	Length of 1st Audio Subheader	4	NA	C
LA001	Length of 1st Audio Segment	9	NA	C

LASHnnn	Length of Nth Audio Subheader	4	NA	C
LAann	Length of Nth Audio Segment	9	NA	C
NUMF	Number of Non-Static Presentation Information Files (NPI)	3	000	R

LFSH001	Length of 1st NPI Subheader	4	NA	C
LF001	Length of 1st NPI File	7	NA	C

LFSHnnn	Length of Nth NPI Subheader	4	NA	C
LFnnn	Length of Nth NPI File	7	NA	C

UDHDL	User Defined Header Data Length	5	00000	R
UDHD	User Defined header Data	*	NA	C
XHDL	Extended Header Data length	5	00000	R
XHD	Extended Header Data	**	NA	C

* As specified by User Defined Header Data Length

** As specified by Extended Header Data Length

Message Constraints for NITF 1.1 Compliance

Image Subheader				
Field	Description	Size	Format Values	Type
IM	Message Part Type	2	IM	R
IID	Image ID	10	ASCII	R
IDATIM	Image Date & Time	14	DDHHMMSSZMONYY	O
TGTID	Target ID	17	BBBBBBBBBBFFFFFC C	O
ITITLE	Image Title	80	ASCII	O
ISCLAS	Image Security Classification	1	T, S, C, R or U	R
ISCODE	Image Codewords	40	Alphanumeric	O
ISCTLH	Image Control and Handling	40	Alphanumeric	O
ISREL	Image Releasing Instructions	40	Alphanumeric	O
ISCAUT	Image Classification Authority	20	Alphanumeric	O
ISCTLN	Image Security Control Number	20	Alphanumeric	O
ISDWNG	Image Security Downgrade	6	Alphanumeric	O
ISDEVT	Image Downgrading Event	40	Alphanumeric	C
ENCRYP	Encryption	1	0= Not Encrypted 1=Encrypted	R
ISORCE	Image Source	80	ASCII	O
ICORDS	Image Coordinate System	1	U, G, C, or N	R
IGEOLO	Image Geographic Location	60	ddmmssXdddmmssY (4 times) or, ggxyzmmmmmmmmmm (4 times)	
NICOM	Number of Image Comments	1	0-9	R
ICOM1	Image Comment 1	80	ASCII	C

ICOMnn	Image Comment N	80	ASCII	C
IC	Image Compression	2	NC or C2	R
COMRAT	Compression Rate Code	4	All C2 Values	C
NBANDS	Number of Bands	1	1	R
ITYPE1	1st Band Image Type	8	ASCII	R
IFC1	1st Band Image Filter Condition	1	N	
IMFLT1	1st Band Standard Image Filter Code	3	Reserved	
NLUTS1	1st Band Number of LUTS	1	0 (assume linear ramp)	
NELUT1	1st Band Number of LUT Entries	5	NA	C
LUTD1	1st Band Data of 1st LUT	+	NA	

LUTDnn	1st Band Data of Nth LUT	+	NA	C

N-0105/0198
~~25-August-1998~~ Review Draft (Date)

Message Constraints for NITF 1.1 Compliance Image Subheader (cont'd.)				
Field	Description	Size	Format Values	Type
ITYPEnn	Nth Band Image Type	8	NA	C
IFCnn	Nth Band Image Filter Condition	1	NA	
IMFLTnn	Nth Band Standard Image Filter Code	3	NA	
NLUTSnn	Nth Band Number of LUTS	1	NA	
NELUTnn	Nth Band Number of LUT Entries	5	NA	
LUTD1	Nth Band Data of 1st LUT	+	NA	

LUTDnn	Nth Band Data of Nth LUT	+	NA	C
ISYNC	Image SYNC Code	1	0	R
IMODE	Image Mode	1	S	
NBPR	Number of Blocks Per Row	4	0001	
NBPC	Number of Blocks Per Column	4	0001	
NPPBH	Number of Pixels Per Block Horizontal	4	0008-0512	
NPPBV	Number of Pixels Per Block Vertical	4	0008-0512	
NBPP	Number of Bits-Per-Pixel Per Band	2	01-08	
DLVL	Display Level	3	000-999	R
ALVL	Attachment Level	3	000-998	R
ILOC	Image Location	10	rrrrrrcccc	R
IMAG	Image Magnification	4	Alphanumeric	
UDIDL	User Defined Image Data Length	5	00000	C
UDID	User Defined Image Data	*	NA	
XSHDL	Extended Subheader Data Length	5	00000	C
XSHD	Extended Subheader Data	**	NA	

+ Bytes for each entry

* As specified by User Defined Image Data Length

** As specified by Extended Subheader Data Length

Message Constraints for NITF 1.1 Compliance Symbol Subheader				
Field	Description	Size	Format Values	Type
SY	Message Part Type	2	SY	R
SID	Symbol ID	10	ASCII	R
SNAME	Symbol Name	20	Alphanumeric	O
SSCLAS	Symbol Security Classification	1	T, S, C, R or U	R
SSCODE	Symbol Codewords	40	Alphanumeric	O
SSCTLH	Symbol Control and Handling	40	Alphanumeric	O
SSREL	Symbol Releasing Instructions	40	Alphanumeric	
SSCAUT	Symbol Classification Authority	20	Alphanumeric	O
SSCTLN	Symbol Security Control Number	20	Alphanumeric	O
SSDWNG	Symbol Security Downgrade	6	Alphanumeric	O
SSDEVT	Symbol Downgrading Event	40	Alphanumeric	C
ENCRYP	Encryption	1	0=Not Encrypted 1=Encrypted	R
STYPE	Symbol Type	1	B=Bit-Mapped	R
NLIPS	Number of Lines Per Symbol	4	0001-0512	R
NPIXPL	Number of Pixels Per Line	4	0001-0512	R
NWDTH	Line Width	4	0000-9999	R
NBPP	Number of Bits-Per-Pixel	1	1	R
DLVL	Display Level	3	000-999	R
ALVL	Attachment Level	3	000-998	R
SLOC	Symbol Location	10	rrrrccccc	R
SLOC2	Second Symbol Location	10	rrrrccccc	O
SCOLOR	Symbol Color	1	N, K, and W	R
SNUM	Symbol Number	6	Alphanumeric	O
SROT	Symbol Rotation	3	000	R
NELUT	Number of LUT Entries	3	000	R
DLUT	Symbol LUT Data	+	Pixel value in order	C
XSHDL	Extended Subheader Data Length	5	00000	R
XSHD	Extended Subheader Data	*	NA	C

* As specified by Extended Subheader Data Length

+ For color LUT symbols, size of DLUT = 3 X NELUT;

For gray scale LUT symbols, size of DLUT = NELUT

N-0105/0198

~~25 August 1998~~ Review Draft (Date)

Message Constraints for NITF 1.1 Compliance Label Subheader				
Field	Description	Size	Format Values	Type
LA		2	LA	R
LID		10	ASCII	R
LSCLAS		1	T, S, C, R, or U	
LSCODE		40	Alphanumeric	O
LSCTLH		40	Alphanumeric	
LSREL		40	Alphanumeric	
LSCAUT		20	Alphanumeric	
LSCTLN		20	Alphanumeric	
LSDWNG		6	Alphanumeric	O
LSDEVT		40	Alphanumeric	C
ENCRYP		1	0=Not Encrypted 1=Encrypted	
LFS		3	3 Spaces	R
LFZ		2	00	
DLVL		3	000-999	R
ALVL		3	000-998	R
LLOC		10	rrrrrcccc	
LTC		3	0, 0, 0 (Transparent) and 1, 1, 1 (Black) and	
LBC		3	0, 0, 0 (Transparent) and 1, 1, 1 (Black)	
XSHDL		5	00000	
XSHD		*	NA	C

* As specified by Extended Subheader Data Length

Message Constraints for NITF 1.1 Compliance Text Subheader				
Field	Description	Size	Format Values	Type
TE		2	TE	R
TEXTID		10	ASCII	
TXTDT		14	DDHHMMSSZMONYY	R
TXTITL		80	ASCII	O
TSCLAS		1	T, S, C, R, or U	
TSCODE		40	Alphanumeric	O
TSCTLH		40	Alphanumeric	O
TSREL		40	Alphanumeric	
TSCAUT		20	Alphanumeric	
TSCTLN		20	Alphanumeric	
TSDWNG		6	Alphanumeric	O
TSDEVT		40	Alphanumeric	C
ENCRYP		1	0=Not Encrypted 1=Encrypted	
TXTFMT		3	STA	R
XSHDL		5	00000	
XSHD		*	NA	C

* As specified by Extended Subheader Data Length

N-0105/~~0198~~
~~25 August 1998~~ Review Draft (Date)

(This page intentionally left blank.)