

**NOT MEASUREMENT
SENSITIVE**

**MIL-HDBK-704-2
9 April 2004**

**DEPARTMENT OF DEFENSE
HANDBOOK**

**GUIDANCE FOR
TEST PROCEDURES FOR DEMONSTRATION OF
UTILIZATION EQUIPMENT COMPLIANCE TO
AIRCRAFT ELECTRICAL POWER CHARACTERISTICS
SINGLE PHASE, 400 Hz, 115 VOLT
(PART 2 OF 8 PARTS)**



**This Handbook is for guidance only.
Do not cite this document as a requirement.**

AMSC N/A

AREA SESS

MIL-HDBK-704-2

FOREWORD

1. This handbook is approved for use by all Departments and Agencies of the Department of Defense.
2. This handbook provides guidance on test procedures for demonstration of single phase, 400 Hz, 115 volt utilization equipment to determine compliance with the applicable edition of MIL-STD-704.
3. MIL-HDBK-704-2 is Part 2 in a series of 8 Parts. Part 2 describes the test methods and procedures to demonstrate that single phase, 400 Hz, 115 volt utilization equipment is compatible with the electric power characteristics of MIL-STD-704. These series of handbooks and MIL-STD-704 are companion documents.
4. Comments, suggestions, or questions on this document should be addressed to Commander, Naval Air Systems Command, Code 4.1.4, Highway 547, Lakehurst, NJ 08733-5100 or email to thomas.omara@navy.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at www.dodssp.daps.mil/.

MIL-HDBK-704-2

CONTENTS

<u>PARAGRAPH</u>	<u>PAGE</u>
FOREWORD	ii
1. SCOPE	1
1.1 Scope.....	1
2. APPLICABLE DOCUMENTS	1
2.1 General.....	1
2.2 Government documents	1
2.2.1 Specifications, standards and handbooks.....	1
3. DEFINITIONS.....	1
3.1 Acronyms and definitions.....	1
4. TEST METHODS INFORMATION.....	1
4.1 Demonstration of compatibility	1
4.1.1 Recording performance.....	1
4.2 Calibration of test equipment.....	1
4.3 Test methods	2
5. TEST METHODS.....	4
METHOD SAC101 Load Measurements	5
METHOD SAC102 Steady State Limits for Voltage and Frequency	9
METHOD SAC103 No Test Required	14
METHOD SAC104 Voltage Modulation	15
METHOD SAC105 Frequency Modulation	19
METHOD SAC106 Voltage Distortion Spectrum	24
METHOD SAC107 Total Voltage Distortion	29
METHOD SAC108 DC Voltage Component.....	34
METHOD SAC109 Normal Voltage Transients	38
METHOD SAC110 Normal Frequency Transients.....	47
METHOD SAC201 Power Interrupt	54
METHOD SAC301 Abnormal Steady State Limits for	59
Voltage and Frequency.....	59
METHOD SAC302 Abnormal Voltage Transients	64
METHOD SAC303 Abnormal Frequency Transients.....	72
METHOD SAC401 Emergency Steady State Limits for	77
Voltage and Frequency.....	77
METHOD SAC501 (No Test Required).....	82
METHOD SAC601 Power Failure (Single Phase).....	83
METHOD SAC602 (No Test Required).....	87
METHOD SAC603 Phase Reversal (Single Phase).....	88

MIL-HDBK-704-2

<u>PARAGRAPH</u>		<u>PAGE</u>
6.	NOTES	93
6.1	Intended use	93
6.2	Single phase test numbers	93
6.3	Subject term (keyword) listing.....	93
TABLE		
SAC-I.	Summary of single phase, 400 Hz, 115 volt utilization equipment	
	MIL-STD-704 compliance tests	3
CONCLUDING MATERIAL		93

MIL-HDBK-704-2

1. SCOPE

1.1 Scope. This handbook provides, as guidance, test methods used to demonstrate that single phase, 400 Hz, 115 volt utilization equipment is compatible with the electric power characteristics of the applicable edition(s) of MIL-STD-704. This handbook is for guidance only and cannot be cited as a requirement.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed below are not necessarily all of the documents referenced herein, but are those needed to understand the information provided by this handbook.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-704

DoD Interface Standard for Aircraft Electric
Power Characteristics

(Copies of these documents are available online at <http://assist.daps.dla.mil/quicksearch> or <http://www.dodssp.daps.mil> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

3. DEFINITIONS

3.1 Acronyms and definitions. The acronyms and definitions of MIL-STD-704 are applicable to this handbook.

4. TEST METHODS INFORMATION

4.1 Demonstration of compatibility. This section contains the test methods which will ensure that single phase, 400 Hz, 115 volt utilization equipment is compatible with the electric power characteristics of the applicable edition(s) of MIL-STD-704, by testing the Unit Under Test (UUT) in accordance with the test procedures as described in test methods SAC 101 through SAC 603.

4.1.1 Recording performance. In table SAC-I, record the UUT information, the edition(s) of MIL-STD-704 that defined the aircraft electric power characteristics used for testing, the dates of the testing, and the performance of the UUT for each of the test methods.

4.2 Calibration of test equipment. Test equipment and accessories required for measurement in accordance with this handbook should be calibrated in accordance with an approved calibration program traceable to the National Institute for Standards and Technology.

MIL-HDBK-704-2

The serial numbers, model, and calibration date of all test equipment should be included with the test data.

4.3 Test methods. The test methods listed in table SAC-I are provided in section 5 of this handbook.

MIL-HDBK-704-2

TABLE SAC-I. Summary of single phase, 400 Hz, 115 volt utilization equipment MIL-STD-704 compliance tests.

UUT:			
Compliance to MIL-STD-704 Edition(s):			
Test Dates:			
Test Method	Description	Performance (Pass/Fail)	Comments
Normal, Aircraft Electrical Operation			
SAC101	Load and Current Harmonic Measurements		
SAC102	Steady State Limits for Voltage and Frequency		
SAC103	No Test, See Note #1	N/A	N/A
SAC104	Voltage Modulation		
SAC105	Frequency Modulation		
SAC106	Voltage Distortion Spectrum		
SAC107	Total Voltage Distortion		
SAC108	DC Voltage Component		
SAC109	Normal Voltage Transients		
SAC110	Normal Frequency Transients		
Transfer, Aircraft Electrical Operation			
SAC201	Power Interrupt		
Abnormal, Aircraft Electrical Operation			
SAC301	Abnormal Limits for Voltage and Frequency		
SAC302	Abnormal Voltage Transients (Overvoltage/Undervoltage)		
SAC303	Abnormal Frequency Transients (Overfrequency/Underfrequency)		
Emergency, Aircraft Electrical Operation			
SAC401	Emergency Limits for Voltage and Frequency		
Starting, Aircraft Electrical Operation			
SAC501	See Note #2	N/A	N/A
Power Failure, Aircraft Electrical Operation			
SAC601	Power Failure (Single Phase)		
SAC602	No Test, See Note #1	N/A	N/A
SAC603	Phase Reversal		

Note 1: There are no tests required for SAC103 and SAC602. The numbering has been arranged so that the single phase test numbers coincide with the three phase test numbers.

Note 2: Starting operation conditions are usually not applicable to AC utilization equipment. No test is required for SAC501 unless specified by the equipment performance specification.

MIL-HDBK-704-2

5. TEST METHODS

MIL-HDBK-704-2

**METHOD SAC101
Load Measurements**

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
OPERATING CONDITION: Normal

PARAMETER: Load Measurements

1. Scope.

1.1 Purpose. This test procedure is intended to verify that single phase, 115 Volt, 400 Hz power utilization equipment utilizes only 115 Volt line-to-neutral power, does not require more power than allowed, maintains power factor within limits, and does not use half-wave rectification for the applicable edition(s) of MIL-STD-704. Additionally, when the utilization equipment performance specification document imposes current waveform requirements, this test procedure is used to verify that the utilization equipment current waveform is within total current distortion and current spectrum (current distortion vs. frequency) limits defined in the utilization equipment performance specification document.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment requires less than or equal to the power limit for single phase equipment, is within the power factor limits, and does not use half-wave rectification for the applicable edition(s) of MIL-STD-704 and as noted in table SAC101-I. If required by the utilization equipment performance specification document, the utilization equipment current waveform must be within the total current distortion and current spectrum limits defined in the utilization equipment performance specification document. The utilization equipment must not suffer damage or cause an unsafe condition.


TABLE SAC101-I. MIL-STD-704 limits for single phase power, power factor, rectification restriction, current distortion, and current spectrum for single phase 400 Hz utilization equipment.

Limit	704A	704B	704C	704D	704E	704F
Single Phase kVA	0.5 kVA	0.5 kVA	0.5 kVA	0.5 kVA	0.5 kVA	0.5 kVA
Power Factor	Figure 12 MIL-STD-704A	N/A	N/A	N/A	N/A	No Leading Power Factor for >100 VA
Rectification Restriction	N/A ^{1/}	N/A ^{1/}	N/A ^{1/}	N/A ^{1/}	No Half-Wave Rectification	No Half-Wave Rectification
Current Distortion	See Note ^{2/}	See Note ^{2/}				
Current Spectrum	See Note ^{2/}	See Note ^{2/}				

MIL-HDBK-704-2

- 1/ It is highly recommended that equipment built to MIL-STD-704 edition(s) A, B, C, or D should not use half-wave rectification.
- 2/ The utilization equipment performance specification document should include requirements that reduce the likelihood of the equipment having an adverse effect on the electrical power characteristics of the aircraft. Current distortion and current spectrum limits may be imposed to minimize undesirable effects to the electrical power characteristics. These limits should take into account the utilization equipment power draw, aircraft electrical system capacity and distribution characteristics, trade-offs with weight, volume, cost, and reliability that are specific to each type of equipment and aircraft.
3. Apparatus. The test equipment should be as follows:
- a. Adjustable AC power supply (rotating AC source for current waveform limits)
 - b. True RMS voltmeter
 - c. Frequency counter
 - d. Power meter
 - e. Spectrum analyzer
 - f. Distortion meter
 - g. Current transformer
 - h. Oscilloscope
4. Test setup. Configure the test setup as shown in figure SAC101-1. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT. Current measurements must be taken from the 115 Volt conductor. If the utilization equipment performance specification document imposes current waveform limits, the AC power source should be a rotating machine.
5. Compliance test. With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC101-1. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz.

Close the circuit breaker, energizing the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Record the voltage, frequency, kVA, and power factor in table SAC101-II. Confirm that the utilization equipment does not use half-wave rectification and record in table SAC101-II. Compare the kVA, power factor, and rectification with the required limits/restriction of the applicable edition(s) of MIL-STD-704. If the utilization equipment performance specification imposes current waveform limits, record the total current distortion and current spectrum in the data sheet shown in table SAC101-II and compare to the limits defined in the utilization equipment performance specification document. Repeat for each mode of operation of the UUT.

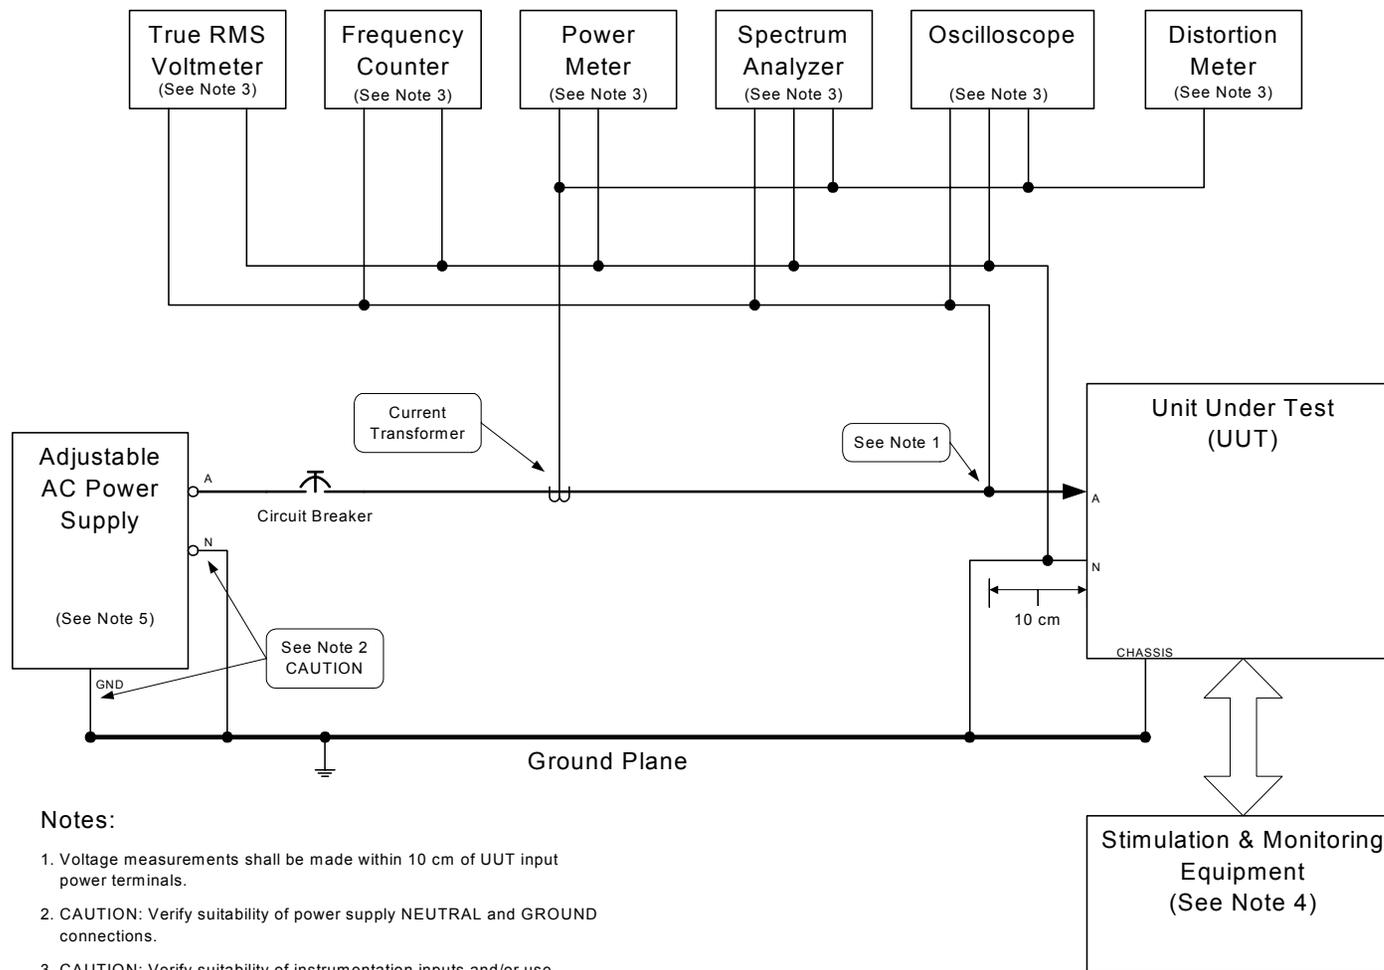**Notes:**

1. Voltage measurements shall be made within 10 cm of UUT input power terminals.
2. CAUTION: Verify suitability of power supply NEUTRAL and GROUND connections.
3. CAUTION: Verify suitability of instrumentation inputs and/or use appropriate attenuation.
4. Stimulation and Monitoring Equipment are user defined. This functional block shall provide appropriate inputs (stimulations) and monitor UUT outputs (e.g.: RPM, signals, data, etc.)
5. If current waveform limits are imposed by the detailed performance specification, the AC power source shall be a rotating machine.

FIGURE SAC101-1. Load measurement.

MIL-HDBK-704-2

TABLE SAC101-II. Sample data sheet for load measurements.

Parameter	Measurement	Unit	Performance Pass/Fail
Voltage		V_{rms}	N/A
Frequency		Hz	N/A
KVA		kVA	
Power Factor		pf	
No Half-Wave Rectification		N/A	
Current		A_{rms}	
Total Current Distortion		% Current Distortion	
Current Spectrum	Attach Spectrum Plot	Amplitude vs. Frequency	

MIL-HDBK-704-2

METHOD SAC102
Steady State Limits for Voltage and Frequency

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
 OPERATING CONDITION: Normal

PARAMETER: Steady State Limits for Voltage and Frequency

1. Scope.

1.1 Purpose. This test procedure is used to verify that single phase, 115 Volt, 400 Hz power utilization equipment operates and maintains specified performance when provided power with voltage and frequency at the Normal Low Steady State (NLSS) limits and the Normal High Steady State (NHSS) limits as specified in the applicable edition(s) of MIL-STD-704.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment operates and maintains performance as specified in the utilization equipment performance specification document for normal aircraft electrical conditions when supplied input power of voltage and frequency at the specified normal steady state limits of the applicable edition(s) of MIL-STD-704 and as noted in table SAC102-I. The utilization equipment should maintain specified performance for a length of time that confirms the utilization equipment can continuously operate at the steady state voltage and frequency limits and should be, not less than thirty (30) minutes for each of the test conditions. The utilization equipment should demonstrate re-start at the steady state voltage and frequency limits. The utilization equipment must not suffer damage or cause an unsafe condition.

Note: If the utilization has exactly the same full performance requirements for abnormal steady state limits and emergency steady state limits as required for the normal aircraft electrical conditions, then performance of test methods SAC301 and SAC401 will constitute performance of SAC102.

TABLE SAC102-I. MIL-STD-704 normal limits for steady state voltage and frequency.

Normal Limit	704A	704B	704C	704D	704E	704F
Voltage NLSS	108 V	108 V	108 V	108 V	108 V	108 V
Voltage NHSS	118 V	118 V	118 V	118 V	118 V	118 V
Frequency NLSS	380 Hz	395 Hz (380 Hz) ^{1/}	393 Hz	393 Hz	393 Hz	393 Hz
Frequency NHSS	420 Hz	405 Hz (420 Hz) ^{1/}	407 Hz	407 Hz	407 Hz	407 Hz

^{1/} Normal steady state frequency limits for MIL-STD-704B for helicopters is 400 ±20 Hz.

MIL-HDBK-704-2

3. Apparatus. The test equipment should be as follows:
 - a. Adjustable AC power supply
 - b. True RMS voltmeter
 - c. Frequency counter
4. Test Setup. Configure the test setup as shown in figure SAC102-1. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT.
5. Compliance Test. With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC102-1. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions.


For each test condition A through I noted in table SAC102-II, the UUT must remain for a length of time that confirms the utilization equipment can continuously operate at the steady state voltage and frequency limits and should be, not less than thirty (30) minutes. At each test condition conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. For each test condition shutdown the UUT and verify that the UUT can be re-started. After re-start conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Record the voltage, frequency, time duration at test condition, successful/unsuccessful re-start and the performance of the UUT for each test condition in the data sheet shown in table SAC102-III. Repeat for each mode of operation of the UUT.

After all test conditions are complete, adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has not suffered damage and is providing specified performance for normal aircraft electrical conditions.

MIL-HDBK-704-2

TABLE SAC102-II. Test conditions for steady state limits for voltage and frequency.

Test Condition	Voltage	Frequency
A	Nominal Voltage	Nominal Frequency
B	Nominal Voltage	NLSS Frequency
C	Nominal Voltage	NHSS Frequency
D	NLSS Voltage	Nominal Frequency
E	NLSS Voltage	NLSS Frequency
F	NLSS Voltage	NHSS Frequency
G	NHSS Voltage	Nominal Frequency
H	NHSS Voltage	NLSS Frequency
I	NHSS Voltage	NHSS Frequency

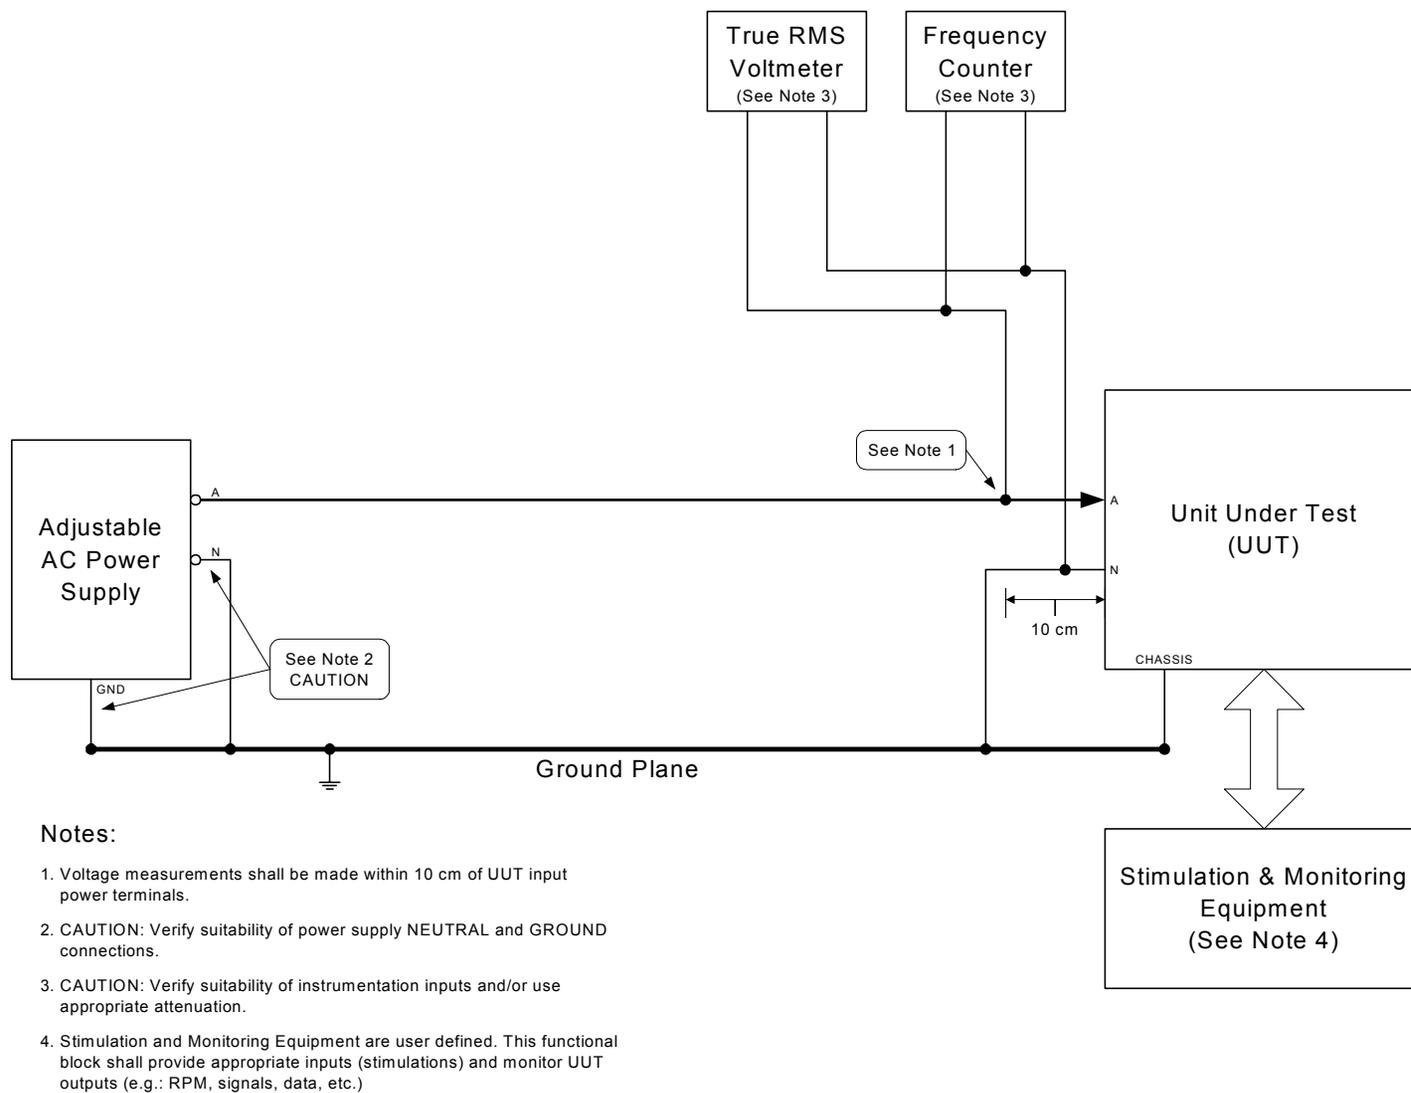FIGURE SAC102-1. Steady state limits for voltage and frequency.

MIL-HDBK-704-2

TABLE SAC102-III. Sample data sheet for SAC102 steady state limits for voltage and frequency.

Test Condition	Parameters						Performance	
	Voltage		Frequency		Time Duration at Condition		Re-Start (Yes/No)	Pass/Fail
A		V _{rms}		Hz		min		
B		V _{rms}		Hz		min		
C		V _{rms}		Hz		min		
D		V _{rms}		Hz		min		
E		V _{rms}		Hz		min		
F		V _{rms}		Hz		min		
G		V _{rms}		Hz		min		
H		V _{rms}		Hz		min		
I		V _{rms}		Hz		min		

MIL-HDBK-704-2

**METHOD SAC103
(No Test Required)**

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
OPERATING CONDITION: Normal

PARAMETER: No Test Required.
Test number SAC103 is not used so that the single phase,
400 Hz, 115V (SAC) test numbers coincide with the
three phase, 400 Hz, 115 V (TAC) test sequence numbers.

MIL-HDBK-704-2

**METHOD SAC104
Voltage Modulation**

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
OPERATING CONDITION: Normal

PARAMETER: Voltage Modulation

1. Scope.

1.1 Purpose. This test procedure is used to verify that single phase, 115 volt, 400 Hz power utilization equipment operates and maintains specified performance when subjected to voltage modulation as specified in the application edition(s) of MIL-STD-704.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment operates and maintains performance as specified in the utilization equipment performance specification document for normal aircraft electrical conditions when supplied input power having voltage modulation as specified in the applicable edition(s) of MIL-STD-704 and as noted in table SAC104-I. The utilization equipment should maintain specified performance for a length of time that confirms the utilization equipment can operate continuously when provided power having voltage modulation. The utilization equipment should not suffer damage or cause an unsafe condition.

TABLE SAC104-I. MIL-STD-704 limits for voltage modulation.

Limit	704A	704B ^{1/}	704C ^{1/}	704D ^{1/}	704E	704F
Voltage Modulation	3.5 V Peak-to-Valley Figure 1 MIL-STD-704A	Sideband 0.62 Vrms over the range 400 ± 60 Hz	N/A	N/A	2.5 Vrms max	2.5 Vrms max

^{1/} For utilization equipment being tested to MIL-STD-704 editions B, C, and D, use MIL-STD-704E limits.

3. Apparatus. The test equipment should be as follows:

- a. Programmable AC power supply
- b. True RMS voltmeter
- c. Frequency counter
- d. Oscilloscope

4. Test setup. Configure the test setup as shown in figure SAC104-1. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT.

MIL-HDBK-704-2

5. Compliance test. With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC104-1. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions.

For each test condition A through G noted in table SAC104-II, set the voltage modulation amplitude and frequency of voltage modulation. The UUT should remain at the test condition for a length of time that confirms the utilization equipment can continuously operate, and should be at least ten (10) minutes at an average steady state voltage of 115 Vrms, at least ten (10) minutes at an average steady state voltage of 109.25 Vrms, and at least ten (10) minutes at an average steady state voltage of 116.75 Vrms. During the test condition, conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Record average voltage, frequency, amplitude of voltage modulation, frequency of voltage modulation, time duration at test condition, and the performance of the UUT for each test condition in the data sheet shown in table SAC104-III. Repeat for each mode of operation of the UUT.

After all test conditions are complete, adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has not suffered damage and is providing specified performance for normal aircraft electrical conditions.

TABLE SAC104-II. Test conditions for voltage modulation.

Test Condition	Frequency of Voltage Modulation	MIL-STD-704A Amplitude of Voltage Modulation Voltage Peak-to-Valley	MIL-STD-704E & F ^{1/} Amplitude of Voltage Modulation Vrms
A	1.0 Hz	0.5 Vp-v	0.375 Vrms
B	1.7 Hz	0.5 Vp-v	0.375 Vrms
C	10 Hz	3.5 Vp-v	2.5 Vrms
D	25 Hz	3.5 Vp-v	2.5 Vrms
E	70 Hz	0.5 Vp-v	0.375 Vrms
F	100 Hz	0.5 Vp-v	0.375 Vrms
G	200 Hz	0.5 Vp-v	0.375 Vrms

^{1/} For utilization equipment being tested to MIL-STD-704 editions B, C, and D, use MIL-STD-704E limits.

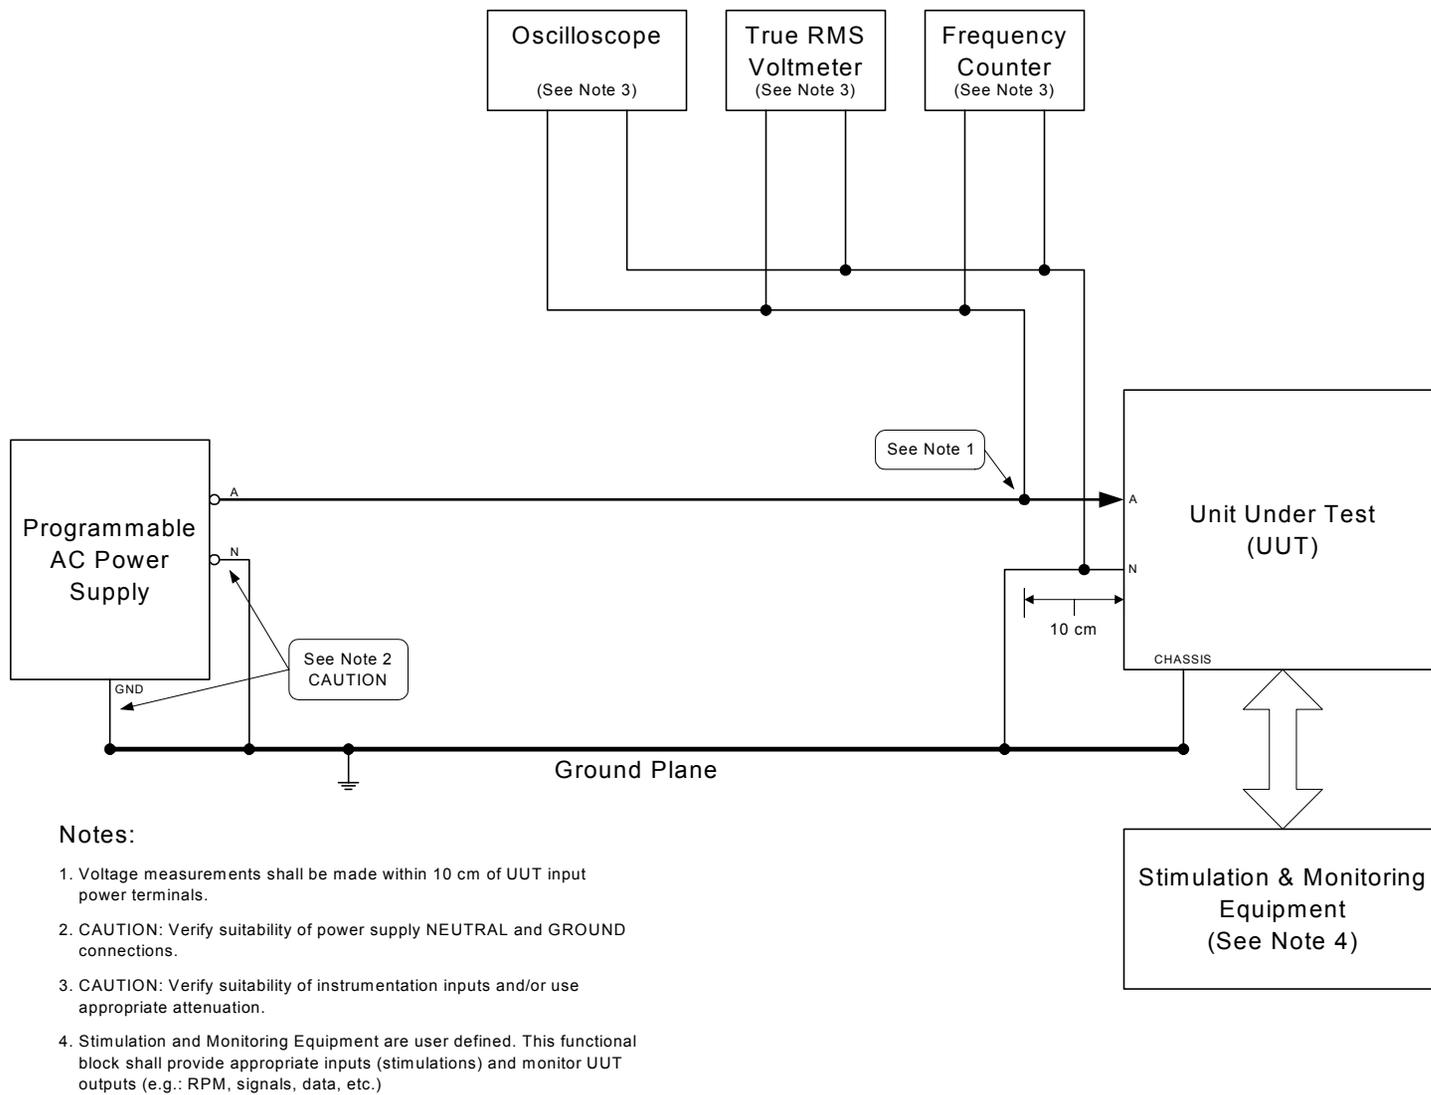
FIGURE SAC104-1. Voltage modulation.

TABLE SAC104-III. Sample data sheet for SAC104 voltage modulation

Test	Parameters									Performance	
Condition	Average Voltage		Frequency		Amplitude of Voltage Modulation		Frequency of Voltage Modulation		Time Duration at Condition		Pass/Fail
A		V_{rms}		Hz		V_{rms}		Hz		min	
		V_{rms}		Hz		V_{rms}		Hz		min	
		V_{rms}		Hz		V_{rms}		Hz		min	
B		V_{rms}		Hz		V_{rms}		Hz		min	
		V_{rms}		Hz		V_{rms}		Hz		min	
		V_{rms}		Hz		V_{rms}		Hz		min	
C		V_{rms}		Hz		V_{rms}		Hz		min	
		V_{rms}		Hz		V_{rms}		Hz		min	
		V_{rms}		Hz		V_{rms}		Hz		min	
D		V_{rms}		Hz		V_{rms}		Hz		min	
		V_{rms}		Hz		V_{rms}		Hz		min	
		V_{rms}		Hz		V_{rms}		Hz		min	
E		V_{rms}		Hz		V_{rms}		Hz		min	
		V_{rms}		Hz		V_{rms}		Hz		min	
		V_{rms}		Hz		V_{rms}		Hz		min	
F		V_{rms}		Hz		V_{rms}		Hz		min	
		V_{rms}		Hz		V_{rms}		Hz		min	
		V_{rms}		Hz		V_{rms}		Hz		min	
G		V_{rms}		Hz		V_{rms}		Hz		min	
		V_{rms}		Hz		V_{rms}		Hz		min	
		V_{rms}		Hz		V_{rms}		Hz		min	

MIL-HDBK-704-2

METHOD SAC105
Frequency Modulation

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
OPERATING CONDITION: Normal

PARAMETER: Frequency Modulation

1. Scope.

1.1. Purpose. This test procedure is used to verify that single phase, 115 volt, 400 Hz power utilization equipment operates and maintains specified performance when subjected to frequency modulation as specified in the applicable edition(s) of MIL-STD-704.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment operates and maintains performance as specified in the utilization equipment performance specification document for normal aircraft electrical conditions when supplied input power having frequency modulation as specified in the applicable edition(s) of MIL-STD-704 and as noted in table SAC105-I. The utilization equipment should maintain specified performance for a length of time that confirms the utilization equipment can operate continuously when provided power having frequency modulation. The utilization equipment must not suffer damage or cause an unsafe condition.

TABLE SAC105-I. MIL-STD-704 limits for frequency modulation.

Limit	704A	704B	704C	704D	704E	704F
Frequency Modulation	± 4 Hz	± 5 Hz Figure 3 MIL-STD- 704B	± 5 Hz Figure 4 MIL-STD- 704C	± 5 Hz Figure 4 MIL-STD- 704D	4 Hz	4 Hz

3. Apparatus: The test equipment should be as follows:

- a. Programmable AC power supply
- b. True RMS voltmeter
- c. Frequency counter
- d. Oscilloscope

4. Test setup. Configure the test setup as shown in figure SAC105-1. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT.

5. Compliance test. With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC105-1. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient

MIL-HDBK-704-2

time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions.

5.1 Compliance test for MIL-STD-704A. For each test condition A through D noted in table SAC105-II, set the amplitude of frequency modulation and rate of change for frequency modulation. The UUT must remain at the test condition for a length of time that confirms the utilization equipment can continuously operate, and should be at least ten (10) minutes at an average steady state frequency of 400 Hz, at least ten (10) minutes at an average steady state frequency of 384 Hz, and at least ten (10) minutes at an average steady state frequency of 416 Hz. During the test condition, conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Record voltage, average frequency, amplitude of frequency modulation, rate of change for frequency modulation, time duration at test condition, and the performance of the UUT for each test condition in the data sheet shown in table SAC105-III. Repeat for each mode of operation of the UUT

5.2 Compliance test for MIL-STD-704B, C & D. For each test condition A through E noted in table SAC105-II, set the amplitude of frequency modulation and rate of change for frequency modulation. The UUT must remain at the test condition for a length of time that confirms the utilization equipment can continuously operate. For test condition A, the UUT must remain at the test condition for a length of time that confirms the utilization equipment can continuously operate, and should be at an average steady state frequency of 400 Hz for at least thirty (30) minutes. For test condition B through E, the UUT must remain at the test condition for a length of time that confirms the utilization equipment can continuously operate and should be at least ten (10) minutes at an average steady state frequency of 400 Hz, at least ten (10) minutes at an average steady state frequency of 395 Hz, and at least ten (10) minutes at an average steady state frequency of 405 Hz. At each test condition, conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Record voltage, average frequency, amplitude of frequency modulation, rate of change for frequency modulation, time duration at test condition, and the performance of the UUT for each test condition in the data sheet shown in table SAC105-III. Repeat for each mode of operation of the UUT.

5.3 Compliance test for MIL-STD-704E & F. For each test condition A through E noted in table SAC105-II, set the amplitude of frequency modulation and rate of change for frequency modulation. The UUT must remain at the test condition for a length of time that confirms the utilization equipment can continuously operate, and should be at least ten (10) minutes at an average steady state frequency of 400 Hz, at least ten (10) minutes at an average steady state frequency of 395 Hz, and at least ten (10) minutes at an average steady state frequency of 405 Hz. During the test condition, conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Record voltage, average frequency, amplitude of frequency modulation, rate of change for frequency modulation, time duration at

MIL-HDBK-704-2

test condition, and the performance of the UUT for each test condition in the data sheet shown in table SAC105-III. Repeat for each mode of operation of the UUT.

After all test conditions are complete, adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has not suffered damage and is providing specified performance for normal aircraft electrical conditions.

TABLE SAC105-II. Test conditions for frequency modulation.

Test Condition	Rate of change for frequency modulation	MIL-STD-704 A Amplitude of Frequency Modulation	MIL-STD-704 B, C, & D Amplitude of Frequency Modulation	MIL-STD-704 E & F Amplitude of Frequency Modulation
A	1 Hz/sec	± 4 Hz	± 5.00 Hz	4 Hz (± 2 Hz)
B	5 Hz/sec	± 4 Hz	± 1.75 Hz	4 Hz (± 2 Hz)
C	10 Hz/sec	± 4 Hz	± 1.20 Hz	4 Hz (± 2 Hz)
D	25 Hz/sec	± 4 Hz	± 0.85 Hz	4 Hz (± 2 Hz)
E	100 Hz/sec	N/A	± 0.58 Hz	4 Hz (± 2 Hz)

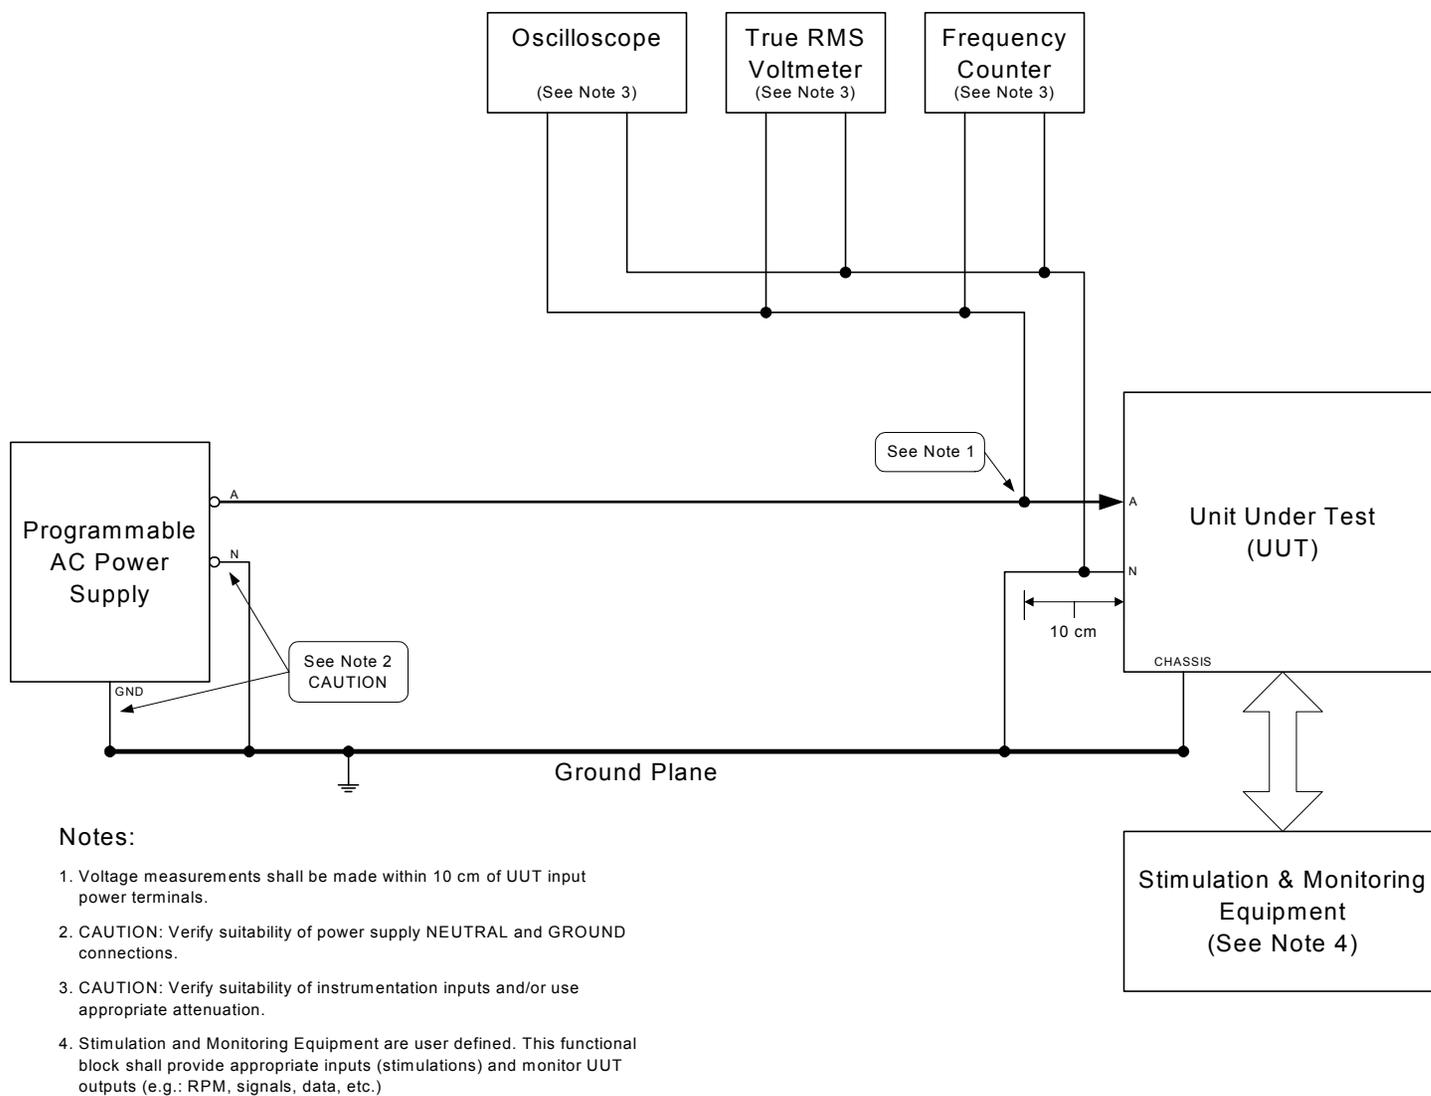
FIGURE SAC105-1. Frequency modulation.

TABLE SAC105-III. Sample data sheet for SAC105 frequency modulation.

Test Condition	Parameters										Performance Pass/Fail
	Voltage		Average Frequency		Amplitude of Frequency Modulation		Rate of change for frequency modulation		Time Duration at Condition		
A		V_{rms}		Hz		\pm Hz		Hz/sec		min	
		V_{rms}		Hz		\pm Hz		Hz/sec		min	
		V_{rms}		Hz		\pm Hz		Hz/sec		min	
B		V_{rms}		Hz		\pm Hz		Hz/sec		min	
		V_{rms}		Hz		\pm Hz		Hz/sec		min	
		V_{rms}		Hz		\pm Hz		Hz/sec		min	
C		V_{rms}		Hz		\pm Hz		Hz/sec		min	
		V_{rms}		Hz		\pm Hz		Hz/sec		min	
		V_{rms}		Hz		\pm Hz		Hz/sec		min	
D		V_{rms}		Hz		\pm Hz		Hz/sec		min	
		V_{rms}		Hz		\pm Hz		Hz/sec		min	
		V_{rms}		Hz		\pm Hz		Hz/sec		min	
E		V_{rms}		Hz		\pm Hz		Hz/sec		min	
		V_{rms}		Hz		\pm Hz		Hz/sec		min	
		V_{rms}		Hz		\pm Hz		Hz/sec		min	

METHOD SAC106 Voltage Distortion Spectrum

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
OPERATING CONDITION: Normal

PARAMETER: Voltage Distortion Spectrum

1. Scope.

1.1 Purpose: This test procedure is used to verify that single phase, 115 Volt, 400 Hz power utilization equipment operates and maintains specified performance when subjected to voltage distortion of frequencies and amplitudes as specified by the voltage distortion spectrum in the applicable edition(s) of MIL-STD-704.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment operates and maintains performance as specified in the utilization equipment performance specification document for normal aircraft electrical conditions when subjected to voltage distortions as specified by the voltage distortion spectrum in the applicable edition(s) of MIL-STD-704 and as noted in table SAC106-I. The utilization equipment must maintain specified performance for a length of time that confirms the utilization equipment can operate continuously when provided power having voltage distortion. The utilization equipment must not suffer damage or cause an unsafe condition.

Note: This test method subjects the UUT to voltage distortion having frequencies components from 50 Hz to 10 kHz. These voltage distortions simulate voltage distortions within aircraft due to the cumulative effects of generators, electrical distribution systems equipments, and aircraft loads. MIL-STD-461, (Requirements For The Control of Electromagnetic Interference Characteristics of Subsystems and Equipment), Test Method CS101, (Conducted Susceptibility, Power Leads, 30 Hz to 150 kHz) is a complimentary test. Power levels of the voltage distortions differ for the two test methods. Performance of Test Method SAC106 of this handbook does not relinquish the requirement to perform Test Method CS101 of MIL-STD-461, and performance of Method CS101 of MIL-STD-461 does not relinquish the requirement to perform Test Method SAC 106 of this handbook.

TABLE SAC106-I. MIL-STD-704 limits for voltage distortion spectrum.

Limit	704A ^{1/}	704B	704C	704D	704E	704F
Voltage Distortion Spectrum	Individual Harmonic < 5%	Figure 2 MIL-STD-704B	Figure 3 MIL-STD-704C	Figure 3 MIL-STD-704D	Figure 3 MIL-STD-704E	Figure 7 MIL-STD-704F

^{1/} For utilization equipment being tested to MIL-STD-704 edition A, use MIL-STD-704B limits.

3. Apparatus. The test equipment should be as follows:

- a. Adjustable AC power supply
- b. Variable frequency power source
- c. Coupling transformer
- d. True RMS voltmeter
- e. Frequency counter
- f. Spectrum analyzer
- g. (2) Inductors, 50 μ H
- h. Capacitor, 10 μ F
- i. Resistor, calibrated load

4. Test setup. Configure the test setup as shown in figure SAC106-1. Measurements, except current, should be made within 10 cm of the input power terminals of the UUT.

4.1 Calibration. Install a calibrated resistive load in the test setup shown in figure SAC106-1 in place of the UUT. The calibrated resistive load should be sized to draw the same current as the UUT. Turn on the adjustable AC power supply and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Set the variable frequency power source to output a sine wave and adjust the frequency and amplitude so that the voltage distortion measured at the input to the calibrated resistive load conforms to each test condition A through H in table SAC106-II of the applicable edition(s) of MIL-STD-704. Record the settings of the variable frequency power source for each test condition.

5. Compliance test. With the adjustable AC power supply off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC106-1. Turn on the adjustable AC power supply and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions.

Set the variable frequency power source to the settings recorded for test condition A of the calibration procedure. For each test condition, remain for a length of time that confirms the utilization equipment can continuously operate with the voltage distortion and should be, not less than five (5) minutes. At each test condition, conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. After each test condition, monitor the voltage distortion frequency and amplitude while slowly increasing the variable frequency power source frequency and adjusting the amplitude until the next test condition is reached. Do not exceed the voltage distortion spectrum limits. Repeat for each test condition A through H noted in table SAC106-II. For each test condition, record voltage, frequency, frequency of

voltage distortion, amplitude of voltage distortion, time duration at test condition, and the performance of the UUT in the data sheet shown in table SAC106-III. Repeat for each mode of operation of the UUT.

After all test conditions are complete, turn the adjustable AC power supply off and remove the coupling transformer from the circuit. Turn on the adjustable AC power supply. Adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has not suffered damage and is providing specified performance for normal aircraft electrical conditions.

TABLE SAC106-II. Test conditions for voltage distortion spectrum.

Test Condition	Frequency of Voltage Distortion	MIL-STD-704B C, D, E & F ^{1/} Amplitude of Voltage Distortion Voltage rms
A	50 Hz	0.316 Vrms
B	100 Hz	0.316 Vrms
C	500 Hz	1.580 Vrms
D	1 kHz	3.160 Vrms
E	2 kHz	3.160 Vrms
F	3 kHz	3.160 Vrms
G	5 kHz	1.900 Vrms
H	10 kHz	0.950 Vrms

^{1/} For utilization equipment being tested to MIL-STD-704 edition A, use MIL-STD-704B limits.

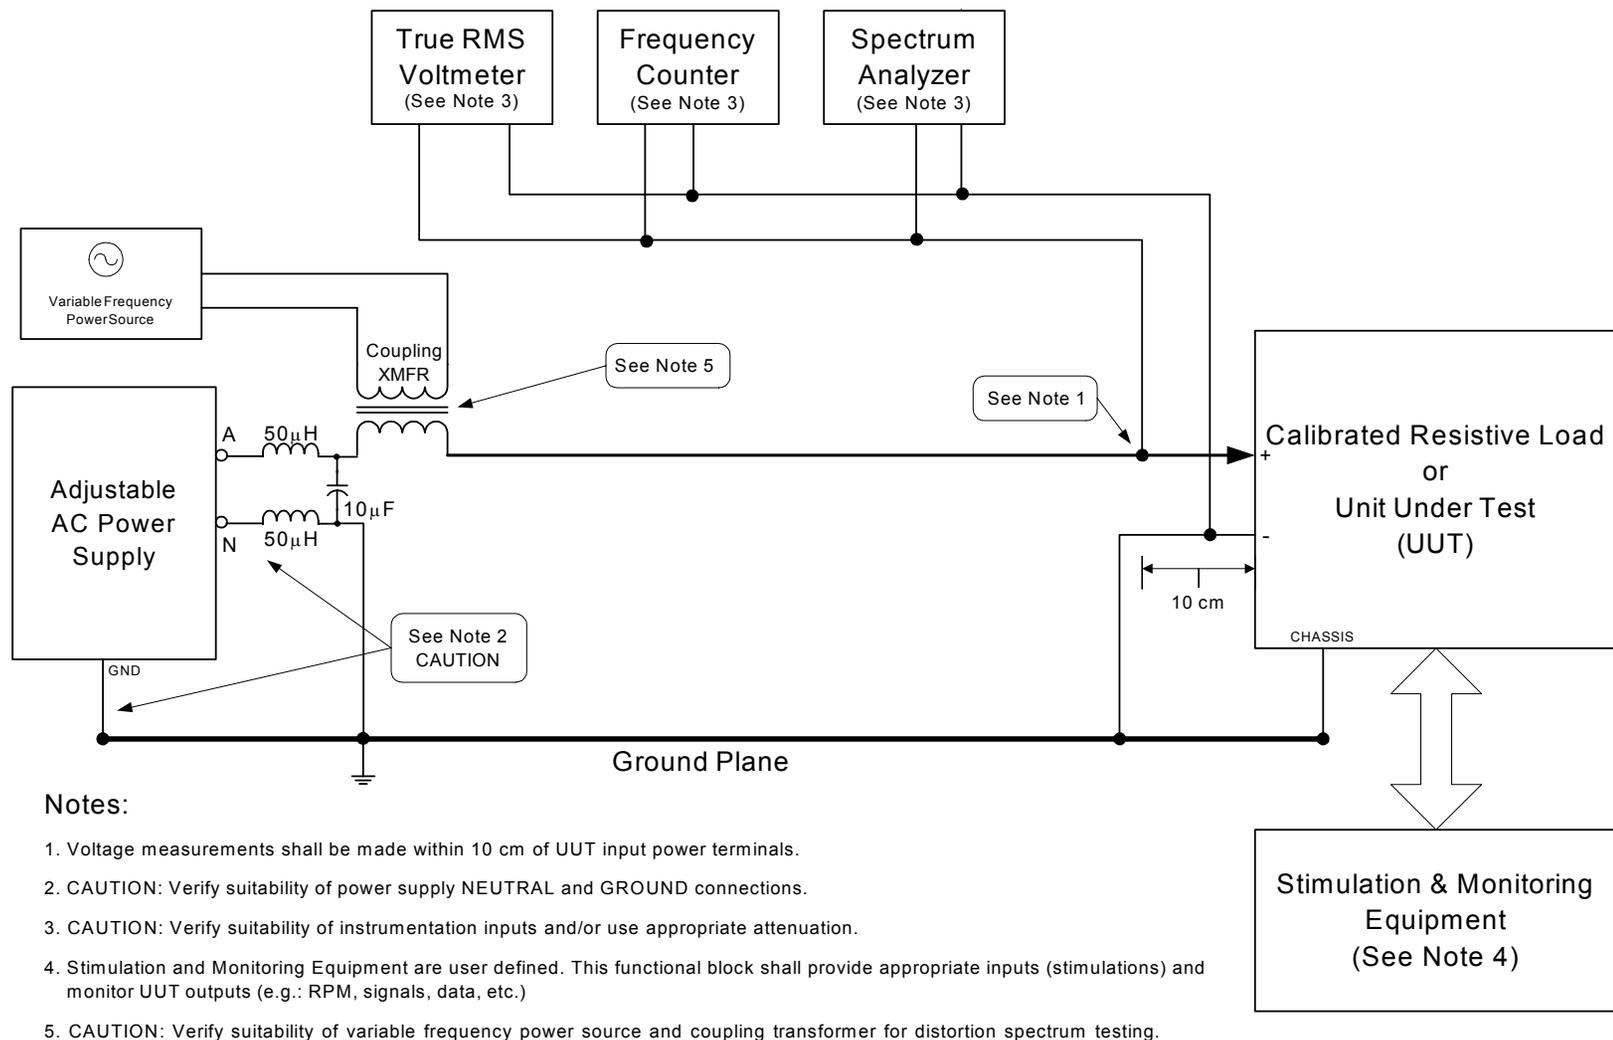


FIGURE SAC106-1. Normal operation - voltage distortion spectrum.

TABLE SAC106-III. Sample data sheet for SAC106 voltage distortion spectrum.

Test Condition	Parameters										Performance Pass/Fail
	Voltage		Frequency		Frequency of Voltage Distortion		Amplitude of Voltage Distortion		Time Duration at Condition		
A		V_{rms}		Hz		Hz		V_{rms}		min	
B		V_{rms}		Hz		Hz		V_{rms}		min	
C		V_{rms}		Hz		Hz		V_{rms}		min	
D		V_{rms}		Hz		kHz		V_{rms}		min	
E		V_{rms}		Hz		kHz		V_{rms}		min	
F		V_{rms}		Hz		kHz		V_{rms}		min	
G		V_{rms}		Hz		kHz		V_{rms}		min	
H		V_{rms}		Hz		kHz		V_{rms}		min	

MIL-HDBK-704-2

METHOD SAC107
Total Voltage Distortion

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
 OPERATING CONDITION: Normal

PARAMETER: Total Voltage Distortion

1. Scope.

1.1 Purpose. This test procedure is used to verify that single phase, 115 Volt, 400 Hz power utilization equipment operates and maintains specified performance when subjected to a voltage waveform having a distortion factor as specified by the applicable edition(s) of MIL-STD-704.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment operates and maintains performance as specified in the utilization equipment performance specification document for normal aircraft electrical conditions when subjected to a voltage waveform having a distortion factor as specified by the applicable edition(s) of MIL-STD-704 and as noted in table SAC107-I. The utilization equipment must maintain specified performance for a length of time that confirms the utilization equipment can operate continuously when subjected to a distorted voltage waveform and should be, not less than thirty (30) minutes. The utilization equipment must not suffer damage or cause an unsafe condition.

TABLE SAC107-I. MIL-STD-704 limits for total voltage distortion.

Limit	704A	704B	704C	704D	704E	704F
Voltage Distortion Factor	0.08	0.05	0.05	0.05	0.05	0.05

3. Apparatus. The test equipment should be as follows:

- a. Programmable AC power supply
- b. True RMS voltmeter
- c. Frequency counter
- d. Spectrum analyzer
- e. Distortion meter

4. Test setup. Configure the test setup as shown in figure SAC107-1. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT.

4.1 Calibration. Install a resistive load in the test setup shown in figure SAC107-1 in place of the UUT. The resistive load should be sized to draw the same current as the UUT. Set the programmable power supply to produce a voltage waveform having harmonic contents listed

MIL-HDBK-704-2

in table SAC107-II. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Confirm that the programmable power supply is producing a voltage waveform having harmonic content listed in table SAC107-II. Record the settings of the programmable power supply.


5. Compliance test. With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC107-1. Set the programmable power supply to the settings recorded during the calibration procedure. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. The UUT must remain for a length of time that confirms the utilization equipment can continuously operate with the total voltage distortion and should be, not less than thirty (30) minutes. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Record the voltage, frequency, voltage distortion factor, voltage harmonics, time duration at test condition, and the performance of the UUT in the data sheet shown in table SAC107-III. Repeat for each mode of operation of the UUT.

After all test conditions are complete, set the programmable power supply to produce a sine wave. Adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has not suffered damage and is providing specified performance for normal aircraft electrical conditions.

MIL-HDBK-704-2

TABLE SAC107-II. Voltage harmonics as percent of fundamental for total voltage distortion test.

Harmonic	MIL-STD-704A Percent of Fundamental	MIL-STD-704B, C, D, E, & F Percent of Fundamental
Fundamental	100%	100%
2nd	0%	0%
3rd	5.00%	2.75%
4th	0%	0%
5th	4.12%	2.75%
6th	0%	0%
7th	2.94%	1.97%
8th	0%	0%
9th	2.29%	1.53%
10th	0%	0%
11th	1.87%	1.25%
12th	0%	0%
13th	1.58%	1.06%
14th	0%	0%
15th	1.37%	0.92%

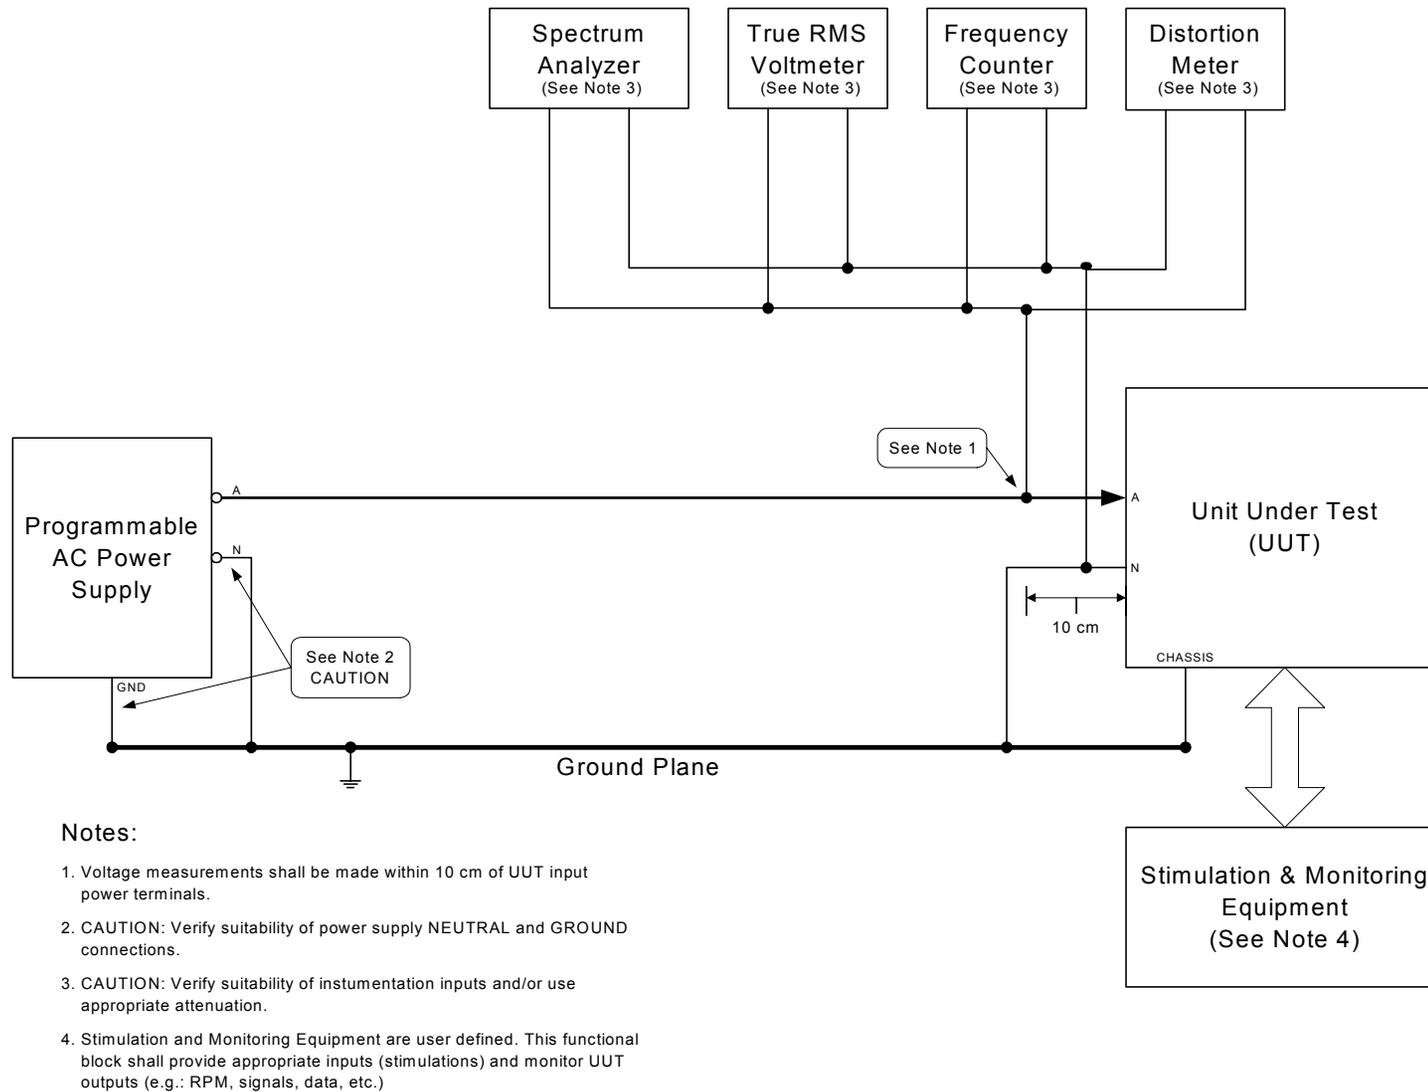FIGURE SAC107-1. Total voltage distortion.

MIL-HDBK-704-2

TABLE SAC107-III. Sample data sheet for SAC107 total voltage distortion.

Parameters							Performance
Voltage		Frequency		Voltage Distortion Factor		Time Duration at Condition	Pass/Fail
	V _{rms}		Hz		No Units	min	
Voltage Harmonics							
	Fund						%
	2 nd						%
	3 rd						%
	4 th						%
	5 th						%
	6 th						%
	7 th						%
	8 th						%
	9 th						%
	10 th						%
	11 th						%
	12 th						%
	13 th						%
	14 th						%
	15 th						%

MIL-HDBK-704-2

METHOD SAC108
DC Voltage Component

POWER GROUP: Single Phase, 400 Hz 115 V

AIRCRAFT ELECTRICAL
OPERATING CONDITION: Normal

PARAMETER: DC Voltage Component

1. Scope.

1.1 Purpose. This test procedure is used to verify that single phase, 115 Volt, 400 Hz power utilization equipment operates and maintains specified performance when subjected to a direct current component of AC voltage as specified by the applicable edition(s) of MIL-STD-704.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment operates and maintains performance as specified in the utilization equipment performance specification document for normal aircraft electrical conditions when subjected to a direct current component of AC voltage as specified by the applicable edition(s) of MIL-STD-704 and as noted in table SAC108-I. The utilization equipment must maintain specified performance for a length of time that confirms the utilization equipment can operate continuously when subjected to a direct current component of AC voltage and should be not less than thirty (30) minutes. The utilization equipment must not suffer damage or cause an unsafe condition.

TABLE SAC108-I. MIL-STD-704 limits for direct current component of AC voltage.

Limit	704A	704B	704C	704D	704E	704F
DC Voltage Component of the AC Voltage	± 0.10 V					

3. Apparatus. The test equipment should be as follows:

- a. Programmable AC power supply
- b. True RMS voltmeter (with capability to measure DC component of AC waveform)
- c. Frequency counter

4. Test setup. Configure the test setup as shown in figure SAC108-1. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT.

5. Compliance test. With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC108-1. Set the programmable power supply to produce a voltage waveform having a DC component for test condition A as noted in

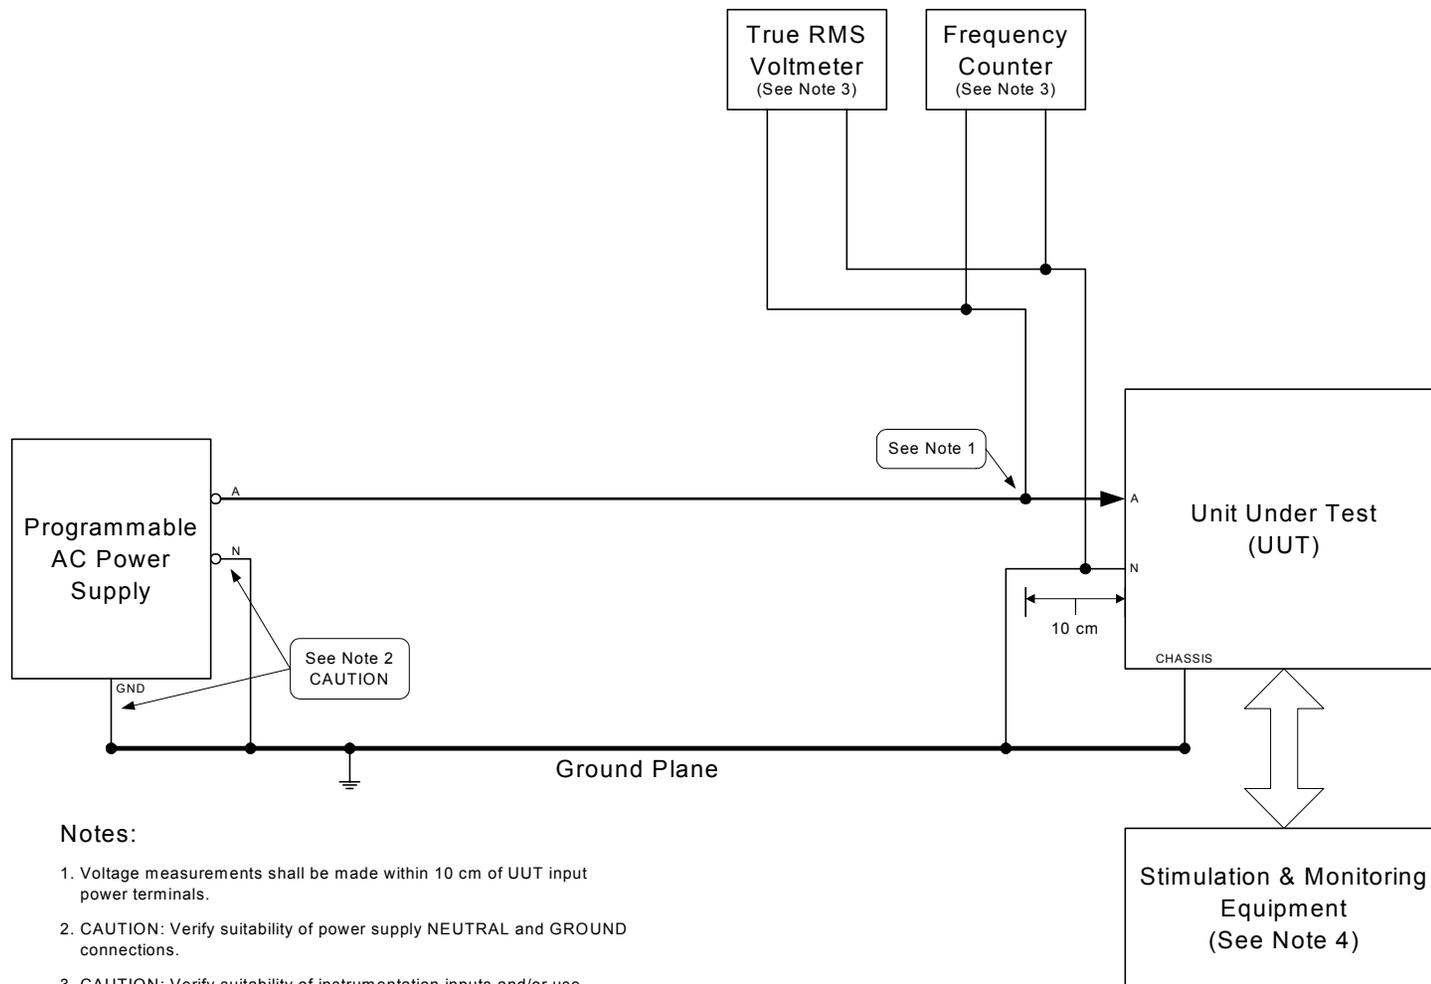
MIL-HDBK-704-2

table SAC108-II. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. The UUT should remain for a length of time that confirms the utilization equipment can continuously operate with the direct current component of the AC voltage and should be not less than thirty (30) minutes. Repeat the test for test condition B as noted in table SAC108-II. Record the voltage, frequency, DC voltage component, time duration at test condition, and the performance of the UUT for each test condition in the data sheet shown in table SAC108-III. Repeat for each mode of operation of the UUT.

After all test conditions are complete, set the programmable power supply to produce a voltage sine wave without a DC component. Adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has not suffered damage and is providing specified performance for normal aircraft electrical conditions.

TABLE SAC108-II. Test conditions for direct current component of AC voltage.

Test Condition	MIL-STD-704A, B C, D, E & F Direct Current Component of AC Voltage
A	+ 0.10V
B	- 0.10 V

FIGURE SAC108-1. DC voltage component.

MIL-HDBK-704-2

TABLE SAC108-III. Sample data sheet for SAC108 DC voltage component.

Test Condition	Parameters								Performance
	Voltage		Frequency		DC Voltage Component		Time Duration at Condition		Pass/Fail
A		V_{rms}		Hz		V_{dc}		min	
B		V_{rms}		Hz		V_{dc}		min	

MIL-HDBK-704-2

METHOD SAC109
Normal Voltage Transients

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
 OPERATING CONDITION: Normal

PARAMETER: Normal Voltage Transients

1. Scope.

1.1 Purpose. This test procedure is used to verify that single phase, 115 Volt, 400 Hz power utilization equipment operates and maintains specified performance when subjected to normal voltage transients as specified in the applicable edition(s) of MIL-STD-704.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment operates and maintains performance as specified in the utilization equipment performance specification document for normal aircraft electrical conditions when subjected to voltage transients within the normal limits of the applicable edition(s) of MIL-STD-704 and as noted in table SAC109-I. The utilization equipment must maintain specified performance during and after the voltage transients. The utilization equipment must not suffer damage or cause an unsafe condition.

TABLE SAC109-I. MIL-STD-704 limits for normal voltage transients.

Limit	704A	704B	704C	704D	704E	704F
Normal Voltage Transients	Figure 3 MIL-STD-704A Locus of Equivalent Step Function Curves 2 and 3	Figure 4 MIL-STD-704B	Figure 5 MIL-STD-704C	Figure 5 MIL-STD-704D	Figure 4 MIL-STD-704E	Figure 3 MIL-STD-704F

3. Apparatus. The test equipment should be as follows:

- a. Programmable AC power supply
- b. True RMS voltmeter
- c. Frequency counter
- d. Oscilloscope

4. Test setup. Configure the test setup as shown in figure SAC109-1. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT.

MIL-HDBK-704-2

5. Compliance test. With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC109-1. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions

5.1 Compliance test for MIL-STD-704A. The UUT must be subjected to the voltage transients for each test condition A through O noted in table SAC109-II. The voltage must increase or decrease from steady state voltage to the voltage transient level within $\frac{1}{2}$ cycle (1.25 milliseconds). The voltage must remain at the voltage transient level for the duration noted in table SAC109-II. The voltage should return to steady state over the time duration noted in table SAC109-II. For test condition G, three over-voltage transients of 160 Vrms for 25 milliseconds are performed, separated by 0.5 seconds. For test condition N, three under-voltage transients of 58 Vrms for 25 milliseconds are performed, separated by 0.5 seconds. For test condition O, an under-voltage transient of 58 Vrms for 25 milliseconds is immediately followed by an overvoltage transient of 160 Vrms for 25 milliseconds and the voltage returns to steady state over the time duration noted. For each test condition, monitor the performance of the UUT during the voltage transient according to the equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Repeat each test condition 5 times. After the power returns to normal steady state limits, conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Record the steady state voltage, steady state frequency, voltage transient level, time duration at voltage transient, oscilloscope trace, and the performance of the UUT for each test condition in the data sheet shown in table SAC109-IV. Repeat for each mode of operation of the UUT. In addition, for MIL-STD-704A test compliance perform the repetitive normal voltage transient test described in 5.3.

5.2 Compliance test for MIL-STD-704B, C, D, E, & F. The UUT must be subjected to the voltage transients for each test condition AA through MM noted in table SAC109-III. The voltage must increase or decrease from steady state voltage to the voltage transient level within $\frac{1}{2}$ cycle (1.25 milliseconds). The voltage must remain at the voltage transient level for the duration noted in table SAC109-III. The voltage must return to steady state over the time duration noted in table SAC109-III. For test condition GG, three overvoltage transients of 180 Vrms for 10 milliseconds are performed, separated by 0.5 seconds. For test condition LL, three undervoltage transients of 80 Vrms for 10 milliseconds are performed, separated by 0.5 seconds. For test condition MM, an undervoltage transient of 80 Vrms for 10 milliseconds is immediately followed by an overvoltage transient of 180 Vrms for 10 milliseconds and the voltage returns to steady state over the time duration noted. For each test condition, monitor the performance of the UUT during the voltage transient according to the equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Repeat each test condition 5 times. After the power returns to normal steady state limits, conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft

MIL-HDBK-704-2

electrical conditions. Record the steady state voltage, steady state frequency, voltage transient level, time duration at voltage transient, oscilloscope trace, and the performance of the UUT for each test condition in the data sheet shown in table SAC109-V. Repeat for each mode of operation of the UUT. In addition, for MIL-STD-704B, C, D, E, & F test compliance perform the repetitive normal voltage transient test described in 5.3.

5.3 Repetitive normal voltage transients test. Program the power supply to provide a continually repeating voltage transient that decreases from 115 Vrms to 90 Vrms in 2.5 msec, then increases to 140 Vrms over 50 msec, then decreases to 115 Vrms over 5.0 msec. The voltage transient is repeated every 0.5 seconds, see figure SAC109-2. The UUT must be subjected to the repetitive voltage transient for a length of time that confirms the utilization equipment can continuously operate and should be, not less than thirty (30) minutes. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Record the steady state voltage, steady state frequency, high voltage transient level, low voltage transient level, oscilloscope trace, time duration at test condition, and the performance of the UUT in the data sheet shown in table SAC109-IV or table SAC109-V. Repeat for each mode of operation of the UUT.

After all test conditions are complete, adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has not suffered damage and is providing specified performance for normal aircraft electrical conditions.

MIL-HDBK-704-2


TABLE SAC109-II. Test conditions for MIL-STD-704A normal voltage transients.

Test Condition	Time From Steady State Voltage to Voltage Transient Level milliseconds	Voltage Transient Level Vrms	Duration at Voltage Transient Level milliseconds	Time From Voltage Transient Level to Steady State Voltage milliseconds
Overvoltage Transients				
A	< 1.25 msec	135 Vrms	210 msec	< 1.25 msec
B	< 1.25 msec	135 Vrms	145 msec	130 msec
C	< 1.25 msec	145 Vrms	130 msec	< 1.25 msec
D	< 1.25 msec	145 Vrms	90 msec	80 msec
E	< 1.25 msec	160 Vrms	48 msec	< 1.25 msec
F	< 1.25 msec	160 Vrms	30 msec	40 msec
G	< 1.25 msec	160 Vrms (3 times)	25 msec every 0.5 sec	< 1.25 msec
Undervoltage Transients				
H	< 1.25 msec	90 Vrms	300 msec	< 1.25 msec
I	< 1.25 msec	90 Vrms	210 msec	180 msec
J	< 1.25 msec	70 Vrms	140 msec	< 1.25 msec
K	< 1.25 msec	70 Vrms	95 msec	85 msec
L	< 1.25 msec	58 Vrms	48 msec	< 1.25 msec
M	< 1.25 msec	58 Vrms	30 msec	40 msec
N	< 1.25 msec	58 Vrms (3 times)	25 msec every 0.5 sec	< 1.25 msec
Combined Transient				
O	< 1.25 msec then < 1.25 msec	58 Vrms 160 Vrms	25 msec 25 msec	< 1.25 msec 50 msec


MIL-HDBK-704-2

TABLE SAC109-III. Test conditions for MIL-STD-704B, C, D, E and F normal voltage.


Test Condition	Time From Steady State Voltage to Voltage Transient Level milliseconds	Voltage Transient Level Vrms	Duration at Voltage Transient Level milliseconds	Time From Voltage Transient Level to Steady State Voltage milliseconds
Overvoltage Transients				
AA	< 1.25 msec	140 Vrms	60 msec	< 1.25 msec
BB	< 1.25 msec	140 Vrms	60 msec	25 msec
CC	< 1.25 msec	160 Vrms	34 msec	< 1.25 msec
DD	< 1.25 msec	160 Vrms	34 msec	52 msec
EE	< 1.25 msec	180 Vrms	10 msec	< 1.25 msec
FF	< 1.25 msec	180 Vrms	10 msec	77 msec
GG	< 1.25 msec	180 Vrms (3 times)	10 msec every 0.5 sec	< 1.25 msec
Undervoltage Transients				
HH	< 1.25 msec	90 Vrms	35 msec	< 1.25 msec
II	< 1.25 msec	90 Vrms	35 msec	45 msec
JJ	< 1.25 msec	80 Vrms	10 msec	< 1.25 msec
KK	< 1.25 msec	80 Vrms	10 msec	70 msec
LL	< 1.25 msec	80 Vrms (3 times)	10 msec every 0.5 sec	< 1.25 msec
Combined Transient				
MM	< 1.25 msec then < 1.25 msec	80 Vrms 180 Vrms	10 msec 10 msec	< 1.25 msec 77 msec

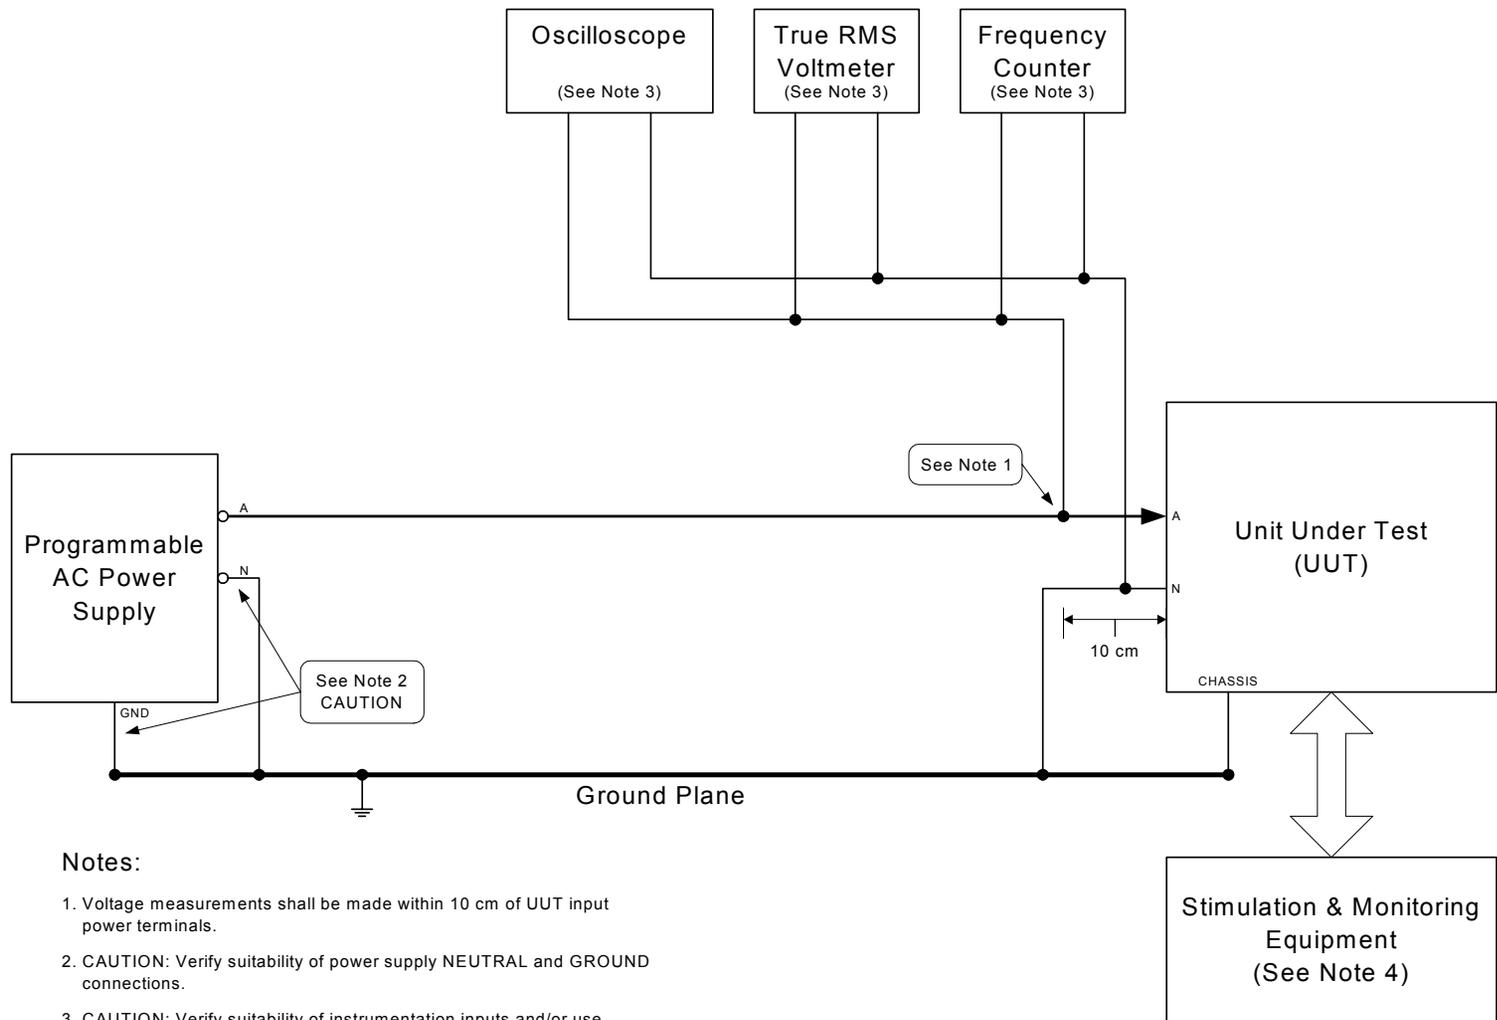FIGURE SAC109-1. Normal voltage transients.

Repetition Rate (f) for transient pulse is twice per second.



Repetitive Normal Voltage Transient

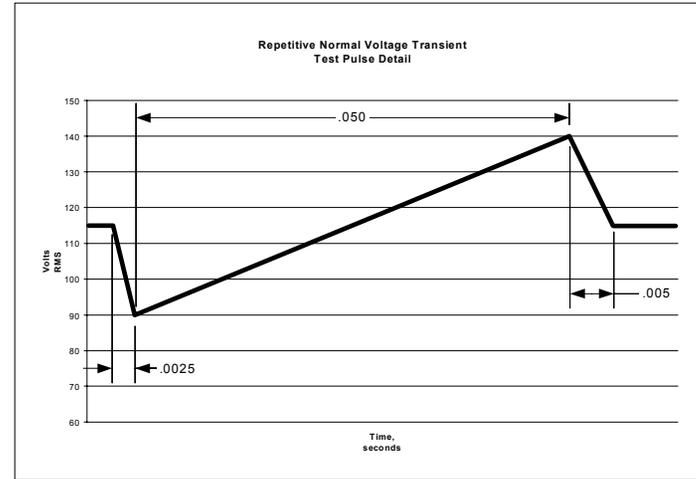

Pulse Detail

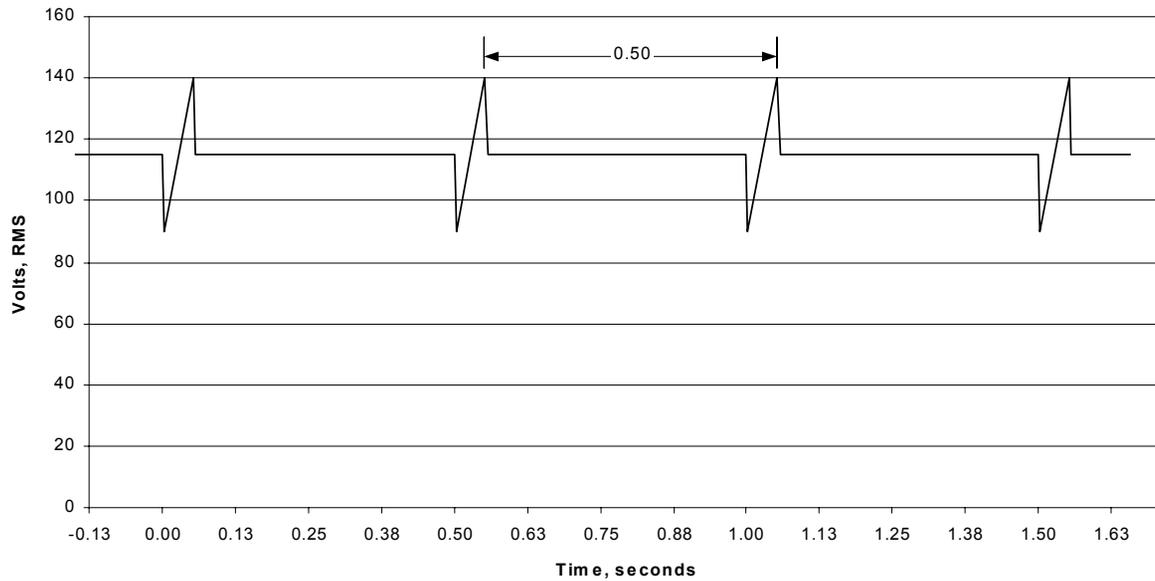


FIGURE SAC109-2. Repetitive normal voltage transient.

TABLE SAC109-IV. Sample data sheet for SAC109 normal voltage transients for MIL-STD-704A.

Test Condition	Parameters									Performance Pass/Fail	
	Steady State Voltage		Steady State Frequency		Voltage Transient		Time at Voltage Transient Level		Oscilloscope Trace		
A		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
B		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
C		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
D		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
E		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
F		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
G		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
H		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
I		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
J		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
K		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
L		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
M		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
N		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
O		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
						V_{rms}		msec			
Repetitive Normal Voltage Transient											
Repetitive Transient	Steady State Voltage		Steady State Frequency		High Voltage Transient		Low Voltage Transient		Oscilloscope Trace		
		V_{rms}		Hz		V_{rms}		V_{rms}	Attach Trace	V_{rms} vs. Time	
	Time Duration at Test Condition										
	minutes										

45

MIL-HDBK-704-2

TABLE SAC109-V. Sample data sheet for SAC109 normal voltage transients for MIL-STD-704B, C, D, E, & F.

Test Condition	Parameters									Performance	
	Steady State Voltage		Steady State Frequency		Voltage Transient		Time at Voltage Transient Level		Oscilloscope Trace		
AA		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
BB		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
CC		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
DD		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
EE		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
FF		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
GG		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
HH		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
II		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
JJ		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
KK		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
LL		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
MM		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
						V_{rms}		msec			
Repetitive Normal Voltage Transient											
Repetitive Transient	Steady State Voltage		Steady State Frequency		High Voltage Transient		Low Voltage Transient		Oscilloscope Trace		
		V_{rms}		Hz		V_{rms}		V_{rms}	Attach Trace	V_{rms} vs. Time	
	Time Duration at Test Condition										
		minutes									

MIL-HDBK-704-2

METHOD SAC110
Normal Frequency Transients

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
 OPERATING CONDITION: Normal

PARAMETER: Normal Frequency Transients

1. Scope.

1.1 Purpose. This test procedure is used to verify that single phase, 115 Volt, 400 Hz power utilization equipment operates and maintains specified performance when subjected to normal frequency transients as specified in the applicable edition(s) of MIL-STD-704.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment operates and maintains performance as specified in the utilization equipment performance specification document for normal aircraft electrical conditions when subjected to frequency transients within the normal limits of the applicable edition(s) of MIL-STD-704 and as noted in table SAC110-I. The utilization equipment must maintain specified performance during and after the frequency transients. The utilization equipment must not suffer damage or cause an unsafe condition.

TABLE SAC110-I. MIL-STD-704 limits for normal frequency transients.

Limit	704A	704B	704C	704D	704E	704F
Normal Frequency Transients	Figure 5 MIL-STD-704A Locus of Equivalent Step Function Curves 2 and 3	¶ 5.1.3 MIL-STD-704B	Figure 6 MIL-STD-704C	Figure 6 MIL-STD-704D	Figure 5 MIL-STD-704E	Figure 5 MIL-STD-704F
Normal Maximum Rate of Change of Frequency	250 Hz/sec	N/A	N/A	N/A	N/A	N/A

3. Apparatus. The test equipment should be as follows:

- a. Programmable AC power supply
- b. True RMS voltmeter
- c. Frequency counter
- d. Oscilloscope

MIL-HDBK-704-2

4. Test setup. Configure the test setup as shown in figure SAC110-1. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT.

5. Compliance test. With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC110-1. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions.

5.1 Compliance test for MIL-STD-704A. The UUT should be subjected to the frequency transients for each test condition A through I noted in table SAC110-II. The frequency must increase or decrease from steady state frequency to the frequency transient level over the duration noted; the frequency must remain at the frequency transient level for the duration noted; and the frequency should return from the frequency transient level over the duration noted. For test condition I, an underfrequency transient of 350 Hz is immediately followed by an overfrequency transient of 450 Hz. For each test condition, monitoring the performance of the UUT during the frequency transient according to the equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Repeat each test condition 5 times. After the power returns to normal steady state limits, conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Record the steady state voltage, steady state frequency, frequency transient level, time at frequency transient, oscilloscope trace (Hz vs. time), and the performance of the UUT for each test condition in the data sheet shown in table SAC110-IV. Repeat for each mode of operation of the UUT.

5.2 Compliance test for MIL-STD-704B, C, D, E, & F. The UUT must be subjected to the frequency transients for each test condition AA through II noted in table SAC110-III. The frequency should increase or decrease from steady state frequency to the frequency transient level over the duration noted; the frequency must remain at the frequency transient level for the duration noted; and the frequency must return from the frequency transient level over the duration noted. For test condition II, an underfrequency transient of 375 Hz is immediately followed by an overfrequency transient of 425 Hz. For each test condition, monitoring the performance of the UUT during the frequency transient according to the equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Repeat each test condition 5 times. After the power returns to normal steady state limits, conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions. Record the steady state voltage, steady state frequency, frequency transient level, time at frequency transient, oscilloscope trace (Hz vs. time), and the performance of the UUT for each test condition in the data sheet shown in table SAC110-V. Repeat for each mode of operation of the UUT.

MIL-HDBK-704-2

After all test conditions are complete, adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has not suffered damage and is providing specified performance for normal aircraft electrical conditions.

TABLE SAC110-II. Test conditions for MIL-STD-704A normal frequency transients.


Test Condition	Time From Steady State Frequency to Frequency Transient Level milliseconds	Frequency Transient Level Hz	Duration at Frequency Transient Level	Time From Frequency Transient Level to Steady State Frequency
Overfrequency Transients				
A	120 msec	430 Hz	½ cycle	120 msec
B	300 msec	430 Hz	½ cycle	1.2 seconds
C	200 msec	450 Hz	½ cycle	200 msec
D	250 msec	450 Hz	½ cycle	3 seconds
Underfrequency Transients				
E	120 msec	370 Hz	½ cycle	120 msec
F	300 msec	370 Hz	½ cycle	1.2 seconds
G	200 msec	350 Hz	½ cycle	200 msec
H	250 msec	350 Hz	½ cycle	3 seconds
Combined Transient				
I	200 msec then 200 msec	350 Hz 450 Hz	½ cycle ½ cycle	200 msec 200 msec

MIL-HDBK-704-2

TABLE SAC110-III. Test conditions for MIL-STD-704B, C, D, E, and F normal frequency transients.

Test Condition	Time From Steady State Frequency to Frequency Transient Level milliseconds	Frequency Transient Level Hz	Duration at Frequency Transient Level	Time From Frequency Transient Level to Steady State Frequency milliseconds
Overfrequency Transients				
AA	40 msec	410 Hz	10 seconds	40 msec
BB	80 msec	420 Hz	5 seconds	80 msec
CC	100 msec	425 Hz	1 seconds	100 msec
DD	100 msec	425 Hz	1 seconds	10 msec
	then 10 msec	420 Hz	4 seconds	20 msec
	then 20 msec	410 Hz	5 seconds	40 msec
Underfrequency Transients				
EE	40 msec	390 Hz	10 seconds	40 msec
FF	80 msec	380 Hz	5 seconds	80 msec
GG	100 msec	375 Hz	1 seconds	100 msec
HH	100 msec	375 Hz	1 seconds	10 msec
	then 10 msec	380 Hz	4 seconds	20 msec
	then 20 msec	390 Hz	5 seconds	40 msec
Combined Transient				
II	100 msec	375 Hz	1 seconds	100 msec
	then 100 msec	425 Hz	1 seconds	100 msec

51

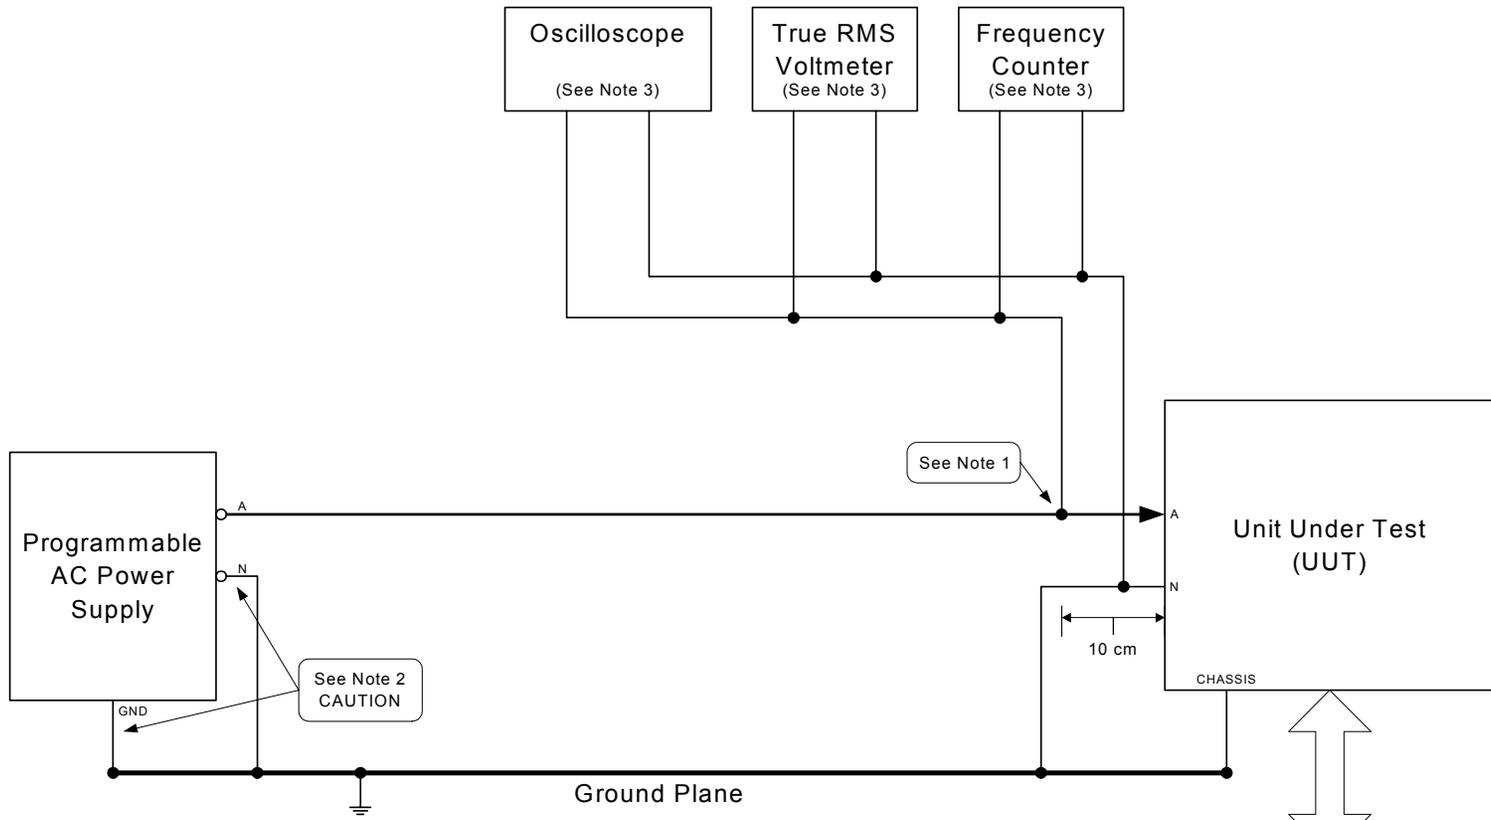

Notes:

1. Voltage measurements shall be made within 10 cm of UUT input power terminals.
2. CAUTION: Verify suitability of power supply NEUTRAL and GROUND connections.
3. CAUTION: Verify suitability of instrumentation inputs and/or use appropriate attenuation.
4. Stimulation and Monitoring Equipment are user defined. This functional block shall provide appropriate inputs (stimulations) and monitor UUT outputs (e.g.: RPM, signals, data, etc.)

MIL-HDBK-704-2

FIGURE SAC110-1. Normal frequency transients.

TABLE SAC110-IV. Sample data sheet for SAC110 normal frequency transients for MIL-STD-704A.

Test Condition	Parameters										Performance Pass/Fail
	Steady State Voltage		Steady State Frequency		Frequency Transient		Time at Frequency Transient Level		Oscilloscope Trace		
A		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
B		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
C		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
D		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
E		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
F		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
G		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
H		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
I		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
						Hz		msec			

TABLE SAC110-V. Sample data sheet for SAC110 normal frequency transients for MIL-STD-704B, C, D, E, & F.

Test Condition	Parameters										Performance Pass/Fail
	Steady State Voltage		Steady State Frequency		Frequency Transient		Time at Frequency Transient Level		Oscilloscope Trace		
AA		V _{rms}		Hz		Hz		sec	Attach Trace	Hz vs. Time	
BB		V _{rms}		Hz		Hz		sec	Attach Trace	Hz vs. Time	
CC		V _{rms}		Hz		Hz		sec	Attach Trace	Hz vs. Time	
DD		V _{rms}		Hz		Hz		sec	Attach Trace	Hz vs. Time	
						Hz		sec			
EE		V _{rms}		Hz		Hz		sec	Attach Trace	Hz vs. Time	
FF		V _{rms}		Hz		Hz		sec	Attach Trace	Hz vs. Time	
GG		V _{rms}		Hz		Hz		sec	Attach Trace	Hz vs. Time	
HH		V _{rms}		Hz		Hz		sec	Attach Trace	Hz vs. Time	
						Hz		sec			
II		V _{rms}		Hz		Hz		sec	Attach Trace	Hz vs. Time	
						Hz		sec			

MIL-HDBK-704-2

METHOD SAC201
Power Interrupt

POWER GROUP: **Single Phase, 400 Hz, 115 V**

AIRCRAFT ELECTRICAL
OPERATING CONDITION: Transfer Interrupt

PARAMETER: Power Interrupt

1. Scope.

1.1 Purpose. This test procedure is used to verify that single phase, 115 Volt, 400 Hz power utilization equipment operates and maintains specified performance when subjected to power interrupts as specified in the applicable edition(s) of MIL-STD-704.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment operates and maintains performance as specified in the utilization equipment performance specification document for transfer aircraft electrical conditions when subjected to power interrupts as specified by the applicable edition(s) of MIL-STD-704 and as noted in table SAC201-I. The utilization equipment must maintain the specified performance during power interrupts. Unless otherwise specified in the utilization equipment performance specification document, the utilization equipment must automatically return to the performance specified for normal aircraft electrical conditions when the power returns to within normal limits. The utilization equipment must not suffer damage or cause an unsafe condition.

TABLE SAC201-I. MIL-STD-704 power transfer limits.

Limit	704A	704B	704C	704D	704E	704F
Power Interrupt	50 msec					
Voltage NLSS	108 V					
Voltage NHSS	118 V					

3. Apparatus. The test equipment should be as follows:

- a. Programmable AC power supply
- b. True RMS voltmeter
- c. Frequency counter
- d. Oscilloscope
- e. Resistive dummy load

4. Test setup. Configure the test setup as shown in figure SAC201-1. The dummy resistive load placed in parallel to the UUT should be sized to draw three times the steady state current of the UUT. Note: This is done to ensure that the UUT test does not lose stored energy to other aircraft

MIL-HDBK-704-2

loads during power interrupts. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT.

5. Compliance test. With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC201-1. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions.


For each test condition A through K noted in table SAC201-II, adjust the voltage to the steady state voltage listed. Perform a power interrupt (0 V) of the duration listed. The voltage should decrease from the steady state voltage to 0 Volts within $\frac{1}{2}$ cycle (1.25 milliseconds), remain at 0 Volts for the duration listed for the test condition, and return from 0 Volts to the Steady State voltage within $\frac{1}{2}$ cycle (1.25 milliseconds). For test condition J, three 50 millisecond power interrupts are performed, separated by 0.5 seconds. For test condition K a normal overvoltage transient follows the power interrupt. The normal voltage transient is 160 Vrms for 30 milliseconds and returns to nominal voltage over the next 40 milliseconds. For test condition L a normal undervoltage transient follows the power interrupt. The normal voltage transient is 70 Vrms for 30 milliseconds and returns to nominal voltage over the next 40 milliseconds. For each test condition, monitor the performance of the UUT according to the utilization equipment performance test procedures for power transfer operation to verify that the UUT is providing specified performance for transfer aircraft electrical conditions. After the power returns to normal limits, conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing the performance specified for normal aircraft electrical conditions (if the UUT is allowed degraded performance during power interrupts, verify the UUT has automatically returned to the performance specified for normal aircraft electrical conditions, and has not suffered damage). Record the steady state voltage, steady state frequency, time duration of power interrupts, and the performance of the UUT for each test condition in the data sheet shown in table SAC201-III. Repeat each test condition 5 times. Repeat for each mode of operation of the UUT.

After all test conditions are complete, adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has not suffered damage and is providing specified performance for normal aircraft electrical conditions.

MIL-HDBK-704-2

TABLE SAC201-II. Test conditions for transfer interrupt.

Test Condition	Steady State Voltage	Duration of Interrupt
A	Nominal Voltage	50 msec
B	NLSS Voltage	50 msec
C	NHSS Voltage	50 msec
D	Nominal Voltage	30 msec
E	NLSS Voltage	30 msec
F	NHSS Voltage	30 msec
G	Nominal Voltage	10 msec
H	NLSS Voltage	10 msec
I	NHSS Voltage	10 msec
J	Nominal Voltage	50 msec (repeated 3 times, separated by 0.5 sec)
K	Nominal Voltage	50 msec (followed by a normal voltage transient of 160 Vrms for 30 msec and return to steady state voltage in 40 msec)
L	Nominal Voltage	50 msec (followed by a normal voltage transient of 70 Vrms for 30 msec and return to steady state voltage in 40 msec)

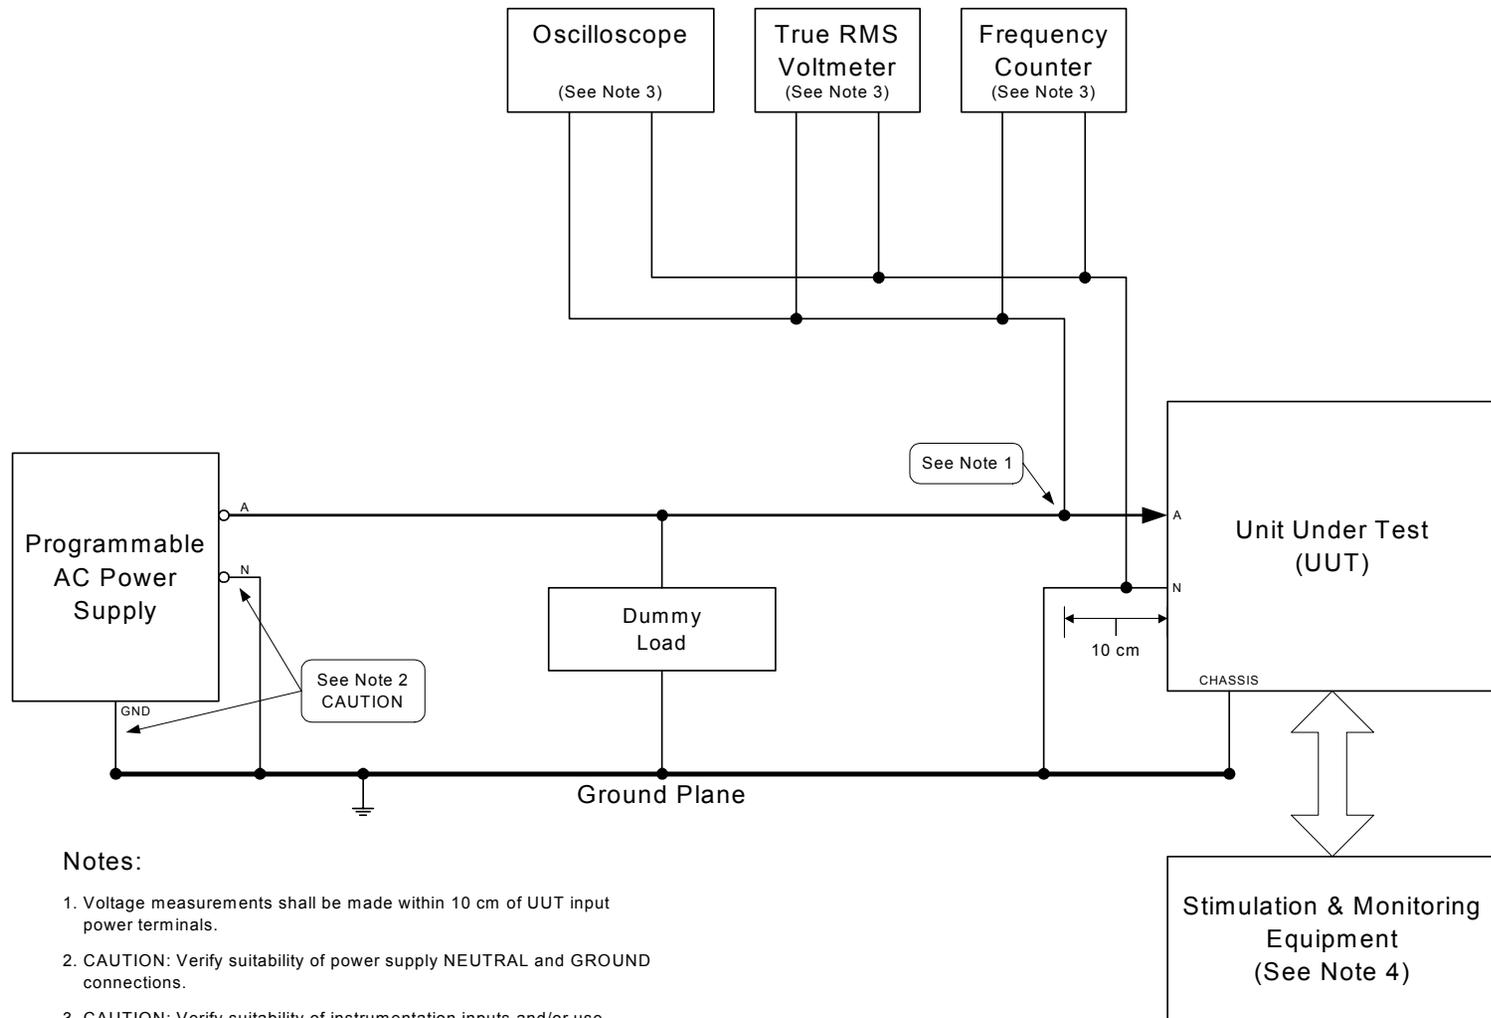FIGURE SAC201-1. Power interrupt.

MIL-HDBK-704-2

TABLE SAC201-III. Sample data sheet for SAC201 power interrupt.

Test Condition	Parameters						Performance Pass/Fail	
	Voltage		Frequency		Time Duration of Power Interrupt			
A		V_{rms}		Hz		msec		
B		V_{rms}		Hz		msec		
C		V_{rms}		Hz		msec		
D		V_{rms}		Hz		msec		
E		V_{rms}		Hz		msec		
F		V_{rms}		Hz		msec		
G		V_{rms}		Hz		msec		
H		V_{rms}		Hz		msec		
I		V_{rms}		Hz		msec		
J		V_{rms}		Hz		msec		
K		V_{rms}		Hz		msec		
	Overvoltage Transient							
	Voltage Transient			Time at Voltage Transient Level				
		V_{rms}				msec		
L		V_{rms}		Hz		msec		
	Undervoltage Transient							
	Voltage Transient			Time at Voltage Transient Level				
		V_{rms}				msec		

MIL-HDBK-704-2

METHOD SAC301
Abnormal Steady State Limits for
Voltage and Frequency

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
 OPERATING CONDITION: Abnormal

PARAMETER: Abnormal Steady State Limits for Voltage and Frequency

1. Scope.

1.1 Purpose. This test procedure is used to verify that single phase, 115 Volt, 400 Hz power utilization equipment operates and maintains specified performance when provided power with voltage and frequency at the Abnormal Low Steady State (ALSS) limits and the Abnormal High Steady State (AHSS) limits as specified in the applicable edition(s) of MIL-STD-704.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment operates and maintains performance as specified in the utilization equipment performance specification document for abnormal aircraft electrical conditions when supplied input power of voltage and frequency at the specified abnormal steady state limits of the applicable edition(s) of MIL-STD-704 and as noted in table SAC301-I. The utilization equipment must maintain specified performance for a length of time that confirms the utilization equipment can continuously operate at the abnormal steady state voltage and frequency limits and should be, not less than thirty (30) minutes for each of the test conditions. Unless otherwise specified in the utilization equipment performance specification document, the utilization equipment must demonstrate re-start at the abnormal steady state voltage and frequency limits. Unless otherwise specified in the utilization equipment performance specification document, the utilization equipment must automatically return to the performance specified for normal aircraft electrical conditions when the power returns to within normal limits. The utilization equipment must not suffer damage or cause an unsafe condition.

TABLE SAC301-I. MIL-STD-704 abnormal limits for steady state voltage and frequency.

Abnormal Limit	704A	704B	704C	704D	704E	704F
Voltage ALSS	102 V	100 V				
Voltage AHSS	124 V	125 V				
Frequency ALSS	370 Hz	375 Hz	380 Hz	375 Hz	380 Hz	380 Hz
Frequency AHSS	430 Hz	425 Hz	420 Hz	425 Hz	420 Hz	420 Hz

MIL-HDBK-704-2

3. Apparatus. The test equipment should be as follows:
 - a. Adjustable AC power supply
 - b. True RMS voltmeter
 - c. Frequency counter
4. Test setup. Configure the test setup as shown in figure SAC301-1. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT.
5. Compliance test. With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC301-1. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions.


For each test condition A through H noted in table SAC301-II, the UUT must remain for a length of time that confirms the utilization equipment can perform as specified at the abnormal steady state voltage and frequency limits and should be, not less than thirty (30) minutes. At each test condition conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for abnormal aircraft electrical conditions. For each test condition shutdown the UUT and verify that the UUT can be re-started. After re-start conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for abnormal aircraft electrical conditions. Adjust the voltage to the nominal steady state voltage of 115 Vrms and adjust the frequency to the nominal steady state frequency of 400 Hz. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has automatically returned to the performance specified for normal aircraft electrical conditions, and has not suffered damage. Record the voltage, frequency, time duration at test condition, successful/unsuccessful re-start and the performance of the UUT for each test condition in the data sheet shown in table SAC301-III. Repeat for each mode of operation of the UUT.

After all test conditions are complete, adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has not suffered damage and is providing specified performance for normal aircraft electrical conditions.

MIL-HDBK-704-2

TABLE SAC301-II. Test conditions for abnormal steady state limits for voltage and frequency.

Test Condition	Voltage	Frequency
A	Nominal Voltage	ALSS Frequency
B	Nominal Voltage	AHSS Frequency
C	ALSS Voltage	Nominal Frequency
D	ALSS Voltage	ALSS Frequency
E	ALSS Voltage	AHSS Frequency
F	AHSS Voltage	Nominal Frequency
G	AHSS Voltage	ALSS Frequency
H	AHSS Voltage	AHSS Frequency

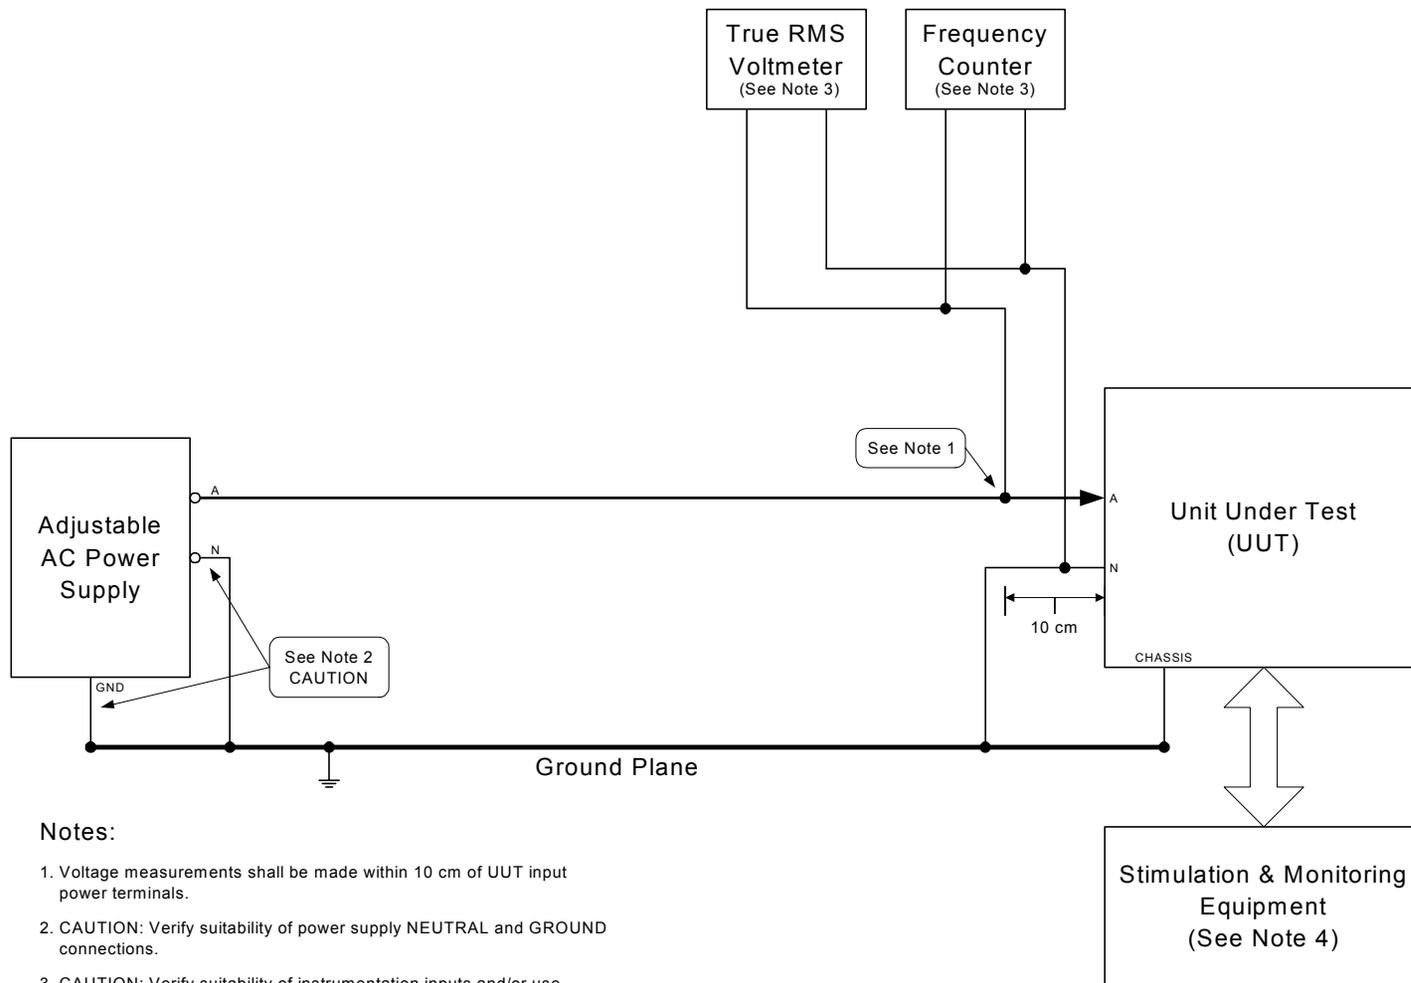FIGURE SAC301-1. Abnormal steady state limits for voltage and frequency.

MIL-HDBK-704-2

TABLE SAC301-III. Sample data sheet for SAC301 abnormal steady state limits for voltage and frequency.

Test Condition	Parameters						Performance	
	Voltage		Frequency		Time Duration at Condition		Re-Start (Yes/No)	Pass/Fail
A		V _{rms}		Hz		min		
B		V _{rms}		Hz		min		
C		V _{rms}		Hz		min		
D		V _{rms}		Hz		min		
E		V _{rms}		Hz		min		
F		V _{rms}		Hz		min		
G		V _{rms}		Hz		min		
H		V _{rms}		Hz		min		

MIL-HDBK-704-2

METHOD SAC302
Abnormal Voltage Transients

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
 OPERATING CONDITION: Abnormal

PARAMETER: Abnormal Voltage Transients

1. Scope.

1.1 Purpose. This test procedure is used to verify that single phase, 115 Volt, 400 Hz power utilization equipment operates and maintains specified performance when subjected to abnormal voltage transients as specified in the applicable edition(s) of MIL-STD-704.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment operates and maintains performance as specified in the utilization equipment performance specification document for abnormal aircraft electrical conditions when subjected to voltage transients within the abnormal limits of the applicable edition(s) of MIL-STD-704 and as noted in table SAC302-I. Unless otherwise specified in the utilization equipment performance specification document, the utilization equipment must automatically return to the performance specified for normal aircraft electrical conditions when the power returns to within normal limits. The utilization equipment must not suffer damage or cause an unsafe condition.

TABLE SAC302-I. MIL-STD-704 limits for abnormal voltage transients.

Limit	704A	704B	704C	704D	704E	704F
Abnormal Voltage Transients	Figure 3 MIL-STD-704A Locus of Equivalent Step Function Curves 1 and 4	Figure 5 MIL-STD-704B	Figure 7 MIL-STD-704C	Figure 7 MIL-STD-704D	Figure 6 MIL-STD-704E	Figure 4 MIL-STD-704F

3. Apparatus. The test equipment should be as follows:

- a. Programmable AC power supply
- b. True RMS voltmeter
- c. Frequency counter
- d. Oscilloscope

4. Test setup. Configure the test setup as shown in figure SAC301-1. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT.

MIL-HDBK-704-2

5. Compliance test. With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC301-1. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions.

5.1 Compliance test for MIL-STD-704A. The UUT must be subjected to the voltage transients for each test condition A through O noted in table SAC302-II. The voltage should increase or decrease from steady state voltage to the voltage transient level within $\frac{1}{2}$ cycle (1.25 milliseconds). The voltage must remain at the voltage transient level for the duration noted in table SAC302-II. The voltage must return to steady state over the time duration noted in table SAC302-II. For test condition G, three over-voltage transients of 180 Vrms for 20 milliseconds are performed, separated by 0.5 seconds. For test condition N, three under-voltage transients of 45 Vrms for 20 milliseconds are performed, separated by 0.5 seconds. For test condition O, an under-voltage transient of 45 Vrms for 20 milliseconds is immediately followed by an overvoltage transient of 180 Vrms for 75 milliseconds and the voltage returns to steady state over the time duration noted. For each test condition, monitor the performance of the UUT during the voltage transient according to the equipment performance test procedures to verify that the UUT is providing specified performance for abnormal aircraft electrical conditions. Repeat each test condition 5 times. After the power returns to normal limits, conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT automatically returns to specified performance for normal aircraft electrical conditions when the power returns to within normal limits, and has not suffered damage. Record the steady state voltage, steady state frequency, voltage transient level, time duration at voltage transient, oscilloscope trace, and the performance of the UUT for each test condition in the data sheet shown in table SAC302-IV. Repeat for each mode of operation of the UUT.

5.2 Compliance test for MIL-STD-704B, C, D, E, & F. The UUT must be subjected to the voltage transients for each test condition AA through OO noted in table SAC302-III. The voltage must increase or decrease from steady state voltage to the voltage transient level within $\frac{1}{2}$ cycle (1.25 milliseconds). The voltage must remain at the voltage transient level for the duration noted in table SAC302-III. The voltage should return to steady state over the time duration noted in table SAC302-III. For test condition GG, three over-voltage transients of 180 Vrms for 20 milliseconds are performed, separated by 0.5 seconds. For test condition NN, three under-voltage transients of 45 Vrms for 20 milliseconds are performed, separated by 0.5 seconds. For test condition OO, an under-voltage transient of 45 Vrms for 20 milliseconds is immediately followed by an overvoltage transient of 180 Vrms for 50 milliseconds and the voltage returns to steady state over the time duration noted. For each test condition, monitor the performance of the UUT during the voltage transient according to the equipment performance test procedures to verify that the UUT is providing specified performance for abnormal aircraft electrical conditions. Repeat each test condition 5 times. After the power returns to normal limits, conduct a performance test of the UUT according to the utilization equipment performance test

MIL-HDBK-704-2

procedures to verify that the UUT automatically returns to specified performance for normal aircraft electrical conditions when the power returns to within normal limits, and has not suffered damage. Record the steady state voltage, steady state frequency, voltage transient level, time duration at voltage transient, oscilloscope trace, and the performance of the UUT for each test condition in the data sheet shown in table SAC302-V. Repeat for each mode of operation of the UUT.

TABLE SAC302-II. Test conditions for MIL-STD-704 abnormal voltage transients.

Test Condition	Time From Steady State Voltage to Voltage Transient Level milliseconds	Voltage Transient Level Vrms	Duration at Voltage Transient Level milliseconds	Time From Voltage Transient Level to Steady State Voltage milliseconds
Overvoltage Transients				
A	< 1.25 msec	140 Vrms	1450 msec	< 1.25 msec
B	< 1.25 msec	140 Vrms	1025 msec	850 msec
C	< 1.25 msec	160 Vrms	520 msec	< 1.25 msec
D	< 1.25 msec	160 Vrms	390 msec	250 msec
E	< 1.25 msec	180 Vrms	98 msec	< 1.25 msec
F	< 1.25 msec	180 Vrms	75 msec	50 msec
G	< 1.25 msec	180 Vrms (3 times)	20 msec every 0.5 sec	< 1.25 msec
Undervoltage Transients				
H	< 1.25 msec	85 Vrms	1450 msec	< 1.25 msec
I	< 1.25 msec	85 Vrms	1025 msec	850 msec
J	< 1.25 msec	75 Vrms	520 msec	< 1.25 msec
K	< 1.25 msec	75 Vrms	390 msec	250 msec
L	< 1.25 msec	45 Vrms	98 msec	< 1.25 msec
M	< 1.25 msec	45 Vrms	75 msec	50 msec
N	< 1.25 msec	45 Vrms (3 times)	20 msec every 0.5 sec	< 1.25 msec
Combined Transient				
O	< 1.25 msec then < 1.25 msec	45 Vrms 180 Vrms	20 msec 75 msec	< 1.25 msec 50 msec

MIL-HDBK-704-2

TABLE SAC302-III. Test conditions for MIL-STD-704B, C, D, E, and F abnormal voltage transients.

Test Condition	Time From Steady State Voltage to Voltage Transient Level milliseconds	Voltage Transient Level Vrms	Duration at Voltage Transient Level milliseconds	Time From Voltage Transient Level to Steady State Voltage or Next Voltage Level
Overvoltage Transients				
AA	< 1.25 msec	140 Vrms	180 msec	< 1.25 msec
BB	< 1.25 msec	140 Vrms	180 msec	87 msec
	then	135 Vrms	Decreasing	253 msec
	then	130 Vrms	Decreasing	6.41 sec
	then	125 Vrms	Decreasing	>10 sec
		115 Vrms		
CC	< 1.25 msec	160 Vrms	78 msec	< 1.25 msec
DD	< 1.25 msec	160 Vrms	78 msec	31 msec
	then	150 Vrms	Decreasing	71 msec
	then	140 Vrms	Decreasing	87 msec
	then	135 Vrms	Decreasing	253 msec
	then	130 Vrms	Decreasing	6.41 sec
	then	125 Vrms	Decreasing	>10 sec
		115 Vrms		
EE	< 1.25 msec	180 Vrms	50 msec	< 1.25 msec
FF	< 1.25 msec	180 Vrms	50 msec	11 msec
	then	170 Vrms	Decreasing	17 msec
	then	160 Vrms	Decreasing	31 msec
	then	150 Vrms	Decreasing	71 msec
	then	140 Vrms	Decreasing	87 msec
	then	135 Vrms	Decreasing	253 msec
	then	130 Vrms	Decreasing	6.41 sec
	then	125 Vrms	Decreasing	>10 sec
		115 Vrms		
GG	< 1.25 msec	180 Vrms (3 times)	20 msec every 0.5 sec	< 1.25 msec

MIL-HDBK-704-2

TABLE SAC302-III. Test conditions for MIL-STD-704B, C, D, E, and F abnormal voltage transients - Continued

Test Condition	Time From Steady State Voltage to Voltage Transient Level milliseconds	Voltage Transient Level Vrms	Duration at Voltage Transient Level milliseconds	Time From Voltage Transient Level to Steady State Voltage or Next Voltage Level
Undervoltage Transients				
HH	< 1.25 msec	85 Vrms	180 msec	< 1.25 msec
II	< 1.25 msec	85 Vrms	180 msec	87 msec
	then	90 Vrms	Increasing	253 msec
	then	95 Vrms	Increasing	6.41 sec
	then	100 Vrms	Increasing	>10 sec
		115 Vrms		
JJ	< 1.25 msec	66 Vrms	78 msec	< 1.25 msec
KK	< 1.25 msec	65 Vrms	78 msec	31 msec
	then	75 Vrms	Increasing	71 msec
	then	85 Vrms	Increasing	87 msec
	then	90 Vrms	Increasing	253 msec
	then	95 Vrms	Increasing	6.41 sec
	then	100 Vrms	Increasing	>10 sec
		115 Vrms		
LL	< 1.25 msec	45 Vrms	50 msec	< 1.25 msec
MM	< 1.25 msec	45 Vrms	50 msec	11 msec
	then	55 Vrms	Increasing	17 msec
	then	65 Vrms	Increasing	31 msec
	then	75 Vrms	Increasing	71 msec
	then	85 Vrms	Increasing	87 msec
	then	90 Vrms	Increasing	253 msec
	then	95 Vrms	Increasing	6.41 sec
	then	100 Vrms	Increasing	>10 sec
		115 Vrms		
NN	< 1.25 msec	45 Vrms (3 times)	20 msec every 0.5 sec	< 1.25 msec
Combined Transient				
OO	< 1.25 msec	45 Vrms	20 msec	< 1.25 msec
	< 1.25 msec	then 180 Vrms	50 msec	11 msec
	then	170 Vrms	Decreasing	17 msec
	then	160 Vrms	Decreasing	31 msec
	then	150 Vrms	Decreasing	71 msec
	then	140 Vrms	Decreasing	87 msec
	then	135 Vrms	Decreasing	253 msec
	then	130 Vrms	Decreasing	6.41 sec
	then	125 Vrms	Decreasing	>10 sec
		115 Vrms		

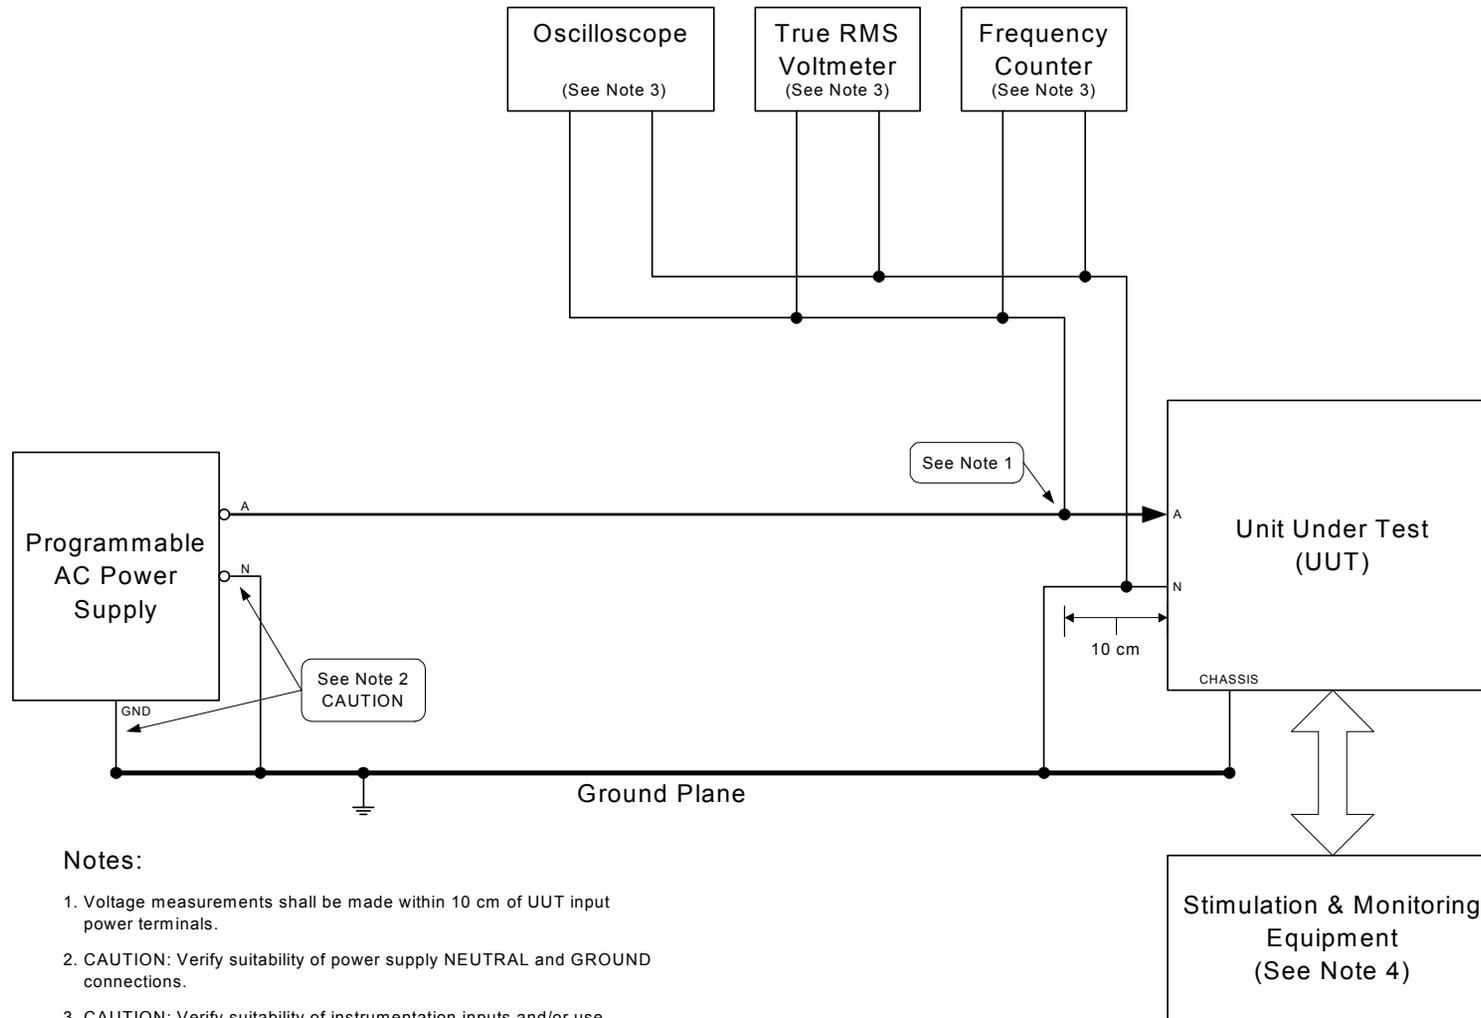
FIGURE SAC302-1. Abnormal voltage transients.

TABLE SAC302-IV. Sample data sheet for SAC302 abnormal voltage transients for MIL-STD-704A.

Test Condition	Parameters								Performance		
	Steady State Voltage		Steady State Frequency		Voltage Transient		Time at Voltage Transient Level		Oscilloscope Trace		Pass/Fail
A		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
B		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
C		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
D		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
E		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
F		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
G		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
H		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
I		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
J		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
K		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
L		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
M		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
N		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
O		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
						V_{rms}		msec			

TABLE SAC302-V. Sample data sheet for SAC302 abnormal voltage transients for MIL-STD-704B, C, D, E, and F.

Test Condition	Parameters									Performance Pass/Fail	
	Steady State Voltage		Steady State Frequency		Voltage Transient		Time at Voltage Transient Level		Oscilloscope Trace		
AA		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
BB		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
CC		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
DD		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
EE		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
FF		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
GG		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
HH		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
II		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
JJ		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
KK		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
LL		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
MM		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
NN		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
OO		V_{rms}		Hz		V_{rms}		msec	Attach Trace	V_{rms} vs. Time	
						V_{rms}		msec			

MIL-HDBK-704-2

METHOD SAC303
Abnormal Frequency Transients

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
 OPERATING CONDITION: Abnormal

PARAMETER: Abnormal Frequency Transients

1. Scope.

1.1 Purpose. This test procedure is used to verify that single phase, 115 Volt, 400 Hz power utilization equipment operates and maintains specified performance when subjected to abnormal frequency transients as specified in the applicable edition(s) of MIL-STD-704.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment operates and maintains performance as specified in the utilization equipment performance specification document for abnormal aircraft electrical conditions when subjected to frequency transients within the abnormal limits of the applicable edition(s) of MIL-STD-704 and as noted in table SAC303-I. Unless otherwise specified in the utilization equipment performance specification document, the utilization equipment must automatically return to the performance specified for normal aircraft electrical conditions when the power returns to within normal limits. The utilization equipment must not suffer damage or cause an unsafe condition.

TABLE SAC303-I. MIL-STD-704 limits for abnormal frequency transients.

Limit	704A	704B	704C	704D	704E	704F
Abnormal Frequency Transients	Figure 5 MIL-STD-704A Locus of Equivalent Step Function Curves 1 and 4	¶ 5.1.5 MIL-STD-704B	Figure 8 MIL-STD-704C	Figure 8 MIL-STD-704D	Figure 7 MIL-STD-704E	Figure 6 MIL-STD-704F
Abnormal Maximum Rate of Change of Frequency	500 Hz/sec	500 Hz/sec	500 Hz/sec	N/A	N/A	N/A

3. Apparatus. The test equipment should be as follows:

- a. Programmable AC power supply
- b. True RMS voltmeter
- c. Frequency counter

MIL-HDBK-704-2

d. Oscilloscope

4. Test setup. Configure the test setup as shown in figure SAC303-1. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT.
5. Compliance test. With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC303-1. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for abnormal aircraft electrical conditions.

5.1 Compliance test for MIL-STD-704A. The UUT must be subjected to the frequency transients for each test condition A through E noted in table SAC303-II. The frequency should increase or decrease from steady state frequency to the frequency transient level over the duration noted; the frequency must remain at the frequency transient level for the duration noted; and the frequency must return from the frequency transient level over the duration noted. For test condition E, an underfrequency transient of 320 Hz is immediately followed by an overfrequency transient of 480 Hz. For each test condition, monitor the performance of the UUT during the frequency transient according to the equipment performance test procedures to verify that the UUT is providing specified performance for abnormal aircraft electrical conditions. Repeat each test condition 5 times. After the power returns to normal limits, conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions, and has not suffered damage. Record the steady state voltage, steady state frequency, frequency transient level, time at frequency transient, oscilloscope trace (Hz vs. time), and the performance of the UUT for each test condition in the data sheet shown in table SAC303-IV. Repeat for each mode of operation of the UUT.

5.2 Compliance test for MIL-STD-704B, C, D, E, & F. The UUT must be subjected to the frequency transients for each test condition AA through EE noted in table SAC303-III. The frequency should increase or decrease from steady state frequency to the frequency transient level over the duration noted; the frequency must remain at the frequency transient level for the duration noted; and the frequency must return from the frequency transient level over the duration noted. For test condition EE, an underfrequency transient of 320 Hz is immediately followed by an overfrequency transient of 480 Hz. For each test condition, monitor the performance of the UUT during the frequency transient according to the equipment performance test procedures to verify that the UUT is providing specified performance for abnormal aircraft electrical conditions. Repeat each test condition 5 times. After the power returns to normal limits, conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions, and has not suffered damage. Record the steady state voltage, steady state frequency, frequency transient level, time at frequency transient, oscilloscope trace (Hz vs. time), and the performance of the UUT for each test condition in the data sheet shown in table SAC303-V. Repeat for each mode of operation of the UUT.

MIL-HDBK-704-2

TABLE SAC303-II. Test conditions for MIL-STD-704A abnormal frequency transients.

Test Condition	Time From Steady State Frequency to Frequency Transient Level milliseconds	Frequency Transient Level Hz	Duration at Frequency Transient Level	Time From Frequency Transient Level to Steady State Frequency milliseconds
Overfrequency Transients				
A	333 msec	480 Hz	½ cycle	60 msec
B	333 msec	480 Hz	6.69 seconds	60 msec
Underfrequency Transients				
C	333 msec	320 Hz	½ cycle	60 msec
D	333 msec	320 Hz	6.69 seconds	60 msec
Combined Transient				
E	333 msec 333 msec	320 Hz then 480 Hz	½ cycle ½ cycle	333 msec 333 msec

TABLE SAC303-III. Test conditions for MIL-STD-704B, C, D, E, and F abnormal frequency transients.

Test Condition	Time From Steady State Frequency to Frequency Transient Level milliseconds	Frequency Transient Level Hz	Duration at Frequency Transient Level	Time From Frequency Transient Level to Steady State Frequency milliseconds
Overfrequency Transients				
AA	160 msec	480 Hz	½ cycle	160 msec
BB	160 msec	480 Hz	4.78 seconds	160 msec
Underfrequency Transients				
CC	160 msec	320 Hz	½ cycle	160 msec
DD	160 msec	320 Hz	4.78 seconds	160 msec
Combined Transient				
EE	160 msec 160 msec	320 Hz then 480 Hz	½ cycle ½ cycle	160 msec 160 msec

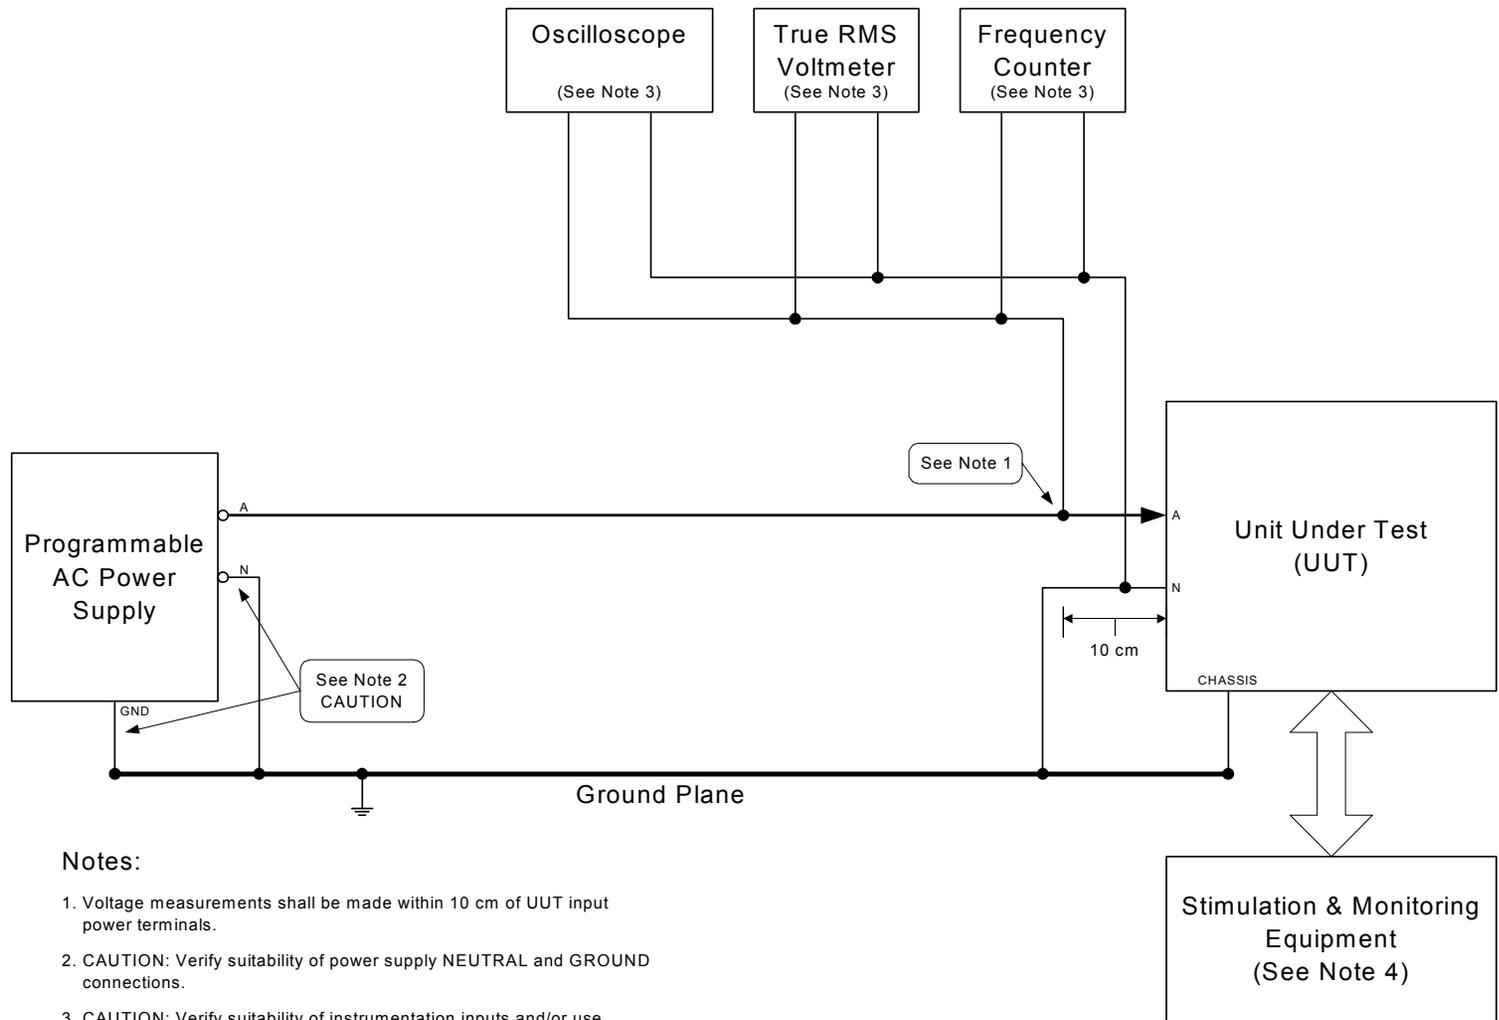
FIGURE SAC303-1. Abnormal frequency transients.

TABLE SAC303-IV. Sample data sheet for SAC303 abnormal frequency transients for MIL-STD-704A.

Test Condition	Parameters										Performance
	Steady State Voltage		Steady State Frequency		Frequency Transient		Time at Frequency Transient Level		Oscilloscope Trace		Pass/Fail
A		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
B		V _{rms}		Hz		Hz		sec	Attach Trace	Hz vs. Time	
C		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
D		V _{rms}		Hz		Hz		sec	Attach Trace	Hz vs. Time	
E		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
						Hz		msec			

TABLE SAC303-V. Sample data sheet for SAC303 abnormal frequency transients for MIL-STD-704B, C, D, E, & F.

Test Condition	Parameters										Performance
	Steady State Voltage		Steady State Frequency		Frequency Transient		Time at Frequency Transient Level		Oscilloscope Trace		Pass/Fail
AA		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
BB		V _{rms}		Hz		Hz		sec	Attach Trace	Hz vs. Time	
CC		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
DD		V _{rms}		Hz		Hz		sec	Attach Trace	Hz vs. Time	
EE		V _{rms}		Hz		Hz		msec	Attach Trace	Hz vs. Time	
						Hz		msec			

MIL-HDBK-704-2

**METHOD SAC401
Emergency Steady State Limits
for Voltage and Frequency**

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
OPERATING CONDITION: Emergency

PARAMETER: Emergency Steady State Limits for Voltage and
Frequency

1. Scope.

1.1 Purpose. This test procedure is used to verify that single phase, 115 Volt, 400 Hz power utilization equipment operates and maintains specified performance when provided power with voltage and frequency at the Emergency Low Steady State (ELSS) limits and the Emergency High Steady State (EHSS) limits as specified in the applicable edition(s) of MIL-STD-704.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment operates and maintains performance as specified in the utilization equipment performance specification document for emergency aircraft electrical conditions when supplied input power of voltage and frequency at the specified emergency steady state limits of the applicable edition(s) of MIL-STD-704 and as noted in table SAC401-I. The utilization equipment must maintain specified performance for a length of time that confirms the utilization equipment can continuously operate at the emergency steady state voltage and frequency limits and should be, not less than thirty (30) minutes for each of the test conditions. Unless otherwise specified in the utilization equipment performance specification document, the utilization equipment must demonstrate re-start at the emergency steady state voltage and frequency limits. Unless otherwise specified in the utilization equipment performance specification document, the utilization must automatically return to the performance specified for normal aircraft electrical conditions when the power returns to within normal limits. The utilization equipment must not suffer damage or cause an unsafe condition.

MIL-HDBK-704-2

TABLE SAC401-I. MIL-STD-704 emergency limits for steady state voltage and frequency.

Emergency Limit	704A	704B	704C	704D	704E ^{1/}	704F ^{1/}
Voltage ELSS	104 V	102 V	104 V	104 V	108 V	108 V
Voltage EHSS	122 V	124 V	122 V	122 V	118 V	118 V
Frequency ELSS	360 Hz	360 Hz	360 Hz	360 Hz	393 Hz	393 Hz
Frequency EHSS	440 Hz	440 Hz	440 Hz	440 Hz	407 Hz	407 Hz

^{1/} For MIL-STD-704E and F, performance of test method SAC102 will constitute performance of test method SAC401.

3. Apparatus. The test equipment should be as follows:

- a. Adjustable AC power supply
- b. True RMS voltmeter
- c. Frequency counter

4. Test setup. Configure the test setup as shown in figure SAC401-1. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT.

5. Compliance test. With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC401-1. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions.


For each test condition A through H noted in table SAC401-II, the UUT must remain for a length of time that confirms the utilization equipment can perform as specified at the emergency steady state voltage and frequency limits and should be, not less than thirty (30) minutes. At each test condition conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for emergency aircraft electrical conditions. For each test condition shutdown the UUT and verify that the UUT can be re-started. After re-start conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for emergency aircraft electrical conditions. Adjust the voltage to the nominal steady state voltage of 115 Vrms and adjust the frequency to the nominal steady state frequency of 400 Hz. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has automatically returned to the performance specified for normal aircraft electrical conditions, and has not suffered damage. Record the voltage, frequency, time duration at test condition, successful/unsuccessful re-start

MIL-HDBK-704-2

and the performance of the UUT for each test condition in the data sheet shown in table SAC401-III. Repeat for each mode of operation of the UUT.

TABLE SAC401-II. Test conditions for emergency steady state limits for voltage and frequency.

Test Condition	Voltage	Frequency
A	Nominal Voltage	ELSS Frequency
B	Nominal Voltage	EHSS Frequency
C	ELSS Voltage	Nominal Frequency
D	ELSS Voltage	ELSS Frequency
E	ELSS Voltage	EHSS Frequency
F	EHSS Voltage	Nominal Frequency
G	EHSS Voltage	ELSS Frequency
H	EHSS Voltage	EHSS Frequency

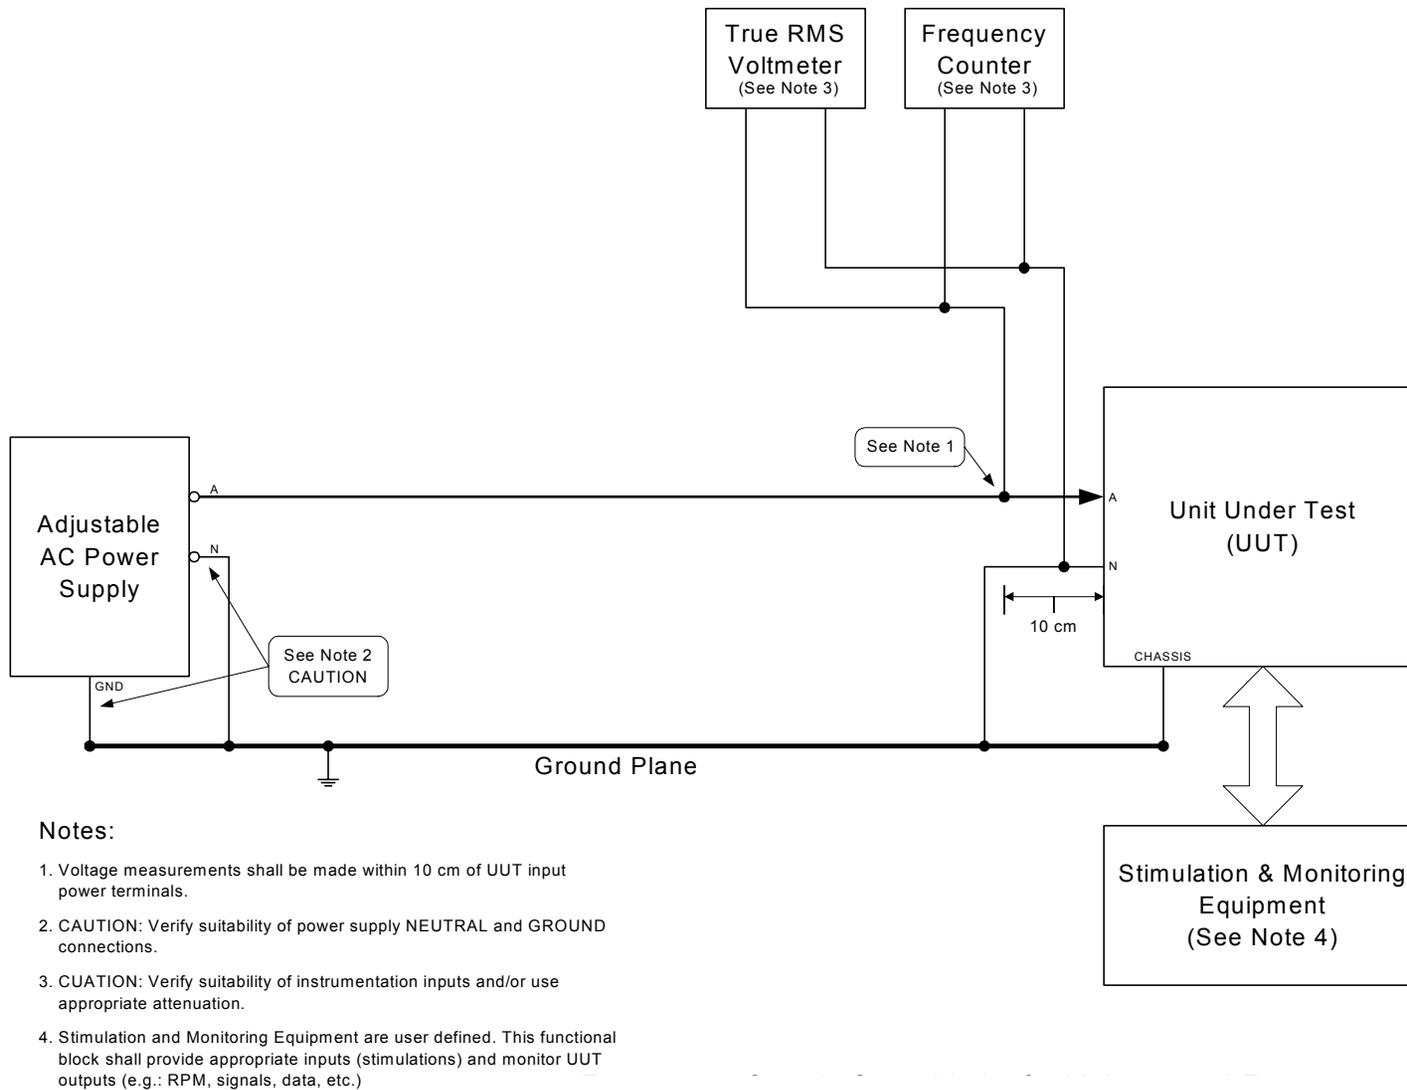FIGURE SAC401-1. Emergency steady state limits for voltage and frequency.

MIL-HDBK-704-2

TABLE SAC401-III. Sample data sheet for SAC401 emergency steady state limits for voltage and frequency.

Test Condition	Parameters						Performance	
	Voltage		Frequency		Time Duration at Condition		Re-Start (Yes/No)	Pass/Fail
A		V_{rms}		Hz		min		
B		V_{rms}		Hz		min		
C		V_{rms}		Hz		min		
D		V_{rms}		Hz		min		
E		V_{rms}		Hz		min		
F		V_{rms}		Hz		min		
G		V_{rms}		Hz		min		
H		V_{rms}		Hz		min		

MIL-HDBK-704-2

METHOD SAC501
(No Test Required)

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
OPERATING CONDITION: Starting

PARAMETER: No Tests

Starting operations are usually not applicable to AC utilization equipment.

MIL-HDBK-704-2

METHOD SAC601
Power Failure (Single Phase)

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
 OPERATING CONDITION: Power Failure

PARAMETER: Power Failure (Single Phase)

1. Scope

1.1 Purpose. This test procedure is used to verify that single phase, 115 Volt, 400 Hz power utilization equipment operates and maintains specified performance when subjected to power failures as specified in the applicable edition(s) of MIL-STD-704.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment operates and maintains performance as specified in the utilization equipment performance specification document for power failure aircraft electrical conditions when subjected to power failures as specified by the applicable edition(s) of MIL-STD-704 and as noted in table SAC601-I. The utilization equipment must maintain the specified performance during the power failures. Unless otherwise specified in the utilization equipment performance specification document, the utilization equipment must automatically return to the performance specified for normal aircraft electrical conditions when the power returns to within normal limits. The utilization equipment must not suffer damage or cause an unsafe condition.

TABLE SAC601-I. MIL-STD-704 power failure limits.

Limit	704A	704B	704C	704D	704E	704F
Power Failure	7 sec Figure 3 Curve 4 MIL-STD-704B	7 sec Figure 5 MIL-STD-704B	7 sec Figure 7 MIL-STD-704C	7 sec Figure 7 MIL-STD-704D	7 sec Figure 6 MIL-STD-704E	7 sec Figure 4 MIL-STD-704F

3. Apparatus. The test equipment should be as follows:

- a. Programmable AC power supply
- b. True RMS voltmeter
- c. Frequency counter
- d. Oscilloscope

4. Test setup. Configure the test setup as shown in figure SAC106-1. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT.

MIL-HDBK-704-2


5. Compliance test. With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC601-1. Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. Allow sufficient time for the UUT to warm up. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to verify that the UUT is providing specified performance for normal aircraft electrical conditions.

For each test condition A through D noted in table SAC601-II, perform a power failure (0 V) of the duration listed. The voltage should decrease from the steady state voltage to 0 Volts within ½ cycle (1.25 milliseconds), remain at 0 Volts for the duration listed for the test condition, and return from 0 Volts to the steady state voltage within ½ cycle (1.25 milliseconds). For each test condition, monitor the performance of the UUT according to the utilization equipment performance test procedures for power failure operation to verify that the UUT is providing specified performance for power failure aircraft electrical conditions. After the power returns to normal limits, conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has automatically returned to the performance specified for normal aircraft electrical conditions, and has not suffered damage. Record the steady state voltage, steady state frequency, time duration of power failure, and the performance of the UUT for each test condition in the data sheet shown in table SAC601-III. Repeat each test condition 5 times. Repeat for each mode of operation of the UUT.

After all test conditions are complete, adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has not suffered damage and is providing specified performance for normal aircraft electrical conditions.

TABLE SAC601-II. Test conditions for single phase power failures.

Test Condition	Duration of Power Failure
A	100 msec
B	500 msec
C	3 seconds
D	7 seconds

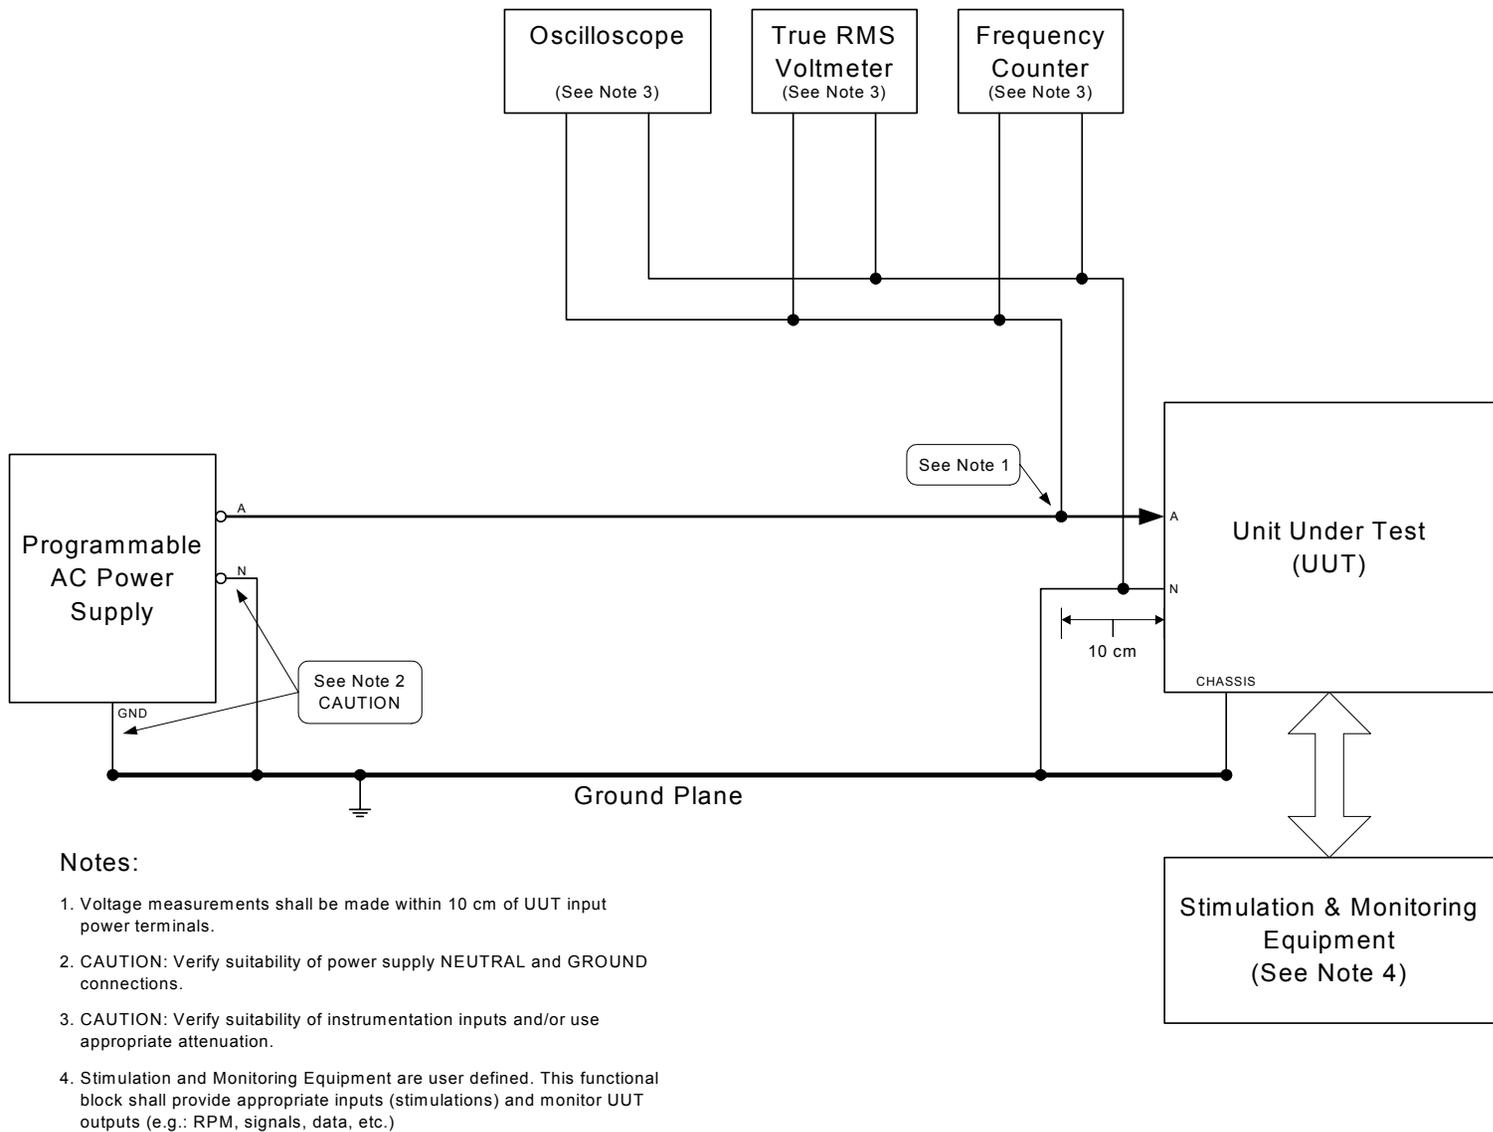FIGURE SAC601-1. Power failure.

MIL-HDBK-704-2

TABLE SAC601-III. Sample data sheet for SAC601 power failure (single phase).

Test Condition	Parameters					Performance	
	Voltage		Frequency		Time Duration of Power Failure	Pass/Fail	
A		V_{rms}		Hz		msec	
B		V_{rms}		Hz		msec	
C		V_{rms}		Hz		sec	
D		V_{rms}		Hz		sec	

MIL-HDBK-704-2

**METHOD SAC602
(No Test Required)**

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
OPERATING CONDITION: Power Failure

PARAMETER: No Test Required.
Test number SAC602 is not used so that the single phase,
400 Hz, 115 V (SAC) test numbers coincide with the
three phase, 400 Hz, 115 V (TAC) test sequence numbers.

MIL-HDBK-704-2

METHOD SAC603
Phase Reversal (Single Phase)

POWER GROUP: Single Phase, 400 Hz, 115 V

AIRCRAFT ELECTRICAL
 OPERATING CONDITION: Power Failure

PARAMETER: Phase Reversal (Single Phase)

1. Scope.

1.1 Purpose. This test procedure is used to verify that single phase, 115 Volt, 400 Hz power utilization equipment is not damaged by phase reversal or a positive physical means is employed to prevent phase reversal.

2. Validation criteria. The utilization equipment is considered to have passed if the utilization equipment is not damaged and does not cause an unsafe condition when the line and neutral connection are reversed for the applicable edition(s) of MIL-STD-704 and as noted in table SAC603-I. A positive physical means to prevent phase reversal may be used to fulfill this requirement.

TABLE SAC603-I. MIL-STD-704 phase reversal requirement.

Limit	704A	704B	704C	704D	704E	704F
Phase Reversal	N/A	N/A	N/A	N/A	N/A	Phase Reversal Does not Cause Damage

3. Apparatus. The test equipment should be as follows:

- a. Adjustable AC power supply
- b. True RMS voltmeter
- c. Frequency counter

4. Test setup. Configure the test setup as shown in figure SAC603-1. Measurements, except current, must be made within 10 cm of the input power terminals of the UUT.


5. Compliance test. If a positive physical means is employed to prevent phase reversal, confirm that the line and neutral conductor cannot be reversed.


If the line and neutral conductor can be reversed, with the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC603-1 (line and neutral conductors reversed). Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady

MIL-HDBK-704-2

state frequency of 400 Hz. Energize the UUT. The UUT must remain for a length of time that confirms the utilization equipment is not damaged and does not cause an unsafe condition due to phase reversal and should be not less than thirty (30) minutes. Record the steady state voltage, steady state frequency, time duration at phase reversal test condition, and the performance of the UUT in the data sheet shown in table SAC603-II. Repeat for each mode of operation of the UUT.

With the power source off, install the UUT and the stimulation and monitoring equipment into the test setup of figure SAC603-II (line and neutral conductors connected properly). Turn on the power source and adjust the voltage to the nominal steady state voltage of 115 Vrms (line-to-neutral) and adjust the frequency to the nominal steady state frequency of 400 Hz. Energize the UUT. The UUT must remain for a length of time that confirms the utilization equipment was not damaged and does not cause an unsafe condition after the phase reversal and should be not less than thirty (30) minutes. Conduct a performance test of the UUT according to the utilization equipment performance test procedures to confirm that the UUT has returned to the performance specified for normal aircraft electrical conditions and has not suffered damage. Record the steady state voltage, steady state frequency, time duration at test condition, and the performance of the UUT in the data sheet shown in table SAC603-II. Repeat for each mode of operation of the UUT.

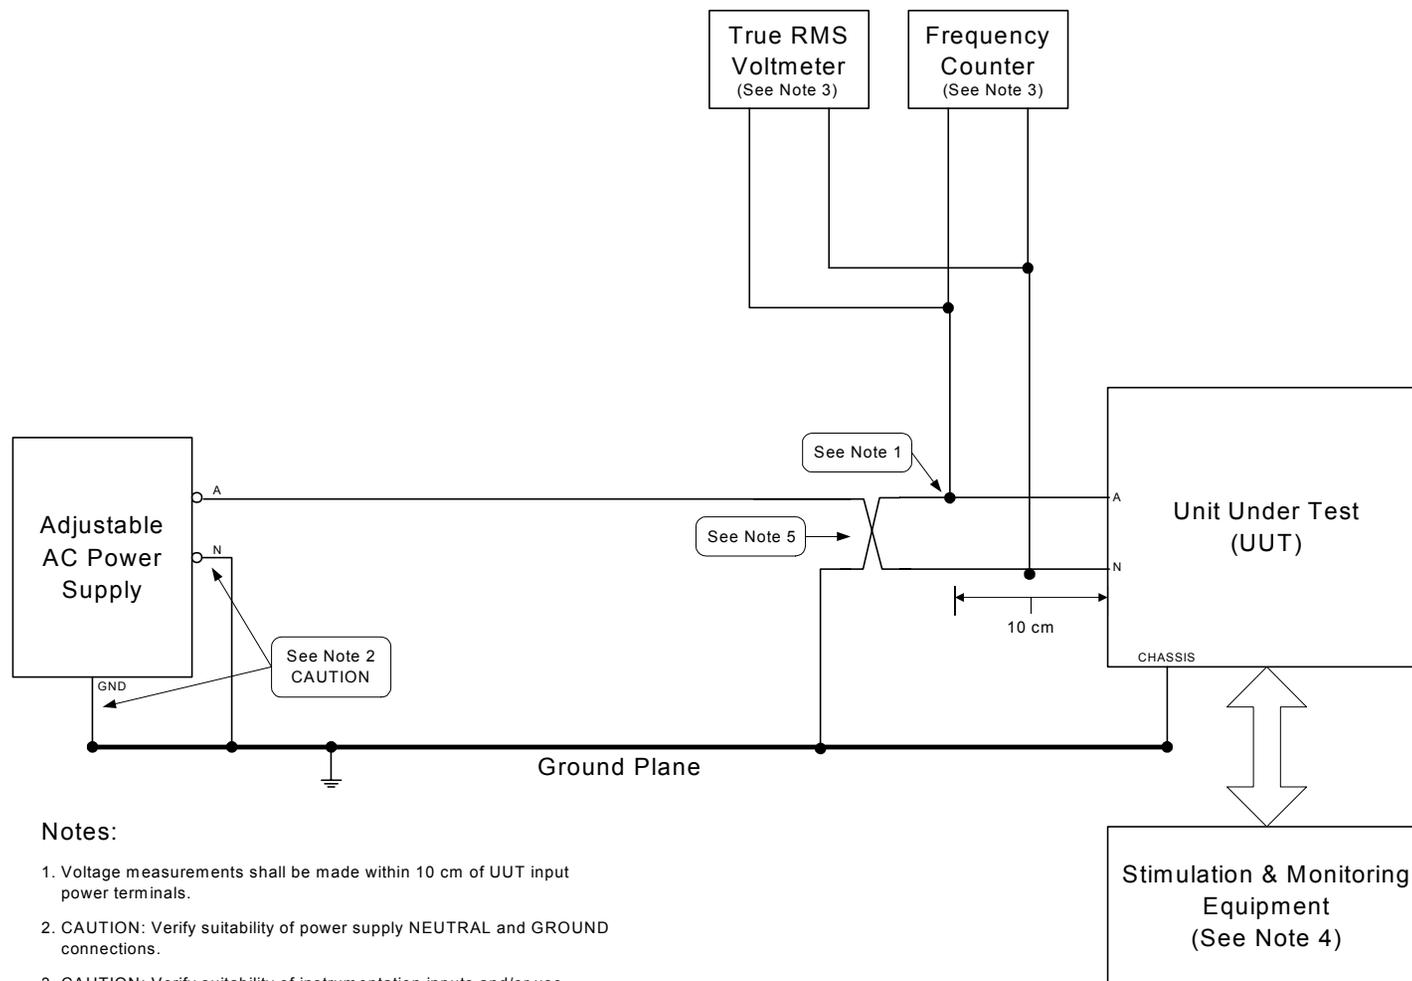FIGURE SAC603-1. Phase reversal.

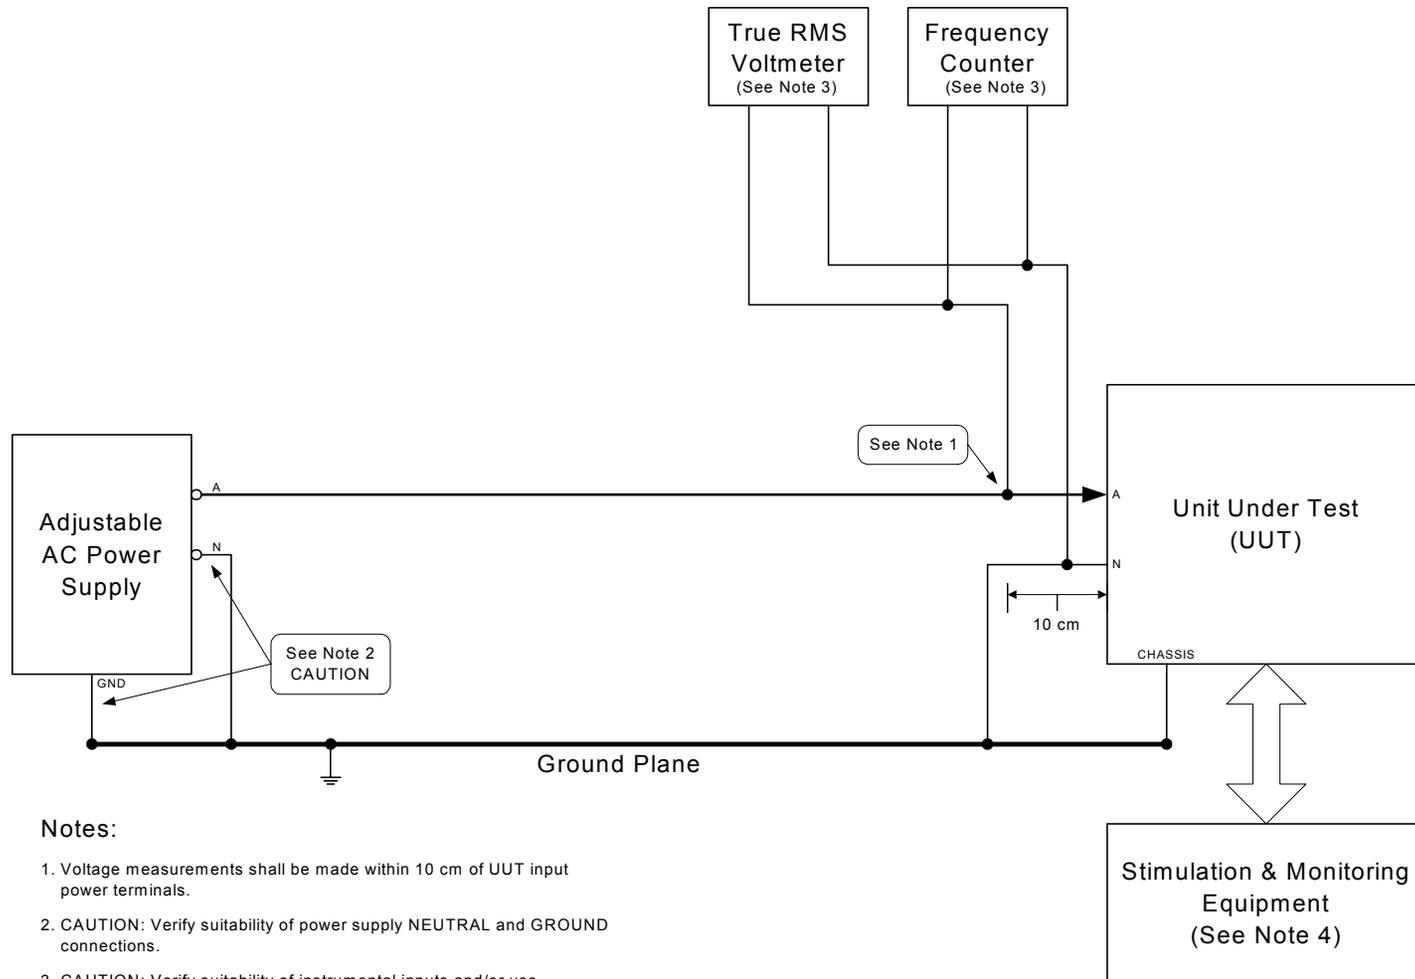FIGURE SAC603-2. Correct phase connection.

MIL-HDBK-704-2

TABLE SAC603-II. Sample data sheet for SAC603 phase reversal.

Test Condition	Parameters						Performance
							Yes/No
Phase Reversal Prevented by Positive Physical Means							
If No							
	Voltage		Frequency		Time Duration at Condition		Pass/Fail
Phase Reversal		V _{rms}		Hz		min	
Correct Phase Connection		V _{rms}		Hz		min	

MIL-HDBK-704-2

6. NOTES

6.1 Intended use. This handbook should be used as guidance when establishing test requirements, for inclusion in performance specifications developed for the procurement of utilization equipment, to ensure compliance with the aircraft electrical power characteristics as specified by MIL-STD-704.

6.2 Single phase test numbers. There are no tests required for SAC103 and SAC602. This is done so that the single phase test numbers coincide with the three phase test numbers.

6.3 Subject term (keyword) listing.

Aircraft, electrical power
Aircraft, electrical test
Electrical operating areas
Equipment, utilization
Power groups
Specification, utilization equipment

CONCLUDING MATERIAL

Custodians:

Army - AV
Navy - AS
Air Force - 11

Preparing Activity:

Navy - AS

(Project No. SESS-0048)

Review Activities:

Army - CR, MI, TE
Navy - EC, MC, SA, SH, YD

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.