

| |
|---|
| <p>NOT MEASUREMENT SENSITIVE</p> |
|---|

MIL-PRF-5096F(USAF)

1 March 1996

SUPERSEDING

MIL-M-5096E(USAF)

10 April 1991

PERFORMANCE SPECIFICATION

**MANUALS, TECHNICAL – INSPECTION AND MAINTENANCE REQUIREMENTS;
ACCEPTANCE AND FUNCTIONAL CHECK FLIGHT PROCEDURES AND CHECKLISTS;
INSPECTION WORK CARDS; AND CHECKLISTS; PREPARATION OF**

This performance specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.

1.1 Scope. This performance specification covers the requirements for the preparation of inspection and maintenance requirements (-6) manuals, acceptance and functional check flight procedures (-6CF) manuals, functional check flight (-6CL) checklists, inspection (-6WC) work cards, and inspection flow/sequence charts. This performance specification also covers the general requirements for all checklists, and specific requirements for maintenance checklists (as applicable to aircraft, Communication Electronic (CE) equipment, air/ground launched missiles, drones, support/systems equipment, rockets and electronic systems). Some systems may require an inspection requirements manual only, or work cards only. For other systems a combination of both inspection manual and work cards may be more suitable. In addition to "paper" delivery, this specification provides for electronic delivery of data through the use of the Document Type Definitions (DTD) contained in Appendixes A through F.

1.2 Detail. The level of detail contained in this performance specification is necessary to comply with the requirements of the Joint Computer-Aided Acquisition and Logistics Support (JCALS) system.

1.3 Checklist classification. This performance specification covers general requirements for checklists of the following types and classes (specifications and standards are in parenthesis):

Type I. Flight Crew

Class 1. For insertion in standard plastic insert binders (MIL-PRF-7700)

| |
|--|
| <p>Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Det 2, HQ ESC/AV-2, 4027 Col Glenn Hwy, Suite 300, Dayton, OH 45431-1672; by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.</p> |
|--|

AMSC N/A

AREA TMSS

Distribution Statement A. Approved for public release; distribution is unlimited.

MIL-PRF-5096F(USAF)

Class 2. For attachment to clipboards (MIL-PRF-7700)

Class 3. Scroll (MIL-PRF-7700)

Class 4. Cargo Loading (MIL-PRF-5288)

Class 5. Nuclear and Nonnuclear Munitions Delivery (MIL-PRF-38384)

Class 6. Acceptance and Functional Check Flight (MIL-PRF-5096)

Type II. Operational and Organizational Maintenance

Class 1. Aircraft, Missile and Space Systems (except Class 2 below), and Weapon System Simulator (MIL-PRF-5096)

Class 2. ICBM Operational (ANSI STD BSR/AIAA R-024-1993)

Type III. Nonnuclear and Chemical/Biological Munitions

Class 1. Loading (MIL-PRF-9977)

Class 2. Storage and Maintenance (MIL-PRF-87929)

Type IV. Nuclear Munitions

Class 1. Loading (MIL-PRF-9977, MIL-PRF-5288)

Class 2. Operational Readiness and Serviceable Condition (MIL-C-38782)

Type V. Intermediate Maintenance (Bench Check) (MIL-PRF-5096)**Type VI. Basic Weight (MIL-M-5920)****2. APPLICABLE DOCUMENTS.**

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this standard. This section does not include documents cited in other sections of this standard or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 4 and 5 of this standard, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS**DEPARTMENT OF DEFENSE**

| | | |
|---------------|---|---|
| MIL-PRF-7700 | – | Manuals, Flight |
| MIL-PRF-83495 | – | Manuals, Technical, On Equipment Set, Organizational Manuals: Detailed Requirements for Preparation of |

MIL-PRF-5096F(USAF)**STANDARDS****DEPARTMENT OF DEFENSE**

- | | | |
|---------------|---|---|
| MIL-STD-1808 | – | System/Subsystem/Subject Number (S/S/SN) Numbering System |
| MIL-STD-38784 | – | Manuals, Technical: General Style and Format Requirements |

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation (see 6.2).

PUBLICATIONS**AIR FORCE TECHNICAL MANUALS**

- | | | |
|-----------------|---|---|
| TO 00-20-series | – | Maintenance Management Series |
| TO 42B1-1-15 | – | Cross Reference-NATO Interchangeability of Aviation Fuels, Lubricants and Allied Products |

(Copies of documents required by contractors in connection with specific procurement functions should be obtained from the acquiring activity or as directed by the contracting officer.)

2.2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the document which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

PUBLICATIONS**AIR TRANSPORT ASSOCIATION OF AMERICA (A.T.A.)**

- | | | |
|-------|---|---|
| MSG-3 | – | Airline/Manufacturer Maintenance Program Development Document |
|-------|---|---|

(Application for copies should be addressed to the Air Transport Association of America, 1301 Pennsylvania Avenue, NW, Washington, D.C. 20004-1707)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

MIL-PRF-5096F(USAF)

3. REQUIREMENTS.

3.1 General. As determined by the acquiring activity (see 6.2), each contract shall state which documents are required for aircraft, air/ground launched missiles, rockets, drones, CE, and support systems. An aircraft or ground system may require an inspection requirements manual only, or work cards only. Others may use the work cards, inspection manual, and Functional Check Flight (FCF) manual and checklist. The requirements of MIL-STD-38784 are applicable except that no page shall contain color nor shall there be any foldout pages.

3.1.1 Equipment nomenclatures. When related Organizational Maintenance Manuals are prepared to the requirements of MIL-PRF-83495, equipment nomenclatures in inspection manuals shall be followed by the applicable higher level designation in parenthesis. System titles in the inspection manual (-6) shall be followed by the applicable work unit code (WUC) system number in parenthesis followed by the applicable System/Subsystem/Subject Number (S/S/SN). S/S/SN definition and assignment instructions are contained in MIL-STD-1808.

3.1.2 Security classification. When possible, the contents of the documents shall be so arranged and worded that they shall be unclassified. However, if classified information is required, it shall be prepared in accordance with MIL-STD-38784.

3.1.3 Warnings, cautions, notes. The requirements of MIL-STD-38784 are applicable.

3.1.4 Printing area. The printing area for each page size shall be in accordance with MIL-STD-38784.

3.1.5 Effectivity markings. Effectivity markings, such as flag note symbols, base codes, and other indicators, shall be used to denote wing applicability, configurational differences, alternate actions, and other equipment differences. Markings shall be explained in the foreword.

3.1.6 Emergency page markings. Emergency page markings shall be in accordance with MIL-STD-38784.

3.2 Inspection and maintenance requirements (-6) manual.

3.2.1 Requirements (-6 manual). There shall be one manual prepared for the aircraft, air/ground launched missiles, rocket, drone, CE and support systems entitled: "Technical Manual, Scheduled Inspection and Maintenance Requirements." The need for additional manual(s) shall be as determined by the acquiring activity (see 6.2).

3.2.1.1 Requirements to be included. The manual shall include all scheduled and special inspections, replacement and check flight requirements and base level repair restrictions for the weapon system and equipment installed therein. Also included shall be requirements pertaining to the marriage of an aircraft with weapons, missiles and other stores, when applicable. The manual shall establish a complete preventive maintenance program for the weapon system to which it pertains. The inspection requirements shall reflect the requirements contained in the inspection work cards. No requirement shall be omitted. The maximum safe interval between inspections shall be as established by the acquiring activity, so that the weapon system is not over inspected.

3.2.1.1.1 Frequency requirements. The determination of each individual requirement and how frequently these requirements should be scheduled, shall be accomplished in accordance with

MIL-PRF-5096F(USAF)

MSG-3, Airline/Manufacturer Maintenance Program Development Document and the acquiring activity.

3.2.1.1.2 Basis. Initial requirements as determined by the acquiring activity, shall be based on technical and maintenance analysis, using the following objectives of an efficient maintenance program:

- a. To prevent deterioration of the inherent design levels of reliability and operating safety.
- b. To accomplish this protection at the minimum practical costs.

3.2.1.2 Excluded information. The inspection requirements shall not explain procedures for removal or installation of equipment nor contain instructions for repair or adjustment. Reference to this type of information shall be in accordance with MIL-STD-38784.

3.2.1.3 Functional nature requirements. The design of a weapon or support system may include various functional systems (i.e. made up of components from several systems). In such cases, the inspections may be broken out by functional systems, as necessary, under suitable headings.

3.2.1.4 Additional considerations. Preparation of the inspection requirements may involve more than just inserting data applicable to systems or end items. The impact of a component failure upon the remainder of a functional system, the impact of a part failure upon the remainder of a functional system, and the impact of a part failure in a component shall also be considered. If visual inspection or other nondestructive inspection can be utilized to detect wear or other evidence of impending failure, those factors shall be weighed in determining scheduled maintenance. When preparing structural inspections, consideration shall be given in determining what stresses are applied to the structure and what structural components are likely to be affected.

3.2.1.5 Syntax. The syntax for stating inspection requirements shall be "Noun" followed by the adverse condition to be sought. Example: "Exhaust Nozzle for cracks and corrosion."

3.2.1.6 Inspection intervals. To simplify recording and scheduling of inspections, all inspection intervals shall be divisible by the lowest interval, rounded to the conservative side. This information cannot be any more specific. Since this specification covers all inspection manuals, and covers all intervals from hours to years, the details need to be determined by the acquiring activity.

3.2.1.7 Components coverage. Unless otherwise specified by the acquiring activity, all installed subsystems, components, etc., shall be covered. The acquiring activity will provide a listing of any items, components or subsystems exempt from coverage (see 6.2).

3.2.2 Arrangement and contents (-6 manual). Appendix A provides the DTD for electronic delivery of the -6 manual. The manual shall be prepared in 8 ½ by 11 inch format and shall be arranged and divided into chapters as follows:

Front matter

Chapter 1 - Scheduled Inspection and Maintenance Requirements

Chapter 2 - Special Inspections and Maintenance Requirements (includes Depot Level Requirements, Acceptance and Functional Check Flight)

MIL-PRF-5096F(USAF)

Chapter 3 - Replacement Schedule

Chapter 4 - Repair Restrictions

3.2.2.1 Front matter (-6 manual). Front matter shall be prepared in accordance with the requirements of MIL-STD-38784 except that the foreword shall contain the statements shown in Figure 1, with appropriate changes for the type of equipment being addressed. The need for additional information applicable to a specific weapon system or any modifications to the foreword shall be as specified by the acquiring activity (see 6.2).

3.2.2.2 Chapter 1, Scheduled Inspection and Maintenance Requirements. This chapter shall contain all inspections that must be accomplished at specified intervals. To identify the various intervals, this chapter shall be divided by sections. Unless otherwise specified by the acquiring activity, all sections listed in paragraphs 3.2.2.2.1 thru 3.2.2.2.6 shall be used. When not required, they shall be included and marked "Not Applicable." When specified, additional sections shall be included and shall begin after the last of the required sections. They shall be of the type specified by the acquiring activity. Pages shall be formatted in accordance with Figure 2 with appropriate wording for the type of inspection and equipment.

3.2.2.2.1 Chapter 1, Section I - Preflight/Preoperation. This inspection shall include:

- a. Items that, due to environment, are subject to damage by outside forces, such as ground equipment, maintenance crews, elements of nature, etc.
- b. Items that, due to design characteristics, normally require service or verification of service prior to the first flight/operation of the day.

3.2.2.2.2 Chapter 1, Section II - End of Runway. This inspection shall include:

- a. Items that are subject to damage during ground operations or are not readily apparent until after operation begins.
- b. Items, such as panels and doors, that must be secure prior to flight/operation.
- c. Items, such as down locks, safety pins, and protective covers, that must be removed prior to flight/operation.

3.2.2.2.3 Chapter 1, Section III - Thruflight. This inspection shall consist of the same type items as the basic postflight/postoperation (see below) but is not as searching in scope.

3.2.2.2.4 Chapter 1, Section IV - Basic Postflight/Postoperation. This inspection shall consist primarily of the following:

- a. Items that due to their operational characteristics are subject to loss of lubricant, fluids, air, etc., during flight/operation.
- b. Items that due to flight/operation are subject to damage such as impact, foreign objects, etc., during operation.
- c. Items of critical nature that are subject to developing defects which are not readily apparent to the users during operation.

MIL-PRF-5096F(USAF)

- d. Items, such as down locks, safety pins, and protective covers, that must be installed prior to maintenance.

3.2.2.2.5 Chapter 1, Section V - Hourly Postflight/Postoperation. This inspections shall augment the basic postflight/postoperation requirements. It shall include requirements that fall in the following categories:

- a. Items that due to their installation characteristics are subject to excessive chafing and insecure mounting.
- b. Items that are subject to extreme heat conditions.
- c. Items that due to their design characteristics are subject to developing leaks or unusual cracks.
- d. Items that require more frequent verification of serviceability or operation than the periodic/phased/isochronal inspection interval.
- e. Items that require more frequent verification of service than the periodic/phased/isochronal inspection interval.

3.2.2.2.6 Chapter 1, Section VI - Periodic, Phased or Isochronal. The inspection (periodic, phased, or isochronal) to be used, shall be as specified by the acquiring activity (see 6.2). These inspections shall include those requirements to be accomplished at a specified interval or multiples of the specified interval. They shall consist primarily of requirements that are necessary at more extended intervals than the hourly postflight/postoperation inspection; in certain instances are more searching in scope than the hourly postflight/postoperation inspection. Isochronal inspections shall be divided into Home Station Check Inspection, Minor Inspection and Major Inspection. This section shall primarily include requirements that fall in the following categories:

- a. Items that are subject to developing defects after periods of operation in excess of the hourly postflight/postoperation inspection interval and may require disassembly to ascertain wear or deterioration that may cause failure of the unit.
- b. Items that due to their function within a system require a periodic examination or servicing less frequent than the hourly postflight/postoperation interval or in some instances, less frequent than the basic periodic/phased/isochronal inspection interval to detect impending failure or a servicing requirement.
- c. Items that require periodic removal for bench check to determine functional reliability, extent of physical wear, and evidence of incipient failure.
- d. Items that require less frequent verification of service than the hourly postflight/postoperation interval.

3.2.2.3 Chapter 2, Special Inspection and Maintenance Requirements. Special inspections shall include those functions to be accomplished at the expiration of a specified number of flying hours, equipment hours of operation, and lapse of calendar time. The special inspections shall also include those functions to be accomplished after the occurrence of a specific or unusual condition or incident, and when accepting an aircraft after extensive modifications. Unless otherwise specified by the acquiring activity (see 6.2), all sections listed in paragraphs 3.2.2.3.1 thru 3.2.2.3.4 shall be used. When not required, they shall be included and marked "Not Applicable." When specified by the acquiring activity (see 6.2), additional sections shall be included and shall begin after the last

MIL-PRF-5096F(USAF)

required section. They shall be of the type specified by the acquiring activity. Pages shall be formatted in accordance with Figures 3 thru 6 with appropriate wording for the type of inspection and equipment.

3.2.2.3.1 Chapter 2, Section I - Special Inspections after a specific occurrence (see Figure 3).

These inspections shall be designed to meet the following criteria:

- a. Items that due to their physical characteristics are subject to deterioration after long periods of service.
- b. Items that due to their structural characteristics are subject to fatigue after long periods of service.
- c. Items that due to their function within a system are subject to damage from specific events, such as hard landings, violent maneuvers, hot starts, false starts, etc.

3.2.2.3.2 Chapter 2, Section II - Depot (see Figure 4). The depot section shall include inspections and maintenance to be accomplished on a scheduled calendar time cycle basis. Inspection requirements shall insure that all accessible areas and components not afforded coverage at other inspection intervals are given thorough and adequate attention. Work cards to detail these requirements shall be prepared. This chapter and section also includes Programmed Depot Maintenance (PDM).

3.2.2.3.3 Chapter 2, Section III - Acceptance and Functional Check Flight (FCF) inspection requirements (see Figure 5). This section shall list those conditions which require a functional check flight to verify maintenance performed on the aircraft or its airworthy condition. Specific conditions for FCFs shall be determined for each aircraft, based upon technical conditions and operational experience. It may also be necessary to prescribe FCFs for component changes such as engines or major flight control surfaces when the possibility of failure or a malfunction of the component is greater during its initial period of operation. These types of requirements shall be related to experience factors on component failures or malfunction rates, the number of like components installed in the aircraft, the number of these items that could be changed simultaneously without creating an unacceptable safety of flight risk, and whether or not an emergency backup system is provided for use in the event of a failure of the main system. This section shall include requirements that fall in the following typical conditions:

- a. After a periodic or specific numbered phase, i.e., sixth and twelfth inspection has been completed. If a complete functional check flight inspection has been accomplished within 150 hours of a sixth or twelfth phased inspection, no functional check flight inspection will be required.
- b. When an aircraft is removed from extended storage.
- c. After fixed flight surfaces have been replaced or removed for repairs and reinstalled.
- d. After replacement or removal and reinstallation of engine main fuel control (single engine aircraft).
- e. After movable flight surfaces have been replaced or removed for repairs and reinstalled.
- f. After flight control cables, rods or actuators have been rerouted, rerigged, readjusted or replaced. A single aileron actuator change does not normally constitute a requirement for a functional check flight.

MIL-PRF-5096F(USAF)

- g. On Fly-By-Wire aircraft, an FCF shall be performed at the discretion of the Logistics Group Commander when work has been performed on the flight control computers.
- h. After a major structural modification or repair is accomplished.
- i. After extensive maintenance or repair is accomplished of such a scope that a test flight is determined to be necessary by the Logistics Group Commander.
- j. After a propeller or propeller governor has been replaced and/or adjusted and reinstalled (single engine aircraft).
- k. After adjustments or changes have been made to the photo system requiring a flight to insure operational capability (although this is normally an "In Flight Check," certain weapon systems may need an FCF to assure all photo systems are working correctly).
- l. After three or more engines, on a four engine aircraft, two or more engines on a three engine aircraft, or one engine on a two engine or less aircraft are replaced by new or completely overhauled engines resulting from a single maintenance action.

3.2.2.3.4 Chapter 2, Section IV - Historical Documents (see Figure 6). This section shall contain a listing of specific weapon system components that require preparation of any of the historical documents (AFTO Forms) prescribed by the 00-20-series technical orders. The listing shall be by work unit code, nomenclature of components and form required.

3.2.2.4 Chapter 3, Replacement Schedule (see Figure 7). As specified by the acquiring activity, this chapter shall include those items and components that must be removed and changed for new or overhauled like items at the expiration of a specified number of flying hours, expiration of a number of cycles, or an interval of calendar time. It shall include only those items that are readily identifiable for record purposes and that fall in the following categories:

- a. Items whose failure due to location or function within a system could compromise flight safety beyond reasonable limits and acceptable risk.
- b. Items whose failure due to location or function within a system would cause an operational or support mission to abort.
- c. Items whose cost is high and whose failure might cause damage beyond economical repair.
- d. Items whose physical characteristics are subject to deterioration from calendar time, flying hours, cycles, operation, or usage.
- e. Life sustaining items such as oxygen regulators, pressurization components, egress, or jettison system components.

3.2.2.5 Chapter 4, Repair Restrictions. Note: A part number shall be preceded by the Federal Supply Class (FSC). These restrictions do not apply to normal preventative maintenance actions such as cleaning, reseating, etc.

3.2.2.5.1 Chapter 4, Section I - Base Level Restrictions (see Figure 8). This section shall contain a listing of items by work unit code, noun, FSC and part number for which base level (organizational and intermediate) repair restrictions are established. A description of repair restrictions shall be provided. Items listed shall be limited to recoverable type items. Items which are Source, Maintenance and Recoverability (SMR) coded "depot repair only" shall not be listed. The part

MIL-PRF-5096F(USAF)

number shall consist of the basic part number for the preferred item and all substitutes. Dash numbers reflecting modifications shall not be listed.

3.2.2.5.1.1 Item selection. Selection of items to be listed shall be as determined by the acquiring activity.

3.2.2.5.1.2 Repair limitation. Repair limitations shall be stated in a manner to positively identify the repair restriction within the limitation statement without any requirement for field activities to relate the text of the foreword with the statements of the restrictions. As an example, statements such as "No Repair" and "No Repairs Requiring Disassembly" shall not be used. To permit the intent of the above statements to stand completely on their own content, the terms "No Repair Authorized" and "Repair Requiring Disassembly Not Authorized" shall be used. Repair restrictions shall always be worded in the form of limitations. Statements reflecting repair authorizations shall not be used as a substitute for repair restrictions to reduce the amount of coverage required.

3.2.2.5.1.3 Technical manual references. Reference to repair technical manuals is permissible but shall be kept to a minimum. References shall be in accordance with MIL-STD-38784. Where it is practical the preference is to extract repair limitations from the applicable repair technical manuals and present them in a condensed form in Chapter 4, Section I. Where it is impractical to condense repair limitations into a brief but concise statement of repair restrictions, reference to a technical order is permitted.

3.2.2.5.2 Chapter 4, Section II - Supplemental Repair Restrictions for contingency operations. This section supplements Chapter 4, Section I, by listing additional items of equipment by work unit code, noun, FSC and part number for which repair restrictions are established for contingency operations.

3.3 Acceptance and Functional Check Flight (FCF) procedures (-6CF) manual. The requirement for the preparation of an FCF manual applies to aircraft. However, when specified by the acquiring activity, it may also be applied to other equipment as a Functional Check Manual (see 6.2). Check flight procedures shall be prepared in standard technical manual format. The manual shall contain a detailed explanation of conditions or operations to be performed or observed during the check flight. Operating requirements shall be expanded and arranged in a consecutive order simulating a recommended test flight profile. A recommended test flight profile shall be included (see Figure 9). Acceptance and functional check flight procedures shall be required only for those conditions where satisfactory performance cannot be verified by maintenance operational checks on the ground. They shall also be required for those conditions where the risk of malfunction in flight is high and would jeopardize safety of flight. For conditions requiring an FCF refer to the -6 inspection manual.

3.3.1 FCF manual arrangement. Appendix B provides the DTD for electronic delivery of the FCF manual. The manual shall be prepared in 8 ½ by 11 inch format and shall be arranged as follows:

Front Matter
Chapters (one for each FCF required crew position)
Sample Completed Checklists (when specified)

3.3.1.1 FCF manual front matter. Front matter shall be prepared in accordance with MIL-PRF-7700. The following exceptions apply: the title of the manual shall be "ACCEPTANCE AND FUNCTIONAL CHECK FLIGHT MANUAL;" the table of contents shall be prepared in

MIL-PRF-5096F(USAF)

accordance with MIL-STD-38784; the information pertaining to the purpose, use of and completion of the check flight, and disposition of the check flight discrepancies shall form the foreword (see Figure 10).

3.3.1.2 FCF manual chapters and sections (see Figure 11). A chapter shall be included for each FCF required crew position. Separate sections as required shall be prepared for each type system to be operated during a functional check flight. Chapters shall be identified with a letter for the applicable crew position, i.e., P - pilot, N - navigator, etc. This letter shall precede the page number, i.e., P-1. Classified information shall be identified in accordance with requirements of MIL-STD-38784 and handled in accordance with appropriate directives. Chapter page(s) shall list those systems/components requiring FCF verification. When applicable, requirements shall be broken out by phase of flight, i.e., Before Flight, Takeoff and Climb, Cruise, etc. The manual shall contain detailed information and procedures on how a component/system will be checked to include operating limits and other essential data. Functional check flight procedures shall be divided into chapters dependent upon type of aircraft and the number of flight crew required to accomplish the FCF requirements.

3.3.1.2.1 Source of data. Technical data relative to system/component operation shall be obtained from applicable aircraft technical manuals, flight manuals, communications publications, logistics support analysis record, etc., for the development of the manual.

3.3.1.3 Sample completed checklists. When specified by the acquiring activity, sample completed checklists shall be included as the last pages of the FCF manual.

3.4 Acceptance and/or functional check flight (-6CL) checklist. This type of checklist shall be revised, not changed, therefore, title page information shall be in an abbreviated style. Such information shall consist of the checklist title, technical manual identification number, aircraft model, distribution statement, replacement note (when applicable), authority notice (all at the top of the first [title] page) and date of issue at the bottom of the page (see Figure 12). Unless otherwise specified by the acquiring activity (see 6.2), the distribution statement shall be the same as on the parent (-6CF) manual. No other front matter is required for this checklist. The FCF checklist shall be prepared in 5 by 8 inch format. Appendix C provides the DTD for electronic delivery of the FCF checklist.

3.4.1 FCF checklist title. The title portion of the FCF checklist shall reflect the applicable type, model, and series of a system. The "Acceptance and/or Functional Check Flight Checklist" title, technical manual identification number, title blocks, and information shall be arranged in the format shown (see Figure 12). No deviation in format or contents of blocks one through six is permitted.

3.4.2 FCF checklist contents (see Figures 12 and 13). Checklist items shall be listed in sequential order in accordance with the FCF procedures manual. The checklist will be used by the crew member to record findings and sign upon completion of the FCF. Requirements or limits, i.e., 1050–1100 psi, 65%, etc. shall be given to assist flight crew personnel. Items shall be representative of a condensed version of the FCF procedures manual and shall include all essential data requirements of a functional check flight. Items included shall be indicative only of major items, systems, components or conditions that may be involved and provide the pilot/crew member with a condensed type checklist of sequenced items for accomplishing a check flight and recording pertinent data during the functional check flight. In the event multiple readings or values must be recorded, a format for this data shall be an integral part of the checklist. The checklist shall have a signature block for the pilot/crew member to sign after the functional check flight has been completed.

MIL-PRF-5096F(USAF)

3.4.3 FCF checklist arrangement. FCF checklist items shall be arranged directly under the title and requirements shall be contained on additional cards as shown (see Figure 13). When specified by the acquiring activity (see 6.2), the test flight profile (see 3.3) shall be included immediately below the title portion and checklist items shall begin below the profile. Check items for each crew member shall begin on a new card (see Figure 14). When specified by the acquiring activity, cards shall be prepared for printing on one side only (see 6.2). Single or double column formats may be used dependent upon weapon system requirements.

3.5 Work cards and checklists, general.

3.5.1 System series designation. When the work card/checklist covers more than one system series and it is necessary to identify the series to which each page applies, the system designator for which the work card/checklist page is applicable shall be placed at the upper binding edge of each page, i.e., F-16C/F-16D.

3.5.2 Work card/checklist foreword. The foreword shall begin with the following standard paragraph:

“This (work card/checklist) is a step-by-step guide in abbreviated form for use as a reference to ensure accomplishment of selected tasks by a predetermined sequence procedure. The intent of this (work card/checklist) is to eliminate the probability of omission of a step in the accomplishment of the intended task. The procedures contained herein are presented in the shortest practical form for use by qualified personnel and are not intended to provide full technical instructions. This (work card/checklist) provides, in an abbreviated form, procedures for (appropriate tasks, inspections, etc.). These procedures are derived from, but do not replace, the detailed procedures contained in Technical Orders (TO). When malfunctions occur reference to the TO shall be made.”

3.5.3 Preliminary instructions. The preliminary instructions shall precede the work card/checklist task and shall contain information pertinent to accomplishment of the task, such as applicable technical manuals, mechanic or Air Force Specialty Code (AFSC) types required, and special tools or equipment required.

3.5.4 Nomenclature. First use of a nomenclature used in a work card/checklist shall be identical with the nomenclature used in any manual to which the work card/checklist applies. Further use of a nomenclature in a work card/checklist may be abbreviated. Abbreviations shall be in accordance with MIL-STD-38784.

3.6 Work cards.

3.6.1 Work card requirements. Separate and distinct work card sets, as they apply to the breakout of the inspection requirements chapters of the -6 inspection manual; e.g., system(s) or end item(s) of equipment, etc., shall be prepared for each type of inspection; i.e., Preflight/Preoperation, Basic Postflight/Postoperation, Hourly Postflight/Postoperation, Periodic/Phased/Isochronal, etc.,. When specified by the acquiring activity, the preflight/preoperation shall be combined with the basic postflight/postoperation (equipment using the periodic or phased concept) or the thruflight (equipment using the isochronal concept) into one set of work cards (see 6.2). Work cards shall be prepared for supplemental periodic inspection requirements which become due in multiples of the particular periodic (see Figure 15). If no inspection requirements manual is prepared, the work cards shall include all inspections, including event orientated special inspections.

MIL-PRF-5096F(USAF)

3.6.2 Work card format. Work cards shall be prepared in horizontal, 8 by 5 inch format. Unless otherwise specified by the acquiring activity, work cards shall be arranged head to head. When specified, work cards shall be arranged head to foot. Spacing and arrangement shall be utilized to achieve uniformity. Individual inspection requirements shall be identified by double spacing between each requirement.

3.6.3 Work card arrangement. Appendix D provides the DTD for electronic delivery of work cards. Appendix E provides the DTD for electronic delivery of flow/sequence charts. Work card sets shall be arranged as follows:

Front Matter
 Work Area Diagrams
 Inspection Requirements
 Lubrication Requirements (Lubrication may be included with inspection items)
 Flow/Sequence Charts

3.6.3.1 Work card front matter. Front matter shall be prepared in accordance with MIL-STD-38784 except the List of Effective Pages shall be titled List of Effective Cards (see 3.6.4.1).

3.6.3.2 Work area diagram cards. Work area diagram cards (see Figure 16) shall be prepared to reflect the work area breakdown for each weapon/support system required for each type of inspection.

3.6.3.3 Inspection requirements (see Figure 17). The inspection requirements work cards shall reflect the requirements contained in chapters 1 (one) and 2 (two) of the -6 inspection manual for all areas/parts requiring inspection, lubrication, and servicing. If required by the acquiring activity work cards may be developed as self-contained documents and only need to be referenced in the -6 inspection manual (see 6.2). The card(s) shall cover systems, assemblies, or components logically grouped together to show an easily understood and orderly progression of inspection requirements. The cards shall contain the appropriate inspection requirement statements on the face of the card and inspection illustrations on the reverse side. The illustration shall reflect the alphanumerically identified inspection/servicing locations specified on the face of the card. Special enlarged and detailed views shall be used to identify otherwise obscured inspection items. Additional information essential to the work card requirements may be obtained from maintenance manuals and other current technical data. Work card information shall include the listing of specified pressures, torques, clearances, tolerances, fluid levels, notes, cautions, warnings, etc. When an inspected item requires a servicing action, such as hydraulic accumulator servicing, the inspection requirement shall indicate the service reference required, i.e. "Check hydraulic accumulator for proper service (if service is required refer to JG 12-10-05)". Should deviations be required by the acquiring activity (e.g. for different models of equipment), all information of a general nature, such as keys, added symbols, effectivity codes and explanatory notes shall be shown on the foreword cards (see 6.2). Notes shall be brief and explicit.

3.6.3.4 Lubrication requirements (see Figure 18). The lubrication work cards shall show periodic lubrication requirements for all parts. Cards shall cover systems, assemblies, or components logically grouped together to show an easily understood and orderly progression of lubrication requirements. The cards shall contain the appropriate lubrication requirement statements on the face of the card and lubrication illustrations on the reverse side. The illustration shall reflect the alphanumerically identified lubrication locations specified on the face of the card, the lubricants required for each location, and a symbol indicating the method of application. Special enlarged and

MIL-PRF-5096F(USAF)

detailed views shall be used to identify otherwise obscured lubrication items. Lubrication work cards text shall be brief and explicit, providing the necessary lubrication information and shall present complete lubrication requirements without need for other manuals. Should deviations be required by the acquiring activity (e.g. for different models of equipment), all information of a general nature such as keys, added symbols, effectivity codes and explanatory notes shall be shown on the foreword cards (see 6.2). The lubrication requirement work cards shall be included within specific mechanic type groups.

3.6.4 Work card preparation. Work cards shall be prepared in accordance with Figures 17 and 18, and the following.

3.6.4.1 Card number. Each work card shall be assigned one number which shall appear on the front and back of the card (including front matter cards). Each card shall be numbered consecutively with a three digit number starting with 001 for the first card of each set, except front matter cards which shall be numbered in accordance with MIL-STD-38784. Where the set is divided into chapters, card numbers shall be preceded by the chapter number. For example: Chapter 1, card 10 would be 1-010; Chapter 2, card 22 would be 2-022. These blocks do not apply to the phased inspection cards (see 3.6.4.1.1).

3.6.4.1.1 Phased inspection card number. Each card shall be assigned a sequential number which shall appear on the front and back of the card. When specified by the acquiring activity (see 6.2), card numbers shall be prefixed according to their groupings or applicable phase (e.g. first phase, second phase, etc.).

3.6.4.2 Work area(s). These blocks shall list the work area or areas in which the tasks listed on the card shall be performed. The work area numbers shall be obtained from the work area diagram. When more than one work area is involved, the work area numbers shall be listed in the order in which the areas will be occupied.

3.6.4.3 Type mechanic required. This entry shall identify the type mechanic or specialist (e.g., AIRCRAFT, ENGINE, HYDRAULIC, etc.) required to accomplish the tasks listed on the card. Where assistance is required by a type mechanic other than that listed, an "Assisted by mechanic type" note shall be added to the beginning of the task.

3.6.4.4 Mechanic number required. This entry shall identify the recommended quantity of specialists required to accomplish the tasks outlined on the work card.

3.6.4.5 Card time. This entry shall indicate the amount of time needed to accomplish the tasks prescribed by the card. This shall be the total time required for all items reflected in the body of the card. Time shall be indicated in hours and minutes; i.e., 02:15, 01:40, 00:25, etc. All time shall be reflected to the nearest minute and reflected in four digits.

3.6.4.6 Technical manual identification and change numbers. The technical manual identification number and change number shall be placed in the respective blocks. Neither the publication nor change dates shall be given.

3.6.4.7 Body heading (inspection requirements). An entry shall be made in this block to indicate the type of inspection for which the card set applies. For example: Preflight, Basic Postflight, Periodic, 100 hour, 200 hour, 180 days, etc.

MIL-PRF-5096F(USAF)

3.6.4.8 Electrical power.

- a. When power is required during the accomplishment of the tasks entered on the card, the word "ON" shall be placed in this block.
- b. When it is mandatory that power be off during the accomplishment of the tasks entered on the card, the word "OFF" shall be placed in this block.
- c. When power may be on or off during the accomplishment of the tasks entered on the card, this block shall be left blank.
- d. Power on and off requirements shall normally not be stated on the same card except when necessary for continuity of the operation, in which case, the word "ON/OFF" shall be placed in this block and each power ON requirement shall be preceded by an "at" (@) symbol in the body of the card.

3.6.4.9 Service. When specified by the acquiring activity, this block shall be completed (see 6.2), otherwise it shall be left blank. When service must be interrupted to accomplish the tasks on the card, the word "OUT" shall be placed in this block. When service need not be interrupted to accomplish the tasks on the card, the word "IN" shall be placed in this block. When there are both in and out of service conditions relating to the tasks on the card, the words "IN/OUT" shall be placed in this block.

3.6.4.10 Figure. Unless otherwise specified by the acquiring activity (see 6.2), this block shall be left blank. When specified by the acquiring activity, figure numbers or other identifier shall be assigned to the figures on each card and this shall be inserted in the figure block.

3.6.4.11 Man-minutes column. The man-minutes required to accomplish each individual inspection item shall be entered in this column. If work cards contain a series of short time items, a horizontal dash may be placed on the line for the first and last items of the group and the time may be made as a single entry midway between the two horizontal dashes.

3.6.4.12 Work area column. The work area in which each item or items will be accomplished shall be listed in this column.

3.6.4.13 WUC system column. The first two digits of the work unit code are used to designate a system. Entries shall be made in this column to denote the system WUC number for each item. Requirements of a general nature, which cannot be coded to a specific system, shall not be coded. Wire bundles are an example of this category.

3.6.4.14 WUC subsystem column. Entries shall be made in this column to denote the WUC subsystem and component number for each item. Coding of other requirements shall be accomplished to the appropriate level. This level may be to the third, fourth, or fifth digit. Routine servicing and lubrication items shall not be coded since these items are covered by support general codes.

3.6.4.15 References (work cards). All requirements for operational checks or adjustments shall include specified instrument readings, tolerances, etc., or reference to applicable technical manuals in which the information may be found. Requirements to be included in the work cards are not collectively reflected in a single manual. Therefore, these requirements must be obtained from

MIL-PRF-5096F(USAF)

several sources, including service tests, service experience, contractor's recommendations, and technical manuals.

3.6.4.16 Lubrication symbols (see Figure 18). A lubrication symbol shall consist of a North Atlantic Treaty Organization (NATO) number (reference TO 42B1-1-15) or a specification number, an application symbol (see Figure 19), and an alphanumeric identifier corresponding to the lubrication location specified on the face of the card. Special notes shall be included when necessary. The lubrication symbol shall have a leader line extending to the point on the diagram, or drawing, that requires servicing. The symbol shall designate one point of servicing; however, several leader lines may branch from the main leader to designate adjacent points of servicing.

3.6.5 Inspection requirements cards. If the inspection requirement cards are divided into Preflight, Basic Postflight, etc., each group shall be preceded by a foreword card. The inspection work cards shall be arranged so that preparation requirements precede the inspection requirements. These requirements shall identify the tasks necessary to prepare the system/equipment for each inspection, e.g., listing of special tools, test equipment, etc. Inspection work cards of each set shall be arranged so as to provide distinct groups for each type of mechanic or specialist required to perform the inspection. In the case of periodic/phased/isochronal inspections, the set shall be divided into major groups and subgroups; that is, if predock work cards are provided, they would be the first group, the dock inspection work cards would be the next group and the postdock cards would be the third group, each group subgrouped by mechanic type.

3.6.5.1 Special inspections. Special inspection requirements to be accomplished on an event oriented basis shall not have inspection work cards prepared except as specified in 3.6.1.

3.6.5.2 Servicing. Servicing work cards shall be prepared to cover all items that require scheduled service, i.e., aircraft batteries, hydraulic reservoirs, etc.

3.6.5.3 Phased inspection work cards.

3.6.5.3.1 Workload requirements. Determination of the total workload requirements shall be as specified by the acquiring activity and shall reflect a breakdown of the number of items and man-hours required by interval groupings of basic and hourly postflight and subsequent hourly intervals for which inspections are prescribed. A listing of equipment, by systems, for which there is an inspection requirement, shall be as specified by the acquiring activity and shall include the inspection interval, the time required to make the inspection, and the work areas of the aircraft or equipment in which the item is located.

3.6.5.3.2 Interval. Determination of the interval at which phased inspections will be made shall be as specified by the acquiring activity.

3.6.5.3.3 Number of packages. Inspection requirements shall be grouped into approximate equal workloads for each package. As far as possible, associated items shall be grouped together. If an area is opened up for inspection or lubrication, then any other necessary inspection or lubrication in the same area shall be phased in at the same time. The workload shall be distributed in such a way as to avoid repeated movement of access or ground support equipment, etc. Care shall be taken to put all items located in the same difficult access area in the same package to minimize time involved in gaining access to the equipment.

MIL-PRF-5096F(USAF)

3.6.5.3.4 Combining packages. Instructions on whether phased packages can be combined and the number of packages authorized at one time for an approved inspection shall be as specified by the acquiring activity and reflected in the foreword of the phased work cards. Typical statements are: "Accomplishment of multiple packages for interval greater than the basic phased interval is not authorized," or "Combining 2 packages for a 50 hour interval or 4 packages for a 100 hour interval is authorized. Combination of more than 4 packages for other intervals is not authorized."

3.6.5.4 Periodic inspection work cards. Periodic inspection work cards shall reflect the requirements in the inspection manual and shall provide for a complete inspection of the aircraft or equipment.

3.6.5.5 Isochronal inspection work cards. Isochronal inspection work cards shall reflect the requirements in the inspection manual. The following inspection work cards shall be included in isochronal inspections.

- a. Home station check inspection work cards.
- b. Minor inspection work cards.
- c. Major inspection work cards.

3.6.6 Flow/Sequence charts. In order to prepare the most realistic flow/sequence charts, the contractor shall prepare a flow/sequence chart to be used for a trial run of an actual inspection and shall make adjustments to the chart as necessary. Work cards covering critical work areas shall be scheduled first. Work cards covering work to be performed with power on shall be scheduled next. The balance of the work cards shall be considered noncritical and shall be plotted on the chart in order to complete the most realistic work schedule. Care shall be taken not to overcrowd any work area when plotting is being accomplished.

3.6.6.1 Series of charts. Because the scope of the inspection varies for each numbered periodic/phase or major/minor isochronal inspection, a series of flow/sequence charts shall be prepared. The number and type of flow/sequence charts required shall be approved by the acquiring activity.

3.6.6.2 Preparation (charts). Flow/sequence charts shall be provided in one standard size (36 by 24 inches). The needed portions of additional blank charts shall be attached below or to the right of the basic blank chart to provide a working copy of the size required for the particular weapon system. Sufficient space shall be provided to the right of the chart to permit the posting of miscellaneous information or to post maintenance to be performed by specialist not normally listed (sheet metal, welding etc.) with the maintenance personnel in the printed portion of the chart. A half inch space shall be provided at the bottom of the chart for use by maintenance personnel to list the major work items that are to be performed.

3.6.6.2.1 Heading blocks.

3.6.6.2.1.1 Mechanic type and applicable cards blocks. These blocks shall reflect the groups of work cards required to accomplish the inspection. The "Mechanic Type" column shall list the types of mechanics required. The associated "card" blocks shall list the cards to reflect which cards are to be accomplished by each type of mechanic.

MIL-PRF-5096F(USAF)

3.6.6.2.1.2 “On EWO” (Emergency War Orders) block. When specified by the acquiring activity, this block shall be included on the flow/sequence chart. All work cards that can or must be accomplished prior to placing the weapon system on EWO alert status shall be listed. This shall cover those work cards that can be accomplished simultaneously and those work cards that must be accomplished in sequence.

3.6.6.2.1.3 “Off EWO” block. When specified by the acquiring activity, this block shall be included on the flow/sequence chart. All work cards that, when accomplished, will place the weapon system into non-EWO status shall be listed. This shall cover those work cards that can be accomplished simultaneously and those work cards that must be accomplished in sequence.

3.6.6.2.1.4 Chart work area diagram. The work area diagram block on the flow/sequence chart shall be identical to the work area diagram card of the related work card set.

3.6.6.2.1.5 Chart title. The title shall show the inspection to which the chart applies and the model/type equipment. The title shall also contain a statement giving the technical manual identification number and date of the work cards to which the chart applies

3.6.6.2.1.6 Chart identification. The chart shall contain blocks listing the technical manual (chart) identification number, chart number (i.e., 1 of 3, 2 of 3, 3 of 3), and chart (publication) date.

3.6.6.2.1.7 Local use blocks. The blocks containing the titles “H-Hour,” “Date,” “Dock Chief” and “Aircraft No.” shall be provided for local usage and shall be left blank except for the title.

3.6.6.2.2 “Work area” Portion. The work area portion of the chart shall contain a listing of work areas and shall reflect a complete work schedule of all inspection work cards for which the chart is prepared.

3.6.6.2.2.1 Electrical Power status line. A line to reflect the electrical power status of the weapon system for the entire period of the inspection shall be provided in the chart body. This electrical power status line shall appear two lines below the last work area listed.

3.6.6.2.3 Maintenance Personnel portion. The maintenance personnel portion shall contain a listing of the predetermined number of mechanics and specialists required to accomplish the inspection. This portion of the chart shall reflect a complete work schedule of all applicable inspection work cards to be accomplished by each individual listed. The crew assignment portion of the chart shall begin immediately below the electrical power status line and shall be clearly set off on the chart by utilizing a double horizontal line for the required heading.

3.7 Checklists (see Figure 20). Appendix F provides the DTD for electronic delivery of checklists.

3.7.1 Checklist front matter. Front matter shall be prepared in accordance with MIL-STD-38784.

3.7.2 Checklist size and arrangement. Unless otherwise specified by the acquiring activity, checklists shall be prepared in 5 by 8 inch size and be arranged head to head (see 6.2). When specified by the acquiring activity, checklists shall be prepared in 8 ½ by 11 inch size and/or be arranged head to foot. When arranged head to foot, the technical manual identification number shall be at the upper right and, the page and change numbers shall be in the lower right.

MIL-PRF-5096F(USAF)

3.7.3 Style and format of text pages. Style, format, and numbering shall be in accordance with MIL-STD-38784 except that if the checklist chapters bear titles such as Normal Procedures, Emergency Procedures, Alert Procedures, etc., the pages of each chapter shall be numbered N-1, N-2; E-1, E-2; A-1, A-2; etc. Text shall be single spaced, except between procedural steps where double spacing shall be used.

3.7.4 Illustrations. Illustrations shall be included only when absolutely necessary to preclude continuous reference to critical data in applicable maintenance manuals. They shall be limited to charts or graphs that contain information which is variable such as temperature or humidity stabilization prior to testing.

3.7.5 Maintenance/operation (non-flight crew) checklists. The parent manuals shall be used as the source documents for obtaining the basic checklist requirements. Checklists shall condense required tasks. They shall standardize, control, integrate, and time phase tasks. They shall be prepared to prevent potential injury or loss of life to personnel. Tasks shall be listed in the most logical and convenient sequence of accomplishment. Checklists shall tell what to do and when it shall be accomplished. They shall not contain instructions on how to do a task.

3.7.5.1 Maintenance/operation (non-flight crew) checklist format (see Figure 21). Checklist tasks shall be presented in a demand/response format, when practical, with the demands at the left and the responses at the right. The responses shall be in upper case letters or figures. Blank lines shall be provided to the right of the responses as check spaces. If insufficient space is available, the blank line shall be entered below each response. Normal readings (and tolerances, if applicable) shall be shown in the response column. Leaders shall be inserted between the columns; e.g. "Demand...Response". The demand/response presentation need not consist of a complete sentence. The function title shall be in upper case letters and shall be underlined. All controls such as switch names and switch positions shall be as marked on the hardware. All other tasks shall have only the first letter of the first word capitalized. Each new function within a checklist shall be started on a new page. When checklist procedures are written for individual performance (such as motor vehicle inspection and operation), the demand/response format need not be followed.

3.7.5.2 System/Subsystem/Subject Number (S/S/SN) (maintenance checklists only). When checklists are prepared from parent organizational maintenance manuals produced in accordance with MIL-PRF-83495, S/S/SN numbers shall be included on the applicable pages in accordance with MIL-STD-38784.

3.7.5.3 References (other manuals). The applicable maintenance and/or operation manual may be referenced at the end of the task in order to provide additional information to accomplish, amplify or clarify a procedure, or to correct a discrepancy or malfunction that may develop when accomplishing the task. Tasks shall be grouped into major functions.

3.7.5.4 Emergency procedures. Emergency procedures shall be included within the normal checklist pages and shall also be contained at the end of the checklist. If the same emergency is likely to occur in more than one phase of the checklist, the emergency procedures shall be repeated for each occurrence. Emergency procedure pages at the end of the checklist shall be numbered separately as required by 3.7.3.

3.7.6 Operations (flight crew) checklists. In addition to the requirements of the detailed content specifications, the requirements listed in the following paragraphs (see 3.7.6.1 through 3.7.6.2.1) apply.

MIL-PRF-5096F(USAF)

3.7.6.1 Scroll checklists. Scroll type checklists shall show the applicable technical manual identification number at the beginning and end of the scroll. Scroll checklists shall be prepared on UV emulsion, black image, sensitized on one side, matte on reverse side, .0043 inch thick Mylar polyester film (Technifax part number PM3200M or equivalent). Film shall be trimmed to form a finished size of 2 ¾ by 96 (maximum) inch size. The print area shall be 2 ½ by 91 (maximum) inch size. Scroll checklists shall be revised rather than changed when changes to the material are required.

3.7.6.2 Clipboard style checklist. Checklists prepared for attachment to a clipboard shall have an extra one-half inch blank space at the top of each odd numbered page and at the bottom of each even numbered page. Pages shall be arranged head to foot.

3.7.6.2.1 Insert. For clipboard style checklists, a transparent plastic sheet shall be placed immediately before the Take Off and Landing Data page(s). This sheet shall be at least equal in strength to the checklist paper and shall be of such quality that it may be written upon with grease pencil.

4. VERIFICATION.

4.1 Verification. Unless otherwise specified in the contract or purchase order:

- a. Validity of the accuracy and scope of the technical content, shall be the responsibility of the contractor (see 6.2).
- b. The contractor shall provide suitable facilities to perform the validation functions specified herein.
- c. The contractor's existing quality assurance procedures shall be used.
- d. The government reserves the right to review any of the verifications when such reviews are deemed necessary to ensure supplies and services conform to the prescribed contractual requirements.

4.1.1 Minimum verification requirements. As a minimum, verification shall ensure the following:

- a. Suitability of the technical manuals, functional check flight procedures and checklists, inspection work cards, and checklists for the intended maintenance environment.
- b. Usability by the intended users.
- c. Compatibility with other Government systems.

4.1.2 Compliance. All technical manuals, functional check flight procedures and checklists, inspection work cards, and checklists shall meet all of the requirements of sections 3 and 5 of this specification and the appropriate DTD Appendix, as required by the acquiring activity (see 6.2). The requirements set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any requirements in this specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Use of sampling inspections shall be at the discretion of the contractor, and in accordance with commercially acceptable quality assurance procedures. However, use of sampling in QA procedures does not

MIL-PRF-5096F(USAF)

authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

5. PACKAGING.

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES.

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Technical manuals, work cards, and charts prepared in accordance with this specification are intended for use by Air Force organizational, intermediate and depot maintenance activities as a guide for performing preventative maintenance (i.e., isochronal, programmed depot maintenance, combined type, etc.) found in the TO 00-20-series technical manuals, on Air Force equipment. FCF manuals and checklists are intended to be used to ensure the aircraft (equipment) is fit for flight (use). Checklists are intended to be used by operations and maintenance personnel to ensure that no step is overlooked.

6.2 Acquisition requirements. Acquisition documents must specify the following:

- a. Title, number, and date of this document.
- b. Issue of the DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1, 2.2.2, 2.2.3).
- c. Types of manuals required (see 3.1).
- d. If more than one inspection and maintenance requirements manual may be prepared (see 3.2.1).
- e. Maximum safe interval between inspections of weapon system (see 3.2.1.1)
- f. Basis for inspection and maintenance requirements (-6) manual (see 3.2.1.1.1)
- g. If component coverage shall be other than as specified in this document and, if so, items exempt from coverage (see 3.2.1.7).
- h. If additional information applicable to a specific weapon system or any modifications to the foreword is required (see 3.2.2.1).
- i. If any specified sections in chapter 1 of inspection and maintenance requirements (-6) manual shall not be used (see 3.2.2.2).
- j. If additional sections in chapter 1 of inspection and maintenance requirements (-6) manual shall be included and type required (see 3.2.2.2).

MIL-PRF-5096F(USAF)

- k. Inspection concept (periodic, isochronal, or phased) to be used (see 3.2.2.2.6).
- l. If any specified sections in chapter 2 of inspection and maintenance requirements (-6) manual shall not be used (see 3.2.2.3).
- m. If additional sections in chapter 2 of inspection and maintenance requirements (-6) manual shall be included and type required (see 3.2.2.3).
- n. Items and components that must be removed and changed for new or overhauled like items at the expiration of a specified number of flying hours, expiration of a number of cycles, or an interval of calendar time (see 3.2.2.4).
- o. Selection of items to be listed in Chapter 4, Section I - Base Level Restrictions (see 3.2.2.5.1.1).
- p. If a functional check manual for equipment other than aircraft shall be prepared (see 3.3).
- q. If sample completed checklists shall be included in the acceptance and functional check flight (-6CF) manual (see 3.3.1.3).
- r. If the distribution statement for the acceptance and functional check flight checklist shall be other than as specified in this document (see 3.4).
- s. If the test flight profile shall be included in the acceptance and functional check flight checklist (see 3.4.3).
- t. If the acceptance and functional check flight checklist shall be prepared for printing on one side only (see 3.4.3).
- u. If the preflight/preoperation inspection shall be combined with the basic postflight/postoperation (periodic or phased concept)/thruflight (isochronal concept) inspection (see 3.6.1).
- v. If workcards shall be arranged other than head to head (see 3.6.2).
- w. If deviations are required for inspection requirements (see 3.6.3.3).
- x. If deviations are required for lubrication requirements (see 3.6.3.4).
- y. If phased inspection card numbers shall be prefixed (see 3.6.4.1.1).
- z. If the service block shall be completed (see 3.6.4.9).
- aa. If the figure block shall be completed (see 3.6.4.10).
- ab. Workload requirements for phased inspection work cards (see 3.6.5.3.1).
- ac. A listing indicating equipment, by system, for which there is an inspection requirement (see 3.6.5.3.1).
- ad. Interval at which phased inspections will be made (see 3.6.5.3.2).
- ae. Instructions on whether phased packages can be combined and the number of packages authorized at one time for an approved inspection (see 3.6.5.3.4).
- af. If the "On EWO" and "Off EWO" blocks shall be included on flow/sequence charts (3.6.6.2.1.2 and 3.6.6.2.1.3).
- ag. If checklist size shall be other than as specified in this document (see 3.7.2).
- ah. If checklist arrangement shall be other than head to head (see 3.7.2).

MIL-PRF-5096F(USAF)

ai. Packaging requirements (see 5.1).

6.3 Technical manual acquisition. The requirement for technical manuals should be considered when this specification is applied on a contract. If technical manuals are required, specifications and standards that have been cleared and listed in DoD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL) must be listed on a separate Contract Data Requirements List (DD Form 1423), which is included as an exhibit to the contract. The technical manuals must be acquired under separate contract line item in the contract.

6.4 Coordination. The procuring activity, after coordination with the using command(s), shall specify the publication(s) required. An inspection requirements manual and work card set shall be developed for each system i.e., aircraft, C-E, support equipment, etc.

6.5 Additional information. Additional information relative to Air Force aircraft, missile and space weapon inspection systems, policies, and procedures may be obtained from the 00-20-series technical orders.

6.6 Definitions. To clarify the terms used throughout this specification, the following definitions are given:

6.6.1 Acceptance inspection. An inspection that will be performed on all newly assigned or extensively modified aircraft, drones, missiles, and support equipment to determine mechanical fitness for flight or use and which usually requires an FCF or Functional Check.

6.6.2 Accessible. A term applied to equipment that may be inspected without further disassembly or removal of covers, cowling, closures, panels, etc, other than those required to accomplish the more specific requirements applicable to the particular inspection.

6.6.3 Basic postflight/postoperation inspection. This inspection is a visual examination of certain components, areas, or systems, to assure that no defect exist which would render the aircraft/equipment unsuitable for flight/use. Primary items check are as follows:

- a. Items that due to their operational characteristics are subject to loss of lubricant, fluids, air, etc., during flight/operation.
- b. Items that due to and during flight/operation are subject to damage such as impact, foreign objects, etc.
- c. Items of critical nature that are subject to developing defects which are not readily apparent to the users during operation.
- d. Items, such as down locks, safety pins, and protective covers, that must be installed prior to maintenance.

6.6.4 Cautions. A caution is a short message which calls attention to an essential operating or maintenance procedure, practice, condition, statement, etc., which, if not strictly observed, could result in damage to, or destruction of equipment or loss of mission effectiveness.

6.6.5 End item. Entity of hardware which is not to be installed in another piece of equipment. The end item for the weapon/support system could be the aircraft, rocket, drone, training device, etc.

MIL-PRF-5096F(USAF)

6.6.6 End of runway inspection. This inspection detects critical defects which may have developed during ground operation. Items checked are those subject to damage during ground operations or are not readily apparent until after operation begins. Also checked are items such as panels and doors, that must be secure prior to flight/operation, and down locks and protective covers, that must be removed prior to flight/operation.

6.6.7 Excessive. Condition which has progressed to the degree that, if not corrected, could result in failure or malfunction of the component prior to the next scheduled accomplishment of the requirement which directed attention to the condition.

6.6.8 Functional system. Those units which make up a system without regard to whether the units are hydraulic, electrical, pneumatic, electronic, or mechanical in nature. The components which comprise a functional system are those components which contribute to the actual function or activation of the system. For example, the components which supply the hydraulic source of power are included under the hydraulic system, whereas a flight control actuator which is hydraulically operated is included under the flight control system, which is a functional system.

6.6.9 Home station check inspection. Home station check inspections are accomplished after return from a long range mission or at expiration of a short term calendar period. Home station check inspections are accomplished in conjunction with the minor and major inspections.

6.6.10 Hourly postflight/postoperation inspection. An inspection which includes those requirements to be accomplished at a specified interval (hours/cycles) or multiples of the specified interval that are necessary to assure no condition exists in a known problem area that would be detrimental to the safety of flight operation. These requirements augment the basic postflight/postoperation requirements. Included are requirements that fall in the following categories:

- a. Items that due to their installation characteristics are subject to excessive chafing and insecure mounting.
- b. Items that are subject to extreme heat conditions.
- c. Items that due to their design characteristics are subject to developing leaks or cracks.
- d. Items that require more frequent verification of serviceability or operation than the periodic/phased/isochronal inspection interval.
- e. Items that require more frequent verification of service than the periodic/phased/isochronal inspection interval.

6.6.11 Isochronal inspections. Isochronal inspections are accomplished based upon calendar periods of equal duration and recurring at regular intervals.

6.6.12 Major inspection. Major inspections consist of inspections to determine if conditions exist which could result in failures or malfunctions prior to the next scheduled inspection and are more searching in scope than the home station check and minor inspections.

6.6.13 Minor inspection. Minor inspections consist of inspections to determine if conditions exist which could result in failures or malfunctions prior to the next scheduled inspection and are more searching in scope than the home station check inspection.

MIL-PRF-5096F(USAF)

6.6.14 Notes. A note is a short message which describes an unusual procedure or condition to which special attention must be paid for any reason (but it may not replace a caution or warning).

6.6.15 Parent manuals. Parent manuals are those that contain complete operational and maintenance instructions and from which checklist items are extracted.

6.6.16 Periodic inspection. Periodic inspections are accomplished upon accrual of a number of flying hours, operating hours, or at the expiration of a calendar period.

6.6.17 Planned inspection concept. Method of performing specific preventive maintenance and inspection requirements on a scheduled basis and predetermines the numbers and skills of maintenance personnel required to accomplish the predictable portion of the inspection. It effectively utilizes maintenance personnel in accordance with their skills against a time schedule using work cards, and sequence charts.

6.6.18 Preflight/preoperation inspection. A (flight) preparedness inspection that checks items that, due to environment, are subject to damage by outside forces, such as ground equipment, maintenance crews, elements of nature, etc. This inspection also checks items that, due to design characteristics, normally require service or verification of service prior to the first flight/operation of the day.

6.6.19 Preventive maintenance. The normal inspection, upkeep, and lubrication of equipment which may be required to maintain serviceability of equipment which has been subjected to usage, wear and deterioration.

6.6.20 Special inspection. An inspection which supplements other inspections (daily, preoperation, periodic, flying hours, operating hours, or calendar) and are accomplished because of specific circumstances or upon occurrence of specific conditions or events. This may also include those requirements having a prescribed interval or frequency which do not coincide with the scheduled periodic, phased or isochronal inspection.

6.6.21. Special inspection and maintenance requirements. The special inspection acceptance and functional check flights, depot level inspection, and maintenance level requirements are performed to determine item or weapon system serviceability. Special inspections include the following:

- a. Functions to be accomplished at the expiration of a specified number of flying hours, equipment hours of operation, and lapse of calendar time.
- b. Functions to be accomplished after the occurrence of a specified or unusual condition or incident, and when accepting an aircraft after extensive modifications.

6.6.22 Support equipment. All articles required to make a weapon system, command and control system, support system, advanced objective, subsystem, or end item or equipment operational in its intended environment. This includes all equipment required to install, launch, arrest, guide, control, direct, inspect, test, adjust, appraise, gage, measure, assemble, disassemble, handle, transport, safeguard, store, actuate, service, repair, overhaul, maintain, or operate the system, subsystem, end item, or component. This comprises special tools and test devices, including measurement standards required for support of items supporting equipment.

MIL-PRF-5096F(USAF)

6.6.23 Thruflight inspection. This inspection is a between flights general visual examination of certain components, areas, or systems, to assure that no defects exist which would render the aircraft unsuitable for flight continuance.

6.6.24 Verification. Verification, in the context of this specification, equates to the contractor's quality assurance program for validating the content of the WP/SWP. Suggested validation methods include:

- a. Actual performance. Using production configured equipment, hands-on performance of the procedure using the technical instructions as written.
- b. Simulation. Using production configured equipment and the technical manual procedure, simulate the actions required by comparing the task steps to the hardware, while not actually removing any equipment.
- c. Table top analysis. Primarily for non-procedural data, compare the technical content to source data to ensure the technical accuracy and depth of coverage.

6.6.25. Warnings. A warning is a short message which calls attention to an essential operating or maintenance procedure, practice, condition, statement, etc., which, if not strictly observed, could result in injury to, or death of personnel or long term health hazards.

6.6.26 Work unit code. A code used to identify the equipment for a weapon/support system by system, subsystem and component breakout consisting of a combination of five numeric and alphabetic characters. These codes are contained in a Work Unit Code (-06) Manual.

6.7 Subject term (key word) listing.

Acceptance Inspection
 Checklist
 Flow/Sequence Chart
 Functional Check Flight
 Inspection Manual
 Isochronal Inspection
 Periodic Inspection
 Phased Inspection
 Work Card

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MIL-PRF-5096F(USAF)

1F-13A-6

FOREWORD

1. PURPOSE AND SCOPE.

This manual contains complete requirements for accomplishing scheduled maintenance on this aircraft during its entire service life. It establishes inspection, accessory replacement, and functional check flight requirements for the aircraft and airborne equipment. The requirements prescribed by this manual are primarily those which are technical in nature and the conditions listed are intended to direct attention to known problem areas where defects or malfunctions would prevent the items from performing their designed functions within prescribed limits. These requirements are developed for new aircraft through maintenance engineering experience and comparison of similar installations on in-service aircraft. They are refined and changed during the service life of the aircraft by continually evaluating the performance of the equipment, results of scheduled maintenance, and through study of factual operating data for the primary use of the aircraft. The interval between the accomplishment of a requirement is intended to be the longest period of time that an item or component can safely operate without an inspection or observation. When an aircraft is operated in other than the primary purpose of major use class, the requirements have been adjusted accordingly, if necessary, and the requirements and inspection intervals are the maximum and should never be exceeded. Local conditions (type of missions, special utilization, geographical locations, etc.) may dictate more frequent inspection or replacement, or more thorough inspections. Therefore, commands, local commanders, and their maintenance officers are expected to exercise their prerogative to increase the frequency or scope of any requirement as required.

1.1 Limitations. This manual does not contain detailed instructions for troubleshooting to find causes for malfunctioning, nor does it contain instructions for repair, adjustment, or other means of rectifying defective conditions. Proper installation of a piece of equipment or accessory is not necessarily within the scope of this manual as adequacy and completeness of installation will have been determined at the time of installation. Further, it does not normally contain informative or precautionary data such as notes, cautions, and warnings. Applicable portions of the appropriate maintenance manuals should be consulted to obtain the maintenance instructions as they are beyond the scope of this manual.

1.2 Applicability. This manual may pertain to some or all types and series of a model of aircraft and may, therefore, contain requirements applicable to specific equipment that is not installed on an individual aircraft. When this situation is encountered, those requirements that are not applicable should be disregarded.

1.3 Performance of inspections. The inspections prescribed by this manual will be accomplished at specified periods by Air Force organizational activities with assistance by intermediate maintenance and depot activities when required. Compliance with the provisions of this manual is required to assure that latent defects are discovered and corrected before malfunctions or serious failures occur.

2. INSPECTION REQUIREMENTS.

The inspection requirements establish what equipment is to be inspected, when it is to be inspected, and what conditions are to be sought. The requirements are designed to direct the attention of maintenance personnel to components and areas where defects are suspected to occur as a result of usage under normal operating conditions. They are not intended to provide coverage for routine cleaning, washing, etc, nor are they designed to lead to the detection of isolated discrepancies that are the result of carelessness, abuse, or poor maintenance practices. During accomplishment of the specified requirements directed by this manual, maintenance personnel should observe both the equipment being inspected and the components in the surrounding area for defects or irregularities not within the scope of the requirements. Inspections requiring the use of electrical power for accomplishment are identified by the commercial "at" symbol (@) preceding the requirements. Requirements in this manual are not in sequence; applicable work cards will specify the sequence.

2.1 Replacement Schedule. The replacement schedule lists items whose expected service life has been determined. The failure of these items would compromise safety, mission accomplishment, or cause failure or condemnation of high value components. Items not listed will be known as: "on condition items" and will be replaced only when necessary.

iii

FIGURE 1. Example foreword (-6 manual).

MIL-PRF-5096F(USAF)

1F-13A-6

2.2 Functional Check Flight (FCF). In conjunction with TO 1-1-300, this manual provides the conditions requiring a Functional Check Flight. They are designed to assure the aircraft is operational and capable of mission accomplishment after completion of certain scheduled or unscheduled maintenance. Detailed procedures are contained in the applicable Acceptance and Functional Check Flight Procedures manual.

2.3 Repair Restrictions. The repair restrictions chapter lists items (by work unit code, nomenclature, federal stock class (FSC), and part number) for which base level repair restrictions have been established and describes the repairs which are not authorized.

2.4 Historical Documents. The historical documents section of Chapter 2 contains a listing of all airplane components that require preparation of AFTO Forms. The forms provide a permanent record of events or conditions encountered during the use of the equipment. The information documented in these forms will be used to plan required logistic and maintenance procedural support.

2.5 Time Requirements. The Minutes column in Chapters 1, 2, and 3 provides the estimated time in man-minutes for accomplishment of each requirement and reflects only the time required for inspection or replacement. They do not include time required to gain access to the equipment or those factors (personnel and equipment shortages, lack of parts, adverse working conditions, and qualifications of personnel) which could affect the length of time for any maintenance action.

3. DEFINITIONS OF TERMS.

For clarification, the following definitions are given:

a. Specified – refers to a definite amount, operation, or limitation which has been established and is contained in applicable directives.

b. Evidence – is an indication of an existing or impending unsatisfactory condition.

c. Security – means the component is properly mounted or attached to related equipment, including applicable safety wiring.

d. Accessible – is the term applied to equipment that may be inspected without further disassembly or removal of panels, cowling, etc., other than those required to accomplish the more specific requirements applicable to the particular inspections.

e. Excessive – is a term used to describe conditions when specific limitations have not been established. A condition is excessive if it has progressed to the degree that, if not corrected, could result in failure or malfunction of the component prior to the next scheduled action which would direct attention to the condition.

4. UPDATES.

Changes and supplements to this manual will be published when necessary to add, delete or change frequency or scope of requirements. Such changes will be based on factual data accumulated as a result of maintenance experience with the aircraft and equipment. Recommendations proposing changes to this manual should be submitted on AFTO Form 22 in accordance with TO 00-5-1 to (insert appropriate agency).

FIGURE 1. Example foreword (-6 manual) – Continued.

MIL-PRF-5096F(USAF)

TO 1E-3A-6

CHAPTER 1
SCHEDULED INSPECTION REQUIREMENTS
SECTION VI
PHASE INSPECTION REQUIREMENTS

| | | 1. | THIS INSPECTION WILL BE ACCOMPLISHED ON THE ACCRUAL OF A SPECIFIED NUMBER OF FLYING HOURS AFTER DELIVERY AS DESCRIBED IN THE INTRODUCTION. THE INSPECTION WILL CONSIST PRIMARILY OF CHECKING COMPONENTS, AREAS, AND SYSTEMS OF THE AIRCRAFT WHICH, DUE TO THEIR FUNCTION, REQUIRE LESS FREQUENT INSPECTION THAN POST FLIGHT. THE PURPOSE OF THE INSPECTION IS TO ENSURE THAT NO CONDITION EXISTS WHICH, IF NOT CORRECTED, COULD RESULT IN A COMPONENT FAILURE OR SYSTEM MALFUNCTION PRIOR TO THE NEXT SCHEDULED INSPECTION. | | |
|-----------------|------------------|------------|---|----------|------------|
| | | 2. | THE COMMERCIAL AT (@) CODE USED IN THIS MANUAL INDICATES A POWER-ON REQUIREMENT. LUBRICATIONS TO BE PERFORMED FOLLOWING AIRCRAFT WASHING ARE IDENTIFIED BY THE SYMBOL ([]). | | |
| | | 3. | WITH THE EXCEPTION OF PREPARATION, BUTTON-UP AND POST-DOCK ACTIONS WHICH ARE EXCLUDED, THE REQUIREMENTS LISTED HEREIN CORRESPOND TO THOSE IN THE INSPECTION WORKCARDS AND THUS PROVIDE A CROSS REFERENCE TO THE PHASE AND WORKCARD NUMBER WHERE THE INSPECTION IS PERFORMED. | | |
| | | 4. | WHEN EXTENDED MISSION REQUIREMENTS DICTATE, MULTIPLE PHASING OF AIRCRAFT; I.E. ONE OR MORE PHASE INSPECTIONS MAY BE ACCOMPLISHED PER TO 00-20-5 AND IS AUTHORIZED BY THE SPM AND MAJCOM AT THE MAIN OPERATING BASE ONLY. | | |
| WORK UNIT CODE | WORK CARD NUMBER | PARA-GRAPH | CHAPTER 1, SECTION VI PHASE INSPECTION REQUIREMENTS | MIN-UTES | WORK AREA |
| | | | AIRCRAFT (SYSTEM 11000) | | |
| | | | 230 HOUR | | |
| 11--- | A-006 | 1. | INSPECT ALL REMOVED DOORS AND PANELS FOR CRACKS, CORROSION, AND DELAMINATION. Latching AND ATTACHING MECHANISMS FOR WEAR, DISTORTION AND DAMAGE. SEALS FOR WEAR AND DETERIORATION. | 340 | AR |
| 11AC | A-018 | 1. | FLIGHT DECK WINDOWS FOR CRACKS, DELAMINATION, SEALANT FOR DETERIORATION. WINDSHIELD HEAT CONNECTIONS FOR SECURITY, WINDSHIELD HEAT WIRING FOR CUTS, CRACKS, DETERIORATION, AND BARE WIRES | 010 | B |
| 11--- | A-012 | 1. | FUSELAGE EXTERIOR SKIN FOR (INCLUDING TAIL CONE) FOR DENTS, CRACKS, LOOSE, OR MISSING FASTENERS/RIVETS; ALL DRAIN HOLES OPEN; VHF, UHF ANTENNAS FOR CORROSION, CRACKED, CHIPPED OR MISSING PAINT. | 015 | C |
| 11-- | | 2. | INSTALLED ACCESS DOORS AND INSPECTION PANELS FOR OBVIOUS DAMAGE, FIT, SECURITY; CONDUCTIVE MATING SURFACE AREAS OF ACCESS DOORS FOR CORROSION, CONTAMINATION; TIN PLATE FOR PEELING, FLAKING PER TO 1E-3A-23. | 005 | C |
| 11-- | | 3. | AFT FUSELAGE DRAINS FOR OBSTRUCTIONS, ACCUMULATION OF FLUIDS; GALLEY DRAIN LINES AND VENTS FOR OBSTRUCTIONS. | 005 | C |
| 11CC0 | | 4. | EMERGENCY EXIT DOOR FOR WEAR DAMAGE; SEALS, SEAL CONTACT AREA FOR DAMAGE, DETERIORATION, CORROSION, CONTAMINATION; WIRE MESH IMBEDDED IN SEAL MUST HAVE A VISIBLE METALLIC GLINT OVER 90% OF SEAL LENGTH AND NO DISCONTINUITIES GREATER THAN 2 INCHES; EMP STRAPS, RUB STRIPS; SEAL DEPRESSOR ANGLES, UPPER GATE, LOWER GATE, FREE FROM PAINT, CORROSION, CONTAMINATION, DAMAGE; PLATING FOR PEELING, FLAKING PER TO 1E-3A-23; LOOSE OR MISSING FASTENERS; WINDOW CRACKS, DELAMINATION, DETERIORATED SEALS (INSPECT PER TO 1E-3A-2-7); EMP WINDOW GRID, RETAINERS, SCREWS, NUT PLATES AND WASHERS FOR CORROSION, DAMAGE PER TO 1E-3A-2-7; WINDOW BARRIER FOR DIRT, CORROSION, CONTAMINATION ON PAINTED SURFACES FOR LIGHT LEAKS WHEN CLOSED (OBSERVE FROM INTERIOR WHILE EXTERIOR IS BATHED IN BRIGHT LIGHT). | 005 | C |
| 11C30 | | 5. | AFT ENTRY DOOR FOR WEAR DAMAGE; SEALS, SEAL CONTACT AREA FOR DAMAGE, DETERIORATION, CORROSION, CONTAMINATION; WIRE MESH EMBEDDED IN SEAL MUST HAVE A VISIBLE METALLIC GLINT OVER 90% OF SEAL LENGTH AND NO DISCONTINUITIES GREATER THAN 2 INCHES; EMP STRAPS, RUB STRIPS, UPPER GATE, LOWER GATE, LOCATOR ANGLE FREE FROM PAINT, CORROSION, CONTAMINATION, DAMAGE; PLATING FOR PEELING, FLAKING PER TO 1E-3A-23; LOOSE OR MISSING FASTENERS; WINDOWS FOR CRACKS, DELAMINATION, DETERIORATED SEALS (INSPECT PER 1-E3A-2-7). | 040 | C |
| 11F-- | | 7. | HORIZONTAL STABILIZER EXTERIOR FOR DAMAGE, CRACKS, LOOSE OR MISSING FASTENERS/RIVETS. | 040 | C |
| 11EA- | | 9. | VERTICAL STABILIZER FOR CRACKED SKIN, LOOSE OR MISSING RIVETS, DETERIORATED TIP PROTECTIVE COATING | 060 | C |
| 11EA- | A-058 | 10. | PRESSURE LIMITER CONTROL UNIT SUPPORT BRACKET FOR CRACKS IN BEND RADII OR RADIATING FROM MOUNTING FASTENER HOLES.. | 030 | C |
| 11G-- | | 1. | WING UPPER SURFACES, WING TO BODY FAIRINGS, INSTALLED INSPECTION PANELS AND ACCESS DOORS FOR CRACKS, DENTS, LOOSE OR MISSING FASTENERS/RIVETS | 030 | G |
| 11G | | 2. | WING VORTEX GENERATORS FOR SECURITY, DAMAGE. | 005 | G |
| 11G | | 3. | WING LOWER SURFACES, WING TO BODY FAIRINGS, INSTALLED INSPECTION PANELS AND ACCESS DOORS FOR CRACKS, DENTS, LOOSE OR MISSING FASTENERS/RIVETS; PAINTED SURFACES OF COVE LIP DOORS FOR DAMAGE, SCRATCHES THAT EXCEED HCI PROTECTION LIMITS PER TO 1E-3A-23, SECTION XIII. | 030 | G |
| 11G | | 4. | WING LEADING AND TRAILING EDGES FOR CRACKS, DENTS, LOOSE OR MISSING FASTENERS/RIVETS. | 015 | G |
| Change 1 | | | | | 1-9 |

FIGURE 2. Example chapter 1 page (-6 manual) (phased inspection showing hourly intervals).

MIL-PRF-5096F(USAF)

| | | | | | | TO 1E-3A-6 | |
|-----------------------------|------------------------|----------------|--|-----|--|--------------|--------------|
| WORK UNIT CODE | WORK CARD NUMBER | PARA- GRAPH | CHAPTER 1, SECTION VI PHASE INSPECTION REQUIREMENTS | | | MIN- UTES | WORK AREA |
| LANDING GEAR (SYSTEM 13000) | | | | | | | |
| 460 HOUR | | | | | | | |
| | | E-065 | (CONTINUED) | | | | |
| 13GA- | | 7. | POSITION ACTUATION SHAFT: ZERK FITTING. | 'W' | | 001 | H |
| 13DG- | | 8. | DOOR CONTROL VALVE ACTUATION LINK: FLUSH FITTING (2 PLACES) | 'W' | | 002 | H |
| 13DG- | | 9. | LOCK BUNGEE: LUBE PER TO 1E-3A-2-7. | | | 015 | H |
| 13FA- | E-066 | 1. | DOOR HINGE REAR OUTBOARD: FLUSH FITTING (2 PLACES). | | | 002 | H |
| 13FA- | | 2. | LINK ROD AFT LOWER DOOR TO CRANK; FLUSH FITTING. | | | 001 | H |
| 13FA- | | 3. | OPERATOR ROD BEARINGS: FLUSH FITTING. | | | 002 | H |
| 13FA- | | 4. | AFT CRANK TO DOOR LINK: FLUSH FITTING (2 PLACES). | | | 002 | H |
| 13FA- | | 5. | CRANK LOWER AFT: FLUSH FITTING (3 PLACES). | | | 002 | H |
| 13FA- | | 6. | DOOR HINGE: APPLY OIL (2 PLACES) AND WIPE OFF EXCESS. | 'W' | | 002 | H |
| 13FA- | | 7. | FORWARD CRANK BEARING: FLUSH FITTING. | | | 001 | H |
| 13FA- | | 8. | LINK ROD FORWARD UPPER DOOR TO CRANK: FLUSH FITTING (2 PLACES). | | | 002 | H |
| 13FA- | | 9. | UPPER FORWARD ACTUATOR ROD: FLUSH FITTING (2 PLACES). | | | 002 | H |
| 1380 HOUR | | | | | | | |
| 13GAA | A-025 | 1. | LANDING GEAR CONTROL LEVER: WIPE CLEAN AND APPLY A FEW DROPS TO SLIDING SURFACE. | | | 002 | B |
| 13FAH | A-075 | 3. | SEAL PAIR INSTALLATION, P/N 2D4-53035-1 IN LH MAIN WHEEL WELL AND P/N 204-53035-2 IN RH WHEEL WELL FOR CONTAMINATION, CORROSION, SECURITY OF FASTENER. IF CORROSION IS PRESENT, PERFORM RESISTANCE CHECK, IF RESISTANCE CHECK IS GREATER THAN 2.5 MILLIOHMS, DISASSEMBLE MATING INTERFACE AND RESTORE SURFACES. | | | 020 | H |
| 13GB- | E-040 | 13. | LANDING GEAR EMERGENCY EXTENSION SYSTEM FOR EVIDENCE OF WEAR, CORROSION, SECURITY OF COMPONENTS. | | | 020 | G |
| 13GB- | | 14. | OPERATION AND RIGGING CHECK OF LANDING GEAR CONTROL SYSTEM PER TO 1E-3A-2-32-1. | | | 045 | G |
| 13GB- | | 15. | OPERATION AND RIGGING CHECK OF EMERGENCY EXTENSION SYSTEM PER TO 1E-3A-2-32-1. | | | 045 | G |
| 13D- | | 19. | RIGHT MAIN GEAR WHEEL WELL TUBING, WIRING, COMPONENTS, AND THROUGH-WALL FITTINGS FOR SECURITY, CORROSION, LEAKS, CHAFFING, AND CONDITION: CABLE SHIELDING FOR SECURITY, CORROSION; CABLE CONNECTORS FOR SECURITY. | | | 020 | G |
| 13GB- | E-058 | 13. | LANDING GEAR EMERGENCY EXTENSION SYSTEM FOR EVIDENCE OF WEAR, CORROSION, SECURITY OF COMPONENTS PER TO 1E-3A-2-32-1. | | | 100 | H |
| 13D- | | 19. | LEFT MAIN GEAR WHEEL WELL TUBING, WIRING, COMPONENTS, AND THROUGH-WALL FITTINGS FOR SECURITY, CORROSION, LEAKS, CHAFFING AND CONDITION: CABLE SHIELDING FOR SECURITY, CORROSION; CABLE CONNECTORS FOR SECURITY, PROPER SAFETY WIRING; COLLETS FOR PROPER INSTALLATION PER TO 1E-3A-2-29-1, CORROSION, CONTAMINATION. | | | 015 | H |
| 2700 HOUR | | | | | | | |
| 13- | C-016 | 1. | LANDING GEAR: | | | 060 | A |
| 13- | | A. | NOSE LANDING GEAR DOOR RELEASE; WGDR. | 'W' | | 060 | A |
| 13- | | B. | NOSE WHEEL STEERING; WWSA,WWS8. | 'W' | | | A |
| 13- | | 2. | LUBRICATION PROCEDURE: | | | | |
| 13- | | A. | MOVE CABLE TO LIMIT OF MOTION OVER PULLEY CONTACT AREA. | | | | |
| 13- | | B. | WIPER CABLE WITH CLEAN CLOTH TO REMOVE DIRT THAT COULD MIX WITH GREASE | | | | |
| 13- | | C. | APPLY A LIGHT COAT OF AEROSHELL 16 (FLAG 1) BY RAG OR BRUSH OVER CABLE IN PULLEY CONTACT AREA MAKING SURE GREASE COMPLETELY FILLS SPIRAL GROOVES, WIPE OFF EXCESS GREASE. | | | | |
| 13- | | | IF THE PULLEY TURNS ON METAL BEARINGS, LUBRICATE BEARINGS TO ENSURE ROTATION | | | | |
| 13- | | | APPLY A LIGHT COAT OF AEROSHELL 16 BY RAG OR BRUSH OVER BALANCE OF CABLE VERIFY THAT BOTTOM OF CABLE GROOVES CONTAIN A THIN SPIRAL OF GREASE. WIPE OFF EXCESS. | | | | |
| 13- | | | WHERE CABLES PASS THROUGH PRESSURE SEALS, FILL SEALS WITH GREASE. | | | | |
| 13- | | | WIPE CABLE ISOLATOR (REF TO 1E-3A-2-7, SECTION X) WITH CLEAN, DRY CLOTH TO REMOVE GREASE OF OTHER CONTAMINANTS, ENSURE THAT NO METALLIC OBJECTS ARE CONTACTING ISOLATOR | | | | |
| | | | | | | Change 1 | 1-11 |

FIGURE 2. Example chapter 1 page (-6 manual) (phased inspection showing hourly intervals) – Continued.

MIL-PRF-5096F(USAF)

TO 1E-3A-6

CHAPTER 2
SCHEDULED INSPECTION REQUIREMENTS
SECTION I
SPECIAL INSPECTION

1. THIS PART CONTAINS INSPECTION REQUIREMENTS THAT WILL BE ACCOMPLISHED UPON THE ACCRUAL OF A SPECIFIED NUMBER OF FLYING HOURS, EQUIPMENT HOURS OF OPERATION, A LAPSE OF CALENDAR TIME, OR AFTER OCCURRENCE OF A SPECIFIED OR UNUSUAL CONDITION. THE CALENDAR AND/OR SPECIAL HOURLY REQUIREMENTS, WHEN DUE, MAY BE ADDED TO AND ACCOMPLISHED AT THE NEXT PHASE INSPECTION AS APPROPRIATE. HOWEVER, A REQUIREMENT WHICH REPRESENTS A HEAVY WORKLOAD AND INVOLVES MULTIPLE INSTALLATIONS MAY BE ACCOMPLISHED IN APPROPRIATE SEGMENTS AT CONSECUTIVE INSPECTIONS; THE CONDITIONAL REQUIREMENTS, WHEN DUE, MAY REQUIRE ACCOMPLISHMENT AS SOON AS POSSIBLE AFTER THE OCCURRENCE OF THE CONDITION OR PRIOR TO FURTHER FLIGHT.

| WORK UNIT CODE | PARA- GRAPH | CHAPTER 1, SECTION VI PHASE INSPECTION REQUIREMENTS | MIN- UTES |
|----------------------|----------------|---|--------------|
| | | AIRCRAFT (SYSTEM 11000) | |
| 11— | 1. | AFTER MODIFICATION, REMOVAL, ADDITION, OR RELOCATION OF EQUIPMENT CAUSING WEIGHT AND BALANCE CHANGES BEYOND ALLOWABLE LIMITS (TO 1E-3A-5) AND WHEN A FLIGHT CHARACTERISTICS AS REPORTED WHICH MAY INDICATE WEIGHT AND BALANCE RECORDS ARE IN ERROR. | |
| 11— | A. | WEIGH AIRPLANE PER TO 1E-3A-2-7 AND MAKE NECESSARY ENTRIES IN MANUAL OF WEIGHT AND BALANCE DATA. | |
| 11— | 2. | WHENEVER AIRPLANE HAS BEEN EXPOSED TO RADIOACTIVE DEBRIS: WASH AIRPLANE WITH COARSE WATER SPRAY AND DETERGENT PER TO 00-110A-1. | |
| 11— | A. | EVERY 30 DAYS: WINDSHIELD RAIN REPELLENT FOR EFFECTIVENESS PER T O. 42D4-1-4: IF REQUIRED, APPLY PER TO 1E-3A-2-7. | |
| 11AC— | B. | AT TIME OF ENGINE REMOVAL: NUT PLATES INSTALLED ON PYLON AT THROTTLE CABLE ATTACH POINT (IF REQUIRED) | |
| 11— | 3. | EVERY 6 MONTHS (OR NEAREST PHASE CLOSEST TO THE 6 MONTH INSPECTION): | |
| 11— | A. | PERFORM PULL CHECK AND CONTINUITY CHECK OF GROUNDING JACKS PER TO 00-25-172. | |
| 11— | 4. | WHENEVER FLAPS-DOWN PLACARDS HAVE BEEN EXCEEDED. | |
| 11— | A. | WING REAR SPAR WEB, FROM WING STATION 280 TO 539, STIFFENERS, ADJACENT SKIN FOR DISTORTION, FLAKING PAINT, CRACKS, PULLED OR MISSING RIVETS. | |
| 11— | 5. | WHENEVER AIRPLANE IS LANDED AT GROSS WEIGHT IN EXCESS OF 250,000 POUNDS. | |
| 11— | A. | INBOARD NACELLE STRUT SIDE SKIN PANELS FOR BUCKLING, CRACKS, PULLED OR MISSING FASTENERS; DROOP STRIPE FOR MISALIGNMENT. | |
| 11— | B. | WING LEADING EDGE-NACELLE GAP COVERS FOR DISPLACEMENT FASTENER HOLE ELONGATION OR TEAR-OUT, SKIN CRACKS, PULLED OR MISSING FASTENERS. | |
| 11— | C. | UPPER AND LOWER FUSELAGE SKIN PANELS FORWARD AND AFT OF THE WING FOR BUCKLES. WRINKLES OR TEARS | |
| 11— | D. | NOSE WHEEL WELL FOR BUCKLING FLAKING PAINT, CRACKS AND PULLED OR MISSING FASTENERS IN THE WEB OF NOSE WHEEL WELL, PARTICULARLY IN THE VICINITY OF THE TRUNNION SUPPORT FITTINGS | |
| 11— | E. | IF DAMAGE IS DETECTED WHEN ACCOMPLISHING STEPS A THROUGH D ABOVE, CONTINUE INSPECTION PER PARAGRAPH 6. | |
| 11— | 6. | WHENEVER AIRPLANE IS SUBJECTED TO HARD LANDING WITH GROUND CONTACT SKIN SPEED IN EXCESS OF ALLOWABLE LIMITS, OR IS LANDED OR TAXIED OFF THE RUNWAY: | |
| 11— | A. | AIRCRAFT FOR ALIGNMENT PER T O. IE-3A 3-1 (REQUIRED ONLY IF DAMAGE IS DETECTED WHEN ACCOMPLISHING ITEMS B THROUGH K). | |
| 11— | B. | WING TO BODY FITTINGS AT STATIONS 600K FOR DISTORTION, FLAKING PAINT, CRACKS, PULLED OR MISSING PARTS | |
| 11— | C. | DRAG ANGLE AT BBL70.5 BETWEEN STATIONS 600K AND 820 FOR DISTORTION, FLAKING PAINT, PULLED OR MISSING RIVETS. | |
| 11— | D. | MAIN LANDING GEAR TO WING FITTINGS FOR CRACKS. | |
| 11J— | E. | THE FOLLOWING BY NDI (NON-DESTRUCTIVE INSPECTION) PER TO 1E-3A-36: | |
| 11J— | (1) | CONE BOLT ATTACH HOLES (2) AND THRUST LINK FITTING ATTACH HOLE IN FORWARD ENGINE MOUNT FITTING 65-10693. | |
| 11J— | (2) | FORWARD ENGINE MOUNT THRUST LINK FITTING 65-2498, THRUST LINK FITTING ATTACH HOLE IN FORWARD ENGINE MOUNT THRUST CONTROL FITTING 65-11760 (2) ATTACHING 65-2498 TO 65-10693 AND 65-11760 (REMOVE BOLTS TO ACCOMPLISH) | |

2-1

FIGURE 3. Example chapter 2 section I page (-6 manual).

MIL-PRF-5096F(USAF)

TO 1E-3A-6

CHAPTER 2

SECTION II
PROGRAMMED DEPOT MAINTENANCE REQUIREMENTS

1. THIS PART CONTAINS DEPOT INSPECTION (AND SOME REPLACEMENT) REQUIREMENTS THAT WILL BE ACCOMPLISHED UPON THE ACCRUAL OF A SPECIFIED NUMBER OF FLYING HOURS. EQUIPMENT HOURS OF OPERATION OR A LAPSE OF CALENDAR TIME THESE INSPECTIONS WILL BE PERFORMED DURING DEPOT MAINTENANCE

ADDITIONAL DEPOT MAINTENANCE REQUIREMENTS, NOT LISTED BELOW ARE CONTAINED IN THE ASIP AND ACI PROGRAMS. THESE PROGRAMS ARE REVISED AND IMPLEMENTED ON A YEARLY BASIS BY OC-ALC/MMKR.

| WORK UNIT CODE | PARA- GRAPH | CHAPTER 1, SECTION VI PHASE INSPECTION REQUIREMENTS | MIN- UTES |
|----------------------|----------------|---|--------------|
| | | AIRCRAFT (SYSTEM 11000) | |
| 11— | 1. | ONE TIME ONLY AND AT INCORPORATION OF TCTO 1E-3A-639: | |
| 11— | A. | ON AIRPLANES 75-0556 THRU 75-0560, 76-1604 THRU 76-1607 AND 77-0351 THRU 77-0353; HORIZONTAL STABILIZER LOWER SURFACE BALANCE PANEL COVERS FOR CORROSION PER TO 1E-3A-23. | |
| 11— | B. | ON AIRPLANES 75-0556 THRU 75-0560, 76-1604 THRU 76-1607 AND 77-0351 THRU 77-0353; HORIZONTAL STABILIZER UPPER SURFACE BALANCE PANEL COVERS FOR CORROSION PER TO 1E-3A-23. | |
| 11— | 2. | EVERY 12,000 FLIGHT HOURS | |
| 11— | A. | REMOVE ENGINE STRUTS AND INSPECT THE FOLLOWING BY NDI (NON-DESTRUCTIVE INSPECTION) PER TO 1E-3A-36: | |
| 11— | (1) | INBOARD STRUT FRONT SPAR FITTING 65-42128, BOLT ATTACHING 65-42128 TO WING FITTING; OUTBOARD STRUT FRONT SPAR FITTING 65-11347, BOLT ATTACHING 65-11347 TO WING FITTING. | |
| 11— | (2) | INBOARD STRUT LEFT AND RIGHT MIDSPAR FITTINGS 65-2536, BOLT ATTACHING 65-2536 TO WING FITTINGS; OUTBOARD STRUT LEFT AND RIGHT MIDSPAR FITTINGS 65-2534, BOLT ATTACHING 65-2534 TO WING FITTINGS | |
| 11— | (3) | STRUT DIAGONAL BRACE 69-11789 (OUTBOARD STRUT) AND 69-11796 (OUTBOARD STRUT), LOWER SPAR ATTACH FITTINGS 65-13348 (INBOARD STRUT) AND 65-13349 (OUTBOARD STRUT) BOLTS ATTACHING THE STRUT DIAGONAL BRACE TUBES TO THE LOWER SPAR ATTACH FITTINGS AND THE WING FITTINGS | |
| 11— | 3. | EVERY 15,000 OPERATING HOURS REMOVE ANTENNA PEDESTAL AND PEDESTAL TURNTABLE PER TO 1E-3A-18 TO PERFORM THE FOLLOWING: | |
| 11— | A. | REMOVE AND VISUALLY INSPECT AZIMUTH TRANSDUCER ASSEMBLY (SYNCHRO ASSEMBLY) FOR CONDITION PER TO 1E-3A-18, AND REWORK/REPLACE AS NECESSARY. | |
| 11— | B. | INSPECT SYNCHRO DRIVE ASSEMBLY PER TO 16W5-6-3, AND REWORK/REPLACE AS NECESSARY. | |
| 11— | C. | REMOVE EACH PEDESTAL DRIVE ASSEMBLY PER TO 1E-3A-18, AND VISUALLY INSPECT FOR FLUID LEAKS, CRACKS AND CORROSION. REWORK/REPLACE AS NECESSARY. | |
| 11— | D. | REMOVE AND INSPECT EACH DRIVE PINION ASSEMBLY PER TO 16W5-6-3 AND REWORK/REPLACE AS NECESSARY. | |
| 11— | E. | REMOVE AND INSPECT UPPER AND LOWER SEAL RETAINER ASSEMBLIES PER TO 16W5-6-3 REWORK/REPLACE AS NECESSARY. | |
| 11— | F. | REMOVE RING GEAR PER TO 16W5-6-3 AND INSPECT FOR CONDITION. REWORK/REPLACE AS NECESSARY. | |
| 11— | | INSPECT BEARING RAGES PER TO 16W5-6-3. REWORK/REPLACE AS NECESSARY. | |
| 11— | 4. | WHENEVER ROTODOME IS REMOVED: | |
| 11— | A. | INSPECT ATTACHMENT POINTS FOR CRACKS AND CORROSION PER TO 1E-3A-36. | |
| 11— | 5. | EVERY 36 MONTHS: | |
| 11— | A. | FIN ANTENNA ABSORBER: VISUALLY INSPECT AT CLOSE RANGE FOR PAINT CRACKS EXTENDING TO ADHESIVE LAYER, SHEET OR SHEET EDGE DELAMINATION, SHEET PART MISSING, AND EROSION OR ABRASION WHICH HAS PENETRATED INTO THE ABSORBER SHEET. ALSO INSPECT FOR LOOSE OR MISSING FAIRING SEAL AND THE PAINT FOR NICKS OR PEELED AREAS WHICH MAY BE TOUCH-UP PAINTED. | |

2-22

FIGURE 4. Example chapter 2 section II page (-6 manual).

MIL-PRF-5096F(USAF)

TO 1C-20B-6

CHAPTER 2

SECTION III

ACCEPTANCE AND FUNCTIONAL CHECK FLIGHT REQUIREMENTS

1. THIS PART CONTAINS THE CONDITIONS WHICH REQUIRE VERIFICATION OF MAINTENANCE PERFORMED BY THE ACCOMPLISHMENT OF A CHECK FLIGHT AND THE INSPECTION REQUIREMENTS THAT ARE TO BE ACCOMPLISHED TO MAKE THE VERIFICATION. THE INSPECTION REQUIREMENTS ARE THOSE CONSIDERED NECESSARY TO ASSURE THE AIRCRAFT IS AIRWORTHY AND CAPABLE OF ACCOMPLISHING ITS MISSION. WHEN A CHECK FLIGHT IS ACCOMPLISHED FOR VERIFICATION OF MAINTENANCE PERFORMED ON SPECIFIC EQUIPMENT OR SYSTEMS, THOSE INSPECTION REQUIREMENTS NOT RELATED TO THAT SPECIFIC EQUIPMENT OR SYSTEM SHOULD BE DISREGARDED. FULL RANGE CHECK FLIGHTS ARE REQUIRED AFTER HEAVY MAINTENANCE.

THIS PART CONSISTS OF FOUR GROUPS. GROUP 1 CONTAINS THE CONDITIONS REQUIRING VERIFICATION BY A CHECK FLIGHT. GROUP 2 CONTAINS THE BEFORE FLIGHT REQUIREMENTS TO BE ACCOMPLISHED PRIOR TO THE CHECK FLIGHT. GROUP 3 CONTAINS THE IN-FLIGHT REQUIREMENTS TO BE ACCOMPLISHED DURING THE CHECK FLIGHT. GROUP 4 CONTAINS THE AFTER FLIGHT REQUIREMENTS TO BE ACCOMPLISHED UPON COMPLETION OF THE CHECK FLIGHT.

| PARA- GRAPH | ACCEPTANCE AND FUNCTIONAL CHECK FLIGHT REQUIREMENTS | MIN- UTES |
|----------------|---|--------------|
| | GROUP 1 | |
| 1. | TO COMPLETE THE APPLICABLE INSPECTION WHEN AIRCRAFT IS REMOVED FROM EXTENDED STORAGE. | |
| A. | AFTER A MAJOR FIXED FLIGHT SURFACE HAS BEEN REPLACED OR HAS UNDERGONE MAJOR STRUCTURAL REPAIRS WHICH COULD AFFECT THE FLIGHT CHARACTERISTICS OF THE AIRCRAFT. | |
| B. | AFTER A MOVABLE PRIMARY FLIGHT CONTROL SURFACE (AILERON, ELEVATOR OR RUDDER) HAS BEEN REPLACED OR HAS UNDERGONE MAJOR REPAIRS WHICH COULD AFFECT THE FLIGHT CHARACTERISTICS OF THE AIRCRAFT AND FOR WHICH SATISFACTORY OPERATION CANNOT BE DETERMINED BY GROUND OPERATIONAL CHECKS. | |
| 2. | AFTER ADJUSTMENTS OR CHANGES HAVE BEEN MADE THAT REQUIRE FLIGHT TO ACCOMPLISH OPERATIONAL CHECKS OR CALIBRATION OF ACCESSORIES OR AUXILIARY EQUIPMENT ON WHICH ABSOLUTE CERTIFICATION OF AIRWORTHINESS CANNOT BE VERIFIED BY GROUND OPERATIONAL CHECKS | |
| A. | AFTER REPLACEMENT OR REMOVAL AND INSTALLATION OF ENGINE; IF BOTH ENGINES ARE CHANGED, A FUNCTIONAL CHECK FLIGHT IS REQUIRED, IF ONE ENGINE IS CHANGED, A FUNCTIONAL CHECK FLIGHT IS NOT REQUIRED. | |
| (1) | AFTER REPLACEMENT OR REMOVAL AND INSTALLATION OF ENGINE MAIN FUEL CONTROL; IF BOTH FUEL CONTROLS ARE CHANGED, A FUNCTIONAL CHECK FLIGHT IS REQUIRED, IF ONE MAIN FUEL CONTROL IS CHANGED, A FUNCTIONAL CHECK FLIGHT IS NOT REQUIRED. | |
| (2) | WHEN MAJOR RETROFIT AND STRUCTURAL MODIFICATION ARE ACCOMPLISHED. | |
| (3) | WHENEVER MAINTENANCE OR REPAIR ARE ACCOMPLISHED OF SUCH SCOPE THAT A CHECK FLIGHT IS DETERMINED TO BE NECESSARY BY THE MAINTENANCE OFFICER. | |
| 3. | AFTER CORRECTING PILOT REPORTED SAFETY OF FLIGHT DISCREPANCIES WHEN IT CANNOT BE DETERMINED THAT THE MAINTENANCE ACTION TAKEN WAS ADEQUATE. | |
| A. | GROUP 2 BEFORE FLIGHT REQUIREMENTS | |
| B. | GROUND CREW: | |
| C. | BEFORE EACH CHECK FLIGHT. PERFORM A PREFLIGHT INSPECTION IN ACCORDANCE WITH TO 1C-20B-6WC-1, PART 1 WORKCARDS. | |
| D. | GROUP 2 CHECK FLIGHT REQUIREMENTS | |
| E. | FLIGHT CREW: | |
| F. | REFER TO TO 1C-20B-6CF-SERIES FOR CHECK FLIGHT REQUIREMENTS. | |
| G. | GROUP 4 AFTER FLIGHT REQUIREMENTS | |
| 4. | GROUND CREW: | |
| A. | AFTER EACH CHECK FLIGHT, PERFORM APPLICABLE INSPECTION IN ACCORDANCE WITH TO 1C-20B-6WC-1. | |

FIGURE 5. Example chapter 2 section III page (-6 manual).

MIL-PRF-5096F(USAF)

TO 1C-135A-6

CHAPTER 2

**SECTION IV
HISTORICAL DOCUMENTS
AFTO FORMS 34, 44, 95 AND 98**

1. THIS PART CONTAINS A LIST OF SPECIFIC COMPONENTS THAT REQUIRE PREPARATION OF ONE OF THE ABOVE AFTO FORMS.
2. THESE HISTORICAL FORMS PROVIDE A PERMANENT RECORD OR HISTORY OF EVENTS AND CONDITIONS ENCOUNTERED DURING THE USE OF THE EQUIPMENT. THE INFORMATION DOCUMENTED IN THESE FORMS (AS APPLICABLE) WILL BE USED TO PLAN REQUIRED LOGISTIC AND MAINTENANCE PROCEDURAL SUPPORT TO MAINTAIN AND ENHANCE THE OPERATION OF THE TOTAL WEAPON SYSTEM.
3. SPECIFIC INSTRUCTIONS FOR FILLING IN THESE FORMS ARE FOUND IN TO 00-20-5.

| WUC | COMPONENT | REQUIRED FORM |
|-------|---|---------------|
| 13AB0 | MAIN LANDING GEAR OLEO STRUT ASSY | AFTO 95 |
| 13FC0 | NOSE LANDING GEAR OLEO STRUT ASSY | AFTO 95 |
| 23000 | ENGINE, J57/TF33 | AFTO 95 |
| 23000 | QEC, J57/TF33 | AFTO 95 |
| 23000 | COMPRESSOR, J57/TF33 | AFTO 95 |
| 23EB0 | TURBINE ROTOR (J57/TF33) | AFTO 44 |
| 24000 | AUXILIARY POWER PLANT | AFTO 95 |
| 27000 | ENGINE, F108-CF-104 | AFTO 95 |
| 27000 | QEC, F108-CF-100 | AFTO 95 |
| 27AA0 | FAN AND BOOSTER (F108) | AFTO 95 |
| 27AB0 | NO 1 AND NO 2 BRG SPT (F108) | AFTO 95 |
| 27AC0 | INLET GEARBOX (F108) | AFTO 95 |
| 27AD0 | FAN FRAME ASSY (F108) | AFTO 95 |
| 27AF0 | HP COMPRESSOR ROTOR (F108) | AFTO 95 |
| 27AG0 | HPC FORWARD STATOR (F108) | AFTO 95 |
| 27AH0 | HPC REAR STATOR (F108) | AFTO 95 |
| 27AJA | COMBUSTION CASING (F108) | AFTO 95 |
| 27AK0 | COMB CHAMBER ASSY (F108) | AFTO 95 |
| 27AL0 | HPT NOZZLE ASSY | AFTO 95 |
| 27AM0 | HP TURBINE ROTOR (F108) | AFTO 95 |
| 27AML | HP TURBINE WHEEL (F108) | AFTO 44 |
| 27AN0 | HPT SHROUD/LPT NOZZLE ASSY | AFTO 95 |
| 27AP0 | TRANSFER GEARBOX (F108) | AFTO 95 |
| 27AQ0 | ACCESSORY GEARBOX (F108) | AFTO 95 |
| 27AX0 | LP TURBINE ROTOR STATOR AND FRAME ASSY (F108) | AFTO 95 |
| 27AWG | LP TURBINE NO. 1 WHEEL (F108) | AFTO 44 |
| 27AWH | LP TURBINE NO. 2 WHEEL (F108) | AFTO 44 |
| 27AWJ | LP TURBINE NO. 3 WHEEL (F108) | AFTO 44 |
| 27AWK | LP TURBINE NO. 4 WHEEL (F108) | AFTO 44 |
| 27AZ0 | LPT SHAFT ASSY (F108) | AFTO 95 |
| 27A10 | TURBINE FRAME ASSY (F108) | AFTO 95 |
| 46421 | 0 FWD BODY CELL | AFTO 95 |
| 46423 | 1 FWD BODY CELL | AFTO 95 |
| 46425 | 2 FWD BODY CELL | AFTO 95 |
| 46427 | 3 FWD BODY CELL | AFTO 95 |
| 46445 | 1 CENTER WING CELL | AFTO 95 |
| 46447 | 2 CENTER WING CELL | AFTO 95 |
| 4645A | 3 CENTER WING CELL | AFTO 95 |
| 46452 | 4 CENTER WING CELL | AFTO 95 |
| 46454 | 5 CENTER WING CELL | AFTO 95 |
| 46456 | 6 CENTER WING CELL | AFTO 95 |
| 46471 | 1 AFT BODY CELL | AFTO 95 |
| 46473 | 2 AFT BODY CELL | AFTO 95 |
| 46475 | 3 AFT BODY CELL | AFTO 95 |
| 46477 | 4 AFT BODY CELL | AFTO 95 |
| 4648A | 5 AFT BODY CELL | AFTO 95 |
| 46515 | UPPER DECK CELL | AFTO 95 |
| 46750 | BOOM ASSEMBLY | AFTO 95 |

2-22

FIGURE 6. Example chapter 2 section IV page (-6 manual).

MIL-PRF-5096F(USAF)

TO 1E-3A-6

CHAPTER 3 REPLACEMENT SCHEDULE

1. THIS PART LISTS UNITS OF EQUIPMENT THAT ARE TO BE REPLACED UPON THE ACCRUAL OF A SPECIFIED NUMBER OF FLYING HOURS, EQUIPMENT HOURS OF OPERATION, A LAPSE OF CALENDAR TIME, OR AFTER THE OCCURRENCE OF A SPECIFIED OR UNUSUAL CONDITION. REPLACEMENT MEANS REMOVAL OF THE ITEM AND INSTALLATION OF A SERVICEABLE ITEM IN ITS PLACE. THE HOURLY AND CALENDAR REQUIREMENTS WHEN DUE, WILL BE ADDED TO AND BE ACCOMPLISHED AT THE NEXT SCHEDULED INSPECTION. THE CONDITIONAL REQUIREMENTS, WHEN DUE, MAY REQUIRE ACCOMPLISHMENT AS SOON AS POSSIBLE AFTER THE OCCURRENCE OF A CONDITION OF PRIOR TO FURTHER FLIGHT.

| WORK UNIT CODE | PARA- GRAPH | CHAPTER 3, REPLACEMENT SCHEDULE | QTY | MIN- UTES |
|--|----------------|--|-----|--------------|
| AIRFRAME (SYSTEM 11000) | | | | |
| 11— | 1. | EVERY 10 YEARS: | | |
| 11— | A. | FIN ANTENNA ABSORBER PER TO 1E-3A-3. | | |
| FUSELAGE COMPARTMENTS (SYSTEM 12000) | | | | |
| 12DBE | 1. | EVERY 5 YEARS: | | |
| 12DBE | A. | AIR BOTTLE, ESCAPE SPOILER (FOR HYDROSTATIC TESTS). | 1 | |
| LANDING GEAR (SYSTEM 13000) | | | | |
| 13DHJ | 1. | EVERY 4 YEARS: | | |
| 13DHJ | A. | ACCUMULATOR, BRAKE | 1 | |
| 13DJK | 2. | EVERY 5 YEARS: | | |
| 13DJK | A. | PNEUMATIC BOTTLE, EMERGENCY BRAKE (FOR HYDROSTATIC TESTS). | 1 | |
| FLIGHT CONTROL (SYSTEM 14000) | | | | |
| 14AEG | 1. | EVERY 6 YEARS: | | |
| 14AEG | A. | ACTUATOR, STABILIZER TRIM. | | |
| TURBOFAN POWER PLANT (SYSTEM 23000) | | | | |
| 23000 | 1. | EVERY 12000 OPERATING HOURS: | | |
| 23000 | A. | TURBOFAN ENGINE TF33-PW-100/100A PER TO 1E-3A-2-71-6WC-1 | 4 | |
| 23000 | 2. | PER TO 2J-TF-33-16, TABLES 7-2 AND 7-4: | | |
| 23— | A | HUBS AND DISCS AT SPECIFIED CYCLES. | | |
| AUXILIARY POWER PLANT (SYSTEM 24000) | | | | |
| 24AAD | 1. | EVERY 4 YEARS: | | |
| 24AAD | A. | ACCUMULATOR, SURGE DAMPER. | 1 | |
| AIR-CONDITIONING, PRESSURIZATION AND SURFACE ICE CONTROL (SYSTEM 41000) | | | | |
| 41HA1 | 1. | EVERY 3 YEARS: | | |
| 41HA1 | A. | LIQUID COOLING SYSTEM NITROGEN PRESSURE CYLINDER (FOR RECERTIFICATION TO DOT 3HT CYLINDER REQUIREMENTS PER TITLE 49 CODE OF FEDERAL REGULATIONS PARTS 170 THRU 179). | | |
| ELECTRICAL POWER SUPPLY (SYSTEM 42000) | | | | |
| 42AH0 | | EVERY 440 FLYING HOURS: | | |
| 42AH0 | | APU GENERATOR (FOR REPLACEMENT OF BEARING, P/N 962A953P1) | | |
| 42BC0 | | EVERY 90 DAYS: | | |
| 42BC0 | | BOTH MAIN AIRCRAFT BATTERIES AND BOTH EMERGENCE BATTERIES (FOR RECONDITIONING PER TO 8D2-28-2) | | |

3-1

FIGURE 7. Example chapter 3 page (-6 manual).

MIL-PRF-5096F(USAF)

TO 21-LG118A-6

CHAPTER 4

BASE LEVEL REPAIR RESTRICTIONS

1. THIS SECTION LISTS ITEMS OF EQUIPMENT BY WORK UNIT CODE AND NOUN FOR WHICH BASE LEVEL (INTERMEDIATE MAINTENANCE) REPAIR RESTRICTIONS ARE ESTABLISHED AND DESCRIBES THE REPAIRS THAT ARE NOT AUTHORIZED AT BASE LEVEL FOR THE ITEMS LISTED. ALL OTHER REPAIRS REQUIRED TO RETURN EQUIPMENT TO A SERVICEABLE CONDITION WILL BE ACCOMPLISHED AT BASE LEVEL CONSISTENT WITH THE BASE REPAIR CAPABILITY AND POLICIES OUTLINED IN AFR 66-1. ITEMS WHICH ARE NOT LISTED IN THIS SECTION WILL BE REPAIRED TO THE EXTENT NECESSARY, INCLUDING COMPLETE OVERHAUL, IF REQUIRED, AT BASE LEVEL CONSISTENT WITH THE ABOVE REFERENCED POLICY.
2. THE REPAIR RESTRICTIONS CONTAINED IN THIS SECTION WILL BE REVIEWED PERIODICALLY BY UTILIZING AFI 21-101 DATA AND OTHER MAINTENANCE AND SUPPLY INFORMATION TO DETERMINE WHETHER BASE LEVEL REPAIR AUTHORIZATION CAN BE EXPANDED.
3. FOR AFI 21-101 MAINTENANCE DATA REPORTING PURPOSES, NRTS CODE 1 (REPAIR NOT AUTHORIZED) WILL BE USED ONLY WHEN AN ITEM OF EQUIPMENT AND A RESTRICTED REPAIR FOR THAT ITEM ARE LISTED IN THIS SECTION. LOCATION EFFECTIVITY OF BASE LEVEL REPAIR RESTRICTIONS IS INDICATED BY APPLICABILITY CODES ARE REFERENCED IN PARAGRAPH 10 OF INTRODUCTION.

NOTE

NO REPAIR AUTHORIZED ON CONNECTORS OF RECOVERABLE POTTED OR MOLDED CABLES.

4. FOR COMMUNICATIONS EQUIPMENT, THE RESTRICTIONS LISTED IN THIS MANUAL TAKE PRECEDENCE OVER ALL OTHER DIRECTIVES WHEN ANY CONFLICTS OCCUR.

| WORK UNIT CODE | PARA- GRAPH | BASE LEVEL REPAIR RESTRICTIONS |
|-------------------------------------|----------------|--|
| LAUNCHER AND LAUNCH FACILITY | | |
| BAB00 | 1. | ACTUATOR, ELECTRO-MECHANICAL BALLSCREW FSC XXXX PN XXXXX REPAIRS OTHER THAN AS OUTLINED IN THE F/O MANUAL TO 35M1-9-2-2 NOT AUTHORIZED. |
| BAE00 | 2. | SECURITY PIT VAULT DOOR FSC XXXX PN XXXXX REPAIRS OTHER THAN REMOVAL AND REPLACEMENT OF COMPONENTS NOT AUTHORIZED. |
| BAN00 | 3. | CYLINDER ASSEMBLY, ACTUATING, LINEAR FSC XXXX PN XXXXX REPAIRS OTHER THAN ADJUSTMENT OF ACTUATOR GLAND NUT NOT AUTHORIZED. |
| LAUNCHER AND LAUNCH FACILITY | | |
| BCD00 | 1. | MECHANISM LAUNCHER CLOSURE, ACTUATING AND LOCKING FSC XXXX PN XXXXX REPAIRS ON COMPONENTS OTHER THAN MULTIPLYING LINKING AND REPLACEMENT OF BALLISTIC ACTUATOR PISTON SEALS NOT AUTHORIZED. |
| BDCCA | 2. | EXPLOSIVE CARTRIDGE FSC XXXX PN XXXXX NO REPAIR AUTHORIZED. |
| ENVIRONMENTAL CONTROL SYSTEM | | |
| HABB0 | 1. | GUIDANCE AND CONTROL CONDITIONING UNIT COMPRESSOR FSC XXXX PN XXXXX REPAIRS OTHER THAN REMOVAL AND REPLACEMENT NOT AUTHORIZED. |
| HAHBA | 2. | MODULATING ASSEMBLY, DUCT HEATER FSC XXX PN XXXXX NO REPAIR AUTHORIZED. |
| HAHCO | 3. | PUMPS, CHILLED WATER, ECU, AC AND DC FSC XXXX PN XXXXX REPAIRS OTHER THAN REMOVAL AND REPLACEMENT OF PACKING SEALS AND IMPELLER NOT AUTHORIZED. |
| ENVIRONMENTAL CONTROL SYSTEM | | |
| HBA00 | 1. | CHILLER ASSEMBLY, REFRIGERANT FSC XXXX PN XXXXX REPAIRS OTHER THAN AS OUTLINED IN THE F/O MANUALS NOT AUTHORIZED. |
| HBAA0 | 2. | COMPRESSOR ASSEMBLY, REFRIGERANT FSC XXXX PN XXXXX REPAIRS OTHER THAN REMOVAL AND REPLACEMENT OF EXTERNAL COMPONENTS NOT AUTHORIZED. |
| HBAB0 | 3. | TANK, EXPANSION, BRINE FSC XXXX PN XXXXX NO REPAIR AUTHORIZED. |

FIGURE 8. Example chapter 4 page (-6 manual).

MIL-PRF-5096F(USAF)

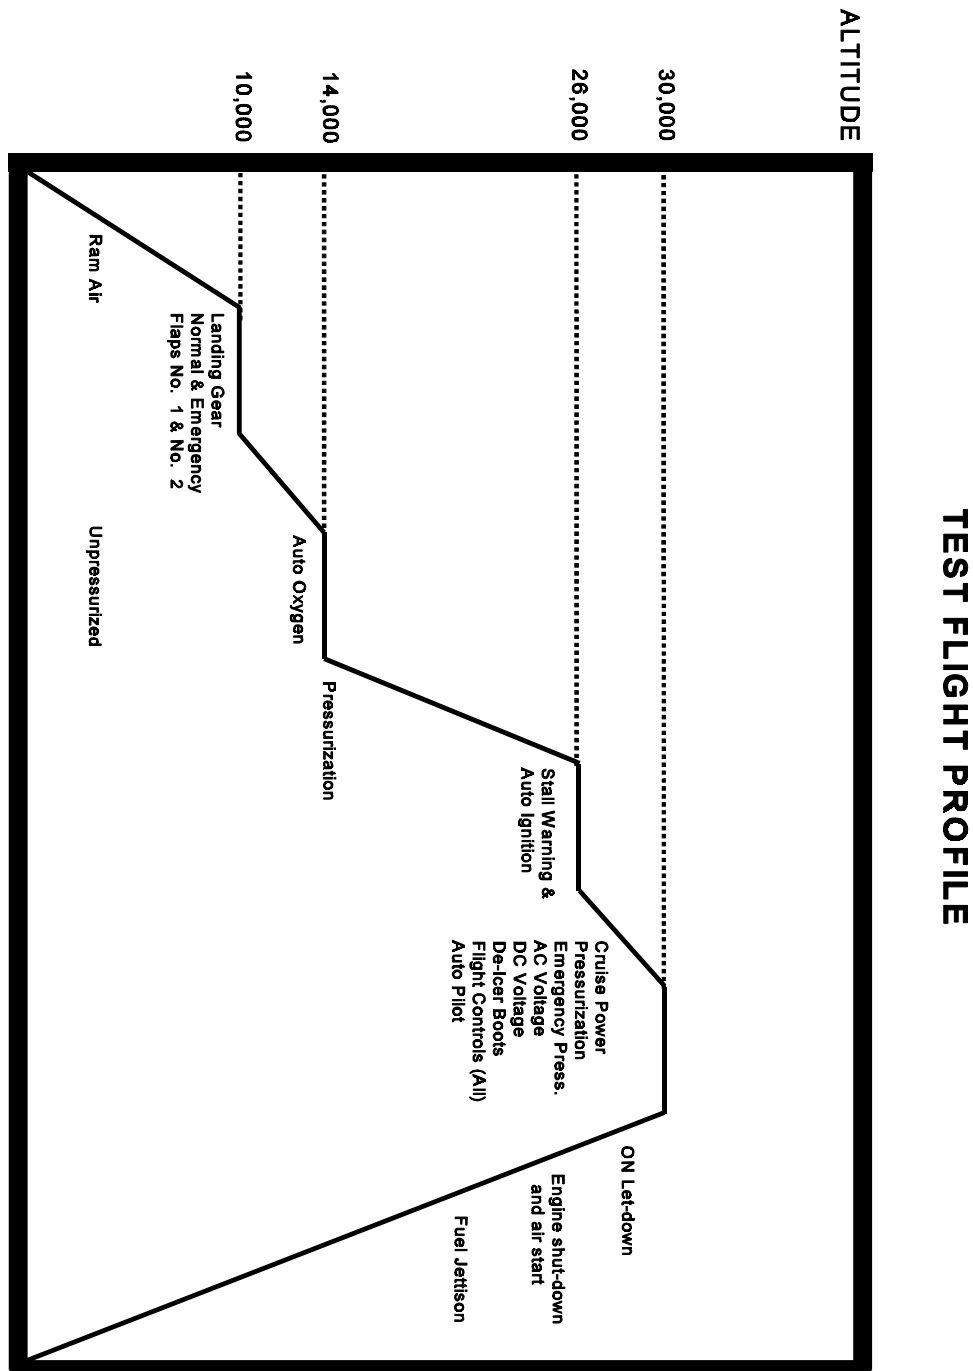


FIGURE 9. Example test flight profile (-6CF) manual.

MIL-PRF-5096F(USAF)

TO 1X-XXX-6CF-1

FOREWORD

1. PURPOSE AND SCOPE.

The purpose of these procedures is to:

a. Assist the flight crew in accomplishing Acceptance or Functional Check Flight (FCF) in accordance with TO 1-1-300, -6 inspection manual and contractual requirements.

b. Assure compliance of the prescribed FCF by providing the flight crew equipment operating procedures, limits, pressure readings and conditions to be noted and recorded during the course of the FCF.

c. Provide the flight crew with definitive procedures emphasizing how a system/component will be checked when applying predetermined criteria.

2. FUNCTIONAL CHECK FLIGHT PROCEDURES.

These procedures will be used when and as directed in TO 1-1-300, -6 inspection manual and at the direction of the Chief of Maintenance. When Acceptance or Functional Check Flights are accomplished to test specific equipment or systems, only applicable portions need be used. A suggested flight profile is included to be utilized for complete Acceptance or Functional Check Flights as appropriate. Description of check flights are:

2.1 Acceptance Check Flight. Includes flight checks for performance and operation to verify

contractual conformance. This is applicable to all aircraft on maintenance or modification contracts and the full range of the procedures contained in this manual are mandatory.

2.2 Functional Check Flight. Includes flight checks to establish if airframe or equipment are operating in accordance with predetermined parameters when subjected to intended environment. Areas to be checked are selective for only that equipment or systems(s) that require flight verification.

3. COMPLETION OF THE FUNCTIONAL CHECK FLIGHT.

Each crew member will complete the portion of the checklist applicable to their position using the symbols specified in the heading or by recording the actual instrument readings in the checklist spaces when required. When the navigator is not a part of the bask crew for a Functional Check Flight, the co-pilot will complete the appropriate portions of the communication requirements. Upon completion of the check flights, the aircraft crew members response for the checks will sign the certification in the space provided to indicate they have completed the checks that are applicable to their station and equipment in the aircraft. The pilot will assure that all discrepancies discovered during the course of an FCF will be recorded on the applicable AFTO Forms 781A as prescribed by TO 00-20-5.

v

FIGURE 10. Example foreword (-6CF) manual.

MIL-PRF-5096F(USAF)

TO 1C-5A-6CF-1

CHAPTER P
PILOTS FUNCTIONAL CHECK FLIGHT PROCEDURES
SECTION VI
FLIGHT CONTROL SYSTEM

PREFLIGHT CHECKS.**Interior Inspection.**

1. Vertical Stabilizer Area - CHECKED
 - a. Rudder Actuators - CHECKED
 - b. Pitch Trim Actuators - CHECKED
 - c. Stabilizer Door - CHECKED/SECURE
 - d. Accumulator - CHECKED

2. Pitch Trim - CHECKED

- a. Flaps - UP
- b. Copilot's Control Wheel Pitch Trim Switches - FULL NOSE DN/CHECKED

Check that horizontal stabilizer (as displayed on the trim indicator) moves from 0 to 1.5 degrees nose down in 3 to 8 seconds.

- c. Air Refuel Electric Power Switch - REFUEL
- d. Air Refuel Door - OPENED
- e. Copilot's Control Wheel Pitch Trim Switches - FULL NOSE DN/CHECKED

Check that the trim indicator displays 3.8 degrees nose down

- f. Air Refuel Door - CLOSED
- g. Air Refuel Electric Power Switch - RADAR
- h. Flaps - 40 PERCENT

I. Copilot's Control Wheel Pitch Trim Switches - FULL NOSE UP/CHECKED

Check that horizontal stabilizer (as displayed on the indicator) moves 12 degrees nose up in 27 to 42 seconds.

- j. Manual Pitch Trim Override Capability CHECKED

While holding a nose down trim signal with the control wheel pitch trim switches, move the manual pitch trim lever full aft and check that horizontal stabilizer changes direction (nose up). Move the lever full forward and check that the horizontal stabilizer again changes direction (nose down).

- k. Pitch Trim - 5 DEGREES NOSE UP

- l. Flaps - UP

m. Pilot's Control Wheel Pitch Trim Switches - FULL NOSE UP/CHECKED

Check that horizontal stabilizer (as displayed on the trim indicator) moves to 6 degrees nose up.

n. Alternate Pitch Trim Switches - FULL NOSE DN/CHECKED

Check that horizontal stabilizer (as displayed on the trim indicator) moves to 1.5 degrees nose down in 45 to 70 seconds.

3. Deleted.

4. Directional Control - CHECKED

- a. Lower Rudder Sys 3 - OFF
- b. Upper Rudder Sys 3 - OFF/CHECKED

Check upper and lower rudder sys 3 off lights on.

- c. Upper and Lower Rudder Movement CHECKED

Check upper and lower rudder movement left and right.

- d. Upper Rudder - SYS 3 NORM, SYS 1 OFF
- e. Lower Rudder - SYS 3 NORM, SYS 2 OFF

Check upper and lower rudder sys 3 off lights off and upper rudder sys 1 off light and lower rudder sys 2 off light on.

- f. Upper and Lower Rudder Movement CHECKED

P-22

FIGURE 11. Example FCF PAGE (-6CF) manual.

MIL-PRF-5096F(USAF)

| | | |
|--|---|--|
| TO 1F-4C-6CL-1 | | |
| ACCEPTANCE AND/OR FUNCTIONAL CHECK FLIGHT CHECKLIST | | |
| USAF SERIES F-4C, F-4D, F-4E, F-4G, AND RF-4C AIRCRAFT | | |
| THIS PUBLICATION SUPERSEDED TO 1F-4C-6CL-1 DATED 1 NOVEMBER 1987 AND IS USED IN CONJUNCTION WITH TO 1F-4C-6CF-1 DATED 1 MAY 1990. | | |
| This publication is required for official use for administrative or operational purposes only. Distribution is limited to US Government agencies. Other requests for this document must be referred to OO-ALC/MMDD, Hill AFB, Utah 84056-5609. | | |
| PUBLISHED UNDER THE AUTHORITY OF THE SECRETARY OF THE AIR FORCE | | |
| 1. Aircraft series & serial No.: | 2. Date: | 3. Record ambient temperature: |
| 4. Reason for checkflight: | | 5. Symbols O Not Checked ✓ Satisfactory X Unsatisfactory |
| 6. Pilots signature: | | <input type="checkbox"/> Released <input type="checkbox"/> Not Released |
| SYM | 1-1. PREFLIGHT | |
| | A. Review AFTO Form 781 | |
| | B. Oil Press Gauge Placards - Compare | |
| | C. Rudder Adjust Crank - Check | |
| | D. Check Landing/Taxi/External Lights | |
| | E. Stab trim 16 Sec Max: Ind. Within ½ to 1 unit full down ¼ to ½ full up | |
| | F. ADI Check 5 to 15° up/10 to 30° down | |
| 1-2. ENGINE START | | |
| L | R | A. Throttle Fingerlifts - Check B. Nozzle Movement - Check C. Fuel Flow - Check D. DC Bus Light - Out (F-4E/G Only) |
| | | |
| | | |
| | | |
| 1-3. BEFORE TAXIING | | |
| | | A. Com-Nav UHF/TACAN/VOR/ILS |
| | | B. VVIs - Check 0 ±150 ft |
| | | C. Airspeed Ind - Check at 12 o'clock |
| CHAPTER P | | |
| CARD 1 OF 14 | | |
| 1 MAY 1990 | | |

FIGURE 12. Example first (title) page (-6CL checklist).

MIL-PRF-5096F(USAF)

| TO 1F-4C-6CL-1 | | |
|---------------------|---|---|
| SYM | | 1-3. BEFORE TAXIING (Cont) |
| | | D. Speed Brake 3 Sec |
| | | E. Rud Trim 13 Sec Max |
| | | F. Ail Trim 10 to 15 Sec |
| | | G. Lateral Control System - Check |
| | | H. Flaps Cont/ARI/Stab - Check |
| | | I. Fit Cont/ARI/Stab - Check |
| | | J. AFCS - Check |
| | | K. Heading and Synchronization - Check |
| | | L. Rat - Check (F-4C/D/RF-4C Only) |
| | | M. Engine Anti-Ice - Check |
| | | N. Tail Hook - Extend/Retract |
| | | O. Canopy - Close and lock 4 to 6 sec (4 to 9 for remaining canopy) |
| 1-4. TAXI | | |
| L | R | |
| | | A. Brakes - Test |
| | | B. Nose Gear Steering - Check |
| 1-5. BEFORE TAKEOFF | | |
| | | A. Throttle Burst 10.5 Sec Max, Note OAT |
| | | B. RPM and EGT - Check |
| | | C. Nozzle position - ½ to ¼ |
| | | D. Oil Press - Check +5, -10psi |
| | | E. Boost Pump Press - Check 30 ±5 psi |
| | | F. Snap Deceleration - WSO |
| | | G. Internal Wing Transfer Sw - STOP TRANSFER |

CHAPTER P **CARD 2 OF 14**


FIGURE 13. Example typical page (-6CL checklist).

MIL-PRF-5096F(USAF)

| TO 1F-4C-6CL-1 | |
|---|---|
| ACCEPTANCE AND/OR FUNCTIONAL CHECK FLIGHT CHECKLIST | |
| 1. Weapon System Officer's Signature: | |
| 2. Date: | 3. Symbols O Not Checked ✓ Satisfactory X Unsatisfactory |
| SYM | 2-1. PREFLIGHT |
| | A. Before Starting |
| | B. External Power - Check |
| 2.2. BEFORE TAKEOFF | |
| | A. Pre-Taxi |
| | (1) Ground Speed/Present Position - Check |
| | (a) AN-46 = 0 TO 5 K's |
| | (b) AN-46 - 0 to 2 K's |
| | (c) DAMS - 0 K's |
| | (d) NODS - 0 K's |
| | (2) Compass Heading - Check |
| | (3) DAMS Ground Bit - Check |
| | B. Taxi |
| | (1) Nose Gear Steering - Check |
| | (2) Wheel Brakes - Check |
| | (3) Flight Controls - Check |
| | (4) Ground Speed - Check |
| | (5) Bit Checks - Performed (As Required) |
| | (a) Radar |
| | (b) Radar Altimeter (RF-4C) |
| | © Tacan |
| | (d) APR-36/47 (F-4G) |
| | (e) RWR |

FIGURE 14. Example first page for additional crew member (-6CL checklist).

MIL-PRF-5096F(USAF)

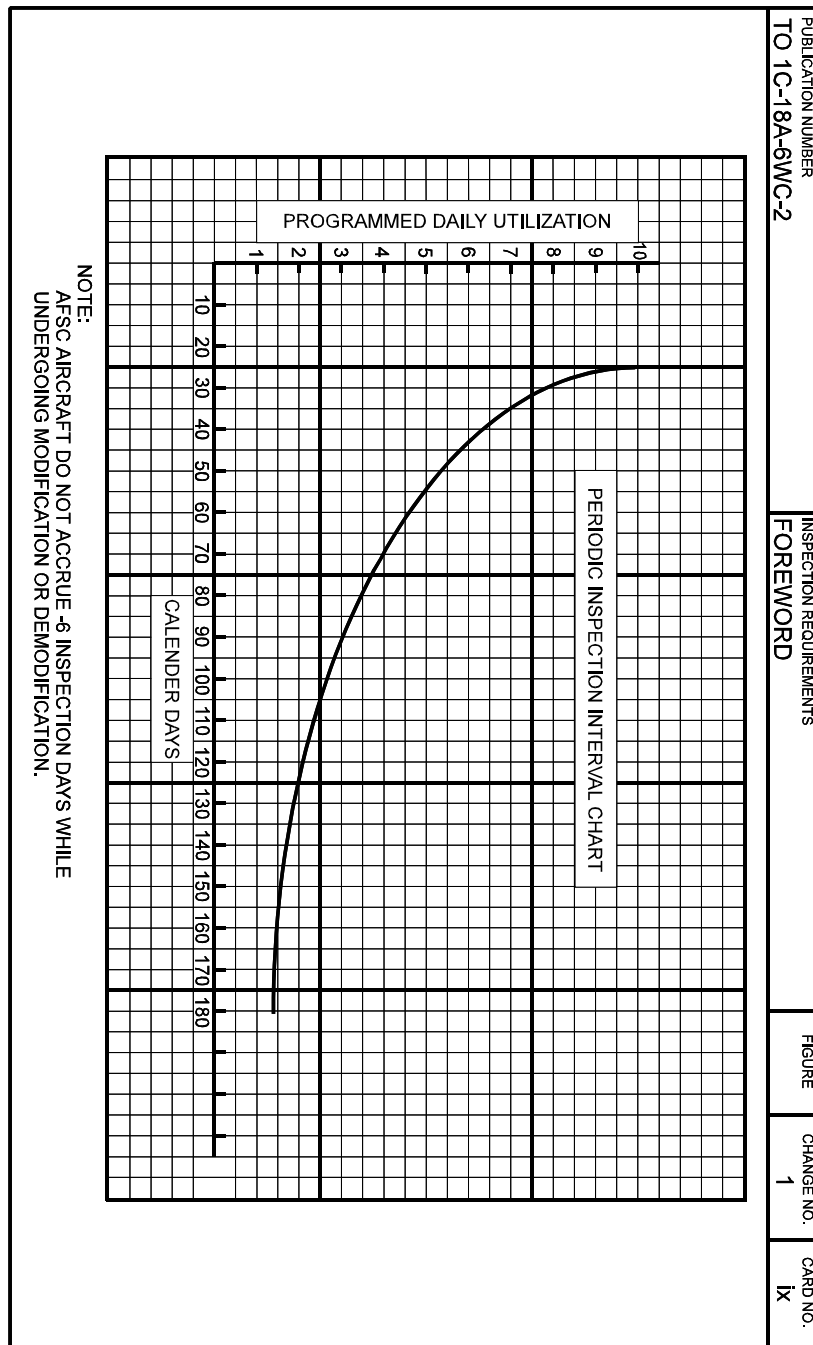FIGURE 15. Example inspection multiples.

MIL-PRF-5096F(USAF)

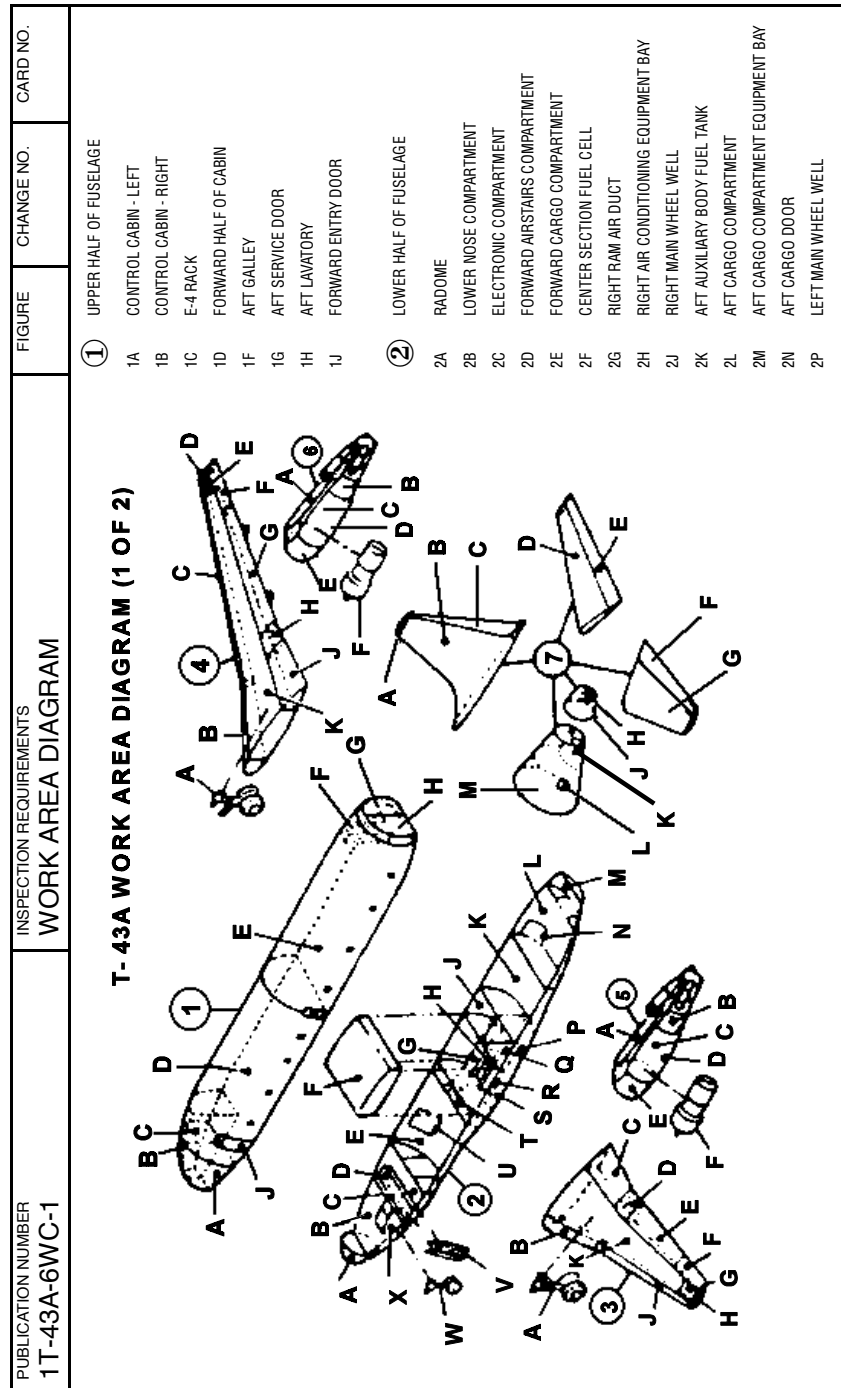


FIGURE 16. Example work area diagram (front).

MIL-PRF-5096F(USAF)

| PUBLICATION NUMBER | INSPECTION REQUIREMENTS | FIGURE | CHANGE NO. | CARD NO. |
|---|--|--|------------|----------|
| 1T-43A-6WC-1 | WORK AREA DIAGRAM | | | VI |
| T-43A WORK AREA DIAGRAM (2 OF 2) | | | | |
| 2Q KEEL BEAM | ④ RIGHT WING | ⑥ RIGHT ENGINE | | |
| 2R LEFT AIR CONDITIONING EQUIP BAY | 4A RIGHT MAIN LENDING GEAR | 6A RIGHT NACELLE FAIRING | | |
| 2S LEFT RAM AIR DUCT | 4B RIGHT WING INBD LEADING EDGE INCLUDING FLAPS | 6B RIGHT NACELLE THRUST REVERSER FAIRING | | |
| 2T AIR CONDITIONING DISTRIBUTION BAY | 4C RIGHT WING OUTBD LEADING EDGE - INCLUDING FLAPS | 6C RIGHT NACELLE RIGHT COWL PANEL | | |
| 2U FORWARD AIRSTAIRS | 4D RIGHT WING TIP | 6D RIGHT NACELLE LEFT COWL PANEL | | |
| 2W NOSE LANDING GEAR | 4E RIGHT FUEL VENT SURGE TANK | 6E RIGHT NACELLE NOSE COWL | | |
| ③ LEFT WING | 4F RIGHT WING TRAILING EDGE OUTBD FLAPS AND SPOILERS | ⑦ EMPENNAGE | | |
| 3A LEFT MAIN LANDING GEAR | 4G RIGHT WING TRAILING EDGE OUTBD FLAPS AND SPOILERS | 7A VERTICAL STABILIZER TIP | | |
| 3B LEFT WING INBD LEADING EDGE - INCLUDING FLAPS | 4H RIGHT WING FIXED TRAILING EDGE, INBD FLAPS AND SPOILERS | 7B VERTICAL STABILIZER | | |
| 3C LEFT WING TRAILING EDGE OUTBD FLAPS AND SPOILERS | 4I INBD FLAPS AND SPOILERS | 7C RUDDER | | |
| 3D LEFT WING FIXED TRAILING EDGE BETWEEN FLAPS | 4J RIGHT WING TRAILING EDGE, INBD FLAPS AND SPOILERS | 7D RIGHT HORIZONTAL STABILIZER | | |
| 3E LEFT WING TRAILING EDGE OUTBD FLAP AND SPOILERS | 4K RIGHT FUEL TANK | 7E RIGHT ELEVATOR AND TAB | | |
| 3F LEFT WING TRAILING EDGE, ALLECON AND CONTROL TAB | ⑤ LEFT ENGINE | 7F LEFT ELEVATOR AND TAB | | |
| 3G LEFT FUEL VENT SURGE TANK | 5A LEFT NACELLE FAIRING | 7G LEFT HORIZONTAL STABILIZER | | |
| 3H LEFT WING TIP | 5B LEFT NACELLE THRUST REVERSER FAIRING | 7H TAIL CONE ACCESS DOOR | | |
| 3J LEFT WING OUTBD LEADING EDGE - INCLUDING SLATS | 5C LEFT NACELLE LEFT COWL PANEL | 7K APU COMPARTMENT | | |
| 3K LEFT FUEL TANK | 5E LEFT NACELLE NOSE COWL | 7L TAIL COMPARTMENT ACCESS DOOR | | |
| | 5F ENGINE NO. 1 | 7M TAIL COMPARTMENT | | |

FIGURE 16. Example work area diagram (back) – Continued.

MIL-PRF-5096F(USAF)

| | | | | | | | | | | | |
|-------------------|--------------|---------------------------|-----|--|----------|----------------------------|--------------------------------------|------------------|-----------------|--------|-------|
| CARD NO. 1-018 | | WORK AREA(S) 1L,1R,4 | | TYPE MECH RQR APG | MECH NO. | CARD TIME | PUBLICATION NUMBER TO 1C-9A-6WC-1 | | CHANGE NO. 1 | | |
| MAN MIN | WORK AREA | WORK UNIT CODE SYS SUB | | PREFLIGHT | | INSPECTION REQUIREMENTS | | ELECTRICAL POWER | SERVICE | FIGURE | |
| 001 | 1 | 13 | 700 | <p>LANDING GEAR</p> <p>1. BRAKES FOR LEAKAGE AND WEAR (SYSTEM PRESSURIZED, BRAKES SET)</p> <p>CAUTION</p> <p>STAND FORWARD OR AFT OF WHEEL DURING TIRE SERVICING OR PRESSURE CHECKS SERVICING HOSES WILL BE FULLY EXTENDED.</p> <p>2. NOSE GEAR TIRES FOR INFLATION OF 131 (+5 -0) PSI (INCLUDING SPARES)</p> <p>CAUTION</p> <p>STAND FORWARD OR AFT OF WHEEL DURING TIRE SERVICING. IF SERVICING KIT IS USED, HOSE TO BE FULLY EXTENDED.</p> <p>4. MAIN GEAR STRUTS FOR PROPER EXTENSION.</p> <p>3. MAIN GEAR TIRES FOR INFLATION IAW TO 1C-9A-2-2-1 (INCLUDING SPARES)</p> <p>5. NOSE GEAR STRUTS FOR PROPER EXTENSION.</p> <p>6. RELEASE BRAKES.</p> | | | | | | | 1-018 |
| 001 | 4 | 13 | 623 | | | | | | | | |
| 001 | 1 | 13 | 613 | | | | | | | | |
| 002 | 1 | 13 | 130 | | | | | | | | |
| 001 | 4 | 13 | 230 | | | | | | | | |
| 001 | 1 | 13 | 700 | | | | | | | | |
| CARD NO. 1-018 | | WORK AREA(S) 1L,1R,4 | | TYPE MECH RQR APG | MECH NO. | CARD TIME | PUBLICATION NUMBER TO 1C-9A-6WC-1 | | CHANGE NO. 1 | | |

FIGURE 17. Example inspection work card (front).

MIL-PRF-5096F(USAF)

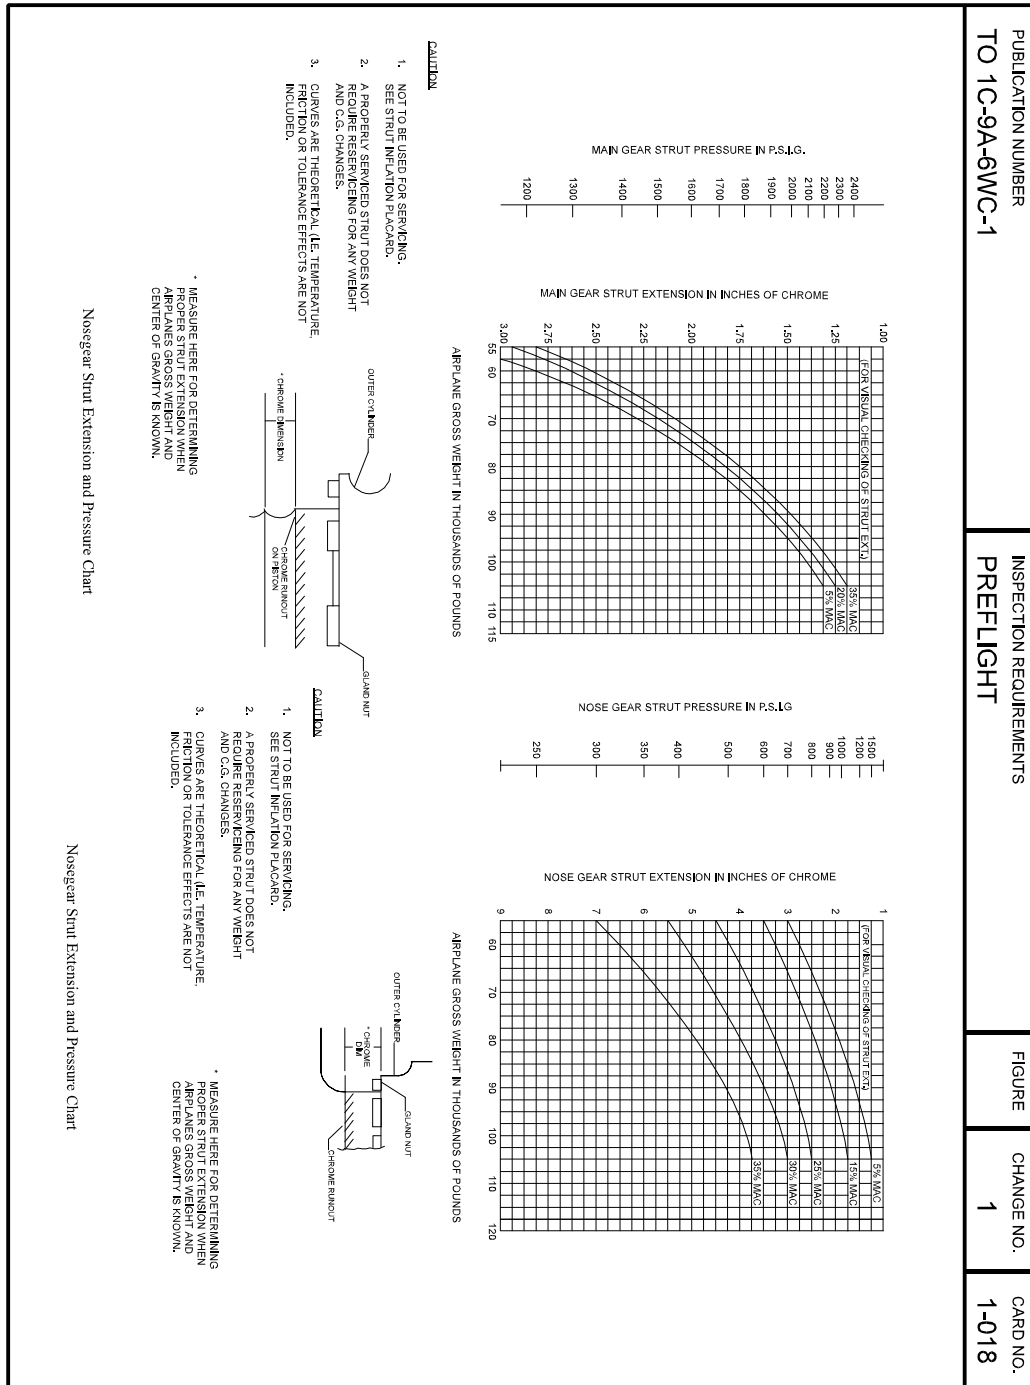


FIGURE 17. Example inspection work card (back) – Continued.

MIL-PRF-5096F(USAF)

| | | | | | | | | | | |
|-------------------|--------------|---------------------------|-----|---|----------|----------------------------|--|------------------|-----------------|--------|
| CARD NO. 2-011 | | WORK AREA(S) 9 | | TYPE MECH RQR HYD | MECH NO. | CARD TIME :15 | PUBLICATION NUMBER TO POSTSCRIPT-WC-1 | | CHANGE NO. 1 | |
| MAN MIN | WORK AREA | WORK UNIT CODE SYS SUB | | SEMI-ANNUALLY | | INSPECTION REQUIREMENTS | | ELECTRICAL POWER | SERVICE | FIGURE |
| 001 | 4 | 13 | 623 | CONTAINER HANDLING SPREADER LUBRICATION (REF. TO 32A34-3-1) 1. CONTAINER HANDLING SPREADER LUBRICATION (1) BOOM PENDANT GREASE FITTING (MIL-G-21164) (2) AIR MOTOR GEAR BOX PLUG (MIL-G-21164) (3) GAPS BETWEEN WIRE ROPES AND SWAGED FITTINGS (MIL-G-23549) | | | | | | |
| CARD NO. 2-011 | | WORK AREA(S) 9 | | TYPE MECH RQR HYD | MECH NO. | CARD TIME :15 | PUBLICATION NUMBER TO POSTSCRIPT-WC-1 | | CHANGE NO. 1 | |


FIGURE 18. Example lubrication work card (front).

MIL-M-5096F(USAF)


| | | | | |
|---|--|--------|-----------------|-------------------|
| PUBLICATION NUMBER T O POSTSCRIPT-WC-1 | INSPECTION REQUIREMENTS SEMI-ANNUALLY | FIGURE | CHANGE NO. 1 | CARD NO. 2-011 |
| CONTAINER HANDLING SPREADER | | | | |
| G9000112 | | | | |

FIGURE 18. Example lubrication work card (back) – Continued.

MIL-PRF-5096F(USAF)

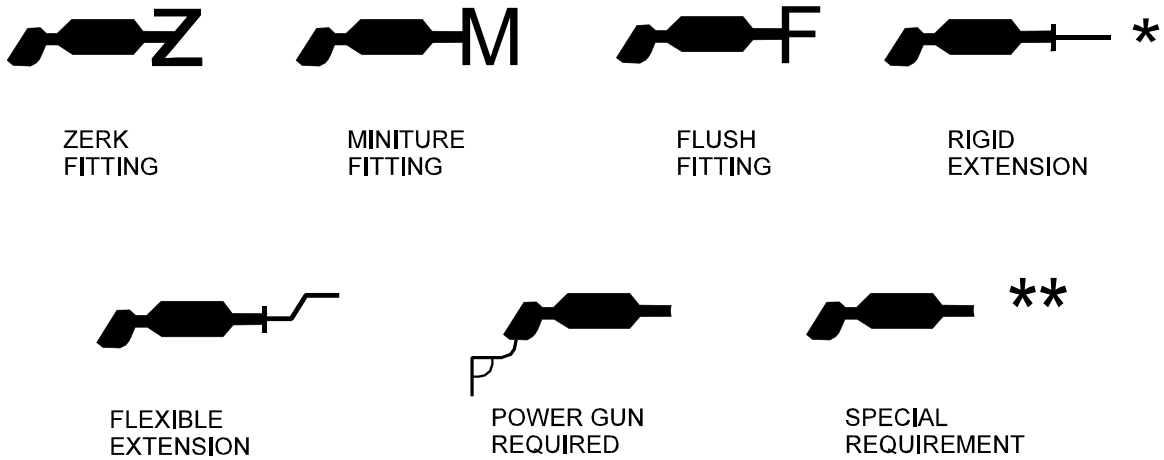

LUBRICATION GUN

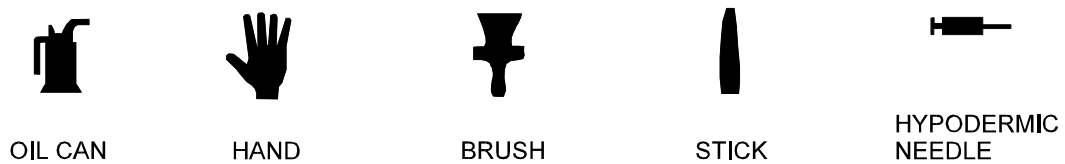

OTHER METHODS

- * The applicable fitting symbol shall be attached.
- ** A note reference number shall be placed in this position. The note shall explain special requirements.

FIGURE 19. Example application symbols.

MIL-PRF-5096F(USAF)

| TO POSTSCRIPT-CL-1 | |
|--|--|
| <p><u>MISSILE PREPARATION</u></p> <p>1. Safing pins installed/ streamers taped VERIFIED ____</p> <div style="text-align: center; margin: 10px 0;"> <div style="border: 2px solid black; padding: 5px; display: inline-block;">CAUTION</div> </div> <p>The sling rods or stabilizing ring shall not be moved while T-E hoist is being operated. Failure to comply could cause hoist cables to catch on missile carriages and result in equipment damage.</p> <p style="text-align: center; margin: 10px 0;">NOTE</p> <p>If moving of sling rods or stabilizing ring is required to free them from hoisting adapter or other equipment, use only the minimum movement necessary. After any movement, perform a thorough visual inspection of hoist cables to ensure they are free of any obstructions before resuming hoist operations.</p> <p>2. Control panel operator of readiness to lower sling rods NOTIFIED ____</p> <p>3. Sling rods clear of access door VERIFIED ____</p> <p>4. Sling rod ends to top of support adapter ring POSITIONED ____</p> | |
| 2 | |

FIGURE 20. Example typical checklist page.

**MIL-PRF-5096F(USAF)
APPENDIX A**

**INSPECTION AND MAINTENANCE REQUIREMENTS MANUAL
DOCUMENT TYPE DEFINITION (DTD) SUBSET**

A.1. SCOPE.

A.1.1 Scope. The markup tags described herein are based on rules outlined in MIL-PRF-28001 and the Information Processing - Text and Office Systems - Standard Generalized Markup Language (SGML) document, International Organization for Standardization (ISO) 8879, as incorporated in Federal Information Processing Standards (FIPS PUB) 152. The Document Type Definition (DTD) subset within this appendix provides the structure and content of documents prepared in accordance with this specification. Digital copies of the DTD (see A.4.1) and Tag Description Table (see A.4.2) are available (see A.5.). This Appendix is a mandatory part of this specification. The information contained herein is intended for compliance.

A.2. APPLICABLE DOCUMENTS.

A.2.1 Government documents.

A.2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-PRF-28001 - Markup Requirements and Generic Style Specification for Electronic
Printed Output and Exchange of Text

STANDARDS

FEDERAL INFORMATION PROCESSING STANDARDS

FIPS PUB 152 - Standard Generalized Markup Language (SGML)

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

(Copies of FIPS are available to Department of Defense activities from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094. Others must request copies of FIPS from the National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161-2171.)

A.3. DOCUMENT TYPE DEFINITION SUBSET.

A.3.1 SGML document type definition subset. Data to be delivered digitally in accordance with this specification shall be tagged using the DTD found in MIL-STD-38784 as modified by the DTD

MIL-PRF-5096F(USAF) APPENDIX A

subset in this appendix. The procedure for accomplishing this is found in MIL-PRF-28001 and FIPS PUB 152 (ISO 8879).

A.3.2 Template document type for Inspection and Maintenance Requirements Manual. The DTD subset for the Inspection and Maintenance Requirements Manual DTD is as follows:

```
<!-- ***** START OF FILE ***** -->

<!-- SUPPLEMENT NOTICE: This file is made available to provide the user with
a digital representation of the DTD found in Appendix A of MIL-PRF-5096F.
This file is incomplete without MIL-PRF-5096F. -->

<!-- NOTE: The start and end of this file are marked with a row of asterisks.
If these rows are not present the file may not be complete! -->

<!-- MIL-PRF-5096F Inspection and Maintenance DTD -->

<!-- The following set of declarations may be referred to by using a public
entity as follows:

<!ENTITY % m5096im PUBLIC "-//USA-DOD//DTD MIL-PRF-5096F IM//EN" >
%m5096im;
-->

<!-- NOTE: In order to parse the following DTD subset alone, append the
following statement to the beginning of the file:

    <!DOCTYPE docim [

and the associated ">" to the end of the file. -->

<!-- ENTITY DECLARATIONS -->

<!ENTITY % m38784STD PUBLIC "-//USA-DOD//DTD MIL-STD-38784//EN" >

<!ENTITY % frnt "(idinfo, lep, verstat?, contents, illuslist?, tablelist?,
foreword, safesum?)" >

<!ENTITY % bodyele "(chapter1, chapter2, chapter3, chapter4)" >

<!ENTITY % chap1 "(system, (wuc, wcno, pararef, para, manmin, workarea)+)" >

<!ENTITY % chap2 "(system, (wuc, pararef, para, manmin)+)" >

<!ENTITY % chap4 "(system, (wuc, pararef, nomen, replim, fsc, partno,
replim)+)" >

<!ENTITY AFitem "User supplies information here." >

<!ENTITY forewordpara "<para0> <title>Purpose and Scope.</title><para>This
manual contains complete requirements for accomplishing schedule maintenance
on this &AFitem; during its entire service life. It establishes inspection,
accessory replacement, and functional check flight requirements for the
&AFitem;. The requirements prescribed by this manual are primarily those which
```

MIL-PRF-5096F(USAF) APPENDIX A

are technical in nature and the conditions listed are intended to direct attention to known problem areas where defects or malfunctions would prevent the items from performing their designed functions within prescribed limits. These requirements are developed for new &AFitem; through maintenance engineering experience and comparison of similar installations on in-service &AFitem;. They are refined and changed during the service life of the &AFitem; by continually evaluating the performance of the equipment, results of scheduled maintenance, and through study of factual operating data for the primary use of the &AFitem;. The interval between the accomplishment of a requirement is intended to be the longest period of time that an item or component can safely operate without an inspection or observation. When the &AFitem; is operated in other than the primary purpose or major use class the requirements have been adjusted accordingly, if necessary, and the requirements identified as to class of operation. These requirements and inspection intervals are the maximum and should never be exceeded. Local conditions (type of missions, special utilization, geographical locations, etc.) may dictate more frequent inspection or replacement, or more thorough inspections. Therefore, commands, local commanders, and their maintenance officers are expected to exercise their prerogative to increase the frequency or scope of any requirements as required.</para0">

<!ENTITY forewordpara2 "<subpara1> <title> Limitations.</title><para>This manual does not contain detailed instructions for troubleshooting to find causes for malfunctioning, nor does it contain instructions for repair, adjustment or other means of rectifying defective conditions. Proper installation of a piece of equipment or accessory is not necessarily within the scope of this manual as adequacy and completeness of installation will have been determined at the time of installation. Further, it does not normally contain informative of precautionary data such as notes, cautions, and warnings. Applicable portions of the appropriate maintenance manuals should be consulted to obtain the maintenance instructions as they are beyond the scope of this manual.

<subpara1> <title> Applicability. </title> <para>This manual may pertain to some or all types and series of a model of &AFitem; and may, therefore, contain requirements applicable to specific equipment that is not installed on individual &AFitem;. When this situation is encountered, those requirements that are not applicable should be disregarded.

<subpara1> <title> Performance of Inspections.</title><para>The inspections prescribed by this manual will be accomplished at specified periods by Air Force organizational activities with assistance by Air Force intermediate maintenance and depot activities when required. Compliance with the provisions of this manual is required to assure that latent defects are discovered and corrected before malfunctions or serious failures occur." >

<!ENTITY forewordpara3 "<para0> <title> Inspection Requirements.</title><para>The inspection requirements establish what equipment is to be inspected, when it is to be inspected, and what conditions are to be sought. The requirements are designed to direct the attention of maintenance personnel to components and areas where defects are suspected to occur as a result of usage under normal operating conditions. They are not intended to provide coverage for routine cleaning, washing, etc., nor are they designed to lead to the detection of isolated discrepancies that may occur on a one time basis, or discrepancies that are the result of carelessness, abuse or poor maintenance

MIL-PRF-5096F(USAF) APPENDIX A

practices. During accomplishment of the specific requirements directed by this manual, maintenance personnel should observe both the equipment being inspected and the components in the surrounding area for defects or irregularities not within the scope of the requirements. Inspections requiring the use of electrical power for accomplishment are identified by a commercial at symbol (@) preceding the requirement. Requirements in this manual are not in sequence; applicable work cards will specify the sequence.

<subpara1> <title> Replacement Schedule.</title><para>The replacement schedule lists items whose expected service life has been determined. The failure of these items would compromise safety, mission accomplishment, or cause failure or condemnation of high value components. Items not listed will be known as 'on-condition items' and will be replaced only when necessary.</para0>" >

<!ENTITY forewordpara4 "<subpara1> <title>Functional Check Flight FCF.</title><para> In conjunction with TO 1-1-300, this manual provides the conditions requiring a Functional Check Flight. They are designed to assure the aircraft is operational and capable of mission accomplishment after completion of certain scheduled or unscheduled maintenance. Detailed procedures are contained in the applicable Acceptance and Functional Check Flight Procedures manual.

<subpara1><title>Repair Restrictions.</title><para>The repair restrictions chapter lists items (by work unit code, nomenclature, federal stock class (FSC), and part number) for which base level repair restrictions have been established and describes the repairs which are not authorized.

<subpara1> <title> Historical Documents </title><para>The historical documents section of Chapter 2 contains a listing of all airplane components that require preparation of AFTO forms. The forms provide a permanent record of events or conditions encountered during the use of the equipment. The information documented in these forms will be used to plan required logistic and maintenance procedural support.

<subpara1> <title> Time Requirements.</title><para>The 'minutes' column in Chapters 1, 2, and 3 provides the estimated time in man-minutes for accomplishment of each requirement and reflects only the time required for inspection or replacement. They do not include time required to gain access to the equipment or those factors (personnel and equipment shortages, lack of parts, adverse working conditions, and qualifications of personnel) which could affect the length of time for any maintenance action." >

<!ENTITY forewordpara5 "<para0> <title> Definitions of Terms.</title> <para> For clarification the following definitions are given.

<deflist>

<term> Specified<def> refers to a definite amount, operation, or limitation which has been established and is contained in applicable directives.

<term> Evidence <def> is an indication of an existing or impending unsatisfactory condition.

<term> Security <def>means the component is properly mounted or attached to related equipment, including applicable safety wiring.

<term> Accessible <def> is the term applied to equipment that may be inspected without further disassembly or removal of panels, cowling, etc., other than

MIL-PRF-5096F(USAF)
APPENDIX A

those required to accomplish the more specific requirements applicable to the particular inspections.

<term>Excessive <def> is a term used to describe conditions when specific limitations have not been established. A condition is excessive if it has progressed to the degree that, if not corrected, could result in failure or malfunction of the component prior to the next scheduled action which would direct attention to the condition.
</deflist>

<para0> <title> Updates.</title><para> Changes and supplements to this manual will be published when necessary to add, delete, or change frequency or scope of requirements. Such changes will be based on factual data accumulated as a result of maintenance experience with the &Afitem;. Recommendations proposing changes to this manual should be submitted on AFTO form 22 in accordance with TO 00-5-1.</para>" >

%m38784STD;

<!-- ELEMENT and ATTRIBUTE LIST DECLARATIONS -->

```
<!ELEMENT accfuncinsp      - - (para0+, (group?, (pararef, para,
manmin)+)+) >
<!ATTLIST accfuncinsp      %sectatt; >

<!ELEMENT baselvlrest      - - (para0+, %chap4;) >
<!ATTLIST baselvlrest      %sectatt; >

<!ELEMENT bpostfltinsp     - - (para0+, %chap1;) >
<!ATTLIST bpostfltinsp     %para0att; >

<!ELEMENT chap1sect        - - (para0+, %chap1;) >
<!ATTLIST chap1sect        %sectatt; >

<!ELEMENT chap2sect        - - (para0+, %chap2;) >
<!ATTLIST chap2sect        %sectatt; >

<!ELEMENT chapter1         - - (prefltinsp, endrunway, thruflight,
bpostfltinsp, hpostfltinsp, ppiinsp, chap1sect*)
>
<!ATTLIST chapter1         %chapatt; >
<!ELEMENT chapter2         - - (specocc, depotlvlinsp, accfuncinsp,
histdoc, chap2sect*) >
<!ATTLIST chapter2         %chapatt; >
<!ELEMENT chapter3         - - (para0+, (system, (wuc, pararef, para, qty,
manmin)+)+) >
<!ATTLIST chapter3         %chapatt; >

<!ELEMENT chapter4         - - (baselvlrest, supreprest) >
<!ATTLIST chapter4         %chapatt; >

<!ELEMENT depotlvlinsp     - - (para0+, %chap2;) >
<!ATTLIST depotlvlinsp     %para0att; >

<!ELEMENT docim            - - (front, body) +(pgbrk | brk | subjinfo |
line | modreq | location) >
```

MIL-PRF-5096F(USAF)
APPENDIX A

| | |
|------------------------|--|
| <!ATTLIST docim | service %service; 'AF' |
| | %docatt; |
| | %secur; > |
| <!ELEMENT endrunway | - - (para0+, %chap1;) > |
| <!ATTLIST endrunway | %para0att; > |
| <!ELEMENT formreq | - o (%text;) > |
| <!ATTLIST formreq | %secur; > |
| <!ELEMENT fsc | - o (%text;) > |
| <!ATTLIST fsc | %secur; > |
| <!ELEMENT group | - o (%text;) > |
| <!ATTLIST group | %secur; > |
| <!ELEMENT histdoc | - - (para0+, (system?, (wuc, nomen, |
| | formreq)+)+) > |
| <!ATTLIST histdoc | %para0att; > |
| <!ELEMENT hpostfltinsp | - - (para0+, %chap1;) > |
| <!ATTLIST hpostfltinsp | %para0att; > |
| <!ELEMENT interval | - o (%text;) > |
| <!ATTLIST interval | %secur; > |
| <!ELEMENT manmin | - o (%text;) > |
| <!ATTLIST manmin | %secur; > |
| <!ELEMENT pararef | - o (%text;) > |
| <!ATTLIST pararef | %secur; > |
| <!ELEMENT ppiinsp | - - (para0+, (system, (interval?, (wuc, wcn, |
| | pararef, para, manmin, workarea)+)+)+) > |
| <!ATTLIST ppiinsp | %para0att; > |
| <!ELEMENT prefltinsp | - - (para0+, %chap1;) > |
| <!ATTLIST prefltinsp | %para0att; > |
| <!ELEMENT qty | - o (%text;) > |
| <!ATTLIST qty | %secur; > |
| <!ELEMENT replim | - o (%text;) > |
| <!ATTLIST replim | %secur; > |
| <!ELEMENT specocc | - - (para0+, %chap2;) > |
| <!ATTLIST specocc | %sectatt; > |
| <!ELEMENT supreprest | - - (para0+, %chap4;) > |
| <!ATTLIST supreprest | %sectatt; > |
| <!ELEMENT system | - o (%text;) > |
| <!ATTLIST system | %secur; > |
| <!ELEMENT thruflight | - - (para0+, %chap1;) > |

**MIL-PRF-5096F(USAF)
APPENDIX A**

```

<!ATTLIST thruflight      %sectatt; >

<!ELEMENT wcno             - o  (%text;) >
<!ATTLIST wcno             %secur; >

<!ELEMENT workarea         - o  (%text;) >
<!ATTLIST workarea         %secur; >

<!ELEMENT wuc              - o  (%text;) >
<!ATTLIST wuc              %secur; >

<!-- ***** END OF FILE ***** -->

```

A.4. DETAILED DESCRIPTION.

A.4.1 Document type definition. The DTD found in MIL-STD-38784 as modified by the DTD subset within this appendix provides the structure and content of documents prepared in accordance with this specification. The DTDs are available in a digital format. See A.5., for information on obtaining the files.

A.4.2 Tag description table. The Tag Description Table provides detailed descriptions of the tags above. It provides the element tagging structure, full element name, tag minimization requirements, element structure, referencing elements, source paragraph, and attribute descriptions unique to the element. See A.5., for information on obtaining this table.

A.5. OBTAINING FILES.

A.5.1 Obtaining files. The DTD, attribute and tag description tables are available as ASCII files by either of two methods (see A.5.1.1 and A.5.1.2). In the event of a conflict between the text of this document and any downloaded files, the text of this document takes precedence. These files are for convenience and informational purposes only.

A.5.1.1 File Transfer Protocol (FTP). The procedures for obtaining files via FTP are as follows.

- a. Connect to "WPCDSO1.wpafb.af.mil" using the FTP software available at your site. For example, if your FTP software is invoked using the "ftp" command, type "ftp WPCDSO1.wpafb.af.mil". Do not attempt to log-in to this site using a "telnet" connection. If this connection fails, connect using "129.52.152.8".
- b. Log-in (login, name, remote user name, etc.) as "ftp" and press "enter".
- c. For password, type electronic mail (e-mail) name followed by "@" (at) and press "enter".
- d. Type "cd sgml" (or the command your system requires to change to "sgml" directory) and press "enter". At this point, a short new users message will normally appear. If the new users message does not appear, it should be downloaded and read. Download file by typing "get.message" (or the command your system requires to download a file) and press "enter".
- e. Type "get filelist.txt" (or the command your system requires to download a file) and press "enter". This file contains a list of all files available. This file is updated as new items are added, therefore it should be downloaded and read before downloading any other file.

**MIL-PRF-5096F(USAF)
APPENDIX A**

- f. If the needed file ends with “.zip”, see g. below, otherwise type “asc” (or the command your system requires for an ASCII transfer) and press “enter”. Type “get XXXXXX.XXX” (where XXXXXX.XXX is the name of the file to be downloaded) and press “enter” to download needed file. Repeat for each file to be downloaded.
- g. If the needed file ends with “.zip”, type “bin” (or the command your system requires for a binary transfer) and press “enter”. Type “get XXXXXX.XXX” (where XXXXXX.XXX is the name of the file to be downloaded) and press “enter” to download needed file. Repeat for each file to be downloaded. Zipped files were compressed using PKZIP Version 2.04
- h. File “nc.txt” contains information on the naming conventions used on all files in this directory. Type “get nc.txt” to download this file.

A.5.1.2 World Wide Web (WWW). Obtain files via the Air Force Product Data Systems Modernization (PDSM) Program Office (AFPPPO) home page at <http://www.pdsm.wpafb.af.mil/>. Select TMSS from the graphical menu and follow the directions presented.

**MIL-PRF-5096F(USAF)
APPENDIX B**

**ACCEPTANCE AND FUNCTIONAL CHECK FLIGHT MANUAL
DOCUMENT TYPE DEFINITION (DTD) SUBSET**

B.1. SCOPE.

B.1.1 Scope. The markup tags described herein are based on rules outlined in MIL-PRF-28001 and the Information Processing - Text and Office Systems - Standard Generalized Markup Language (SGML) document, International Organization for Standardization (ISO) 8879, as incorporated in Federal Information Processing Standards (FIPS PUB) 152. The Document Type Definition (DTD) subset within this appendix provides the structure and content of documents prepared in accordance with this specification. Digital copies of the DTD (see B.4.1) and Tag Description Table (see B.4.2) are available (see A.5.). This Appendix is a mandatory part of this specification. The information contained herein is intended for compliance.

B.2. APPLICABLE DOCUMENTS.

B.2.1 Government documents.

B.2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-PRF-28001 Markup Requirements and Generic Style Specification for Electronic
Printed Output and Exchange of Text

STANDARDS

FEDERAL INFORMATION PROCESSING STANDARDS

FIPS PUB 152 Standard Generalized Markup Language (SGML)

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

(Copies of FIPS PUBs are available to Department of Defense activities from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094. Others must request copies of FIPS from the National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161-2171.)

B.3. DOCUMENT TYPE DEFINITION SUBSET.

B.3.1 SGML document type definition subset. Data to be delivered digitally in accordance with this specification shall be tagged using the DTD found in MIL-STD-38784 as modified by the DTD subset in this section. The procedure for accomplishing this is found in MIL-PRF-28001.

**MIL-PRF-5096F(USAF)
APPENDIX B**

B.3.2 Template document type for Acceptance and Functional Check Flight Manual. The DTD subset for the Acceptance and Functional Check Flight Manual DTD is as follows:

```
<!-- ***** START OF FILE ***** -->

<!-- SUPPLEMENT NOTICE: This file is made available to provide the user with
a digital representation of the DTD found in Appendix B of MIL-PRF-5096F.
This file is incomplete without MIL-PRF-5096F. -->

<!-- NOTE: The start and end of this file are marked with a row of asterisks.
If these rows are not present the file may not be complete! -->

<!-- MIL-PRF-5096F Functional Check Flight DTD -->

<!-- The following set of declarations may be referred to by using a
public entity as follows:

<!ENTITY % m5096fcf PUBLIC "-//USA-DOD//DTD MIL-PRF-5096F FCF//EN" >
%m5096fcf;
-->

<!-- NOTE: In order to parse the following DTD subset alone, append the
following statement to the beginning of the file:

    <!DOCTYPE docfcf [

and the associated ">" to the end of the file. -->

<!-- ENTITY DECLARATIONS -->

<!ENTITY % m5096fcfc1 PUBLIC "-//USA-DOD//DTD MIL-PRF-5096F FCFCL//EN" >

<!ENTITY % bodyele "(chapter+)" >

<!ENTITY % sect "(title, ((phase, phase+) | para0+))" >

<!ENTITY % idinf " (tmidno, pretmidno*, doctype, prttitle, graphic, contractno,
supersd?, suppl*, discl, distrib, expcont?, destr?, authnot, downgrd?,
pubdate, (chgdate, chgnum?)" >

<!ENTITY % frnt " (idinfo, lep, assoccl, verstat?, contents, illuslist?,
tablelist?, foreword, testfltprof)" >

<!ENTITY % chap "(title, ((section, section+) | (phase, phase+) | para0+))" >
%m5096fcfc1;

<!-- ELEMENT and ATTRIBUTE LIST DECLARATIONS -->

<!ELEMENT assoccl          - o (%parazero;, subpara1*) >

<!ELEMENT docfcf          - - (front, body) +(pgbrk | brk | subjinfo |
line | modreq | location) >
<!ATTLIST docfcf
service %service; 'AF'
%docatt;
```

MIL-PRF-5096F(USAF)
APPENDIX B

%secur; >

<!-- ***** END OF FILE ***** -->

B.4. DETAILED DESCRIPTION.

B.4.1 Document type definition. The DTD found in MIL-STD-38784 as modified by the DTD subset within this appendix provides the structure and content of documents prepared in accordance with this specification. The DTDs are available in a digital format. See A.5., for information on obtaining the files.

B.4.2 Tag description table. The Tag Description Table provides detailed descriptions of the tags above. It provides the element tagging structure, full element name, tag minimization requirements, element structure, referencing elements, source paragraph, and attribute descriptions unique to the element. See A.5., for information on obtaining this table.

**MIL-PRF-5096F(USAF)
APPENDIX C**

**ACCEPTANCE AND FUNCTIONAL CHECK FLIGHT CHECKLIST
DOCUMENT TYPE DEFINITION (DTD) SUBSET**

C.1. SCOPE.

C.1.1 Scope. The markup tags described herein are based on rules outlined in MIL-PRF-28001 and the Information Processing - Text and Office Systems - Standard Generalized Markup Language (SGML) document, International Organization for Standardization (ISO) 8879, as incorporated in Federal Information Processing Standards (FIPS PUB) 152. The Document Type Definition (DTD) subset within this appendix provides the structure and content of documents prepared in accordance with this specification. Digital copies of the DTD (see C.4.1) and Tag Description Table (see C.4.2) are available (see A.5.). This Appendix is a mandatory part of this specification. The information contained herein is intended for compliance.

C.2. APPLICABLE DOCUMENTS.

C.2.1 Government documents.

C.2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-PRF-28001 Markup Requirements and Generic Style Specification for Electronic
Printed Output and Exchange of Text

STANDARDS

FEDERAL INFORMATION PROCESSING STANDARDS

FIPS PUB 152 Standard Generalized Markup Language (SGML)

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

(Copies of FIPS PUBs are available to Department of Defense activities from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094. Others must request copies of FIPS PUBs from the National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161-2171.)

C.3. DOCUMENT TYPE DEFINITION SUBSET.

C.3.1 SGML document type definition subset. Data to be delivered digitally in accordance with this specification shall be tagged using the DTD found in MIL-STD-38784 as modified by the DTD subset in this section. The procedure for accomplishing this is found in MIL-PRF-28001.

**MIL-PRF-5096F(USAF)
APPENDIX C**

C.3.2 Template document type for Acceptance and Functional Check Flight Checklist. The DTD subset for the Acceptance and Functional Check Flight Checklist DTD is as follows:

```
<!-- ***** START OF FILE ***** -->

<!-- SUPPLEMENT NOTICE: This file is made available to provide the user with
a digital representation of the DTD found in Appendix C of MIL-PRF-5096F.
This file is incomplete without MIL-PRF-5096F. -->

<!-- NOTE: The start and end of this file are marked with a row of asterisks.
If these rows are not present the file may not be complete! -->

<!-- MIL-PRF-5096F Functional Check Flight Checklist DTD -->

<!-- The following set of declarations may be referred to by using a public
entity as follows:

<!ENTITY % mfcfcfl PUBLIC "-//USA-DOD//DTD MIL-PRF-5096F FCFCL//EN" >
% mfcfcfl;
-->

<!-- NOTE: In order to parse the following DTD subset alone, append the
following statement to the beginning of the file:

    <!DOCTYPE docfcfcfl [

and the associated ">" to the end of the file. -->

<!-- ENTITY DECLARATIONS -->

<!ENTITY % m38784STD PUBLIC "-//USA-DOD//DTD MIL-STD-38784//EN" >

<!ENTITY % bodyele "(testfltprof?, chapter+)" >

<!ENTITY % titles "title" >

<!ENTITY % idinf "(tmidno, aircraftype, replnote?, distrib, authnot, pubdate)"
>

<!ENTITY % chap "%titles;, ((phase, phase+) | para0+)" >

<!ENTITY % frnt "idinfo, warnpage?, chginssht?, lep, verstat?, tpdr?, chgrec?,
contents, illuslist?, tablelist?, (foreword | preface | intro), safesum?" >

<!ENTITY % stepcon "(clitem?, action?)+> >

<!ENTITY distrest "Distribution restrictions are the same for this checklist
as the parent manual." >

%m38784STD;

<!-- ELEMENT and ATTRIBUTE LIST DECLARATIONS -->

<!ELEMENT action - o (%text;) >
<!ATTLIST action %secur; >
```

MIL-PRF-5096F(USAF)
APPENDIX C

```

<!ELEMENT aircrafttype      - o  (%text;) >
<!ATTLIST aircrafttype      %secur; >

<!ELEMENT clitem            - o  (%text;) >
<!ATTLIST clitem            %secur; >

<!ELEMENT docfcfc1          - -  (front, body) +(pgbrk | brk | subjinfo |
<!ATTLIST docfcfc1          line | modreq | location) >
                             service %service; 'AF'
                             %docatt;
                             %secur; >

<!ELEMENT phase             - o  (%titles;, para0+) >
<!ATTLIST phase             %sectatt; >

<!ELEMENT replnote          - o  (%text;) >
<!ATTLIST replnote          %secur; >

<!ELEMENT testfltprof       - o  (figure) >
<!ATTLIST testfltprof       %secur; >

<!-- ***** END OF FILE ***** -->

```

C.4. DETAILED DESCRIPTION.

C.4.1 Document type definition. The DTD found in MIL-STD-38784 as modified by the DTD subset within this appendix provides the structure and content of documents prepared in accordance with this specification. The DTDs are available in a digital format. See A.5., for information on obtaining the files.

C.4.2 Tag description table. The Tag Description Table provides detailed descriptions of the tags above. It provides the element tagging structure, full element name, tag minimization requirements, element structure, referencing elements, source paragraph, and attribute descriptions unique to the element. See A.5., for information on obtaining this table.

**MIL-PRF-5096F(USAF)
APPENDIX D**

**WORK CARDS
DOCUMENT TYPE DEFINITION (DTD) SUBSET**

D.1. SCOPE.

D.1.1 Scope. The markup tags described herein are based on rules outlined in MIL-PRF-28001 and the Information Processing - Text and Office Systems - Standard Generalized Markup Language (SGML) document, International Organization for Standardization (ISO) 8879, as incorporated in Federal Information Processing Standards (FIPS PUB) 152. The Document Type Definition (DTD) subset within this appendix provides the structure and content of documents prepared in accordance with this specification. Digital copies of the DTD (see D.4.1) and Tag Description Table (see D.4.2) are available (see A.5.). This Appendix is a mandatory part of this specification. The information contained herein is intended for compliance.

D.2. APPLICABLE DOCUMENTS.

D.2.1 Government documents.

D.2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-PRF-28001 Markup Requirements and Generic Style Specification for Electronic Printed Output and Exchange of Text

STANDARDS

FEDERAL INFORMATION PROCESSING STANDARDS

FIPS PUB 152 Standard Generalized Markup Language (SGML)

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

(Copies of FIPS PUBs are available to Department of Defense activities from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094. Others must request copies of FIPS PUBs from the National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161-2171.)

D.3. DOCUMENT TYPE DEFINITION SUBSET.

D.3.1 SGML document type definition subset. Data to be delivered digitally in accordance with this specification shall be tagged using the DTD found in MIL-STD-38784 as modified by the DTD subset in this section. The procedure for accomplishing this is found in MIL-PRF-28001.

**MIL-PRF-5096F(USAF)
APPENDIX D**

D.3.2 Template document type for Work Cards. The DTD subset for the Work Cards DTD is as follows:

```
<!-- ***** START OF FILE ***** -->

<!-- SUPPLEMENT NOTICE: This file is made available to provide the user with
a digital representation of the DTD found in Appendix D of MIL-PRF-5096F.
This file is incomplete without MIL-PRF-5096F. -->

<!-- NOTE: The start and end of this file are marked with a row of asterisks.
If these rows are not present the file may not be complete! -->

<!-- MIL-PRF-5096F Work Card DTD -->

<!-- The following set of declarations may be referred to by using a public
entity as follows:

<!ENTITY % m5096wc PUBLIC "-//USA-DOD//DTD MIL-PRF-5096F WC//EN" >
%m5096wc;
-->

<!-- NOTE: In order to parse the following DTD subset alone, append the
following statement to the beginning of the file:

    <!DOCTYPE docwc [

and the associated ">" to the end of the file. -->

<!-- ENTITY DECLARATIONS -->

<!ENTITY % m38784STD PUBLIC "-//USA-DOD//DTD MIL-STD-38784//EN" >

<!ENTITY % frnt "(idinfo, lep, verstat?, contents, illuslist?, tablelist?,
foreword, safesum?, wadiag+)" >

<!ENTITY % bodyele "(wcno, workarealist, mechblk, cardtime, chgnum?, inspreg,
power, serv, figblk, actionblk, figure+)" >

<!ENTITY % parazero "(manmin?, workarea?, wuc?, title, warning*, caution?,
note?, para, note?, (step1, step1+)?)" >

<!ENTITY % stepcon "(manmin?, workarea?, wuc?, warning*, caution?, note?,
para, note?)" >

<!ENTITY forewordpara " This work card is a step by step guide in abbreviated
form for use as a reference to insure accomplishment of selected tasks by a
predetermined sequence procedure. The intent of this work card is to eliminate
the probability of omission of a step in the accomplishment of the intended
task. The procedures contained herein are presented in the shortest practical
form for use by qualified personnel and are not intended to provide full
technical instructions. This work card provides in an abbreviated form
procedures for &proc;. These procedures are derived from, but do not replace,
the detailed procedures contained in technical orders (TO). When malfunctions
occur reference to the TO shall be made." >
```

MIL-PRF-5096F(USAF)
APPENDIX D

```

<!ENTITY proc "User supplies information here" >

%38784STD;

<!-- ELEMENT and ATTRIBUTE LIST DECLARATIONS -->

<!ELEMENT actionblk          - o (para0+) >
<!ATTLIST actionblk          %secur; >

<!ELEMENT cardtime           - o (%text;) >
<!ATTLIST cardtime           %secur; >

<!ELEMENT docwc               - - (front, body) +(pgbrk | brk | subjinfo |
<!ATTLIST docwc               line | modreq | location) >
                             service %service; 'AF'
                             phasedwc %yesorno; '0'
                             %docatt;
                             %secur; >

<!ELEMENT figblk              - o (%text;) >
<!ATTLIST figblk              %secur; >

<!ELEMENT inspreq             - o (%text;) >
<!ATTLIST inspreq             %secur; >

<!ELEMENT manmin              - o (%text;) >
<!ATTLIST manmin              %secur; >

<!ELEMENT mechblk             - o (mechno, mechtype) >
<!ATTLIST mechblk             %secur; >

<!ELEMENT mechno              - o (%text;) >
<!ATTLIST mechno              %secur; >

<!ELEMENT mechtype            - o (%text;) >
<!ATTLIST mechtype            %secur; >

<!ELEMENT power               - o EMPTY >
<!ATTLIST power               status (on | off | onoroff | onandoff) #REQUIRED
                             %secur; >

<!ELEMENT serv                - o EMPTY >
<!ATTLIST serv                status (in | out | inandout) #REQUIRED
                             %secur; >

<!ELEMENT sub                 - o (%text;) >
<!ATTLIST sub                 %secur; >

<!ELEMENT sys                 - o (%text;) >
<!ATTLIST sys                 %secur; >

<!ELEMENT wadiag              - o (figure+) >
<!ATTLIST wadiag              %secur; >

<!ELEMENT wcno                - o (%text;) >

```

**MIL-PRF-5096F(USAF)
APPENDIX D**

```

<!ATTLIST wcno                %secur; >

<!ELEMENT workarea            - o  (%text;) >
<!ATTLIST workarea            %secur; >

<!ELEMENT workarealist        - o  (workarea*) >
<!ATTLIST workarealist        %secur; >

<!ELEMENT wuc                 - o  (sys, sub) >
<!ATTLIST wuc                 %secur; >

<!-- ***** END OF FILE ***** -->

```

D.4. DETAILED DESCRIPTION.

D.4.1 Document type definition. The DTD found in MIL-STD-38784 as modified by the DTD subset within this appendix provides the structure and content of documents prepared in accordance with this specification. The DTDs are available in a digital format. See A.5., for information on obtaining the files.

D.4.2 Tag description table. The Tag Description Table provides detailed descriptions of the tags above. It provides the element tagging structure, full element name, tag minimization requirements, element structure, referencing elements, source paragraph, and attribute descriptions unique to the element. See A.5., for information on obtaining this table.

**MIL-PRF-5096F(USAF)
APPENDIX E**

**FLOW/SEQUENCE CHARTS
DOCUMENT TYPE DEFINITION (DTD) SUBSET**

E.1. SCOPE.

E.1.1 Scope. The markup tags described herein are based on rules outlined in MIL-PRF-28001 and the Information Processing - Text and Office Systems - Standard Generalized Markup Language (SGML) document, International Organization for Standardization (ISO) 8879, as incorporated in Federal Information Processing Standards (FIPS PUB) 152. The Document Type Definition (DTD) subset within this appendix provides the structure and content of documents prepared in accordance with this specification. Digital copies of the DTD (see E.4.1) and Tag Description Table (see E.4.2) are available (see A.5.). This Appendix is a mandatory part of this specification. The information contained herein is intended for compliance.

E.2. APPLICABLE DOCUMENTS.

E.2.1 Government documents.

E.2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-PRF-28001 Markup Requirements and Generic Style Specification for Electronic
Printed Output and Exchange of Text

STANDARDS

FEDERAL INFORMATION PROCESSING STANDARDS

FIPS PUB 152 Standard Generalized Markup Language (SGML)

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

(Copies of FIPS PUBs are available to Department of Defense activities from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094. Others must request copies of FIPS PUBs from the National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161-2171.)

E.3. DOCUMENT TYPE DEFINITION SUBSET.

E.3.1 SGML document type definition subset. Data to be delivered digitally in accordance with this specification shall be tagged using the DTD found in MIL-STD-38784 as modified by the DTD subset in this section. The procedure for accomplishing this is found in MIL-PRF-28001.

MIL-PRF-5096F(USAF)
APPENDIX E

E.3.2 Template document type for Flow/Sequence Charts. The DTD subset for the Flow/Sequence Charts DTD is as follows:

```
<!-- ***** START OF FILE ***** -->

<!-- SUPPLEMENT NOTICE: This file is made available to provide the user with
a digital representation of the DTD found in Appendix E of MIL-PRF-5096F.
This file is incomplete without MIL-PRF-5096F. -->

<!-- NOTE: The start and end of this file are marked with a row of asterisks.
If these rows are not present the file may not be complete! -->

<!-- MIL-PRF-5096F Flow Sequence Chart DTD -->

<!-- The following set of declarations may be referred to by using a public
entity as follows:

<!ENTITY % mfschart PUBLIC "-//USA-DOD//DTD MIL-PRF-5096F FS//EN" >
% mfschart;
-->

<!-- NOTE: In order to parse the following DTD subset alone, append
the following statement to the beginning of the file:

    <!DOCTYPE docfschart [

and the associated ">" to the end of the file. -->

<!ENTITY % m38784STD PUBLIC "-//USA-DOD//DTD MIL-STD-38784//EN" >
% m38784STD;

<!-- ELEMENT and ATTRIBUTE LIST DECLARATIONS -->

<!ELEMENT area                - o  (#PCDATA) >
<!ATTLIST area                %secur; >

<!ELEMENT cardtime            - o  (%text;) >
<!ATTLIST cardtime            %secur; >

<!ELEMENT diagblk             - o  (figure) >
<!ATTLIST diagblk             %secur; >

<!ELEMENT docfschart          - -  (hdblk, workarea, workassign) +(pgbrk |
<!ATTLIST docfschart          brk | subjinfo | line | modreq | location) >
                             service %service; 'AF'
                             %docatt;
                             %secur; >

<!ELEMENT epline              - o  EMPTY >
<!ATTLIST epline              power (on | off | onoroff | onandoff) #IMPLIED
                             %secur; >

<!ELEMENT hdblk               - -  ((mechtype, wcno, onewo?, offewo?)+,
                             diagblk, prttitle, suppl, tmidno, pubdate) >
```

MIL-PRF-5096F(USAF)
APPENDIX E

```

<!ATTLIST hdblkc          %secur; >

<!ELEMENT hplus          - o  (#PCDATA) >
<!ATTLIST hplus          %secur; >

<!ELEMENT mectype        - o  (%text;) >
<!ATTLIST mectype        %secur; >

<!ELEMENT offewo         - o  (wcno+) >
<!ATTLIST offewo         %secur; >

<!ELEMENT onewo          - o  (wcno+) >
<!ATTLIST onewo          %secur; >

<!ELEMENT wcno           - o  (%text;) >
<!ATTLIST wcno           %secur; >

<!ELEMENT workarea       - -  ((area, (wcno, hplus, cardtime,
                                epline?)+)+) >
<!ATTLIST workarea       %secur; >

<!ELEMENT workassign     - -  ((mectype, (wcno, hplus, cardtime)+)+) >
<!ATTLIST workassign     %secur; >

<!-- ***** END OF FILE ***** -->

```

E.4. DETAILED DESCRIPTION.

E.4.1 Document type definition. The DTD found in MIL-STD-38784 as modified by the DTD subset within this appendix provides the structure and content of documents prepared in accordance with this specification. The DTDs are available in a digital format. See A.5., for information on obtaining the files.

E.4.2 Tag description table. The Tag Description Table provides detailed descriptions of the tags above. It provides the element tagging structure, full element name, tag minimization requirements, element structure, referencing elements, source paragraph, and attribute descriptions unique to the element. See A.5., for information on obtaining this table.

MIL-PRF-5096F(USAF)
APPENDIX F
CHECKLIST
DOCUMENT TYPE DEFINITION (DTD) SUBSET

F1. SCOPE.

F.1.1 Scope. The markup tags described herein are based on rules outlined in MIL-PRF-28001 and the Information Processing - Text and Office Systems - Standard Generalized Markup Language (SGML) document, International Organization for Standardization (ISO) 8879, as incorporated in Federal Information Processing Standards (FIPS PUB) 152. The Document Type Definition (DTD) subset within this appendix provides the structure and content of documents prepared in accordance with this specification. Digital copies of the DTD (see C.4.1) and Tag Description Table (see C.4.2) are available (see A.5.). This Appendix is a mandatory part of this specification. The information contained herein is intended for compliance.

F.2. APPLICABLE DOCUMENTS.

F.2.1 Government documents.

F.2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-PRF-28001 Markup Requirements and Generic Style Specification for Electronic
Printed Output and Exchange of Text

STANDARDS

FEDERAL INFORMATION PROCESSING STANDARDS

FIPS PUB 152 Standard Generalized Markup Language (SGML)

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

(Copies of FIPS PUBs are available to Department of Defense activities from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094. Others must request copies of FIPS PUBs from the National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161-2171.)

F.3. DOCUMENT TYPE DEFINITION SUBSET.

F.3.1 SGML document type definition subset. Data to be delivered digitally in accordance with this specification shall be tagged using the DTD found in MIL-STD-38784 as modified by the DTD subset in this section. The procedure for accomplishing this is found in MIL-PRF-28001.

**MIL-PRF-5096F(USAF)
APPENDIX F**

F.3.2 Template document type for Checklist. The DTD subset for the Checklist DTD is as follows:

```
<!-- ***** START OF FILE ***** -->

<!-- SUPPLEMENT NOTICE: This file is made available to provide the user with
a digital representation of the DTD found in Appendix F of MIL-PRF-5096F.
This file is incomplete without MIL-PRF-5096F. -->

<!-- NOTE: The start and end of this file are marked with a row of asterisks.
If these rows are not present the file may not be complete! -->

<!-- MIL-PRF-5096F Checklist DTD -->

<!-- The following set of declarations may be referred to by using a public
entity as follows:

<!ENTITY % m5096cl PUBLIC "-//USA-DOD//DTD MIL-PRF-5096F CL//EN" >
%m5096cl;
-->

<!-- NOTE: In order to parse the following DTD subset alone, append the
following statement to the beginning of the file:

    <!DOCTYPE doccl [

and the associated ">" to the end of the file. -->

<!-- ENTITY DECLARATIONS -->

<!ENTITY % m38784STD PUBLIC "-//USA-DOD//DTD MIL-STD-38784//EN" >

<!ENTITY % frnt "(idinfo, lep, verstat?, contents, illuslist?, tablelist?,
foreword, safesum?)" >

<!ENTITY % titles "(title)">

<!ENTITY % chap "(%titles;, task+)" >

<!ENTITY % bodyele "(chapter+ | task+)" >

<!ENTITY % stepcon "(warning*, caution?, note?, (clitem, action?), note?)" >

<!ENTITY forewordpara "This checklist is a step by step guide in abbreviated
form for use as a reference to insure accomplishment of selected tasks by a
predetermined sequence procedure. The intent of this checklist is to eliminate
the probability of omission of a step in the accomplishment of the intended
task. The procedures contained herein are presented in the shortest practical
form for use by qualified personnel and are not intended to provide full
technical instructions. This checklist provides, in an abbreviated form,
procedures for (appropriate tasks, inspections, etc.). These procedures are
derived from, but do not replace, the detailed procedures contained in
Technical Orders (TO). When malfunctions occur reference to the TO shall be
made." >
```

MIL-PRF-5096F(USAF)
APPENDIX F

```
%m38784STD;

<!-- ELEMENT and ATTRIBUTE LIST DECLARATIONS -->

<!ENTITY % taskatt "%para0att;,
    special NOTOKEN #IMPLIED" >

<!ELEMENT action                - o (%text;) >
<!ATTLIST action                %secur; >

<!ELEMENT clitem                - o (%text;) >
<!ATTLIST clitem                %secur; >

<!ELEMENT doccl                 - - (front, body)      +(pgbrk | brk | subjinfo
    | line | modreq | location) >
<!ATTLIST doccl                 service %service; 'AF'
    %docatt;
    %secur; >

<!ELEMENT prelim                - - (warning*, caution?, note?, para)+ >
<!ATTLIST prelim                %secur; >

<!ELEMENT task                  - - (%titles;, prelim, (para | warning |
    caution | note)*, (step1, step1+)? ) >
<!ATTLIST task                  %para0att;
    special NMTOKENS #IMPLIED
    nr NMTOKENS #REQUIRED >

<!-- ***** END OF FILE ***** -->
```

F.4. DETAILED DESCRIPTION.

F.4.1 Document type definition. The DTD found in MIL-STD-38784 as modified by the DTD subset within this appendix provides the structure and content of documents prepared in accordance with this specification. The DTDs are available in a digital format. See A.5., for information on obtaining the files.

F.4.2 Tag description table. The Tag Description Table provides detailed descriptions of the tags above. It provides the element tagging structure, full element name, tag minimization requirements, element structure, referencing elements, source paragraph, and attribute descriptions unique to the element. See A.5., for information on obtaining this table.

MIL-PRF-5096F

INDEX

| | PARA | PAGE |
|---|---------|------|
| Acceptance and functional check flight (-6CL) checklist | 3.4 | 11 |
| FCF checklist arrangement | 3.4.3 | 12 |
| FCF checklist contents | 3.4.2 | 11 |
| FCF checklist title | 3.4.1 | 11 |
| Acceptance and Functional Check Flight (FCF) procedures (-6CF) manual | 3.3 | 10 |
| FCF manual arrangement | 3.3.1 | 10 |
| FCF manual chapters and sections | 3.3.1.2 | 11 |
| FCF manual front matter | 3.3.1.1 | 10 |
| Sample completed checklists | 3.3.1.3 | 11 |
| Acquisition requirements | 6.2 | 21 |
| Additional information | 6.5 | 23 |
| Applicable documents | 2. | 2 |
| General | 2.1 | 2 |
| Government documents | 2.2 | 2 |
| Non-Government publications | 2.2.3 | 3 |
| Order of precedence | 2.3 | 3 |
| Other Government documents, drawings and publications | 2.2.2 | 3 |
| Specifications, standards, and handbooks | 2.2.1 | 2 |
| Arrangement and contents (-6 manual) | 3.2.2 | 5 |
| Chapter 1, Scheduled Inspection and Maintenance Requirements | 3.2.2.2 | 6 |
| Chapter 2, Special Inspection and Maintenance Requirements | 3.2.2.3 | 7 |
| Chapter 3, Replacement Schedule | 3.2.2.4 | 9 |
| Chapter 4, Repair Restrictions | 3.2.2.5 | 9 |
| Front matter (-6 manual) | 3.2.2.1 | 6 |
| Changes from previous issue | 6.8 | 26 |
| Checklists | 3.7 | 18 |
| Checklist front matter | 3.7.1 | 18 |
| Checklist size and arrangement | 3.7.2 | 18 |
| Clipboard style checklist | 3.7.6.2 | 20 |
| Emergency procedures | 3.7.5.4 | 19 |
| Illustrations | 3.7.4 | 19 |
| Maintenance/operation (non-flight crew) checklist format | 3.7.5 | 19 |
| Maintenance/operation (non-flight crew) checklists | 3.7.5 | 19 |
| Operations (flight crew) checklists | 3.7.6 | 19 |
| References (other manuals) | 3.7.5.3 | 19 |
| Scroll checklists | 3.7.6.1 | 20 |
| Style and format of text pages | 3.7.3 | 19 |
| System/Subsystem/Subject Number (S/S/SN) (maintenance checklists only) .. | 3.7.5.2 | 19 |
| Coordination | 6.4 | 23 |
| Definitions | 6.6 | 23 |
| Acceptance inspection | 6.6.1 | 23 |
| Accessible | 6.6.2 | 23 |
| Basic postflight/postoperation inspection | 6.6.3 | 23 |
| Cautions | 6.6.4 | 23 |
| End item | 6.6.5 | 23 |

MIL-PRF-5096F

INDEX

| | PARA | PAGE |
|---|-----------|------|
| End of runway inspection | 6.6.6 | 24 |
| Excessive | 6.6.7 | 24 |
| Functional system | 6.6.8 | 24 |
| Home station check inspection | 6.6.9 | 24 |
| Hourly postflight/postoperation inspection | 6.6.10 | 24 |
| Isochronal inspections | 6.6.11 | 24 |
| Major inspection | 6.6.12 | 24 |
| Minor inspection | 6.6.13 | 24 |
| Notes | 6.6.14 | 25 |
| Parent manuals | 6.6.15 | 25 |
| Periodic inspection | 6.6.16 | 25 |
| Planned inspection concept | 6.6.17 | 25 |
| Preflight/preoperation inspection | 6.6.18 | 25 |
| Preventive maintenance | 6.6.19 | 25 |
| Special inspection | 6.6.20 | 25 |
| Special inspection and maintenance requirements | 6.6.21 | 25 |
| Support equipment | 6.6.22 | 25 |
| Thruflight inspection | 6.6.23 | 26 |
| Verification | 6.6.24 | 26 |
| Warnings | 6.6.25 | 26 |
| Work unit code | 6.6.26 | 26 |
| Effectivity markings | 3.1.5 | 4 |
| Emergency page markings | 3.1.6 | 4 |
| Equipment nomenclatures | 3.1.1 | 4 |
| Flow/Sequence charts | 3.6.6 | 17 |
| “Work area” Portion | 3.6.6.2.2 | 18 |
| Heading blocks | 3.6.6.2.1 | 17 |
| Maintenance Personnel portion | 3.6.6.2.3 | 18 |
| Preparation (charts) | 3.6.6.2 | 17 |
| Series of charts | 3.6.6.1 | 17 |
| General (requirements) | 3.1 | 4 |
| Effectivity markings | 3.1.5 | 4 |
| Emergency page markings | 3.1.6 | 4 |
| Equipment nomenclatures | 3.1.1 | 4 |
| Printing area | 3.1.4 | 4 |
| Security classification | 3.1.2 | 4 |
| Warnings, cautions, notes | 3.1.3 | 4 |
| Government documents | 2.2 | 2 |
| Inspection and maintenance requirements (-6) manual | 3.2 | 4 |
| Additional considerations | 3.2.1.4 | 5 |
| Components coverage | 3.2.1.7 | 5 |
| Excluded information | 3.2.1.2 | 5 |
| Functional nature requirements | 3.2.1.3 | 5 |

MIL-PRF-5096F

INDEX

| | PARA | PAGE |
|---|----------|------|
| Inspection intervals | 3.2.1.6 | 5 |
| Requirements (-6 manual) | 3.2.1 | 4 |
| Syntax | 3.2.1.5 | 5 |
| Inspection requirements cards | 3.6.5 | 16 |
| Isochronal inspection work cards | 3.6.5.5 | 17 |
| Periodic inspection work cards | 3.6.5.4 | 17 |
| Phased inspection work cards | 3.6.5.3 | 16 |
| Servicing | 3.6.5.2 | 16 |
| Intended use | 6.1 | 21 |
| Isochronal inspection work cards | 3.6.5.5 | 17 |
| Non-Government publications | 2.2.3 | 3 |
| Notes | 6. | 21 |
| Order of precedence | 2.3 | 3 |
| Other Government documents, drawings and publications | 2.2.2 | 3 |
| Packaging | 5.1 | 21 |
| Periodic inspection work cards | 3.6.5.4 | 17 |
| Phased inspection work cards | 3.6.5.3 | 16 |
| Printing area | 3.1.4 | 4 |
| Scope | 1.1 | 1 |
| Checklist classification | 1.3 | 1 |
| Detail | 1.2 | 1 |
| Security classification | 3.1.2 | 4 |
| Subject term (key word) listing | 6.7 | 26 |
| Technical manual acquisition | 6.3 | 23 |
| Verification | 4.1 | 20 |
| Compliance | 4.1.2 | 20 |
| Minimum verification requirements | 4.1.1 | 20 |
| Warnings, cautions, notes | 3.1.3 | 4 |
| Work cards | 3.6 | 12 |
| Body heading (inspection requirements) | 3.6.4.7 | 14 |
| Card number | 3.6.4.1 | 14 |
| Card time | 3.6.4.5 | 14 |
| Electrical power | 3.6.4.8 | 15 |
| Figure | 3.6.4.10 | 15 |
| Inspection requirements | 3.6.3.3 | 13 |
| Lubrication requirements | 3.6.3.4 | 13 |
| Lubrication symbols | 3.6.4.16 | 16 |
| Man-minutes column | 3.6.4.11 | 15 |
| Mechanic number required | 3.6.4.4 | 14 |
| References (work cards) | 3.6.4.15 | 15 |

MIL-PRF-5096F**INDEX**

| | PARA | PAGE |
|--|-------------|-------------|
| Service | 3.6.4.9 | 15 |
| Technical manual identification and change numbers | 3.6.4.6 | 14 |
| Type mechanic required | 3.6.4.3 | 14 |
| Work area column | 3.6.4.12 | 15 |
| Work area diagram cards | 3.6.3.2 | 13 |
| Work area(s) | 3.6.4.2 | 14 |
| Work card arrangement | 3.6.3 | 13 |
| Work card format | 3.6.2 | 13 |
| Work card front matter | 3.6.3.1 | 13 |
| Work card preparation | 3.6.4 | 14 |
| Work card requirements | 3.6.1 | 12 |
| WUC subsystem column | 3.6.4.14 | 15 |
| WUC system column | 3.6.4.13 | 15 |
| Work cards and checklists, general | 3.5 | 12 |
| Nomenclature | 3.5.4 | 12 |
| Preliminary instructions | 3.5.3 | 12 |
| System series designation | 3.5.1 | 12 |
| Work card/checklist foreword | 3.5.2 | 12 |

CONCLUDING MATERIAL**Custodian:**

Air Force – 16

Preparing Activity:

Air Force - 16

Review Activities:Air Force – 01, 10, 11, 13, 19, 70,
71, 80, 82, 84, 90

(Project TMSS-F627)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:

1. DOCUMENT NUMBER

MIL-PRF-5096F (USAF)

2. DOCUMENT DATE (YYMMDD)

96/03/01

3. DOCUMENT TITLE

Manuals, Technical - Inspection and Maintenance Requirements; Acceptance and Functional Check Flight Procedures and Checklist

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*

b. ORGANIZATION

c. ADDRESS *(include Zip Code)*

d. TELEPHONE *(Include Area Code)*

(1) Commercial

(2) AUTOVON

(If applicable)

e. DATE SUBMITTED
(YYMMDD)

8. PREPARING ACTIVITY

a. NAME

Steven C. Holloway

b. TELEPHONE *(Include Area Code)*

(1) Commercial

(513) 427-5869

(2) AUTOVON

787-5869

c. ADDRESS *(Include Zip Code)*

Det 2, HQ ESC/AV-2
4027 Col Glenn Hwy, Suite 300
Dayton, OH 45431-1672

IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:

Defense Quality and Standardization Office
5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466
Telephone (703) 756-2340 AUTOVON 289-2340


INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvement. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edges (*DO NOT STAPLE*), and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarifications of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

BUSINESS REPLY MAIL

FIRST CLASS

PERMIT NO. 73236

WASHINGTON D.C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Det 2, HQ ESC/AV-2C
4027 Col Glenn Hwy, Suite 300
Dayton, OH 45431-1672

