

INCH-POUND

MIL-PRF-18546F  
 15 May 2001  
 SUPERSEDING  
 MIL-PRF-18546E  
 3 May 1994

## PERFORMANCE SPECIFICATION

### RESISTORS, FIXED, WIRE-WOUND (POWER TYPE, CHASSIS MOUNTED), GENERAL SPECIFICATION FOR


This specification is approved for use by all Department  
 and Agencies of the Department of Defense.

#### 1. SCOPE

1.1 Scope. This specification covers the general requirements for power type, wire wound, fixed resistors which utilize the principal of heat dissipation through a metal mounting surface. The resistors have an initial resistance tolerance of  $\pm 1$  percent and a resistance temperature characteristic range from 30 ppm/ $^{\circ}\text{C}$  to 200 ppm/ $^{\circ}\text{C}$  depending upon the resistance value. They are not suitable for application when the alternating current (ac) characteristics are of critical importance; however, provisions have been made to minimize the inductance.

#### 1.2 Classification.

1.2.1 Part or Identifying Number (PIN). The PIN is in the following form.

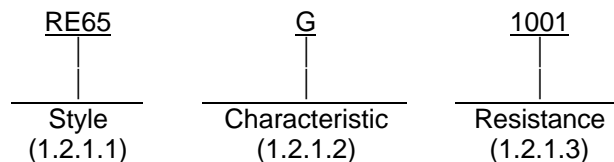

1.2.1.1 Style. The style is identified by the two letter symbol "RE" followed by a two digit number; the letters identify chassis mounted, power type, wire wound, fixed resistor, and the number identifies the size and power rating of the resistor.

1.2.1.2 Characteristic. The characteristic is identified by a single letter which identifies the maximum continuous operating temperature, and inductive (G) or noninductive (N) method of winding in accordance with table I.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to DSCC-VAT, Post Office Box 3990, Columbus, Ohio 43216-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 5905

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

## MIL-PRF-18546F

TABLE I. Characteristic.

Symbol	Method of winding	Maximum continuous operating temperature
G	Inductive	+250°C
N	Noninductive	+250°C

1.2.1.3 Resistance. The nominal resistance value expressed in ohms is identified by a four digit number; the first three represent significant figures, and the last digit specifies the number of zeros to follow. Where fractional values of an ohm, and values of less than 100 ohms are required, the letter "R" is substituted for one of the significant digits to represent the decimal point. When the letter "R" is used, the succeeding digits become significant. The following are examples of symbols for resistance values:

R050 = 0.05 ohm	1000 = 100 ohms
R100 = 0.10 ohm	1001 = 1,000 ohms
1R00 = 1.00 ohm	1002 = 10,000 ohms
10R0 = 10.0 ohms	

Minimum and maximum nominal resistance values are as specified (see 3.1). The standard resistance values for every decade will follow the sequence demonstrated for the "1 to 10" decade (see table II).

TABLE II. Standard resistance values for the 1 to 10 decade. 1/

1.00	1.27	1.62	2.05	2.61	3.32	4.22	5.23	6.49	8.00
1.02	1.30	1.65	2.10	2.67	3.40	4.32	5.36	6.65	8.06
1.05	1.33	1.69	2.15	2.74	3.48	4.42	5.49	6.81	8.25
1.07	1.37	1.74	2.21	2.80	3.57	4.53	5.62	6.98	8.45
1.10	1.40	1.78	2.26	2.87	3.65	4.64	5.76	7.00	8.66
1.13	1.43	1.82	2.32	2.94	3.74	4.75	5.90	7.15	8.87
1.15	1.47	1.87	2.37	3.01	3.83	4.87	6.00	7.32	9.09
1.18	1.50	1.91	2.43	3.09	3.92	4.99	6.04	7.50	9.31
1.21	1.54	1.96	2.49	3.16	4.02	5.00	6.19	7.68	9.53
1.24	1.58	2.00	2.55	3.24	4.12	5.11	6.34	7.87	9.76
									9.90

1/ Resistors having resistance values not listed herein, or in any other decade, will be considered as not conforming to the specification.

## 2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of the list, document users are cautioned that they must meet all specified requirements cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issue of these documents are those listed in the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

## MIL-PRF-18546F

### SPECIFICATIONS

#### DEPARTMENT OF DEFENSE

- MIL-R-18546/1 - Resistors, Fixed, Wire-Wound (Power Type, Chassis Mounted), Styles RE60, RE65, RE70, and RE75.
- MIL-PRF-18546/2 - Resistors, Fixed, Wire-Wound (Power Type, Chassis Mounted), Styles RE77 and RE80.
- MIL-PRF-39009 - Resistors, Fixed, Wire-Wound (Power Type, Chassis Mounted), Nonestablished Reliability, and Established Reliability, General Specification for.

### STANDARDS

#### DEPARTMENT OF DEFENSE

- MIL-STD-202 - Test Methods Standard Electronics and Electrical Component Parts.
- MIL-STD-1285 - Marking of Electrical and Electronic Parts.

### HANDBOOKS

#### FEDERAL

- FED-STD-H28 - Screw Thread Standards for Federal Services.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Document Automation and Production Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.3 Non-government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

#### AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

- ANSI/NCSL Z540-1 - Calibration Laboratory and Measuring and Test Equipment, General Requirement for.

#### INTERNATIONAL ORGANIZATION FOR STANDARDS (ISO)

- ISO 10012-1 - Quality Assurance Requirements for Measuring Equipment, Part 1: Meteorological Confirmation System for Measuring Equipment.

(Application for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.)

## MIL-PRF-18546F

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

### 3. REQUIREMENTS

3.1 Specification sheets. The individual item requirements shall be as specified herein and in accordance with the applicable specification sheet. In the event of any conflict between the requirements of this specification and the specification sheet, the latter shall govern (see 6.2).

3.2 Qualification. Resistors furnished under this specification shall be products which are authorized by the qualifying activity for listing on the applicable Qualified Product List (QPL) at the time of award of contract (see 4.4 and 6.3).

3.3 Material. The material shall be as specified herein. However, when a definite material is not specified, a material shall be used which will enable the resistors to meet the performance requirements of this specification. Acceptance or approval of any constituent material shall not be construed as a guaranty of the acceptance of the finished product.

3.4 Interface and physical dimension. Resistors shall meet the interface and physical dimensions specified (see 3.1). Resistors shall be wound with a resistance wire (round or flat-wound ribbon), except as required for noninductive performance of applicable styles (see 3.1). When applicable, in order to minimize inductance, resistors shall be wound by one of the following methods:

- a. Ayrton-Perry.
- b. Bifilar.
- c. Or equivalent method.

3.4.1 Protective coating or enclosure. The resistance element and caps shall be protected by a coating or an enclosure which shall completely cover the exterior of the resistance element and caps. The enclosure shall be free from holes, fissures, chips, and other faults. Small cracks and molding flaws which do not adversely affect the unit's ability to meet all environmental requirements of this specification will not be considered a cause for rejection. The exposed end of the enclosure shall prevent the entrapment of moisture.

3.4.2 Housing. The housing shall be protected against corrosion. All fasteners shall be suitably plated. Unplated copper bearing metals shall not be used in contact with aluminum.

3.4.3 Terminals. Connection of resistor windings to terminals shall result in a joint that is electrically stable and mechanically strong. When applicable, terminals shall be suitably treated to facilitate soldering. When a coating containing tin is used, the tin content shall range between 40 percent and 70 percent. The terminals shall be firmly secured and shall not be solely dependent on the protective coating or enclosure for mechanical anchorage.

3.4.3.1 Solder dip (retinning) leads. Only the manufacturer or his authorized MIL-PRF-39009 category B or C distributor may solder dip/retin the leads of product supplied to this specification provided the solder dip/retin process (see appendix) has been approved by the qualifying activity.

## MIL-PRF-18546F

3.4.4 Threaded parts. All threaded parts shall be in accordance with FED-STD-H28.

3.4.5 Weight. Resistors shall not exceed the maximum weight specified (see 3.1).

3.5 Voltage rating. Resistors shall have a rated direct current (dc) continuous working voltage, or an approximate sine wave root mean square (rms) continuous working voltage at commercial line frequency and waveform corresponding to the power rating, as determined from the following formula:

$$E = \sqrt{PR}$$

Where: E = rated dc or rms continuous working voltage.

P = power rating (see 3.1).

R = nominal resistance.

3.6 DC resistance. When resistors are tested as specified in 4.7.2, the dc resistance shall be within 1 percent of the nominal resistance (see 1.2.1.3 and 3.1).

3.7 Solderability (as applicable) (see 3.1). When resistors are tested as specified in 4.7.3, the flat portion of the terminal shall be considered as the solderable area, and must be completely solderable.

3.8 Terminal strength. When resistors are tested as specified in 4.7.4, there shall be no evidence of mechanical damage. The change in resistance shall not exceed  $\pm(0.2 \text{ percent} + 0.05 \text{ ohm})$ .

3.9 Resistance temperature characteristic. When resistors are tested as specified in 4.7.5, the resistance temperature characteristic shall not exceed 30 ppm/ $^{\circ}\text{C}$  for resistance values of 20 ohms and higher, 50 ppm/ $^{\circ}\text{C}$  for resistance values from 1 ohm to 19.6 ohms,  $\pm 100 \text{ ppm}/^{\circ}\text{C}$  for resistance values from 0.1 ohm to 0.976 ohm, and  $\pm 200 \text{ ppm}/^{\circ}\text{C}$  for resistance values from 0.05 ohm to 0.09 ohm.

3.10 Dielectric withstanding voltage. When resistors are tested as specified in 4.7.6, resistors shall not flashover, show any evidence of damage, arcing, or insulation breakdown, nor a change in resistance in excess of  $\pm(0.2 \text{ percent} + 0.05 \text{ ohm})$  as applicable.

3.11 Insulation resistance. When resistors are tested as specified 4.7.7, the insulation resistance shall not be less than 10,000 megohms.

3.12 Thermal shock. When resistors are tested as specified in 4.7.8, the change in resistance shall not exceed  $\pm(0.5 \text{ percent} + 0.05 \text{ ohm})$  nor shall there be any evidence of mechanical damage which will result in degradation of performance.

3.13 Short time overload. When resistors are tested as specified in 4.7.9, the change in resistance shall not exceed  $\pm(0.5 \text{ percent} + 0.05 \text{ ohm})$ , and there shall be no evidence of arcing, burning, or charring.

3.14 Moisture resistance. When resistors are tested as specified in 4.7.10, the change in resistance shall not exceed  $\pm(1 \text{ percent} + 0.05 \text{ ohm})$ . The insulation resistance shall not be less than 1,000 megohms. There shall be no evidence of breaking, cracking, loosening of terminals, or corrosion.

## MIL-PRF-18546F

3.15 Life. When resistors are tested as specified in 4.7.11, the resistors shall dissipate not less than the rated power input (see 3.1) without exceeding a change in resistance in excess of  $\pm(1 \text{ percent} + 0.05 \text{ ohm})$  between the initial measurement and any succeeding measurement. The insulation resistance shall be not less than 10,000 megohms, and there shall be no of mechanical damage.

3.16 Shock, (specified pulse). When resistors are tested as specified in 4.7.12, there shall be no electrical discontinuity during the test, the change in resistance shall not exceed  $\pm(0.2 \text{ percent} + 0.05 \text{ ohm})$ , and there shall be no evidence of mechanical damage. Resistors shall meet the dielectric withstanding voltage requirements specified in 3.10.

3.17 Vibration, high frequency. When resistors are tested as specified in 4.7.13, there shall be no electrical discontinuity during the test, the change in resistance shall not exceed  $\pm(0.2 \text{ percent} + 0.05 \text{ ohm})$ , and there shall be no evidence of mechanical damage. Resistors shall meet the dielectric withstanding voltage requirements specified in 3.10.

3.18 Marking. Resistors shall be marked with the type designation and the manufacturer's name, trademark, or code symbol and shall be in accordance with MIL-STD-1285. All marking may appear on one flat at the manufacturer's option; however, all marking must be visible after mounting. There shall be no space between the symbols which comprise the type designation. Marking shall remain legible at the end of all test.

3.19 Soldering. Where soldering is employed, only noncorrosive fluxes shall be used unless it can be shown that corrosive elements have been satisfactorily removed after soldering. Solder shall not be used for obtaining mechanical strength. Electrical connections shall be mechanically secure before soldering and electrically continuous after soldering. Except for solder used to coat the terminals, the solder used shall in no case start to melt at a temperature less than  $+300^{\circ}\text{C}$ .

3.20 Recycling, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.21 Workmanship. Resistors shall be processed in such a manner as to be uniform in quality and shall be free from holes, fissures, chip, corrosion, and malformation; the terminals shall be unbroken and not crushed or nicked; and the resistors shall be free from other defects that will affect life, serviceability, or appearance.

#### 4. VERIFICATION

4.1 Classification of inspection. The inspection requirements specified here are classified as follows:

- a. Qualification inspection (see 4.4).
- b. Conformance inspection (see 4.6).

4.2 Test equipment and inspection facilities. The supplier shall establish and maintain a calibration system in accordance with ANSI/NCSL Z540-1, ISO 10012-1, or equivalent system as approved by the qualifying activity.

## MIL-PRF-18546F

#### 4.3 Inspection conditions and precautions.

4.3.1 Conditions. Unless otherwise specified herein, all inspections shall be performed in accordance with the GENERAL REQUIREMENT of MIL-STD-202.

4.3.2 Precautions. Adequate precautions shall be taken during tests to prevent condensation or moisture on resistors, except during the moisture resistance tests.

4.4 Qualification inspection. Qualification inspection shall be performed at a laboratory acceptable to the Government (see 6.3) on sample units produced with equipment and procedures normally used in production.

4.4.1 Sample. The number of sample units comprising a sample of resistors to be submitted for qualification inspection shall be as specified in the appendix to this specification. The sample shall be taken from a production run and shall be produced with equipment and procedures normally used in production.

4.4.2 Test routine. Sample units shall be subjected to the qualification inspection specified in table III, in the order shown. All sample units except those listed under group IA shall be subjected to the inspection of group I. The 18 sample units shall then be divided equally into 3 groups of 6 sample units each, for groups II to IV inclusive, and subjected to the inspection for their particular group. The uncoated or enclosed sample units shall be subjected to the inspection of group V.

4.4.3 Failures. Failures in excess of those allowed in table III shall be cause for refusal to grant qualification.

4.5 Retention of qualification. Every 12 months, the manufacturer shall verify the retention of qualification to the qualifying activity. In addition, the manufacturer shall immediately notify the qualifying activity whenever the group B inspection results indicate failure of the qualified product to meet the requirements of this specification. Verification shall be based on meeting the following requirements:

- a. The manufacturer has not modified the design of the item.
- b. The specification requirements for the item have not been amended so far as to affect the character of the item.
- c. Lot rejection for group A inspection does not exceed the group A sampling.
- d. The requirements for group B inspection are met.

When group B requirements were not met and the manufacturer has taken corrective action satisfactory to the Government, group B inspection retesting shall be instituted.

4.5.1 Alternate inspection. For the purpose of retention of qualification and conformance inspection (see 4.5 and 4.6), test results on identical items covered by MIL-PRF-39009 may be used.

## MIL-PRF-18546F

TABLE III. Qualification inspection.

Inspection	Requirement paragraph	Method paragraph	Number of samples	Number of defectives allowed <u>1/</u>
<u>Group I</u> DC resistance <u>2/</u> Visual and mechanical inspection <u>3/</u>	3.6 3.1, 3.3 to 3.4.5 incl., 3.19 to 3.21 incl.	4.7.2 4.7.1	18 coated or enclosed sample units	0
<u>Group IA</u> <u>4/</u> Solderability <u>5/</u> Terminal strength	3.7 3.8	4.7.3 4.7.4	4 coated or enclosed sample units	1
<u>Group II</u> Resistance temperature characteristic <u>2/</u> Dielectric withstanding voltage Insulation resistance Thermal shock Short time overload Moisture resistance	3.9 3.10 3.11 3.12 3.13 3.14	4.7.5 4.7.6 4.7.7 4.7.8 4.7.9 4.7.10	6 coated or enclosed sample units	
<u>Group III</u> Life	3.15	4.7.11	6 coated or enclosed sample units	
<u>Group IV</u> Shock, (Specified pulse) Vibration, high frequency	3.16 3.17	4.7.12 4.7.13	6 coated or enclosed sample units	
<u>Group V</u> Visual and mechanical inspections	3.1, 3.3 to 3.4.5 incl., 3.19 to 3.21 incl.	4.7.	4 coated or enclosed sample units	0

1/ Failure of a resistor in one or more tests of a group shall be charged as a single defect.

2/ Nondestructive tests.

3/ Marking shall be considered defective only if marking or any portion thereof is illegible. Marking shall remain legible at the end of all tests.

4/ These sample units are subjected to group IA only.

5/ As applicable (see 3.1).

#### 4.6 Conformance inspection.

4.6.1 Inspection of product for delivery. Inspection of product for delivery shall consist of group A and group B inspections.

4.6.1.1 Inspection lot. An inspection lot, as far as practical, shall include resistors of any style within a given group shown in table IV without regard to resistance value or resistance tolerance, produced under essentially uniform conditions and offered for inspection at one time. Resistors which differ in design, construction, materials, and terminal type shall not be included in one lot.

4.6.1.2 Production lot. A production lot consists of parts manufactured from the same basis raw materials, processed under the same specifications and procedures, and produced with the same equipment. Each production lot of parts should be a group identified by a common manufacturing record through all significant manufacturing operations.



## MIL-PRF-18546F

4.6.2 Group A inspection. Group A inspection shall consist of the inspection specified in table IV, and shall be made on the same set of sample units, in the order shown.

TABLE IV. Group A inspection.

Inspection	Requirement paragraph	Method paragraph	Number of samples
<u>Subgroup 1</u> DC resistance	3.6		See 4.6.2.1
<u>Subgroup 2</u> Visual and mechanical inspections Material Dimensions Design and construction (other than dimensions) Marking Soldering Workmanship	3.3 3.4 3.4.1 to 3.4.3 inclusive 3.18 3.19 3.21	4.7.1	See 4.6.2.2
<u>Subgroup 3</u> Solderability <sup>1/</sup>	3.7	4.7.3	5

<sup>1/</sup> The manufacturer may request the deletion of the subgroup 3 solderability test, provided an in line or process control system for assessing and assuring the solderability of leads can be validated and approved by the qualifying activity. Deletion of the test does not relieve the manufacturer from meeting this test requirement in case of dispute. If the design, material, construction, or processing of the part is changed, or if there are any quality problems, the qualifying activity may require resumption of the test.

4.6.2.1 Subgroup 1. A sample of parts from each inspection lot shall be randomly selected in accordance with table V. If one or more defects are found, the lot shall be rescreened and defects removed. After screening and removal of defects, a new sample of parts shall be randomly selected in accordance with table V. If one or more defects are found in the second sample, the lot shall be rejected and shall not be supplied to this specification. Resistance values in the samples shall be representative, and where possible, in proportion to the resistors in the inspection lot.

4.6.2.2 Subgroup 2. A sample of parts from each inspection lot shall be randomly selected in accordance with table V. If one or more defects are found, the lot shall be rescreened and defects removed. After screening and removal of defects, a new sample of parts shall be randomly selected in accordance with table V. If one or more defects are found in the second sample, the lot shall be rejected and shall not be supplied to this specification.

4.6.2.3 Subgroup 3 (solderability).

4.6.2.3.1 Sampling plan. Five samples shall be selected randomly from each inspection lot and subjected to the subgroup 3 solderability test. If there are one or more defects, the lot shall be considered to have failed.

## MIL-PRF-18546F

TABLE V. Group A sampling plan.

Lot size	Subgroup 1 sample size	Subgroup 2 Sample size
2 to 13	100 percent	100 percent
14 to 125	100 percent	13
126 to 150	125	13
151 to 280	125	20
281 to 500	125	29
501 to 1,200	125	34
1,201 to 3,200	125	42
3,201 to 10,000	192	50
10,001 to 35,000	294	60
35,001 to 150,000	294	74
150,001 to 500,000	345	90
500,001 and over	435	102

4.6.2.3.2 Rejected lots. In the event of one or more defects, the inspection lot is rejected. The manufacturer may use one of the following options to rework the lot:

- a. Each production lot that was used to form the failed inspection lot shall individually submitted to the solderability test as required in 4.7 3. Production lots that pass the solderability test are available for shipment. Production lots failing the solderability test can be reworked only if submitted to the solder dip procedure in 4.6.2.3.2b.
- b. The manufacturer submits the failed lot to a 100 percent solder dip using an approved solder dip process in accordance with 3.4.3.1. Following the solder dip, the electrical measurements required in group A, subgroup 2 tests shall be repeated on 100 percent of the lot. The Percent Defective Allowable (PDA) for the electrical measurements shall be as for the subgroup 1 tests. Five additional samples shall then be selected and subjected to the solderability test with zero defects allowed. If the lot fails this solderability test, the lot shall be reworked a second time and retested. If the lot fails the second rework, the lot shall be considered rejected and shall not be furnished against the requirements of this specification.

4.6.2.3.2.1 Disposition of samples. The solderability test is considered a destructive test and samples submitted to the solderability test shall not be supplied on the contract.

4.6.3 Group B inspection. Group B inspection shall consist of the test specified in table VI, in the order shown. They shall be performed on sample units that have been subjected to and have passed the group A inspection, unless the Government considers it more practical to select from the lot for group B inspection.

4.6.3.1 Sampling plan. A sample of 13 parts (highest value) shall be randomly selected. If one or more defects are found, the lot shall be rescreened and defects removed. After screening and removal of defects, a new sample of 13 parts shall be selected. If one or more defects are found in the second sample, the lot shall be rejected and shall not be supplied to this specification.

4.6.3.2 Deposition of sample units. Sample units which have been subjected to group B inspections may be delivered on the acquisition document provided they are within resistance tolerance.

## MIL-PRF-18546F

TABLE VI. Group B inspection. 1/

Inspection	Requirement paragraph	Method paragraph	Number of sample	Number of defects allowed
Resistance temperature characteristic	3.9	4.7.5	13 (highest value)	0

1/ If the manufacturer can demonstrate that this test has been performed five consecutive time with zero failures, the frequency of this test, with the approval of the qualifying activity, can be performed on an annual basis. If the design, material, construction or processing of the part is changed, or if there are any quality problems or failures, the qualifying activity may require resumption of the original test frequency.

4.6.4 Inspection of packaging. The sample and inspection of the packaging, preservation, and container marking shall be in accordance with the requirements of section 5.

#### 4.7 Methods of inspections.

4.7.1 Visual and mechanical inspections. Resistors shall be inspected to verify that the materials, design, construction, physical dimensions, marking, and workmanship are in accordance with the applicable requirements (see 3.1, 3.3 to 3.4.5 inclusive, and 3.19 to 3.21 inclusive).

4.7.2 DC resistance (see 3.6). Resistors shall be tested in accordance with method 303 of MIL-STD-202. The following details and exceptions shall apply:

- a. The same measuring apparatus shall be used for any one test, but not necessarily for all tests.
- b. Test voltage: The test voltage shall not exceed 1 percent of rated dc voltage (see 3.1). The voltage used for initial measurement shall for all subsequent measurements.

4.7.3 Solderability (see 3.7). Resistors shall be tested in accordance with method 208 of MIL-STD-202. The following details shall apply:

- a. Both terminals of each sample shall be tested.
- b. Terminals shall be immersed sufficiently to cover the flat portion.

## MIL-PRF-18546F

4.7.4 Terminal strength (see 3.1 and 3.8). Resistors shall be tested in accordance with method 211 of MIL-STD-202. The following details and exceptions shall apply:

- a. Test condition letters A and E (pull test and torque test, respectively): Test condition A for all terminal types, and test condition E for screw thread terminals.
- b. Method of holding:
  - (1) Test condition A: The resistor body shall be firmly mounted and the specified direct pull (see 3.1) applied to the hole or nut of each terminal, as applicable, for at least 30 seconds, one terminal at a time.
  - (2) Test condition E: The resistor body shall be firmly mounted and specified torque (see 3.1) shall be applied to each terminal, one at a time.
- c. Measurement before and after test: DC resistance shall be measured as specified in 4.7.2.
- d. Inspection after test: Resistors shall be inspected for evidence of mechanical damage.

4.7.5 Resistance temperature characteristic (see 3.9). Resistors shall be tested in accordance with method 304 of MIL-STD-202. The following detail shall apply:

- a. Test temperature shall be in accordance with table IX.

TABLE IX. Resistance temperature characteristic test temperature.

Sequence	Temperature °C $\pm 3^{\circ}\text{C}$	
	Qualification inspection	Conformance inspection <u>2/</u>
1	+25 <u>1/</u>	+25 <u>1/</u>
2	-55	-55
3	+25 <u>1/</u>	+25 <u>1/</u>
4	+125	
5	+200	
6	+250	+250

1/ This temperature shall be considered the reference temperature for each of succeeding temperatures.

2/ At the option of the manufacturer, the reverse sequence may be as follows:

- 1: +25°C  $\pm 3^{\circ}\text{C}$  1/
- 2: +250°C  $\pm 3^{\circ}\text{C}$
- 3: +25°C  $\pm 3^{\circ}\text{C}$  1/
- 4: -55°C  $\pm 3^{\circ}\text{C}$

## MIL-PRF-18546F

4.7.6 Dielectric withstanding voltage (see 3.10).

4.7.6.1 Atmospheric pressure. Resistors shall be tested in accordance with method 301 of MIL-STD-202. The following details shall apply:

- a. Special preparations: Resistors shall be mounted firmly on a metal plate by means of the normal mounting hardware. The plate shall be of sufficient size to extend beyond the resistor extremities.
- b. Magnitude of test voltage: As specified in 3.1.
- c. Nature of potential: An ac supply at commercial line frequency and waveform.
- d. Points of application of test voltage: Between the terminals tied together and mounting plate, making certain that there is good electrical contact between the metal of the mounting tab, if any, and mounting plate.
- e. Measurements and inspection: Resistance (see 4.7.2) shall be measured before the test. At the conclusion of the test, resistors shall be inspected for evidence of damage, arcing, flashover, and insulation breakdown.

4.7.6.2 At reduced barometric pressure. Following the test specified in 4.7.6.1, resistors shall be tested in accordance with method 105 of MIL-STD-202. The following details shall apply:

- a. Method of mounting: As specified in 4.7.6.1a.
- b. Test condition C.
- c. Magnitude of test voltage: As specified in 3.1.
- d. Nature of potential: As specified in 4.7.6.1c.
- e. Points of application of test voltage: As specified in 4.7.6.1d.
- f. Measurements and inspection: At the conclusion of the test, resistance shall be measured (see 4.7.2). Resistors shall also be inspected for evidence of damage, arcing, flashover, and insulation breakdown.

4.7.7 Insulation resistance (see 3.11). Resistors shall be tested in accordance with method 302 of MIL-STD-202. The following details shall apply:

- a. Test condition A.
- b. Special preparations: As specified in 4.7.6.1a.
- c. Points of measurement: As specified in 4.7.6.1d.

## MIL-PRF-18546F


4.7.8 Thermal shock (see 3.12). Resistors shall be mounted as specified in 4.7.11.1. Following a measurement of resistance (see 4.7.2), rated voltage from an ac supply at commercial line frequency and waveform (see 3.5) shall be applied until thermal stability has been reached. The potential shall then be removed and within 8 seconds to 12 seconds, the resistors shall be subjected to an air temperature of  $-55^{\circ}\text{C} +0^{\circ}\text{C}$ ,  $-5^{\circ}\text{C}$  for a period of not less than 15 minutes nor more than 30 minutes. Resistance (see 4.7.2) shall again be measured not less than 2 hours after final exposure. Resistors shall then be inspected for evidence of mechanical damage.

4.7.9 Short time overload (see 3.13). Resistors shall be mounted as specified in 4.7.11.1. One of the resistor terminals shall be grounded to the resistor housing during the test. Following a measurement of resistance (see 4.7.2), a test potential from an ac supply at commercial line frequency and waveform which will result in five times the rated wattage (see 3.1), but not to exceed the specified voltage used for the dielectric withstanding voltage test (atmospheric pressure) (see 3.1), shall be applied to the resistors for 5 seconds. Resistors (see 4.7.2) shall be measured after the resistors have stabilized at room temperature. Resistors shall then be inspected for evidence of arcing, burning, and charring.

4.7.10 Moisture resistance (see 3.14). Resistors shall be tested in accordance with method 106 of MIL-STD-202. The following details and exceptions shall apply:

- a. Mounting: Resistors under load shall be mounted as specified in 4.7.11.1. Resistors under polarization shall be mounted as specified in 4.7.6.1a.
- b. Initial measurements: Resistors shall be measured as specified in 4.7.2.
- c. Load and polarization: One half of the resistors shall be subjected to load and the remaining half to polarization.
  - (1) Load: During the first 2 hours of each of steps 1 and 4, the rated dc continuous working voltage (see 3.5), derated in accordance with figure 1 to the temperature attained at the end of the two hour period, shall be applied to the resistors. The negative terminals shall be electrically grounded to the mounting surface.
  - (2) Polarization: During steps 1 to 6 inclusive, a potential of 100 volts dc shall be applied with the positive side connected to the terminals tied together, and the negative side connected to the mounting plate.
- d. Final measurements and inspection: At the end of the final cycle, the resistors shall be removed from the chamber, conditioned at room ambient conditions, and the dc resistance and insulation resistance shall be measured as specified in 4.7.2 and 4.7.7, respectively, within 30 minutes  $\pm 15$  minutes of removal from the chamber. The resistors shall not be wiped or forced air dried prior to these measurements. Resistors shall then be inspected for evidence of breaking, cracking, loosening of terminals and corrosion. (The subsequent 4 hours to 24 hours conditioning period and measurements do not apply).

## MIL-PRF-18546F

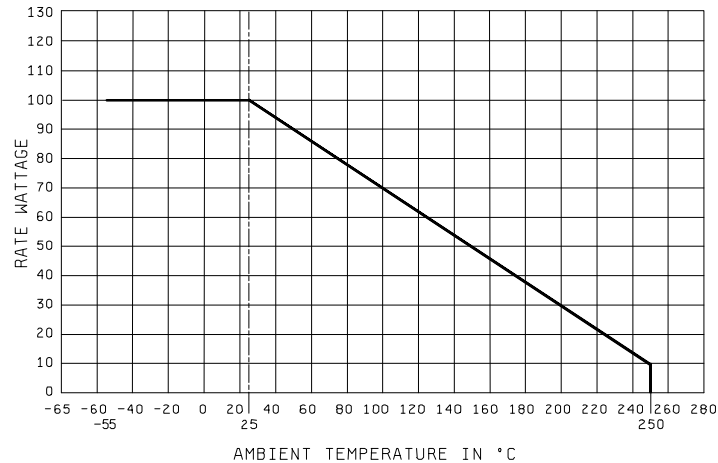FIGURE 1. Derating curves for high ambient temperatures.4.7.11 Life (see 3.15).

4.7.11.1 Test conditions. Life test shall be conducted at an ambient temperature of  $+25^{\circ}\text{C} \pm 2^{\circ}\text{C}$ . The resistor shall be centrally mounted by normal mounting means on an aluminum chassis of the dimensions specified (see 3.1). The resistor shall be mounted with the longitudinal axis of the resistor parallel to the longitudinal axis of the chassis. The chassis shall be horizontally supported by a material having a low thermal conductivity. Resistors shall be so arranged that the temperature of any one resistor shall not appreciably influence the temperature of any other resistor. There shall be no undue draft over the resistors. The voltage used shall be the rated continuous working voltage (see 3.5) from an ac supply at commercial line frequency and waveform, and adequate precaution shall be taken to maintain constant voltage on resistors under test.

4.7.11.2 Procedure. Following a measurement of resistance (see 4.7.2), the test potential shall be applied intermittently, 1 hour 30 minutes on, and 30 minutes off, for a total of 1,000 hours  $\pm 12$  hours. Resistance measurements (see 4.7.2) shall be made at the end of the 30 minutes off periods after the following hours have elapsed:

250 hours +72 hours, - 24 hours  
 500 hours +72 hours, - 24 hours  
 750 hours +72 hours, - 24 hours  
 1,000 hours +72 hours, - 24 hours

Resistance and insulation resistance as specified in 4.7.2 and 4.7.7, respectively, shall be measured. Resistors shall then be inspected for evidence of mechanical damage. Measurement shall be made as near as possible to the specified time but may be adjusted so that measurements need not be made during other than normal weekdays.

## MIL-PRF-18546F

4.7.12 Shock (specified pulse) (see 3.16). Resistors shall be tested in accordance with method 213, condition I, of MIL-STD-202. The following details shall apply:

- a. Mounting: Resistors shall be mounted by their normal mounting means as specified in 4.7.11.1 on an appropriate mounting fixture. The mounting fixture shall be constructed in such a manner as to insure that the mounting supports remain in a static condition with reference to the shock table. Resistors shall be mounted in such a manner that the stress applied is in the direction which would be considered most detrimental.
- b. Test condition: I
- c. Measurement before shock: Resistance as specified in 4.7.2.
- d. Measurement during shock: Each resistor shall be monitored to determine electrical discontinuity by a method which shall at least be sensitive enough to monitor or register, automatically, any discontinuity having as duration of 0.1 millisecond as well as those of greater duration.
- e. Measurement, inspection, and test after shock: Resistance (see 4.7.2) shall be measured, and the resistors inspected for evidence of mechanical damage. Resistors shall be subjected to the dielectric withstanding voltage test (at atmospheric pressure) as specified in 4.7.6.1.

4.7.13 Vibration, high frequency (see 3.17). Resistors shall be tested in accordance with method 204 of MIL-STD-202. The following details shall apply:

- a. Mounting: Resistors shall be mounted by their normal mounting means as specified in 4.7.11.1 on a vibration test jig. The jig shall be so constructed so as to preclude any resonance within the test range. Resistors shall be mounted in relation to the test equipment in such a manner that the stress applied is in the direction which would be considered most detrimental.
- b. Test condition: B.
- c. Measurements before vibration: Resistance as specified 4.7.2.
- d. Measurements during vibration: Each resistor shall be monitored to determine electrical discontinuity by a method which shall at least be sensitive enough to monitor or register, automatically, any discontinuity having a duration of 0.1 millisecond or less, as well as those of greater duration.
- e. Measurements, inspection, and test after vibration: Resistance (see 4.7.2) shall be measured, and the resistors inspected for evidence of mechanical damage. Resistors shall then be subjected to the dielectric withstanding voltage test (atmospheric pressure) as specified in 4.7.6.1.

## 5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.



## MIL-PRF-18546F

## 6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The resistors covered by this specification are military unique due to the fact that these devices must be able to operate satisfactorily in military systems under the following demanding conditions: 20 G's of high frequency vibration, 100 G's of shock (specified pulse), thermal shock (with no more than 1 percent deviation in initial resistance), and a low temperature coefficient of resistance. In addition, these military requirements are verified under a qualification system. Commercial components are not designed to withstand these military environmental conditions.

6.2 Acquisition requirements. Acquisition documents must specify the following:

- a. Title, number, and date of this specification, the applicable associated specification, and the complete PIN (see 1.2.1).
- b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).
- c. Packaging requirements (see 5.1).

6.3 Qualification. With respect to products requiring qualification, awards are made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List (QPL) whether or not such products have actually been so listed by the date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center, Columbus, ATTN: DSCC-VQP, Post Office Box 3990, Columbus, Ohio 43216-5000.

6.4 MIL-R-18564 substitution data. Resistor of this specification are inactive for new design, and resistors of MIL-PRF-39009 of the same resistance value are to used, are as follows:

<u>Inactivated specification and characteristic</u>	<u>Substitution specification</u>
MIL-R-18546/1 characteristic G	MIL-PRF-39009/1
MIL-R-18546/1 characteristic N	MIL-PRF-39009/2

6.5 Retinning leads. If retinning (hot solder dip) of the leads is required (see 3.4.3.1).

6.6 Subject term (key word) listing.

Enclosure  
Heat dissipation  
Metal mounting surface  
Solderable  
Weldable

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

## MIL-PRF-18546F

## APPENDIX

## PROCEDURE FOR QUALIFICATION INSPECTION

## 1. SCOPE

1.1 Scope. This appendix details the procedure for submission of samples for qualification inspection of resistors covered by this specification. The procedure for extending qualification of the required sample to other resistors covered by this specification is also outlined herein. This appendix is a mandatory part of this specification. The information contained herein is intended for compliance only.

## 2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, and 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in section 3, 4, and 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

## STANDARDS

## DEPARTMENT OF DEFENSE

MIL-STD-1276 - Leads for Electronic Component Part.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from Document Automation and Production Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for associated specifications, specification sheets, or MS sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless exemption has been obtained.

## 3. SUBMISSION

3.1 Sample. A sample consisting of 18 coated or enclosed and 4 uncoated or unenclosed sample units, of the highest resistance value, and in addition, a sample consisting of 4 coated or enclosed sample units of any resistance value, shall be submitted for each style and characteristic for which qualification is sought. If the same coating or enclosure is not used, a separate sample shall be submitted for each coating and enclosure for which qualification is sought. Samples shall be representative of the supplier's normal production.

## MIL-PRF-18546F

## APPENDIX

## 4. EXTENT OF QUALIFICATION

4.1 Resistance values. Qualification of a particular style and resistance value will qualify a range of resistance values from the smallest value manufactured in that style to the resistance value qualified.

4.2 Characteristics N and G. Qualification of characteristic "N" resistors will also qualify corresponding characteristic "G" resistors. Qualification of maximum resistance value in characteristic "N" will also qualify highest value in characteristic "G".

## 5. SOLDER DIP (RETNING) LEADS

5.1 Solder dip (retinning) leads. The manufacturer may solder dip/retin the leads of product supplied to this specification provided the solder dip process of this appendix, or an equivalent process has been approved by the qualifying activity.

5.2 Qualifying activity approval. Approval of the solder dip process will be based on one of the following options:

- a. When the original lead finish qualified was hot solder dip lead finish 52 of MIL-STD-1276 (Note: The 200 microinch maximum thickness is not applicable). The manufacturer shall use the same solder dip process for retinning as is used in the original manufacture of the product.
- b. When the lead originally qualified was not hot solder dip lead finish 52 of MIL-STD-1276 as prescribed in 5.2a, approval for the process to be used for solder dip shall be based on the following test procedure:
  - (1) Thirty samples of any resistance value for each style and lead finish are subjected to the manufacturer's solder dip process. Following the solder dip process, the resistors are subjected to the dc resistance test and other group A electricals. No defects are allowed.
  - (2) Ten of the 30 samples are then subjected to the solderability test. No defects are allowed.
  - (3) The remaining 20 samples are subjected to the resistance to solder heat test followed by the moisture resistance test. No defects allowed.

MIL-PRF-18546F

APPENDIX

5.3 Solder dip/retrinning options. The manufacturer may solder dip/retrine as follows:

- a. After the group A tests: Following the solder dip/retrinning process, the electrical measurements required in group A, subgroup 1, shall be repeated on the lot. The group A subgroup 1, lot rejection criteria shall be used. Following the test, the manufacturer shall submit the lot to the group A solderability test as specified in 4.7.3.
- b. As a corrective action, if the lot fails the group A solderability test, the lot may be retrinned no more than two times. The lot after retrinning shall be 100 percent screened for group A electrical requirements (dc resistance) and parts failing (lot not exceeding PDA for group A, subgroup 1, (see 4.6.1.2) these screens shall be supplied to this specification, if electrical failures are detected after the second retrinning operation exceeding 1 percent of the lot, the lot shall not be supplied to this specification.
- c. After the group A inspection has been completed: Following the solder dip/retrinning process, the electrical measurements required in group A, subgroup 1, 100 percent dc resistance shall be repeated on 100 percent of the lot. The PDA for the electrical measurements shall be as for the subgroup 1 tests (see 4.6.1.2). Following these tests, the manufacturer shall submit the lot to the group A solderability test as specified in 4.7.3.

MIL-PRF-18546F

Custodians:

Army - CR  
Navy - EC  
Air Force - 11  
DLA - CC

Preparing activity:

DLA - CC

(Project 5905-1610)

Review activities:

Army - AR, MI  
Navy - MC  
Air Force - 99

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

## INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

### I RECOMMEND A CHANGE:

#### 1. DOCUMENT NUMBER

MIL-PRF-18546F

#### 2. DOCUMENT DATE

15 May 2001

#### 3. DOCUMENT TITLE

RESISTORS, FIXED, WIRE WOUND (POWER TYPE, CHASSIS MOUNTED), GENERAL SPECIFICATION FOR.

#### 4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

#### 5. REASON FOR RECOMMENDATION

#### 6. SUBMITTER

a. NAME (Last, First, Middle initial)

b. ORGANIZATION

c. ADDRESS (Include Zip Code)

d. TELEPHONE (Include Area Code)

Commercial  
DSN  
FAX  
EMAIL

7. DATE SUBMITTED

#### 8. PREPARING ACTIVITY

a. Point of Contact  
Andrew Ernst

b. TELEPHONE

Commercial      DSN      FAX      EMAIL  
614-692-0552      850-0552      614-692-6939  
[andrew\\_ernst@dsccl.dla.mil](mailto:andrew_ernst@dsccl.dla.mil)

c. ADDRESS  
Defense Supply Center Columbus  
ATTN: DSCC-VAT  
Columbus, OH 43216-5000

#### IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:

Defense Standardization Program Office (DLSC -LM)  
8725 John J. Kingman Road, Suite 2533  
Fort Belvoir, Virginia 22060-6221  
Telephone (703) 767-6888      DSN 427-6888