

NOT MEASUREMENT  
SENSITIVE

**MIL-PRF-63029D(AV)**  
**23 August 1996**  
**SUPERSEDING**  
**MIL-M-63029C(AV)**  
**20 March 1991**

## PERFORMANCE SPECIFICATION

# MANUALS, TECHNICAL: REQUIREMENTS FOR OPERATOR'S MANUALS AND CHECKLISTS FOR AIRCRAFT

This specification is approved for use by US Army Aviation and Troop Command, Department of the Army, and is available for use by all departments and agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification contains the requirements for preparing technical manuals (TMs) describing operating procedures, checklists, and maintenance test flight (MTF) checklists for operators of Army aircraft.

1.2 Classification. The TMs to be prepared in accordance with this specification include:

- 10 - Operator's Manual
- CL - Operator's Checklist
- MTF - Maintenance Test Flight Checklist

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to US Army, ATTN: AMSAT-R-EDS, 4300 Goodfellow Blvd., St. Louis, MO 63120-1798, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter. E-mail comments may be sent to smithb@avrdec.army.mil or buscemij@avrdec.army.mil. Send faxes to 314-263-1622, ATTN: AMSAT-R-EDS.

AMSC A6038

AREA  
TMSS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

**MIL-PRF-63029D(AV)**

1.3 Figures. In the event of a conflict between the text and the illustrations, the text of this document takes precedence over the figures.

**2. APPLICABLE DOCUMENTS**

2.1 General. The documents listed in this section are specified in Sections 3 and 4 of this specification. This section does not include documents cited in other sections of this standard or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in Sections 3 and 4 of this specification, whether or not they are listed.

**2.2 Government documents.**

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

**STANDARDS****DEPARTMENT OF DEFENSE**

MIL-STD-12	Abbreviations for Use on Drawings, Specifications, Standards and in Technical Documents
MIL-STD-210	Climatic Extremes for Military Equipment
MIL-STD-38784	DOD Standard Practice, General Style and Formatting Requirements for Technical Manuals

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Bldg 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

**3. REQUIREMENTS**

3.1 General. This section is divided into general and detailed requirements. The general provisions shall cover overall qualities of the TMs that will be produced. Detailed requirements shall deal with specific format, detailed preparation, and technical aspects of operator's manuals and checklists and MTF checklists.

**MIL-PRF-63029D(AV)**

3.1.1 Chapter and section requirements. Each chapter shall start on an odd numbered page. Two or more sections may be contained in a chapter. More than one section may be on one right- or left-hand page, provided there is a minimum amount of space remaining for a heading and one entire line of text to start the next section.

3.1.2 Additional sections and appendixes. Additional sections and appendixes may be added to cover peculiar system applications with prior approval of the contracting activity (6.2).

3.1.3 Nomenclature. The nomenclature of items shall be the short name used in the applicable aircraft parts manuals, TM 1-XXXX-XXX-23P. The only exception shall be the use of placard item names shown on controls, switches, panels, etc. These items shall be expressed as shown on the placards. These items shall appear in text and procedural steps in boldfaced capital letters.

3.1.4 Text formatting. All text within the TM shall be formatted in the following manner.

3.1.4.1 Primary sideheads. Primary sideheads shall divide text within chapters or sections into two or more portions. There shall be at least one primary sidehead in each chapter or section. Primary sideheads stand alone (are not run in with text) and shall appear in capital letters, end with a period, and shall begin at the left margin. (See Figure 1).

3.1.4.2 Paragraph numbering and titling. Subordinate paragraphs shall be numbered consecutively within the chapter. All paragraph numbers shall be preceded by the chapter number and a period, and the first word and main words in paragraph titles shall be capitalized. Second and subsequent lines of subordinate paragraphs shall begin at the left margin.

3.1.4.3 Procedural steps. Procedural steps shall begin two spaces below the preceding text, numbered sequentially with letters or Arabic numbers, and indented five spaces from the left margin. Substeps shall begin two spaces below the preceding step and indented an additional five spaces. The text shall begin on the same line as the step number and be separated by two spaces. Carry over lines shall not return to the left margin but shall start under the first letter of the preceding line.

3.1.5 Front matter. Front matter pages, except change record pages, shall be assigned sequential lower case Roman numerals, i.e. i, ii, iii, etc. Unless otherwise specified (6.2), material preceding the first chapter of a TM shall consist of the following in the order specified:

Cover/title page

Warning page

List of effective pages

Table of contents

3.1.6 Cover/title page. TMs shall have either a cover or title page, or an abbreviated title page. When specified (6.2), there shall be a cover and title page. When an abbreviated title followed by text on the same page is used instead of a cover/title page, the abbreviated title shall be confined

**MIL-PRF-63029D(AV)**

to a 7 by 5-1/2 inch area. Type size shall be such that all the information can be included within the prescribed area. Abbreviated title pages shall be used only when specified by the contracting activity (6.2). The cover/title page shall contain the various elements found in MIL-STD-38784. Unless otherwise specified (6.2), if there is both a cover and a title page, the date shall be omitted from the cover page. When specified (6.2), certain information such as the supersedure notice, supplement notice, disclosure notice and destruction notice, as applicable, may be placed on the reverse side of the title page if additional space is needed to avoid overcrowding of the title page. When the reverse side of the title page, T-2, is used, a statement shall be placed on the title page indicating which information has been moved to the T-2 page.

3.1.7 Warning page. When specified (6.2), a warning page(s) shall include each general type of warning and warning symbol used within the TM. This shall not be a list of specific warnings that pertain to particular procedural steps, but shall include general hazardous subject data such as radiation, chemicals, high voltage, gas pressure, laser light, etc. The warning page shall be placed on the inside front cover or be the initial page(s) of the manual. The page(s) shall be numbered with lower case letters.

3.1.8 List of effective pages. The list of effective pages shall be a complete list of all manual pages, including title page, T-2 page (if used), list of pages currently in effect, verification status pages, table of contents pages, safety summary pages, blank pages, deleted pages, added pages, and foldout pages. The list of effective pages shall include a statement of the total number of pages in the manual. The list of effective pages shall be updated for each change or revision. The listing shall be held to a minimum by grouping numbers where applicable. The page numbers for a blank page and the printed side of the sheet shall be listed as separate numbers even though a double number shall appear on the printed side of the sheet. Appropriate change numbers shall be indicated for each page that is changed. The words “deleted” or “blank” shall be placed along side the page number that is affected. The pages shall be numbered with an upper case letter in the lower left-hand corner.

3.1.9 Table of contents. A table of contents listing chapters and sections in the same order and with the same title used in the text shall begin on the title page or on the first right-hand page following the title page. Each volume of a multi-volume manual shall have its own table of contents.

3.1.10 TM identification number. Unless otherwise specified by the contracting activity (6.2), the publication number shall be the same as the TM number of the aircraft system, followed by “-10” for operator’s manuals, “-CL” for operator’s checklists, and “-MTF” for MTF checklists. The TM number shall appear centered in the top margin and in boldfaced type.

3.1.11 Publication date. The publication date shall be the cutoff date from which no further changes to the TM are permitted without issuing a formal change. Unless otherwise specified (6.2), the publication date shall be the date at which the last material to be included was received. The date shall be written in the sequence: day; month; year, for example 23 June 1996.

3.1.12 Page numbers. Page numbers shall be located at the lower center of the page and shall be in boldfaced type. Even numbers, including zero, shall be assigned to left-hand pages and odd numbers to right-hand pages. Manuals divided into chapters shall contain consecutively numbered pages, tables and illustrations for the entire chapter. Page, table, and illustration

**MIL-PRF-63029D(AV)**

numbers shall consist of the chapter number, followed by a hyphen, and then a second number representing the order within the chapter. See MIL-STD-38784 for additional information on page numbering.

3.1.13 Supersession notice. Unless otherwise specified (6.2), the supersession notice shall be placed on the cover/title page when the manual/change/revision/rapid action change (RAC) under preparation supersedes all or portions of other manuals/changes/revisions. When specified, the notice of supersession shall include a list of all currently superseded supplements and RAC's. Superseded supplements/RAC's shall normally be listed individually, but when several alphabetically/numerically sequenced supplements/RAC's are superseded, they shall be grouped. The applicable portions of the following notice shall be used:

This (manual/change/revision/RAC) supersedes (applicable manual/change/revision number or portions of) dated (date of superseded document), change (change number) dated (change date), including (superseded supplement/RAC numbers).

3.1.14 Manual types. There are three types of draft publications covered in this specification. The requirements specified in Section 3 apply to all three. See 6.4 for definitions.

- a. Preliminary draft equipment publication (PDEP)
- b. Draft equipment publication (DEP)
- c. Final draft equipment publication (FDEP)

3.1.15 Text. The text shall be written in clear, simple, and concise language. Technical terms requiring special knowledge shall be avoided, except where no other wording will convey the intended meaning. Procedures shall be broken down into distinct steps for accomplishment. All procedures called out shall be fully explained in logical completion sequence. When possible, a tabular format shall be used to simplify complicated or comparative data. Classified information shall not be included in any TMs.

3.1.16 Joint manuals. When TMs are acquired by one Service for joint use with another Service, each Service's number shall be prefixed with the word "Army", "Navy (NAVSEA) (NAVAIR)", "Marine Corps", or "Air Force", as applicable. The contracting activity's TM number shall be placed above the using activity's TM number. Paragraphs in joint publications which do not apply to all Services concerned shall be marked to indicate the Services to which they do apply.

3.1.17 Abbreviations. Abbreviations shall be written in accordance with MIL-STD-12. The first time an abbreviation is used in text, it shall be placed in parentheses and preceded by the word or term spelled out in full.

3.1.18 Acronyms. The first time an acronym is used in text, it shall be placed in parentheses and shall be preceded by the word or term spelled out in full. Acronyms used in figures and tables shall be spelled out in a footnote to the applicable figure or table.

3.1.19 Structure. The contents of the TM shall be structured in the following fashion:

**MIL-PRF-63029D(AV)**

- a. Chapters--divides TM into major divisions
- b. Sections--divides chapters into specific areas of coverage
- c. Paragraphs and subparagraphs--divide sections into specific topics

No less than two of any subdivision shall be used; for example, chapters shall contain at least two sections, sections shall contain at least two paragraphs, etc.

3.1.20 Revisions. When specified (6.2), a complete, updated, nonsuperseding , or a pickup revision shall be prepared. See 6.4 for definitions. Revisions shall incorporate current information from previously issued changes to the existing TM. Revisions or changes shall be published at the same frequency as other aircraft system manuals.

3.1.20.1 Renumbering and removal. In a complete revision, all pages, paragraphs, illustrations, and tables shall be renumbered, as necessary, to eliminate all number suffixes and to establish correct sequences. Complete revisions shall be prepared to current specifications and standards. In an update revision, suffixed paragraph, illustration, and table numbers shall be retained when use of the TM will not be substantially improved by renumbering. All change numbers and change dates shall be removed from pages. All partial pages, miniature pointing hands, shading, screening, vertical lines in margin and other change symbols shall be eliminated. For additional guidance see MIL-STD-38784.

3.1.20.2 Revision change symbols. When specified (6.2), after all previous change symbols have been eliminated, new change symbols shall be inserted to identify technical changes in text, illustrations, and tables that differ in the revision from those contained in the latest previous edition of the TM.

3.1.21 Changes. The change package shall conform to the format of the basic TM. Note: Changes shall be prepared for printing on the same size paper as the basic TM. The changes shall also incorporate all advanced change notices and resolution of outstanding deficiencies. Unless otherwise specified (6.2), when required a change record shall be prepared in accordance with MIL-STD-38784. It should not back or be backed up. These pages shall not be numbered. Detailed instructions for issuing changes shall be in accordance with MIL-STD-38784.

3.1.22 Artwork. Line drawings shall be used for all artwork.

3.1.22.1 Lettering. Lettering and type on original artwork shall be well-defined and large enough to be easily read when the illustration is reproduced at page size. Lettering and type shall be in capital letters. The minimum type size shall be eight point. Spacing of letters and words shall be controlled to insure clear, legible copy.

3.1.22.2 Keys for illustrations. Keys shall, when feasible, be included on the illustration. Where keys are too numerous or the explanations too lengthy to fit within the illustration cropped area without crowding, they shall be placed in tabular form immediately above or below the illustration or on the facing page. These tables shall be considered as a text function.

**MIL-PRF-63029D(AV)**

3.1.22.3 Illustrations. Line drawings (black lines on white background) shall be used throughout the TM. Photographic illustrations may be used only when prior approval has been obtained from the contracting activity (6.2). Illustrations, including diagrams and schematics, shall be clear, simple, and complete, and shall contain all necessary callouts to support the text. The number of callouts on a single illustration or a single sheet of a multi-sheet illustration shall be 25 or less. If more than 25 callouts are required, the total number required shall be equally divided between two identical or similar illustrations (Figure 2). Illustrations shall be prepared in accordance with MIL-STD-38784, except where the requirements of that standard conflict with the illustration requirements of this specification. Broadsides (illustrations that have been turned 90 degrees on the page) shall not be used.

3.1.23 Graphical data style and format.

3.1.23.1 General requirements. Unless otherwise specified by the contracting activity (6.2), data that includes more than three variables shall be presented graphically. Data with three variables shall be presented graphically if it represents continuous data (for example, torque available as a function of altitude and temperature).

3.1.23.1.1 Order of precedence. In the event of a conflict between the graphical data presentation requirements in the text of this specification and the sample graphs provided, the text of this specification shall take precedence.

3.1.23.1.2 Explanatory text. A brief explanation shall be provided for each graphic presentation including, but not limited to, description, purpose, procedure for use, applicable conditions, and effects of their variations.

3.1.23.1.3 Priorities. Unless otherwise specified by the contracting activity (6.2), the following order of priorities shall be followed while preparing graphical presentations:

- a. Minimize the possibility of user mistakes.
- b. Cover the full applicable range of data. Unless data ranges are specified in the illustration requirements of this specification, the maximum probable ranges to be expected in operation shall be used. MIL-STD-210 can be used for reference for ranges of climatic data.
- c. Provide adequate accuracy. The graphical presentation shall be readable over all ranges of the data. It shall also duplicate the source data to at least one percent of the applicable range of the parameter (for example, a free air temperature range from -60°C to +50°C should be readable to at least 1°C).
- d. Clarity and ease of use. Each graph shall be designed to directly provide the most commonly used parameters (for example, torque required to hover at known conditions of altitude, temperature, weight, and skid height). Less often used information, such as maximum temperature to hover at a given weight and altitude, shall be obtainable with additional effort.



**MIL-PRF-63029D(AV)**

e. Ensure standardization. Standardization tables are provided to ensure standardization of graphic illustrations. Type and spacing requirements are summarized in Figure 3. Line requirements are summarized in Figure 4. The tables of standardization shall be used during preparation of basic, changed, or revised illustrations. The requirements in the tables of standardization are applicable to the final product. If graphic presentation is other than final size, adjustments shall be made to ensure that final size graphs meet the stated criteria.

f. Place the graphs on the minimal number of pages, consistent with the importance of clarity and ease of use.

g. General appearance, cost, and ease of production shall be given consideration, but only as three of the lesser priorities.

### 3.1.23.2 Specific requirements.

3.1.23.2.1 Titles. Titles for graphs shall be the most succinct title that adequately indicates the nature of the graphical data.

3.1.23.2.2 Condition heading. The range, parameter name, and units of each condition that apply to the data shall be listed with each condition separated. When abstract conditions (for example, clean configuration forward cg) are used, they shall be described in detail and/or quantified in the accompanying text. Conditions that apply to more than three similar graphs shall be listed only on the first example page and shall be referred to on all subsequent graphs in the series. General aircraft or system limits shall not be listed. Any condition known not to effect the data shall not be listed. The effect of variation of each listed condition on the data shall be discussed in the text. If the effect of condition variation is not known and cannot be estimated, it shall be so stated in the text. General conditions (for example, rigging, instrument errors, fuel types, etc.) applicable to all data in a chapter shall be discussed in a paragraph titled "General Conditions" which shall appear near the beginning of the chapter: The information in the "General Conditions" paragraph shall not be repeated on the graphs within the chapter.

3.1.23.2.3 Sub-graphs. . On some graphical data pages, it may be desirable to include separate sub-graphs with data on the same general subject. Titles and conditions different from the main conditions shall be given for the sub-graphs.

3.1.23.2.4 Notes. Notes should not be used on graphs. Notes may be placed on areas adjacent to charts, when absolutely necessary, in order to prevent misuse or misinterpretation of the data. If the note does not fit this condition, it should appear in the text.

3.1.23.2.5 Data basis. Data basis information shall include data type (for example, flight test, estimated, etc.) and each actual data source document (for example, AEFA TR 66-04, Nov 70) used to compute the data presented on that page.

3.1.23.2.6 Examples. An example shall be provided on the graphical data page to demonstrate primary use of each type of graph. If there are two equally important uses of the charts, a maximum of two examples may be presented on the graph page. Additional examples (text only) of other uses or methods of use of the data, where applicable, shall be included in explanatory text. These examples shall be in the same format as those on the graphical data page.



**MIL-PRF-63029D(AV)**

3.1.23.2.6.1 Example text. The example text shall be located on the left side of the graphical data page. If multiple examples are used; each example shall be sequentially numbered using Roman numerals (for example, EXAMPLE I, EXAMPLE II, etc.). If a single example is used, it shall be identified by the heading "EXAMPLE". The example text shall be clear yet succinct. Omit articles, conjunctions; prepositions, etc. Wanted parameter names only shall be used. A maximum of three parameters shall be used. If more wanted parameters are available, use additional examples in the explanatory text to explain them. Use one line each to list known parameters and values. If the known parameter value is obtained from elsewhere in the manual, or the source is not evident, parenthetically (below known parameter line) describe the most probable source, such as (from example 1) or (computed from winds aloft). The method for using the graph shall be described using one line per distinct step. Known values shall not be repeated in the method. If needed or useful intermediate values are obtained using the method, these values shall be stated.

3.1.23.2.6.2 Example values. Example values shall be chosen to represent reasonably critical conditions. Standard and absolute extreme conditions shall not be used. If restricted or special conditions are shown on the chart, the example values shall be chosen to illustrate their effect. Values shall be chosen to require graphical interpolation on every parameter.

3.1.23.2.7 Scaling. Scale and data line increments shall conform to the rule of 1, 2, 5, or 10 minor divisions per major division, except as noted here. The preferred scale grid shall be five minor divisions per major division along each axis. Ten division grids are undesirable and shall be used only when absolutely necessary. Four division grids shall be used only with the permission of the contracting activity (6.2). Asymmetrical (4 x 5) grids are permitted. For highly nonlinear variations approximately equal increments of the dependent variable(s) shall be used. The minimal minor grid spacing shall be six points, unless otherwise specified by the contracting activity (6.2).

3.1.23.2.8 Units. Each parameter on the graph and its corresponding unit of measure shall be those most commonly used for the subject aircraft. If the parameter is available on an aircraft indicator, the units used on the graph shall be the same as those on the indicator. If the parameter is not on an aircraft indicator, the units used shall be the same as those of the most often used source of the data. In some instances, two nearly equal common units may be in use or a transition may be in progress from an older model to a newer model. When this occurs, the primary unit of measure shall be that associated with the new model. Where practicable, the primary unit shall be used on the primary scale and the unit associated with the older model shall be presented on a (redundant) secondary scale. When scales or data include negative values, + and – prefixes shall be used with all numbers for that parameter. For data values on the graph, brackets shall be used around the prefixes.

**MIL-PRF-63029D(AV)**

3.1.23.2.9 Data range. The data range presented shall cover the full applicable range of data. Scales shall extend to the next major division beyond the extreme or limit value(s) and no further, unless specified by the contracting activity (6.2).

3.1.23.2.10 Grid. The grid shall correspond to the primary scales. Grids shall be prepared to the graphical line standards (Figure 4).

3.1.23.2.11 Scales. The scale title shall include the parameter name and units of measure. When used, multipliers shall be included with the units (for example, GROSS WEIGHT - pounds X1000). Multipliers shall be used only to meet specific illustration requirements in this specification for values with three zeros or more, or when significant improvement in the appearance of the graph would result. Resulting fractional values (for example, GROSS WEIGHT - 1000 pounds = 20.2) shall be avoided. Secondary scales should be located on the opposite side of the grid from the primary scale. Scale numbers shall be used for each major, or every other (most even value) major, scale increment, unless the secondary scale corresponds to markings on an aircraft indicator. In this case, the increment and value labeling shall be the same as those on the indicator.

3.1.23.2.12 Data line labels and values. Labels for data lines shall include the parameter name, multiplier, if any, units, and corresponding value. They shall be located approximately at the midpoint of, and oriented parallel to, the data line, as read from the bottom of the page. Data line labels and values shall be prepared in accordance with the graphical standards as shown in Figures 3 and 4. Labels shall minimally obscure the grids. Data line labels and values shall be located according to the following order of preference:

- a. Parallel centered interrupting the line, alternately staggered to avoid masking a continuous area of the grid (shall be used for primary data line numbers).
- b. At the end of, and parallel to, the data line (suitable for secondary data lines).
- c. Adjacent and parallel to the data line (suitable for secondary data lines).
- d. Outside the data lines with leader lines to each data line (suitable for secondary data lines).

3.1.23.2.13 Primary data lines. Primary data lines shall be prepared in accordance with Figure 4. Scales shall be chosen so that the mid-range of approximately linear data is oriented at approximately 45°. Increments shall be chosen so that the majority of the data lines are separated by at least one minor grid width and no more than one major grid width. Converging data lines shall be truncated (alternately) when the separation decreases to 1/2-1 minor grid spacing, so that actual convergence does not occur.

**MIL-PRF-63029D(AV)**

3.1.23.2.14 Secondary data lines. Operating limits, restricted operating conditions, and optimum, recommended, or critical operating conditions shall be depicted, as applicable, on each graph. Secondary data lines shall be prepared in accordance with Figure 4.

3.1.23.2.15 Layout and sizing. Scales and grid size shall be chosen to take maximum advantage of the available space to provide the most easily read graph, consistent with the previously specified range and readability requirements. Several single graphs on the same general subject may be included on a single page. For sequential graphs the following requirements apply. The general layout shall have the example text near the upper left corner of the page. The first step graph shall be near the upper right corner. The sequence shall be for the user to enter on left of first graph, move right, reflect down at right angles, reflect left, reflect down, etc. until the primary wanted parameter is read out on the final scale. A transfer grid (in the direction of transfer only) shall be provided between each step graph. Intermediate parameters may be provided on secondary scales by continuing through the reflector data lines or by reflecting in the opposite direction to the primary direction.

3.1.23.2.16 Original graphical data designs. For original (sequential) graphical designs, the following requirements also apply.

- a. Each "known" parameter shall be used only once in the sequence, unless its use will simplify a procedure.
- b. The sequence shall proceed from the best known (or most certain) parameter to the least certain parameter consistent with technical requirements.
- c. Each sequential stop shall reflect at right angles (90° parameter transfers only). "Paralleling" data transfers shall be avoided.

3.1.24 Dimensional data. Except for weight and balance values in Chapter 6, linear dimensions shall be stated in feet and inches or in inches and decimal fractions, unless otherwise specified by the contracting activity (6.2). No more than 3 decimal places shall be used. When dimensions are less than a foot, they shall be expressed in inches and decimal fractions. All dimensions, tolerances, clearances, measurements, and decimal equivalents appearing in Chapters 8 and 9 shall be stated in bold capital lettering in the text and on illustrations.

3.1.25 Manufacturers' names. The use of manufacturers' names in the operator's manual or checklists shall be prohibited without prior approval of the contracting activity (6.2).

3.1.26 Appendixes. Appendixes shall immediately follow the last chapter of the TM and shall begin on a right-hand page. The title shall be written with all capitals, for example

**MIL-PRF-63029D(AV)**

APPENDIX A. Pages, paragraphs, illustrations and tables shall be consecutively numbered in Arabic numerals preceded by the capital letter of the appendix, e.g. page A-17 (page) or Figure B-17.

3.1.27 Index. Unless otherwise specified (6.2), an alphabetical index shall be prepared. It shall begin on a right hand page. It shall list pertinent subjects under every topic for which users are likely to look. “See” and “see also” references may be included to guide the user to other pertinent entries. All applicable paragraph numbers for each item shall be indicated. Page numbers for indexes shall be consecutively numbered in Arabic numerals with the word “Index” preceding the page number. The index shall be located at the end of the publication but shall be located before foldout page(s). Each manual or volume in a set of manuals shall contain its own index. In addition, volume 1 or the first manual of the set shall contain an index for all volumes or manuals in the set.

3.1.28 Emergency procedures. Chapter 9 of the operator’s manual and the -CL checklist pages that contain emergency procedure information/steps shall have heavy black diagonal lines around three edges (Figure 55).

3.1.29 Designator symbols. Designator symbols C such as shall be used in conjunction with text headings, text contents, and illustrations to show limited applicability of the material. If more than one model is described or the aircraft has a variety of configurations, one or more symbols may follow a text heading or illustration title to highlight that part of the text that pertains to the aircraft or systems in question. For procedural steps, the designator symbols shall precede each step. If the material applies to all series and configurations, no designator symbols shall be used. Where practicable, descriptive information shall be condensed and combined for all series to avoid duplication. A table showing designator symbols shall be included.

## 3.2 Operator's manual.

3.2.1 General. The TM shall describe briefly and concisely the operation of the complete aircraft. The description of aircraft, aircraft systems, sub-systems, and components shall contain only that detail required to explain the operation, operational procedures, and checks necessary for the pilot to safely and efficiently operate the aircraft, aircraft systems, and mission equipment during flight and ground operation. The format shall be as follows:

Cover

Table of Contents

Chapter 1 - Introduction

**MIL-PRF-63029D(AV)**

Chapter 2 - Aircraft and Systems Description and Operation

Chapter 3 - Avionics

Chapter 4 - Mission Equipment

Chapter 5 - Operating Limits and Restrictions

Chapter 6 - Weight/Balance and Loading

Chapter 7 - Performance Data

Chapter 8 - Normal Procedures

Chapter 9 - Emergency Procedures

Appendix A - References

Appendix B - Abbreviations and Terms

Index

3.2.1.1 Size. Operator's TMs shall be prepared for a final trim size of 8 1/2 inches wide by 11 inches in length. The usable area for preparation of the manuals shall be 7-1/4 by 10 inches (including marginal copy). See MIL-STD-38784 for additional information.

3.2.1.2 Page arrangement. All text shall be arranged in a double column page. Each column shall be approximately 3-1/2 inches wide with a gutter approximately 1/4 inch wide between the columns. When configuration or equipment differences exist, duplicate pages of the operator's manual may be prepared when authorized by the contracting activity (6.2). The pages shall be numbered identically, with the difference indicated by a designator symbol in the upper right corner of the page. When appropriate, the following statement shall be added verbatim to Chapter 1:

Duplicate pages have been provided. Aircraft applicability is indicated in the upper right corner of the -10 pages affected. Remove and discard pages which are not applicable to the assigned aircraft.

3.2.1.3 Cover. Covers shall be prepared in accordance with Figure 5 (note the distribution statement). A 3/8-inch bleed-to-edge indicator shall be used on both the right edge of the cover and corresponding right-hand pages. Pages in Chapter 9, Emergency Procedures, shall not have bleed-to-edge indicators in the text, but shall have diagonal lines around three edges of the page (Figure 55).

**MIL-PRF-63029D(AV)**

3.2.1.4 Reporting errors. To assist in improving TMs and reporting errors, specific information shall be placed in the TM.

3.2.1.4.1 Errors statement. The following statement shall immediately precede the Table of Contents:

**REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS**

You can help improve this manual. If you find any mistakes or if you know of a way to improve these procedures, please let us know. Write a letter or complete and mail a DA Form 2028-2, Recommended Changes to Publications and Blank Forms, to Commander, US Army Aviation and Troop Command, ATTN: AMSAT-I-MP, 4300 Goodfellow Blvd., St. Louis, MO 63120-1798. You may also report errors or recommend improvements by e-mail directly to <mpmt@avma28.stl.army.mil>. A reply will be furnished to you. Instructions for sending an electronic 2028 may be found at the back of this manual preceding the hard copy 2028-2. Types of comments that should be avoided on DA Form 2028-2's are those that: (1) ask a question instead of giving an answer; (2) are based on minor differences of opinion or wording; (3) point out obvious editorial errors, misspellings, or errors in punctuation, *unless the errors change the intended meaning*.

An overprinted sample of DA Form 2028-2 and three pre-addressed tear out DA Form 2028-2's shall be included at the back of each manual.

3.2.1.4.2 E-mail. The following instructions shall be placed at the back of the manual immediately in front of the DA Form 2028-2's.

The following format must be used when submitting an electronic 2028. The subject line must be exactly the same and all fields must be included; however only the following fields are mandatory: 1, 3, 4, 5, 6, 7, 8, 9, 10, 13, 15, 16, 17, and 27.

From: (enter e-mail address)  
To: <mpmt@avma28.stl.army.mil>

Subject: DA Form 2028

1. From:
2. Unit
3. Address
4. City:
5. St:

**MIL-PRF-63029D(AV)**

6. Zip:
7. Date sent:
8. Pub No:
9. Pub title:
10. Publication date:
11. Change No:
12. Submitter rank:
13. Submitter Fname:
14. Submitter Mname:
15. Submitter Lname:
16. Submitter phone:
17. Problem:
18. Page:
19. paragraph:
20. Line:
21. NSN:
22. Reference:
23. Figure:
24. Table:
25. Item:
26. Total:
27. Text:

(Enter the text for the problem below line 27.)

3.2.2 Chapter 1 - Introduction. This chapter shall consist, at a minimum, of introductory material that applies to the manual as a whole. There are also a number of statements that shall be included exactly as written in this specification.

3.2.2.1 General. The first paragraph of Chapter 1 shall be titled "General" and shall briefly summarize the contents of the paragraph.

3.2.2.2 Warnings, cautions, and notes. This paragraph shall describe warnings, cautions, and notes that the operators will find in the TM and the importance of observing these safety alerts. They shall be short, concise and used only to emphasize important or critical data. They shall state the hazard and result, or reason, unless obvious. Unless otherwise specified, warnings and cautions shall precede the text but follow paragraph headings to which they apply. Notes may precede or follow applicable text. Warnings, cautions, and notes shall not contain procedural steps nor shall the headings be numbered. If it is necessary to precede a paragraph with two or more of these notations, the more serious one shall precede the less serious one. The text of these alerts shall be indented at least five spaces from the left and right margins, and they shall be printed in boldfaced letters. Near the front of Chapter 1, the following shall be placed verbatim in the style and format shown:



## MIL-PRF-63029D(AV)

**WARNINGS, CAUTIONS, AND NOTES.** Warnings, cautions, and notes are used to emphasize important and critical instructions and are used for the following conditions.

**WARNING**

**Highlights an essential operating or maintenance procedure, practice, condition, statement, etc. which if not strictly observed, could result in injury to, or death of, personnel or long term health hazards.**

**CAUTION**

**Highlights an essential operating or maintenance procedure, practice, condition, statement, etc. which, if not strictly observed, could result in damage to, or destruction of, equipment or loss of mission effectiveness.**

**NOTE**

**Highlights an essential operating or maintenance procedure, condition, or statement.**

3.2.2.3 Designator symbols. An explanation of designator symbols, along with a table of symbols used in the TM shall be placed near the beginning of Chapter 1.

3.2.2.4 Description. This paragraph shall be a succinct summary of the aircraft's description and primary mission, omitting any extraneous mission capabilities statements. The following statement shall be added to this paragraph:

This manual contains the best operating instructions and procedures for the (insert aircraft designation), under most circumstances. The observance of limitations, performance and weight/balance data provided is mandatory. The adherence to procedures is mandatory except when modifications are required because of multiple emergencies, adverse weather, terrain, etc. Basic flight principles are not included. **THIS MANUAL SHALL BE CARRIED IN THE AIRCRAFT DURING ALL FLIGHTS.**

3.2.2.5 Army aviation safety program. This paragraph shall describe the reports necessary to comply with the Army aviation safety program. Reference shall be made to AR 385-40.

3.2.2.6 Destruction of Army materiel. Information shall be presented on procedures for destroying Army materiel to prevent enemy use. Reference shall be made to TM 750-244-1-5.

**MIL-PRF-63029D(AV)**

3.2.2.7 Forms and records. Flight records and aircraft maintenance records which are used by the operators and crewmembers shall be described. References shall be made to DA Pam 738-751 and TM 55-1500-342-23.

3.2.2.8 Change symbols. The following shall be placed in Chapter 1:

Changes to the text and tables, including new material on added pages shall be indicated by a vertical bar in the outer margin extending close to the entire area of the material affected. Pages with emergency markings, which consist of black diagonal lines around three edges, shall have the vertical bar or change symbol placed along the outer margins between the text and the diagonal lines. Change symbols show current changes only. A miniature pointing hand symbol is used to denote a change to an illustration. However, a vertical line in the outer margin, rather than miniature pointing hands, shall be utilized when there have been extensive changes made to an illustration. Change symbols shall not be used to indicate changes in the following.

- a. Introductory material.
- b. Indexes and tabular data where the change cannot be identified.
- c. Correction of minor inaccuracies, such as spelling, punctuation, relocation of material, etc., unless such correction changes the meaning of instructive information and procedures.

3.2.2.9 Shall, should, and may. The following shall be placed at the end of Chapter 1:

Within this TM use "shall" whenever a TM expresses a mandatory requirement. Use "should" to indicate a non-mandatory but preferred method of accomplishment. The word "may" shall be used to indicate an acceptable method of accomplishment.

3.2.3 Chapter 2 - Aircraft and Systems Description and Operation.

3.2.3.1 General. This chapter shall describe the airframe and all aircraft systems and controls. Each system shall be described under its own heading. The nomenclature of the system shall be used as the primary paragraph heading and the name of each control or indicator as the subordinate paragraph heading. The description of each control and item of equipment shall be brief, concise, and include an index number and figure reference, as appropriate. Include flight crew oriented malfunction isolation charts (Figure 6), as required, and only as approved by the contracting activity (6.2). Maintenance type fault isolation charts shall not be used.

For aircraft equipped with interactive displays, such as a multifunction display (MFD), the data management system, including the interactive display, shall be described in this chapter. For each section within this chapter that describes a subsystem, the appropriate top page of

**MIL-PRF-63029D(AV)**

the interactive display, including each button, shall be fully described and explained. In addition each page underneath the top page shall be briefly described. When needed for clarity, illustrations representative of the pages displayed on the interactive display shall be included throughout the TM.

3.2.3.1.1 Controls. Each control contributing to the operation of a system shall be described and its location given. The function of the control and the end result produced when the control is moved to each of its possible positions shall be included in the description. Any effect which this control may have on other systems, or which they may have on the control shall be stated. If movement of the control requires any special action because of locks, gates, etc., it shall be so stated. When feasible, a separate paragraph and illustration shall be devoted to each control and the name of that control shall be the paragraph heading. It is preferable to divide the control description into two portions, normal controls and emergency controls, if emergency capabilities exist.

3.2.3.1.2 Indicators. All indicators, instruments, and warning devices which are a part of the aircraft system shall be described and illustrated. This shall include location, function, power source, and interpretation of the indications.

3.2.3.2 Section I - Aircraft. This section shall provide a complete but concise description of the aircraft. At a minimum, the following subjects and illustrations shall be included.

3.2.3.2.1 General. This paragraph shall contain a description of the airframe. Major assemblies such as fuselage, wings, and tailboom shall be described. Each compartment of the aircraft such as cockpits and cabins shall be described and illustrated as required.

3.2.3.2.2 Illustrations and tables. The following illustrations and tables shall be included in section I.

a. The aircraft's general arrangement shall depict all access openings which will be checked during preflight of the aircraft (Figure 2). The general arrangement shall be placed as near to the beginning of Section I as practicable. These diagrams shall not include individual controls or aircraft systems. Diagrams which are needed for clarity shall be used. Two or more of these illustrations, such as crew movement diagram and compartment diagram, may be combined into one.

b. Figures 7 and 8 illustrate minimum turning radius, ground clearance, dimensions and danger areas. The minimum turn shall be based on a turn permitted on one wheel (tire hub), with and without power steering assist. Minimum ground clearance shall also be shown.. The turning radius for skid equipped aircraft shall be based on turning the aircraft on an identifiable reference point on the aircraft or an identifiable reference point on the ground. An illustration shall be included showing danger areas around the aircraft for all modes of operations on or near the ground. Areas to be avoided to prevent damage to equipment or injury to personnel shall be depicted or described. These figures shall be provided for idle and maximum power. For rotary wing aircraft, illustrations shall be

**MIL-PRF-63029D(AV)**

based on hover power required at maximum gross weight. Danger areas of main rotors, tail rotors, or propellers shall also be depicted.

c. A table (Figure 9) indicating the most significant differences in design and operation between each aircraft series included in the manual shall be provided. Special emphasis shall be placed on features which will affect recognition and operation of the various series.

d. Each major compartment, such as cockpit or cabin (Figure 10), that can carry payload or that can be entered by personnel shall be illustrated and identified.

3.2.3.2.3 Landing gear system. Information describing the landing gear system shall be presented in detail for the operator's use. The following shall also be included.

a. The steering system, including any special or unusual features, shall be described.

b. The brake system, including all emergency provisions, shall be described. Brake provisions for aircraft equipped with floats shall be described as well.

3.2.3.2.4 Instruments, panels and consoles. All instruments, panels, and consoles shall be illustrated. Several configurations may be covered by one illustration labeled typical. Minor variations in number or type of controls and instruments shall be indicated by detailed views to the illustration and by notations in the key. The panels or console may be shown more than once when major changes in configuration are involved.

3.2.3.2.5 Canopies. Several configurations may be covered by one illustration labeled typical. All normal and emergency canopy controls, both external and internal, shall be described and illustrated.

3.2.3.2.6 Doors. All doors to include ramps, hatches, etc., controls for normal and emergency operations, and their sources of power shall be described.

3.2.3.2.7 Seats. Pilot and other flight compartment seat controls shall be described and illustrated. Emergency and ejection seat controls, inertia reels, harnesses, and seat belts shall be described and illustrated in detail, emphasizing how they are affected by other systems.

3.2.3.3 Section II - Emergency equipment. All emergency equipment, except that which forms part of a complete system, shall be included. For example, emergency landing gear controls shall be treated under the landing gear system and emergency fuel pumps under the fuel system. Emergency equipment in this section shall include, but not be limited to, hand fire extinguishers, engine fire extinguishers, emergency alarms, pyrotechnic equipment, axes, emergency hatches, signal lamps, ditching jackets, first aid kits, and survival kits. Emergency procedures shall be described only in Chapter 9.

**MIL-PRF-63029D(AV)**

Illustrations showing locations of emergency equipment or systems shall be shown as needed but only in Chapter 9.

3.2.3.4 Section III - Engines and related systems. The engine and its related controls, as outlined in the following paragraphs shall be described.

3.2.3.4.1 Engines. This paragraph shall cover the most important characteristics and special features of the engine. Model designation shall be included for all engines used in the subject aircraft. The following systems shall be discussed:

- a. Cooling system and controls such as cowl flaps and engine cooling fans shall be described.
- b. The engine/engine inlet anti-icing/deicing system shall be described and illustrated.
- c. The engine fuel control system, which applies to jet and turbine powered aircraft and extends from the engine fuel control unit through the burner ring or combustor section, shall be described. Where applicable, special emphasis shall be placed on the emergency fuel control systems. Any special or unusual characteristics of the system shall also be described, but the theory of operation shall not be included. Discussion of the throttle/power lever shall be included, and all systems effected by throttle/power lever operation shall be mentioned.
- d. Information on all controls affecting the oil system shall be included.
- e. The ignition system controls shall be described.
- f. Starter controls shall be described.
- g. The infrared suppression system shall be detailed.
- h. Engine instruments and indicators shall be described in detail. For the purpose of the operator's manual, the fuel and oil supply systems shall be treated as ending at the point where they deliver the fluid to the carburetor, fuel control unit, or the engine-driven oil pump.

3.2.3.5 Section IV - Fuel system. This section shall describe the aircraft fuel system as follows:

3.2.3.5.1 General. A full description of the fuel system shall be given. Coverage of drop tank release controls shall be included. Reference shall be made to fuel grades and specifications in section XV, Servicing.

3.2.3.5.2 Controls and indicators. Fuel system controls and indicators shall be described.

**MIL-PRF-63029D(AV)**

3.2.3.5.3 Fuel system management. The fuel system management process shall be described, including auxiliary fuel, booster pump use, fuel transfer procedures, tank selection procedures, and courses of fuel flow. All possible courses of fuel flow, such as inoperative engines and failed boost pump, shall be included. The sequence in which fuel tanks must be used shall be stated with corresponding reasons (strength or balance). When applicable, reference shall be made to the pertinent portion of Chapter 6 when weight distribution becomes a problem. The required sequence of use of tanks to maintain a favorable center-of-gravity (CG) shall be described in detail. Remarks shall also be included regarding control of the aircraft if the transfer system fails and results in an unbalanced condition because of improper fuel distribution.

3.2.3.5.4 Illustrations. Diagrams of the typical courses of fuel flow, including fuel system control positions for takeoff, cruising, landing, and emergency operation shall be included.

3.2.3.6 Section V - Flight control system. This section shall cover in detail the flight control system.

3.2.3.6.1 General. This shall describe the flight control system and its location. The system shall be described in its entirety. The nomenclature of the system shall be used as the primary paragraph heading and the name of each control or indicator as a subordinate heading.

3.2.3.6.2 Flight control system. Flight controls, indicators, trim tabs, force trim, control locks, etc. shall be discussed as stated in paragraphs 3.2.3.1.1 and 3.2.3.1.2. In addition, all other controls located on the control sticks, wheels, yokes, pedals, cyclic and collective, shall be mentioned.

3.2.3.6.3 Automatic flight control system. Detailed coverage of automatic stabilization equipment, stability augmentation control system, and auto pilot shall be provided. All modes of operation shall be described. If any additional systems are required to operate in conjunction with the stabilization equipment, a statement shall be included to that effect. Applicable precautionary data shall be included for conditions of partial or temporary electrical power failure, manual override, etc. When applicable, reference shall be made to navigation equipment descriptions and operations contained in Chapter 3.

3.2.3.6.4 Illustrations. Illustrations shall be provided for each control column or control stick. Details shall be shown for switches and control buttons, friction devices, locks, etc. Variations in controls between aircraft series or serial numbers, or both, shall also be shown.

**MIL-PRF-63029D(AV)**

3.2.3.7 Section VI - Hydraulic and pneumatic systems. This section shall provide a description of all hydraulic and pneumatic systems. At a minimum, test switches, indicators and gauges, caution/warning lights, and controls shall be covered:

3.2.3.8 Section VII - Power train system. The power train system shall be described in detail to include the transmission and gearbox systems, drive shafting, system controls, and indicators.

3.2.3.9 Section VIII - Rotors or propellers. Section title shall be "Rotors" or "Propellers" as applicable. Describe the propellers or rotors and their functions. Include a detailed description of operation.

3.2.3.10 Section IX - Utility systems. This section shall describe defrosting, anti-icing/deicing, pressurization, oxygen, and rain removal systems and miscellaneous equipment. Coverage here shall be brief and shall concern itself largely with location of the equipment and its controls, source of power, illustration of the controls (if not covered previously), and a brief discussion of function and operation. Control/switch panels that control several different utility systems should only be illustrated once, if feasible. The text describing the operation of the different systems should reference the single illustration. Information shall be included on all nonemergency equipment which is not part of a system. All miscellaneous equipment and normal and emergency operation procedures shall be included. Equipment shall include, but not be limited to, seats (other than pilot and flight engineer), hatches, heated blanket provisions, data case, beaching gear, night flying curtains, ladders, relief equipment, food warmers, water containers, and tool kits. Items covered as aircraft loading equipment in Chapter 6 shall not be included here. Items dealing with aircraft servicing and ground handling shall be contained in section XV.

3.2.3.11 Section X - Heating, ventilation, cooling, and environmental control systems. This section shall describe the heating, ventilation, cooling, and environmental control systems. They shall be covered in paragraphs titled "description", "normal operation", and "emergency operation".

3.2.3.12 Section XI - Electrical power supply and distribution systems. The electrical power supply and distribution systems and controls shall each be described and illustrated under its own heading (Figure 11). Where pertinent, reference shall be made to auxiliary power systems that are described elsewhere. The external power source and the interaction between the auxiliary power plant and the electrical system shall be described. General arrangement and order of the primary system shall be covered first, followed by the secondary system.

3.2.3.12.1 DC power supply system. DC power supply systems shall include battery; starter-generators, generators, alternators and converters; indicators, gauges, and controls; circuit breaker and junction boxes; auxiliary power; and ground power.



**MIL-PRF-63029D(AV)**

Armament. This section shall describe gunnery, rocket, tow target, control, and computer equipment and their interrelations when installed. Armor protection shall be discussed along with the individual item which is being protected. When the equipment and their description are extensive, armament equipment may be covered as separate sections. The TM shall also cover precautions and safety considerations.

3.2.5.3.1 Armament control system. This part of the manual shall contain the operating instructions for the armament control system. Also, information such as presentation on the scope or sight, when applicable, shall be included. Warm-up time and preflight, in-flight, before landing, and after landing checks shall be listed. Checklist format and style shall be in accordance with paragraph 3.2.10.2.4.

3.2.5.3.2 Gunnery equipment. Information shall be included on all guns and turrets, including quantity of ammunition which can be carried for each gun. The manual, when describing remote controlled turrets, shall include, but not be limited to, the station from which the turret is operated, method of gaining control of the turret, and method of transferring control. All gunnery controls shall be covered, including gun sight and gun heater.

3.2.5.3.3 Rocket equipment. Information shall be provided regarding the firing procedures, description and capability, controls, and types and number of rockets that can be carried. Typical combinations of rockets and firing order shall be covered. Special precautions, if any, shall be listed.

3.2.5.3.4 Missiles. Information shall be provided regarding the firing procedures, description and capability, controls, and types and number of missiles that can be carried. Special precautions, if any, shall be listed.

3.2.5.4 Section III - Cargo handling. This section shall describe cargo handling systems and equipment to include hoists, winches, and cargo hooks.

3.2.5.5 Section IV - Passive defense. Passive defense equipment shall be described, procedures outlined, and controls and precautions listed. Employment methods shall be discussed.

3.2.5.6 Additional sections. Additional sections may be used as required to describe systems not covered in other sections.

### 3.2.6 Chapter 5 - Operating Limits and Restrictions.

3.2.6.1 General. This chapter shall include all important operating limits and restrictions that shall be observed during ground and flight operations. Special emphasis shall be

**MIL-PRF-63029D(AV)**

placed on any unusual restrictions which are particularly characteristic of the aircraft. All time limited operations shall include a time limit and the upper and lower boundaries.

3.2.6.2 Section I - General. This section shall contain general information on aircraft limits and restrictions, including decals and placards. The following statements shall be included in the TM:

Purpose. This chapter identifies or refers to all important operating limits and restrictions that shall be observed during ground and flight operations.

General. The operating limitations set forth in this chapter are the direct results of design analysis, tests, and operating experiences. Compliance with these limits will allow the pilot to safely perform the assigned missions and to derive maximum utility from the aircraft.

Exceeding operational limits. Any time an operational limit is exceeded, an appropriate entry shall be made on DA Form 2408-13-1. Entry shall state what limit or limits were exceeded, range, time beyond limits, and any additional data that would aid maintenance personnel in the maintenance action that may be required.

The TM shall list the minimum crew required for flight. The following statement shall be included:

The minimum crew required for flight is (fill in proper number). Additional crewmembers, as required, will be added at the discretion of the commander in accordance with pertinent DA regulations.

3.2.6.3 Section II - System limits. This section shall contain all aircraft system limits, not covered elsewhere in this chapter, that may restrict operation.

3.2.6.3.1 Instrument, interactive display, or display operating ranges and markings. Each instrument, interactive display, or display that indicates an operating limit(s) shall be illustrated and accurately reflect the actual markings/displays on the instrument, interactive display, or display (Figure 15). The information appearing on the illustration depicting markings or displays shall not be repeated in the text or table. The color coded markings/displays or interactive display graphic symbols shall be fully explained. If the instrument, interactive display, or display limits cannot be adequately explained in the space provided for the captions, explanations shall be included under the appropriate paragraph heading in this section. The paragraph shall state or describe all limit ranges, including gaps that may be shown in range markings.

3.2.6.3.2 Propeller limitations. Propeller limitations shall be discussed including, but not limited to reverse pitch and restricted rpm.

**MIL-PRF-63029D(AV)**

3.2.6.3.3 Rotor limitations. For rotary wing aircraft, rotor limitations during both flight and ground operation shall be discussed, covering such points as restricted rpm, autorotational rpm, limitations for startup and shutdown during high winds, and wind gust spread.

3.2.6.3.4 Power limitations. Power limits shall include engine and drive train and idle limitations. This shall include limitations that must be observed when alternate fuel grades are used. Acceleration limits and restrictions which apply to the engine shall be covered. Limits shall be expressed in terms of observable indications which are available to the flight crew e.g. 360°C, 46 lb., 10 psi. Terms such as military power or takeoff power should not be used.

3.2.6.3.5 Additional limitations. All system limits and restrictions not described by the instrument markings shall be included. Limits and restrictions that should be observed when operating utility, heating, ventilation, cooling or rain removal systems shall also be included.

3.2.6.4 Section III - Loading limits. Loading limits pertaining to the aircraft shall be discussed in detail in this section.

3.2.6.4.1 Center-of-gravity limitations. Longitudinal limitations shall be described. Lateral limitations shall be described when specified by the contracting activity (6.2). Also, the following statement shall be included:

CG limits for the aircraft to which this manual applies and appropriate charts for computation of the CG are contained in Chapter 6.

3.2.6.4.2 Weight limitations. All minimum/maximum aircraft weight limitations including parking, towing, taxiing, and takeoff and landing from prepared/unprepared fields shall be provided. For aircraft in which weight distribution is a problem, (such as minimum fuel to be carried in the wings at various gross weights), coverage of the limitations involved shall be included. References shall be made to fuel management in Chapter 2, as necessary.

3.2.6.4.3 Turbulence. Restrictions regarding flying in all levels of turbulence shall be discussed. Limitations shall be covered.

3.2.6.4.4 Other 3.2.3.12.2 AC power supply system. These systems shall include inverters and alternators; indicators, gauges, and controls; AC circuit breaker and junction box diagram; auxiliary power; and ground power.

3.2.3.12.3 Breakers. The location of each circuit breaker panel shall be shown, and on standardized installation, each circuit breaker in the panels shall be identified. The illustration shall depict a typical installation of both systems (AC/DC) which may be combined on one illustration. In those instances where a standardized circuit breaker location does not exist, the location of circuit breakers or fuses shall be given. This diagram shall be located near the description of the electrical system.

3.2.3.13 Section XII - Auxiliary power unit. This section shall include a description of the auxiliary power unit, controls, and its interaction with other systems. Starting, stopping, and

**MIL-PRF-63029D(AV)**

in-flight operating procedures shall be contained in Chapter 8 and emergency procedures in Chapter 9.

3.2.3.14 Section XIII - Lighting. Information shall be provided for, but not limited to, formation, landing, fuselage, cabin, instruments, wheel well, taxi, navigation, and anti-collision lights. Coverage shall concern itself largely with locations, controls, power sources, and a discussion of functions. Illustrations may be used if equipment is not depicted in Chapter 2 or elsewhere.

3.2.3.15 Section XIV - Flight instruments. All flight instruments, indicators, gauges, and miscellaneous instruments and systems shall be described in this section. Miscellaneous instruments and systems shall include such items as master caution systems, rpm high/low warning systems, trainer instrument panel, and clocks. Special problems, such as erroneous readings of the airspeed indicating system resulting from installation error or hovering, shall be included with references to correction charts, when applicable. Complex display systems shall be included under a separate primary heading.

3.2.3.15.1 Illustrations. Line drawings shall be provided for all instruments. Each indicator, gauge, and control shall be shown (Figure 12). Each item shall be indexed or posted and references shall be entered in the text as appropriate. On the drawing the names or index number, whichever is most legible, of the instruments may be placed in the instrument or indicator outline.

3.2.3.16 Section XV - Servicing, parking, and mooring. Servicing shall include, but not be limited to, flight crew oriented instructions for normal and closed circuit refueling and for replenishment of fuel, oil, hydraulic fluid, other fluids, and air in tires. Servicing shall also include all other such items involved in servicing the aircraft that a crew could be expected to perform while away from military maintenance support. Safety precautions to observe in servicing a particular tank or reservoir, such as grounding and prevention of fire hazards, shall be stated clearly. Servicing instructions shall be supplemented with a diagram showing locations of regular and alternate servicing points. NO STEP areas on walkways leading to tanks shall be indicated, with necessary precautions. Reference shall be made to graphs or data in other parts of the manual pertinent to servicing, such as tire pressure versus gross takeoff weight.

3.2.3.16.1 Servicing diagram. The servicing diagram shall depict each servicing point, including, but not limited to, tanks, reservoirs, filler caps, receptacles, oxygen bottles, and accumulators and shall be shown as viewed (Figure 13). Illustrations of site gauges and other indicators shall clearly depict proper servicing levels.

3.2.3.16.2 Servicing table. The servicing table shall be in tabular form as shown in Figure 14. Each item of equipment including, but not limited to, engine, transmission, gearboxes, reservoirs (hydraulic, anti-icing), auxiliary power unit, and oxygen systems shall be listed under "System". Under the heading of "Specification", the military specification for the fuel, oil, fluid, or lubricant shall be listed including references to any notes on temperature ranges,

**MIL-PRF-63029D(AV)**

mixing of oil, etc. Fuel capacities shall also be listed to include total, servicing capacity, and usable capacity in U.S. measurements to the nearest tenth of a gallon, and metric equivalents.

3.2.3.16.3 Approved fuels. Include a tabular listing of primary, alternate, and emergency fuels, to include NATO and commercial brand names authorized for use in the aircraft for which this manual applies. Warnings and cautions regarding additives shall be presented in the table. Also restrictions on the use of any fuels shall be stated. The fuels contained in this listing shall only be those authorized for use by TB 55-9150-200-24 and by the contracting activity (6.2). This information shall not be repeated in the manual.

3.2.3.16.4 Additional servicing instructions. Information shall include a listing of acceptable commercial engine oils as indicated in TB 55-9150-200-24 and as authorized for use in the aircraft (Figure 15).

3.2.3.16.5 Ground handling. List instructions and necessary precautions for ground handling aircraft, including any information needed in extreme cold, heat, humidity, and dust. Provide description and instructions for operating any ground handling equipment involved. Left and right turning limits while towing (with or without external stores) shall be listed. Aircraft ground handling procedures relating to electronics equipment shall be stated when applicable.

3.2.3.16.6 Parking and mooring. Instructions for parking and mooring and the installation and stowage of aircraft covers, control locks, chocks, and tiedown devices shall be described and illustrated. Ground handling, parking, and mooring may be shown on a single page illustration.

### 3.2.4 Chapter 3 - Avionics.

3.2.4.1 General. Except for mission avionics, this chapter shall describe the avionics equipment configuration including all its systems and controls and shall provide the proper techniques and procedures to be employed when operating the equipment.

3.2.4.2 Section I - General. This chapter shall cover avionics equipment configurations installed on a specific aircraft. It shall include a brief description of the avionics equipment, its technical characteristics, capabilities, and locations. Reference shall be made to Chapter 4 for mission avionics.

For each item of avionics equipment contained within Sections II, III, and IV, the TM shall be written in the following format.

- a. Description
- b. Controls and functions
- c. Operation

**MIL-PRF-63029D(AV)**

- d. Emergency operation (if applicable)

Additional sections may be added to this chapter by the contracting activity (6.2).

3.2.4.2.1 Description. Avionics equipment shall be described in detail, including controls, indicators, instruments (if applicable), jacks, switches, control panels, etc. Antenna locations shall be shown on appropriate illustrations.

3.2.4.2.2 Controls and functions.

- a. The location and function of each control, including built-in test capability, contributing to the operation of the avionics equipment shall be listed. A separate paragraph shall be used for each control panel. Reference shall be made to illustrations in Chapter 2 regarding controls and control panels.

- b. A tabular listing shall be included with each paragraph listing control panels. The listing shall be divided into two columns, titled "Control" and "Function" or "Control/Indicator" and "Function", whichever is applicable. Each control or indicator shall be listed and its function defined in terms of what the operator of the control will see, hear, or do as a result of the control setting. Terms of simple, immediate, and observable results shall be used. No attempt shall be made to give the operator the exact technical details about what happens when the control is used.

3.2.4.2.3. Operation. A series of paragraphs shall be used to describe the operating details for each item of avionics equipment. Whenever standard operational avionics data exists within the government, such data shall be furnished to the contractor by the contracting activity. Complete operating procedures shall be included as follows:

- a. When separate modes of operation are available i.e. when the equipment may serve two or more systems, each mode shall be described. These shall be listed as modes of operation and each shall be briefly described.

- b. Explain the sequence of settings and the position to which the controls should be set to ensure proper results each time the equipment is energized. Instructions shall be provided to prevent the possibility of damage through improper settings or sequence of operations. When appropriate, call attention to operating tolerances. When operation of a unit is related to or dependent on the operation of a similar or independent control unit, this information shall be included in the operating procedure. Only those controls normally used by the operator shall be included. Control adjustments that are the responsibility of maintenance personnel shall not be included.

- c. If the configuration provides for a parallel operation from various positions in the aircraft, similar, separate, and complete coverage for each position shall be provided. When the procedure is identical to a position previously covered, it may be covered by a reference to the previous procedure.

**MIL-PRF-63029D(AV)**

3.2.4.2.4 Emergency operations. When applicable, settings and operations of avionics equipment during emergency operations shall be described.

3.2.4.2.5 Power source. A brief description of the power sources for avionics equipment shall be provided, including any special procedures or limitations using, but not limited to, external power and battery power.

3.2.4.3 Section II - Communications. This section shall contain all information for communications equipment installed in the aircraft.

3.2.4.4 Section III - Navigation. This section shall cover all navigation systems and indicators, as applicable. When there is doubt as to whether the system should be covered under communications or navigation, the primary use of the system shall be the deciding factor, and a suitable reference shall be made in the manual to aid the operator in locating the material. The following systems and indicators shall be described.

- a. Automatic direction finder (ADF)
- b. Gyro compass and magnetic indicators
- c. Marker beacon
- d. Flight director
- e. (VHF) OMNI directional range
- f. Tactical Air Navigation (TACAN)
- g. Instrument landing system
- h. Doppler
- i. Inertial navigation system (INS)
- j. Autopilot
- k. Other

3.2.4.5 Section IV - Transponder and radar. This section shall cover all transponders, collision warning systems, and radar systems and indicators, as applicable.

3.2.5 Chapter 4 - Mission Equipment.



**MIL-PRF-63029D(AV)**

3.2.5.1 General. This chapter shall describe all standard mission equipment that may be utilized with the aircraft. Coverage shall include description, controls and function, operating procedures, power sources, and illustrations. Controls, functions, and operating procedures shall be in the same format as Chapter 3.

3.2.5.2 Section I - Mission avionics. This section shall contain unclassified information regarding mission avionics equipment that is not a part of the standard flight communication, navigation, transponder, or radar equipment. It contains electronic equipment such as radio monitoring systems, side looking airborne radar (SLAR), infrared devices, and photographic equipment. Detailed information shall be given regarding the photographic equipment, including, but not limited to, types of cameras, control stations, camera doors, and capabilities of the equipment. Gun camera equipment shall also be covered. Mission avionics equipment that requires extensive explanation of operating procedures shall be covered in this section or in an appendix. An appendix for mission avionics equipment shall be included only if authorized by the contracting activity (6.2). Classified information on mission avionics equipment shall be covered in a separate classified supplement to the manual.

3.2.5.3 Section II - limitations. Other types of limitations that affect operations shall be covered, including:

- a. Additional restrictions to be observed when carrying stores. For aircraft equipped to carry a variety of external stores, information concerning the stores carried at each station and the maximum lateral unbalanced load that can be carried shall be included.
- b. Limitations as to the weight for external sling loads on rotary wing aircraft and speed restrictions, if any.
- c. Floor loading limits which are to be observed when carrying internal cargo.
- d. Restrictions on jettisoning external stores and sling loads.

3.2.6.5 Section IV - Maximum and minimum airspeed limits. Airspeed limitations shall be discussed, including level flight airspeed, diving airspeed, airspeed for various degrees of flap extension, airspeed for various stabilator positions, airspeed for door opening, and airspeeds under various conditions of weight and configuration. For rotary wing aircraft, sideward and rearward airspeed limits and restrictions shall be discussed. Airspeeds shall be expressed as knots indicated airspeed (KIAS), unless otherwise specified by the contracting activity (6.2).

3.2.6.5.1 Airspeed operating limits chart. This chart shall present operating limits for forward flight at various gross weights, pressure altitudes, free air temperature (FAT), and KIAS (Figure 16).

3.2.6.6 Section V - Maneuvering limits. Maneuvering flight limitations to include acrobatic flight, if applicable, shall be described. Acceleration limitations shall also be covered, including maximum acceleration with tip tanks and maximum bank angle at high gross

**MIL-PRF-63029D(AV)**

weight. Maximum permissible accelerations under various flight conditions at specific gross weights and fuel weights shall be detailed. For aircraft not equipped with G meters, G forces shall be expressed in terms that are recognizable by the pilot, such as airspeed and bank angle. Restrictions on control movements shall be listed. Material shall be presented on permissible bank angles and side slip. Prohibited maneuvers shall be listed as appropriate.

3.2.6.6.1 Flight envelope chart. For aircraft with G meters, plots of load factor versus speed for the full range of gross weight shall be shown. The speeds at which maneuvers are restricted and unrestricted, as a function of load limit factors, shall be presented (Figure 17). When changes in configuration result in variations in airspeed position error, separate airspeed scales shall be shown. Where direct reading Mach meters are provided, charts for both indicated airspeed (IAS) and indicated Mach number (IMN) shall be provided.

3.2.6.7 Section VI - Environmental restrictions. This section shall cover altitude, temperature, rain, snow, ice, hail, and oxygen limits, as applicable. Material on maximum wind velocity and gust spread, maximum wind velocity for crosswind operations, wind from the critical azimuth, and normal operation shall be included. Operations under wind azimuth direction and wind velocity conditions which should be avoided shall be discussed. Where appropriate, charts shall be used to depict the preceding conditions.

3.2.6.7.1 Flight under instrument meteorological conditions (IMC). The TM shall define IMC and provide criteria for such flights. In addition when applicable, the TM shall note when a particular aircraft is qualified for operation in instrument meteorological conditions and when a certain aircraft is restricted to visual flight conditions.

3.2.6.8 Additional sections. Additional sections may be used to allow for added limits or restrictions to fit specific aircraft when specified by the contracting activity (6.2).

### 3.2.7 Chapter 6 - Weight/balance and loading

3.2.7.1 Section I - General. This section shall contain general statements about the importance of weight and balance calculations. It shall also note that Chapter 6 contains sufficient instructions and data so that an aviator, given the proper data, can compute any combination of weight and balance. When weight and balance computers/calculators are provided for the aircraft, instructions and examples of their use shall be based on gear down configurations, with supplementary data for gear up conditions (when required). The following statement shall be included:

Army (insert assigned aircraft designation) are in class (insert class). Additional directives governing weight and balance of class (insert class) aircraft forms and records are contained in AR 95-1.

3.2.7.1.1 Aircraft compartment and station diagram. This paragraph and diagram shall provide a general description of the aircraft compartments and shall show the reference datum line, stations, butt lines, and water lines in inches (Figure 18).

**MIL-PRF-63029D(AV)**

3.2.7.2 Section II - Weight and balance. This section shall contain information necessary for the computation of weight and balance for loading of specific aircraft. Instructions for completion of weight and balance forms (DD Form 365 series) shall not be provided in the manual; however, TM 55-1500-342-23 which provides these instructions shall be referenced. Sufficient information shall be provided in this section to permit the flight crew to readily use the data presented in the other sections of this chapter to determine loading arrangements, fuel burn or transfer sequences, ordinance off-load sequences, and other weight and balance procedures to assure the aircraft remains within weight and balance limits for the entire flight.

3.2.7.3 Section III - Fuel/oil. Fuel quantity data shall be in chart form (Figure 19). The names of the tanks on the charts shall be identical to the name appearing on the tank selector (a more explanatory title may be carried in parentheses if desired). Any group of tanks or cells which are interconnected to fill and drain shall be treated as a single tank. The chart shall include data on each tank (including droppable and ferry) that is designed for use with the aircraft. Tank volume shall be given in terms of usable fuel rather than total tank volume. Fuel quantities shall be given in gallons regardless of the type of instrumentation. All gallon figures shall be followed by the conversion to pounds. The grid lines within the chart shall be based on fuel weight in pounds of fuel. It shall be stated that the weights are based on a given specific gravity at standard day temperature.

3.2.7.3.1 Oil data. When specified by the contracting activity (6.2), a statement of usable oil capacity, equivalent in pounds, total moments, and fuselage station number shall be included in the manual. Aircraft that have a large usable oil capacity shall have a tabular listing if oil loading computation is critical. It shall be noted in the TM that the weight shall be based on specific gravity at standard day temperature.

3.2.7.4 Section IV - Personnel. This section shall contain all essential information and instructions for preparation, loading, and unloading of personnel, including airborne troops.

3.2.7.4.1 Personnel compartment and entrances. A general description of the personnel compartment and entrances, including profile and cross-section drawings showing all dimensions, in inches, shall be provided. In addition, a description shall be provided of any critical dimensions which limit full use of the personnel compartment.

3.2.7.4.2 Personnel loading and unloading. Personnel loading and unloading shall include, but not be limited to, a checklist and description of steps necessary for loading and unloading troops as follows:

- a. Troop seat installation
- b. A description and operation of safety belts and harnesses
- c. A check of comfort and emergency provisions
- d. Instructions for troop loading and unloading procedure

**MIL-PRF-63029D(AV)**

3.2.7.4.3 Personnel weight. The TM shall note that when aircraft are operated at critical gross weights, the exact weight of each individual occupant plus equipment should be used. In addition the TM shall state that if weighing facilities are not available, or if the tactical situation dictates otherwise, loads shall be computed as follows:

- a. Combat equipped soldiers - 240 pounds per individual.
- b. Combat equipped paratroopers - 260 pounds per individual.
- c. Litter and patients weight - 265 pounds per patient.
- d. Crew and passengers with no equipment - compute weight according to each individual's estimate.

3.2.7.4.4 Personnel moments. Personnel moments charts for personnel in any position shall be provided (Figure 20).

3.2.7.5 Section V - Mission equipment. Loading data charts for mission equipment shall provide a tabular listing containing the quantity, weight and moment of each load item up to the maximum quantity for which provisions are available. Only items of load (Chart E items) shall be listed. Items which are part of the basic weight (Chart A Items) shall not be part of this listing. Data shall be provided for all applicable mission system loads including, but not limited to, armament, avionics, sling, hoist, and litters. Listings shall provide weights and moments of required pylons and launchers. Tabular listing of rockets shall be inclusive for maximum capacity of launchers. Since rockets vary in weight by type, separate listings shall be required (Figure 21).

3.2.7.6 Section VI - Cargo loading. This section shall contain detailed information on cargo loading.

3.2.7.6.1 Description and illustrations. A general description of cargo compartment and entrances, including profile and cross-section drawings showing all dimensions (in inches) shall be provided. Also, descriptions of critical dimensions which limit full use of cargo compartment shall be included.

- a. A plan view showing dimensions of cargo floor, designation, location, and strength of tie-down fittings, diagram and limitations on use of fittings, including the desirable cone of action when using fittings, shall be provided. Also, a plan view of cargo floor showing variations in floor strength and weight concentration limitations in various areas shall be included, as applicable.
- b. A suitable view of litter provisions showing location shall be presented.
- c. A general description of, and operating instructions for, aerial delivery systems shall be included, when applicable.

**MIL-PRF-63029D(AV)**

d. A list and description of all cargo loading aids, unloading aids, cargo securing equipment (including, but not limited to, ramps, hoists, winching provisions, and tiedowns), and stowage provisions shall be presented.

3.2.7.6.2 Equipment loading and unloading. This shall include procedures and a checklist for loading and unloading vehicles and equipment as follows:

- a. Assembly of equipment needed for loading.
- b. Preparation of cargo compartment and floor and installation of fittings.
- c. When applicable, preparation of the aerial delivery system.
- d. Including, but not limited to, operation of cargo doors, ramps, load assist devices, and aircraft support jacks, including installation and operation, as applicable. Instructions for checking landing gear shall be included, when appropriate.
- e. Assembly and checking of unloading aids and releasing of cargo tiedown devices.

3.2.7.6.3 Preparation of general cargo. Pre-loading information shall be presented as follows:

- a. The TM shall note that loading personnel should assemble, prior to loading, data such as weights, dimensions, CG locations, and contact areas of equipment for use in positioning the load.
- b. Reference shall be made to the weight and balance computations in Section II, and the balance computer, if furnished, for the computation of final load positions in the aircraft.

3.2.7.6.4 Loading, securing, and unloading cargo. This portion of the TM shall include general methods of loading, safe lashing, and unloading of cargo, vehicles, and equipment. Rigging of cargo for aerial delivery shall be included, when applicable. The information shall be detailed enough to acquaint service personnel with the factors involved in properly loading, securing loads, and unloading the aircraft.

3.2.7.6.5 Cargo center-of-gravity. A chart shall be provided (Figure 22) showing approximate allowable cargo CGs versus known weights which may be used for planning purposes for various cargo loads. The chart shall be based on a range of aircraft basic weights and center of gravity locations to allow for anticipated variations in these values. The chart shall state that this data is for planning purposes only, that the results are approximate, and final loading must be checked for the particular aircraft using weight and balance computations and the balance computer, if furnished.

**MIL-PRF-63029D(AV)**

3.2.7.6.6 Loading procedure. This shall include a checklist of the actions required from the time the aircraft is prepared for loading until it is ready for flight. It shall include instructions and notes on loading equipment into the aircraft, checking items with CG markings and items 10 feet or longer and placing them in position, determining the amount of shoring required for flight conditions, and general instructions for loading and lashing miscellaneous cargo. Reference shall be made to the appropriate regulations regarding handling of hazardous equipment.

3.2.7.6.7 Securing loads. The following items shall be described in the TM.

- a. Approved restraint criteria including fore, aft, sideward and vertical restraints.
- b. Detailed tiedown instructions shall be provided only for equipment or cargo that are unique to a specific aircraft.

3.2.7.6.8 Unloading procedures. Procedures for unloading the aircraft and stowing associated equipment shall be listed.

3.2.7.7 Section VII - Center-of-gravity. This section shall cover longitudinal CG limitations. Lateral CG limits shall be shown as specified by the contracting activity (6.2).

- a. Where possible, the gross weight and CG limitations of the aircraft shall appear on a single chart; however, additional charts may be used if necessary to adequately portray the various configurations of the aircraft. All charts shall be in the style and format of Figure 23.
- b. Explanatory text shall explain the purpose and components of the charts; illustrate the use of the charts; emphasize that charts are designed to illustrate degree of risk involved at various weights and CGs; and establish limitations.
- c. The chart shall be based on gross weight which is defined as the total weight of the aircraft and its contents. It shall include, but not be limited to, operating weight plus fuel, cargo, ammunition, missiles, and external auxiliary fuel tanks. The gross weight in pounds shall be shown on the left side of the chart, and shall range from the aircraft's minimum operating weight to maximum gross weight allowable.
- d. The TM shall present at least one example to illustrate the application of the chart.

3.2.8 Chapter 7 - Performance Data.

3.2.8.1 General. This chapter shall contain all the performance data charts required for the completion of preflight and in-flight mission planning. The data presented shall cover the maximum range of conditions and performances for which the aircraft is qualified. Explanatory text applicable to the use of data presented shall be included for each model of aircraft. Performance data charts shall appear in all TMs, including the initial issue.

**MIL-PRF-63029D(AV)**

Information contained on the charts shall be based on, and shall be consistent with, the recommended operating procedures and techniques set forth elsewhere in the manual. Each section in the chapter shall include an explanation of all applicable charts and a synopsis of pertinent terms used with each chart.

3.2.8.1.1 Data basis. Unless otherwise specified by the contracting activity (6.2), the preparation of performance data charts shall be derived from flight test reports, when available. Exceptions to this may be authorized by the contracting activity for new aircraft, provided adequate flight tests have been completed for the prototype. However, for these exceptions, an evaluation of all changes which affect performance shall be obtained by additional flight tests. The basis for data presented shall be clearly defined at the bottom of each chart to include data type and source data document. Army test reports shall be used when available. When flight test reports are not available, referenced estimates shall be clearly identified as such. Conservative estimates shall be used until verified by flight test data. Data that is not based strictly on the particular aircraft shall be explained in detail. The results of Government reports shall be referenced and used in preference to flight test data obtained by contractors.

3.2.8.1.2 Identification. Each chart shall be marked in the following manner:

- a. Titles shall be centered above the chart. The name of each chart shall define the type of information to be obtained from that particular chart.
- b. Condition headings (3.1.23.2.2) shall be centered below the title and, when required, shall contain the following types of information, when applicable:
  - (1) Pressure altitude
  - (2) Situation to which chart applies (e.g. takeoff, landing, sling load takeoff, etc.)
  - (3) Conditions of auxiliary equipment (ECU, bleed air, etc.)
  - (4) Configuration
  - (5) Wing flap position
  - (6) Rotor or prop rpm
  - (7) Engine rpm
  - (8) Fuel type
  - (9) Hovering condition (in ground effect (IGE) or out of ground effect (OGE))
  - (10) Power requirements



**MIL-PRF-63029D(AV)**

- (11) Runway conditions
- (12) Wind conditions
- (13) Gear up/down
- (14) Power required

c. Titles of figures shall be centered below all chart information and shall match the title shown at the top of each chart.

3.2.8.1.3 Factors affecting data. Conditions which affect the data but are not presented as variables on any specific chart shall be listed as "Conditions" under the title of the chart. An explanation of these factors shall be included in the text that describes that chart.

3.2.8.1.4 Configuration. Unless otherwise specified by the contracting activity (6.2), the baseline configuration for all presented data shall be the most probable combat configuration. This baseline configuration shall be labeled and presented as a condition on applicable charts. The baseline configuration shall be completely defined in the "Drag" section. Where inherent configuration variations exist (including, but not limited to, antenna variations, IR suppressers, and engine inlet configurations), the data shall be based on the most conservative configuration combination (highest drag, lowest power/thrust available, highest fuel consumption, etc.). The effects of altering these items shall be discussed in each section, as applicable.

3.2.8.1.5 Fuel. All charts shall be based on the primary fuel for the engine/engines installed unless additional charts are required by the contracting activity for alternate fuels (6.2).

3.2.8.1.6 Atmospheric conditions. Where data is presented incrementally, it shall be presented to the next increment beyond the range of probable operating atmospheric conditions as found in MIL-STD-210, to permit interpolation. Unless otherwise specified by the contracting activity (6.2), standard day, standard conditions, standard temperature, or density altitude shall not be mentioned or presented. The following formulas for converting pressure altitude( $H_p$ ) to static air pressure (P), and visa versa, shall be used:

$$P \text{ (in. Hg)} = 29.92125(1 - H_p/145,442.1)^{5.255376}$$

$$H_p \text{ (ft.)} = 145,442.1(1 - P/29.92125)^{.1902632}$$

3.2.8.1.7 Allowances. Allowance shall be made for all installation losses and a complete analysis of such allowances shall be included in the performance data substantiation report. The following allowances shall be included. An increased allowance of five percent shall be made for fuel consumption data only when data is based on estimates; however, this shall not be stated in the TM.

**MIL-PRF-63029D(AV)**

3.2.8.1.8 Limitations and restrictions. Applicable operating limits shall be shown. Restricted operating regions shall be depicted by shaded areas. Data may be extended to the next normal increment beyond operating limits to aid interpolation. Such data shall be represented by dotted lines. Note: maximum gross weight is an operating limit.

3.2.8.1.9 Definitions. Definition of terms used through this chapter including, but not limited to, takeoff speed, takeoff distance, and rotation speed shall be included in Appendix B.

3.2.8.1.10 Rotary wing performance data. Unless otherwise specified by the contracting activity (6.2), the following performance data charts shall be created for rotary wing aircraft:

- a. Fuel flow (Figure 24)
- b. Maximum torque available (insert condition/time) (Figure 25)
- c. Hover (Figure 26)
- d. Takeoff (Figure 27)
- e. Drag (Figure 28)
- f. Cruise (Figure 29)
- g. Climb-decent (Figure 30)
- h. Airspeed calibration (Figures 31 and 32)

Additional charts peculiar to certain aircraft, such as multi-engine, shall be included as specified by the contracting activity. These charts, if required, shall completely define the operation or restrictions of the aircraft.

3.2.8.1.11 Fixed wing performance data. Unless otherwise specified by the contracting activity (6.2), the following performance data shall be presented for fixed wing aircraft:

- a. Crosswinds - takeoff and landing (Figure 33)
- b. Idle fuel flow (Figure 24)
- c. Torque available for takeoff (Figure 34)
- d. Takeoff - normal (Figure 35)
- e. Normal rotation/takeoff airspeed (Figure 36)
- f. Acceleration check distance (Figure 37)

**MIL-PRF-63029D(AV)**

- g. Accelerate-stop distance (Figure 38)
- h. Accelerate after lift off (Figure 39)
- i. Minimum single engine control airspeed (Figure 40) (flaps down and up, if applicable)
- j. Single engine climb (Figure 41).
- k. Cruise climb (Figure 42)
- l. Drag (Figure 28)
- m. Cruise (Figure 44)
- n. Climb/descent (Figure 43)
- o. Approach speed (Figure 45)
- p. Landing (Figure 46)
- q. Airspeed calibration (Figures 31 and 32)

3.2.8.2 Section I - Introduction. This section shall contain an explanation of the performance data to include the purpose, scope, limits, uses, and conditions.

3.2.8.2.1 Purpose. This paragraph shall include the following:

The purpose of this chapter is to provide the best available performance data for the (insert assigned aircraft designation). Regular use of this information will allow you to receive maximum safe use of the aircraft. Although maximum performance is not always required, regular use of this chapter is recommended for the following reasons:

- a. Knowledge of performance margins will allow you to make better decisions when unexpected conditions or alternate missions are encountered.
- b. Situations requiring maximum performance will be more readily recognized.
- c. Familiarity with the data will allow performance to be computed more easily and quickly.
- d. Experience will be gained in accurately estimating the effects of conditions for which data are not presented.

**MIL-PRF-63029D(AV)**

The information is primarily intended for mission planning and is most useful when planning operations in unfamiliar areas or at extreme conditions. The data may also be used inflight, to establish unit or area SOPs, including pilot aid cards, and to inform ground commanders of performance/risk tradeoffs.

3.2.8.2.2 General. This paragraph shall contain the following:

The data presented covers the maximum range of conditions and performance that can reasonably be expected. In each area of performance, the effects of altitude, temperature, gross weight, and other parameters relating to that phase of flight are presented. In addition to the presented data, judgment and experience will be necessary to accurately determine performance under a given set of circumstances. The conditions for the data are listed under the title of each chart. The effects of different conditions are discussed in the text accompanying each phase of performance. Where practical, data are presented at conservative conditions. However, no general conservatism has been applied.

**CAUTION**

**Exceeding operating limits can cause permanent damage to critical components. Overlimit operation can decrease performance, cause immediate failure, or failure on a subsequent flight.**

3.2.8.2.3 Limits. The following statement shall be placed verbatim in the TM:

Applicable limits are shown on the charts. Performance generally deteriorates rapidly beyond limits. If limits are exceeded, minimize the amount and time. Enter the maximum value and time beyond limits on DA Form 2408-13-1 so proper maintenance action can be taken. Exceeding operating limits can cause permanent damage to critical components. Overlimit operations can decrease performance, cause immediate failure, or failure on a subsequent flight.

3.2.8.2.4 Use of charts. A sample problem typical of a normal mission accomplished by the aircraft shall be included on the first chart of the section and/or on the preceding page. Additional examples may be prepared as required for other charts within a section. When possible, actual chart values shall be used throughout the problem. Data for the problem in which derivation may not be entirely clear shall be explained. Additional discussion, sample problems, or illustrations may be used throughout the chapter to clarify the usage of charts.

The TM shall point out that the use of a straight edge (ruler or page edge) and a hard fine point pencil is recommended to avoid cumulative errors. In addition to the primary use, other uses of each chart are explained in the text accompanying each set of performance charts. An example of an auxiliary use of the charts is shown by noting that although the hover chart is primarily arranged to find torque required, maximum skid height or maximum gross weight

**MIL-PRF-63029D(AV)**

can also be found. The TM shall note that in general, any single variable can be found if all other variables are known. Also, the tradeoffs between two variables can be found.

3.2.8.2.5 Data basis. This paragraph shall contain the following statements and definitions:

The source of data used is indicated at the bottom of each performance chart under "Data Basis". The applicable report and date of the data are also given. The data provided generally are based on one of the following categories.

- a. Flight test data is obtained by flight tests of the aircraft at precisely known conditions using sensitive calibrated instruments.
- b. Calculated data is data based on tests, but not on flight tests of the complete aircraft.
- c. Estimated data is data based on estimates using aerodynamic theory or other means not verified by flight testing.

3.2.8.2.6 Specific conditions. This paragraph shall contain the following:

The data presented is accurate only for specific conditions listed under the title of each chart. Variables for which data is not presented, but which may affect that phase of performance, are discussed in the text. Where data is available or reasonable estimates can be made, the amount that each variable affects performance shall be given.

3.2.8.2.7 General conditions. General conditions, in addition to specific conditions listed on each chart, shall be included in the text of the TM. Examples of general conditions which might affect performance of the aircraft include, but are not limited to, rigging, pilot technique, sideslip, aircraft variation, engine variation, and instrument variation. Information shall be included which defines what effect the general conditions listed will have on the performance data of the aircraft.

3.2.8.2.8 Performance discrepancies. The following shall be included in the TM:

Regular use of this chapter will also allow monitoring of instruments and other aircraft systems for malfunctions, by comparing actual performance with planned performance. Knowledge will also be gained concerning the effects of variables for which data is not provided, thereby increasing the accuracy of performance predictions.

3.2.8.3 Section II and subsequent sections. A separate section shall be created for each chart listed in paragraphs 3.2.8.1.10 and 3.2.8.1.11. The sections shall be titled as described in the two paragraphs. In addition to the chart itself, each section shall contain, as a minimum, the following requirements:

**MIL-PRF-63029D(AV)**

- a. Description. The paragraph shall provide a description of the performance data presented in each applicable section to include those parameters obtainable from the chart and information relative to any peculiarity of data presented.
- b. Use of charts. Reference shall be made to examples used on each chart. Additional use of charts may be included when approved by the contracting activity (6.2). Reference shall be made to related charts which may be used in conjunction with the chart and all information relative to peculiarities of data presented on the chart.
- c. Conditions. Each condition which has a direct or indirect effect on the chart data presented, shall be discussed, explaining the effect it may have on the aircraft.

3.2.8.3.1 Rotary wing chart content. Performance data charts for rotary wing aircraft shall conform to the requirements detailed in the following paragraphs.

3.2.8.3.1.1 Fuel flow chart. The fuel flow chart (Figure 24) shall show fuel flow at both the airframe idle throttle position and at normal rotor speed with flat pitch. The chart shall also present fuel flow conditions when the engine is operational at different configurations, e.g. bleed air On/Off. Pressure altitude and FAT shall be used as the criteria for fuel flow computations. Reference shall be made to other charts within the chapter that present fuel flow data at cruise conditions. Fuel flow data shall be based on the primary fuel type. Information shall be included in the supporting text to define additional pertinent information which may affect fuel flow. All data shall be based on normal operating engine rpm.

3.2.8.3.1.2 Maximum torque available chart. The charts for maximum torque available (Figure 25) shall show the effects of altitude and temperature on the maximum torque available and shall take into consideration calibration factors used to correct for known errors in torque indicating systems. Separate charts shall be provided for each applicable set of time limited torque available data. For example, separate charts shall be provided for intermediate (30 minute) and one engine inoperative contingency (10 minute) torque available data. Data for continuous torque available shall not be provided unless it is also the maximum torque available. Information shall be provided to allow the operator to correct the data presented on the charts to account for variations in torque available due to operation of IR suppressers, systems requiring bleed air, or other similar operating conditions. Information shall also be provided to allow the operator to correct the data presented to account for known variations in the torque available of the individual engines installed in the aircraft compared to the standard or specification engines depicted by the charts.

3.2.8.3.1.3 Hover chart. The hover chart (Figure 26) shall present the torque required to hover at given conditions of skid height, gross weight, temperature and altitude. Aircraft limitations shall be presented to include marginal areas of performance. When unsafe performance areas could be encountered, the full range of precautionary data shall be presented and safe limits presented to better clarify the use of the data. Basic IGE hover data shall be based on hovering over a level surface. If IGE hover data is presented for other than

**MIL-PRF-63029D(AV)**

level surfaces, information shall be included in the supporting text or on the charts. Compressibility effects on hover power required may be presented in a table as shown on Figure 26.

3.2.8.3.1.4 Critical data chart. Critical wind azimuth and velocities at varying gross weights, pressure altitudes, and FAT during hover and low speed flight shall be presented as required. A separate chart may be used.

3.2.8.3.1.5 Takeoff chart. The takeoff chart (Figure 27) shall consist of all takeoff data required to clear various obstacle heights and shall be based on all the parameters shown on Figure 27. All approved techniques such as level acceleration, coordinated climb, and sling load techniques shall be covered on additional charts as required by the contracting activity (6.2). The primary parameters used for takeoff performance shall be maximum hovering height capability, FAT, gross weight, and maximum torque available. Additional performance charts shall be referenced when required. Takeoff limits shall be stated and indicated on all charts. All takeoff conditions shall be based on calm winds, level hard surfaces, normal rotor/engine speeds, and optimum torque available.

3.2.8.3.1.6 Drag chart. The baseline configuration for drag (Figure 28) shall be completely defined in this section. This shall include inherent or basic equipment variations, existing or anticipated, and any external stores included in the baseline configuration. Tabular data shall be prepared to show each drag item and the drag area change in square feet based on additional engine torque or horsepower required. Negative drag increments from baseline configurations are permissible. The drag data shall fall into one of these major categories: (1) inherent or basic aircraft modifications or basic equipment changes; (2) external stores and store combinations; (3) crew alterable configurations; and (4) for helicopters with sling capability, drag of various standard sling loads. A procedure shall be provided for estimating drag of sling loads for which data is not provided. Information to determine the change in maximum range or long range cruise speeds with drag variations shall be provided. A supplementary graph on the cruise chart depicting torque/horsepower change for drag area change shall be provided. It shall cover the airspeed range from minimum power to limit airspeed. It shall also cover a drag range to one-half the basic aircraft drag or the largest drag increment combination, whichever is larger. One or two alternate total configurations may be depicted on these sub-graphs using special line coding with approval of the contracting activity (6.2). If alternate configurations are depicted, they shall be completely defined in the manual.

3.2.8.3.1.7 Cruise chart. The cruise chart (Figure 29) shall present torque requirements for level flight at various airspeeds, gross weights, pressure altitudes, and FAT. The particular altitudes and temperatures at which cruise data are to be presented shall be specified by the contracting activity (6.2). Indicated airspeeds for all airspeed systems, used on the aircraft referenced, shall be shown on the charts. Fuel flow shall be shown for different engine operations. Torque available shall be shown for maximum torque and continuous bleed air On/Off. When torque available is greater than the torque limit only, the torque limit shall be shown. Velocity never exceed ( $V_{ne}$ ) shall be shown on each chart, as appropriate. Airspeeds



**MIL-PRF-63029D(AV)**

for maximum range, endurance, and rate of climb shall be included on each chart. This information shall be presented for each engine when performance data pertains to multi-engine aircraft. Maximum performance, precautionary, and limits data shall be shown on each chart and explained in the text. Other performance data charts related to the cruise charts shall be referenced. All cruise data shall be based on normal operational rotor and engine speed, on drag area changes, true airspeed, pressure altitude, and FAT. A drag area change table showing the change due to each possible configuration change shall be included.

3.2.8.3.1.8 Climb-descent chart. The climb-descent chart (Figure 30) shall show the torque required in excess of that needed for level flight to obtain the desired rate of climb. The torque decrease for a desired rate of descent shall also be shown. Desired rate of climb or descent and gross weight shall be used to compute the torque change required.

3.2.8.3.1.9 Airspeed calibration chart. An airspeed calibration chart (Figures 31 and 32), which defines the relationship between the pilot's indicated and calibrated airspeed for level flight, climb, and descent, shall be provided. Instructions and examples shall be provided to show the operator how to determine the level flight indicated airspeed value which corresponds to known indicated airspeeds in climb and descent. Instructions and examples for determining calibrated airspeeds corresponding to known indicated airspeed shall also be provided. Altimeter correction charts which provide position error correction versus indicated airspeed shall be provided for all normal and emergency altimeter systems. Data shall be provided for all applicable flap settings or other variations in configuration. A temperature conversion/correction chart which provides true FAT as a function of true airspeed and indicated temperature shall also be provided for aircraft capable of significant airspeeds. For those aircraft whose air data system position errors are insignificant, calibration data for airspeed, altitude, and temperature may be omitted, with approval of the contracting activity (6.2).

3.2.8.3.1.10 Optimum cruise. When requested by the contracting activity (6.2), data shall be provided to determine the altitude for maximum range and maximum endurance as a function of gross weight and ambient temperature. Information shall also be provided for optimum rotor/propeller rpm for maximum range and endurance. Where optimum rpm is different from that presented for the (normal) cruise data, information shall be provided to correct fuel flow for the different rpms. Optimum cruise speed (maximum range or endurance) presented on the cruise chart shall be referenced and used. Airspeed and power schedules for climb and descent to maximize total range or endurance shall be described. A means shall be provided for estimating ambient temperature at optimum altitude. Also, a means shall be provided for comparing the effects of varying winds with altitude with the change in aircraft performance with altitude. Data shall cover the range of gross weights and ambient temperatures presented on the cruise charts, and to the limits of altitude on the cruise charts (if required). If corrections to optimum altitude for configuration variations are significant and capable of being done, this information shall be provided.

3.2.8.3.2 Fixed wing chart content. Performance data charts for fixed wing aircraft shall conform to the requirements in the following paragraphs.

**MIL-PRF-63029D(AV)**

3.2.8.3.2.1 Crosswind chart. The crosswind chart (Figure 33) shall show the takeoff or landing conditions under which a takeoff or landing is or is not recommended. Various wind velocities, runway wind angle, and rotation or touchdown airspeeds are shown. Additional charts to obtain required information shall be referenced. When more than one configuration is possible for the applicable aircraft, the differences shall be indicated and the charts adjusted appropriately.

3.2.8.3.2.2 Idle fuel flow chart. The idle fuel flow chart (Figure 24) shall show idle fuel flow pounds per hour, at the airframe idle throttle position at various altitudes and ambient air temperatures. Additional charts, when applicable, depicting idle fuel flow at various idle conditions shall be shown. Differences between idle fuel flow with bleed air On or Off and similar conditions shall also be shown when applicable. The type of fuel used in computation shall be shown in the subheading of this chart

3.2.8.3.2.3 Torque available for takeoff chart. This chart (Figure 34) shall show the torque available for takeoff, per engine for multi-engine aircraft, at various ambient air temperatures and altitudes. Maximum torque limits shall be shown when applicable. The standards for which the chart was compiled shall be shown in the heading and defined in the supporting text. Allowable tolerances for available torque shall be stated when applicable.

3.2.8.3.2.4 Takeoff chart. The takeoff chart (Figure 35) shall show the ground roll distance and total takeoff distance required to clear different obstacle heights at various temperatures, altitudes, and aircraft gross weights. Wind conditions, aircraft configuration, power requirements, runway surface condition, and other applicable information shall be given in the subheading and explained in the text. Additional charts required to obtain information shall be referenced. Each approved takeoff technique shall be covered on separate charts.

3.2.8.3.2.5 Rotation/takeoff airspeed chart. The chart (Figure 36) shall show the recommended normal rotation and takeoff airspeeds for the aircraft at various gross weights. Flap settings and other applicable information, as required by the contracting activity (6.2), shall be given in the subheading or explained in the text. Each approved takeoff technique shall be covered on separate charts.

3.2.8.3.2.6 Acceleration check distance chart. This chart (Figure 37) shall show the relationship between indicated airspeed and ground roll distance during takeoff. The actual indicated airspeed required at any distance traveled along the takeoff path shall be computable from this chart. Computations shall be based on the required takeoff airspeeds for various aircraft gross weights and the required ground roll distances for the aircraft.

3.2.8.3.2.7 Accelerate-stop distance chart. The accelerate-stop distance chart (Figure 38) shall show the actual distance required to begin takeoff, accelerate to rotation speed, abort the takeoff, and bring the aircraft to a stop. Variables shall include ambient air temperature, pressure altitude, runway conditions, and gross weight.

**MIL-PRF-63029D(AV)**

3.2.8.3.2.8 Accelerate after takeoff chart. The chart (Figure 39) shall show the actual distance required to clear an obstacle after takeoff. Parameters shall include FAT, pressure altitude, takeoff weight, and velocity.

3.2.8.3.2.9 Minimum single engine control airspeed chart. This chart (Figure 40) is applicable to multi-engine aircraft and shall show the minimum controllable airspeed ( $V_{mc}$ ), with parameters of FAT, pressure altitude, and gross weight, following engine failure during takeoff. The chart shall be based on the operating engine's capability to produce full takeoff power. The primary use of the chart shall be to provide  $V_{mc}$  at takeoff and not to provide single engine rate of climb information. All applicable limits shall be shown and explained in the text. Conditions such as flap setting, landing gear position, etc. shall be included in the subheading or explained in the text. The effect of engine failure on takeoff, climb, and cruising performance, the effect of windmilling and feathered propellers on aircraft drag, and other adverse factors shall be described in the TM.

3.2.8.3.2.10 Single engine climb chart. This chart (Figure 41) shall present single engine airspeeds and rate of climb data for various temperatures, altitudes, and gross weights. Single engine rate of climb shall be based on takeoff airspeeds to include gear-up and gear-down configurations. When alternate aircraft configurations change the validity of information being presented, additional charts shall be prepared with an explanation of the alternate configuration provided in the subheading and within the text when necessary. Information indirectly obtained from the chart that would help in the determination of the best course of action to be taken shall also be included in the text. Reference shall be made to other charts related to single engine operations.

3.2.8.3.2.11 Cruise climb chart. The cruise climb chart (Figure 42) shall be used to find the time, fuel, and distance required to climb. Parameters shall include initial and final FAT, initial and final pressure altitude, and initial gross weight.

3.2.8.3.2.12 Drag chart. The drag chart (Figure 28) shall show additional shaft horsepower required at various airspeeds, altitudes, and temperatures due to drag increases caused by changes in external configuration. Additional shaft horsepower shall be given per engine for multi-engine aircraft. Charts used in connection with the drag chart shall be referenced in the text. Tabular data presenting each drag item and the drag area change in square feet shall be included in the text.

3.2.8.3.2.13 Cruise chart. The cruise chart (Figure 44) shall show the obtainable airspeed, required engine shaft horsepower, engine torque pressure, shaft horsepower increase required due to increases in drag, fuel flow and optimum propeller rpm for maximum range during cruise flight at various aircraft gross weights, altitudes, and temperatures. The particular altitudes, configurations, and temperatures at which cruise data are to be presented shall be specified by the contracting activity (6.2) This information shall be presented for each engine when performance data pertains to multi-engine aircraft. When fuel flow variations exist due to alternate engine operations, fuel flow for each alternate conditions shall be shown. Single engine data shall be placed on the same charts as multi-engine data only when approved by

**MIL-PRF-63029D(AV)**

the contracting activity (6.2). Maximum performance, precautionary, and limits data shall be shown on each chart and explained in the text. Indicated and true airspeed for each altitude shall be shown. When an altitude limitation prevents safe single engine cruise for multi-engine aircraft, the single engine graph shall be omitted. Additional charts related to cruise performance shall be referenced in the text.

3.2.8.3.2.14 Climb-descent chart. The climb-descent chart (Figure 43) shall show changes in torque and horsepower required to obtain a desired rate of climb or descent at a known gross weight and propeller rpm. For maximum rate of climb information, reference shall be made to the cruise charts. If the aircraft is other than baseline configuration, an increase in horsepower due to drag must be computed from the drag chart and added to the horsepower required per engine. Charts used in connection with the climb-descent charts shall be referenced in the text and the single engine climb chart.

3.2.8.3.2.15 Approach speed chart. The approach speed chart (Figure 45) shall present the recommended airspeeds during approach to landing for the full range of gross weights and flap settings for the aircraft. The chart shall be valid for all aircraft configurations, unless otherwise specified by the contracting activity (6.2). Charts used in connection with the approach speed chart shall be referenced in the text.

3.2.8.3.2.16 Landing chart. The landing chart (Figure 46) shall show the total ground roll distance for landing with no reverse thrust at known gross weight, pressure altitude, and ambient air temperature. Landing distance shall be based on touching down at the approach speed obtained from the approach speed chart, full braking with 0 degrees, and normal landing flap settings. The correct approach speed is obtained from the approach speed chart. Landing performance shall be based on a dry, level, hard surface runway and calm wind conditions. This chart shall be valid for all stores configurations unless otherwise specified by the contracting activity (6.2). The chart used in computing landing distances shall be described in the text.

3.2.8.3.2.17 Airspeed calibration chart. An airspeed calibration chart (Figures 31 and 32) which defines the relationship between the pilot's indicated and calibrated airspeed for level flight, climb, and descent shall be provided. Instructions and examples shall be provided to show the operator how to determine the level flight indicated airspeed value which corresponds to known indicated airspeeds in climb and descent. Instructions and examples for determining calibrated airspeeds corresponding to known indicated airspeed shall also be provided. Altimeter correction charts which provide position error correction versus indicated airspeed shall be provided for all normal and emergency altimeter systems. Data shall be provided for all applicable flap settings or other variations in configuration. A temperature conversion/correction chart which provides true FAT as a function of true airspeed and indicated temperature shall also be provided. For those aircraft whose air data system position errors are insignificant, airspeed, altitude, and temperature calibration data may be omitted, with approval of the contracting activity (6.2).

**MIL-PRF-63029D(AV)**

3.2.8.3.2.18 Optimum cruise. When requested by the contracting activity (6.2), data shall be provided to determine the altitude for maximum range and maximum endurance as a function of gross weight and ambient temperature. Information shall also be provided for optimum rotor/propeller rpm for maximum range and endurance. Where optimum rpm is different from that presented for the (normal) cruise data, information shall be provided to correct fuel flow for the different rpm. Optimum cruise speed (maximum range or endurance) presented on the cruise chart shall be referenced and used. Airspeed and power schedules for climb and descent to maximize total range or endurance shall be described. A means shall be provided for estimating ambient temperature at optimum altitude. Also, a means shall be provided for comparing the effects of varying winds with altitude with the change in aircraft performance with altitude. Data shall cover the range of gross weights and ambient temperatures presented on the cruise charts, and to the limits of altitude on the cruise charts (if required). If corrections to optimum altitude for configuration variations are significant and capable of being done, this information shall be provided.

3.2.9 Chapter 8 - Normal procedures.

3.2.9.1 General. This chapter shall contain the procedures (amplified checklists) from the time a flight is planned until the flight is completed and the aircraft is properly parked and secured. The checklists shall include all steps necessary to ensure safe flight under normal, night, and instrument conditions. Only the duties of the minimum crew necessary for the actual operation of the aircraft shall be included. Instructions for the operation of utility, avionic, mission equipment, and controls are contained in Chapters 2, 3, and 4 and shall be included in this chapter only if neglect would affect safety or efficiency of the flight or cause damage to the equipment. (This does not preclude the inclusion of utility equipment checklists in chapters to which they pertain.) Only unique feel, characteristics, and reaction of the aircraft during the various specified phases of operation, and the techniques or procedures used for operating the aircraft shall be described in detail. All precautions to be observed during the various operations shall be covered. Procedures for operation under all adverse environmental conditions shall be described. Instrument flight procedures shall be integrated with normal procedures as much as possible. For aircraft where no unique or abnormal techniques apply, reference shall be made to appropriate flight training publications.

3.2.9.2 Section I - Crew duties. Unique responsibilities which result from the specific characteristics of the aircraft shall be described.

3.2.9.3 Section II - Operating procedures and maneuvers. This section shall contain the procedural steps to be followed from mission planning through the walk around check.

3.2.9.3.1 Procedures. Procedural steps shall be so designed that crewmembers are not required to retrace steps. Insofar as possible, checks shall be grouped to keep control manipulation and ground operating time at a minimum. Phases may be added or deleted to provide for special aircraft or special situations. However, the interpretation of the period of operation encompassed by a given phase shall be identical in all operator's manuals. In the checklists, the condition and response of a procedural step shall be separated by a long dash.

**MIL-PRF-63029D(AV)**

3.2.9.3.1.1 Sequence. Sequence of phases and actions shall be arranged chronologically.

3.2.9.3.1.2 Checks. All checks shall be made from left to right or top to bottom except where chronology must take precedence.

3.2.9.3.2 Symbols definition. The TM shall incorporate the following in the checklist:

- a. The symbol “O”, which shall precede the step, shall be used to indicate if equipment is installed or available.
- b. Those duties which are the responsibility of the pilot (not on the controls) shall be indicated by a circle around the step number, “④”.
- c. The symbol “★”, which shall precede the step, shall indicate that a detailed procedure for the step is located in the performance section of the condensed checklist.
- d. The symbol “\*”, which shall precede the step, shall indicate that performance of the step is mandatory for all through-flights. The asterisked steps in this checklist may be used for combat/tactical operations when authorized by the commander. The asterisk applies only to checks performed prior to takeoff.

3.2.9.3.3 Amplified checklist. The amplified checklist shall consist of numbered items supplemented where necessary by explanatory material. Where required for emphasis, a brief explanation shall be provided as to why it is required. These checklists are provided in the operator's manual for each aircraft. They are the basis of all operator's checklists. An amplified normal checklist shall be included for the pilot, pilot (not on the controls), and flight engineer, as applicable. The following information shall be included only in the amplified checklist:

Normal procedures are given primarily in checklist form and amplified as necessary in accompanying paragraph form when a detailed description of a procedure or maneuver is required. A condensed version of the amplified checklist, omitting all explanatory text including warnings, cautions, and notes, is contained in the Operator's Checklist, TM 1-XXXX-XXX-CL. The procedural steps are numbered to coincide with the corresponding numbered steps in this manual.

3.2.9.3.4 Amplified checklist format and style. The checklist format shall be as shown in Figure 47. All checklist titles, such as “**BEFORE EXTERIOR CHECK**” shall be boldfaced capital type. Checklist entries shall be listed numerically and shall be blocked. Checklist entries shall have the first letters of each line of type aligned. Placarded items shall be in boldfaced capital letters. Paragraphs shall have type returned to the left margin.



**MIL-PRF-63029D(AV)**

3.2.9.3.5 Preflight check. The amplified preflight check shall include a before exterior check, if required, and the exterior and interior checks. The TM shall emphasize that the preflight is not intended to be a detailed mechanical inspection and that the order is a recommended sequence only. In addition the expanded sub-steps do not need to be memorized or accomplished in a certain order. The preflight may be made as comprehensive as conditions warrant at the discretion of the pilot.

3.2.9.3.6 Before exterior check. When required by the aircraft configuration, all necessary actions that must be performed prior to starting the exterior check shall be included. Emphasis shall be placed on items that affect safety during the inspections to follow.

3.2.9.3.7 Exterior check. Only those exterior points which significantly affect the flight shall be included avoiding needless repetition of items which are the normal responsibility of the maintenance crew. The criteria on which these checks shall be based are safety of flight, items that have previously been a problem or that are anticipated to be a problem, and ease of accomplishing the check. Inspections usually should proceed clockwise (as viewed from the top) around the aircraft.

3.2.9.3.8 Interior check. The complete interior check shall be described, including all necessary check items up to the point where the pilot is strapped in the seat. All necessary equipment including, but not limited to, first aid kit, fire axes, pyrotechnic equipment, aircraft covers, tie downs, and control locks shall be stowed. A check of the headrest area of the ejection seat shall be included to determine that the face curtain handles are properly stowed, that the catapult pin is installed and connected to the removal mechanism, and that the catapult firing yoke is properly positioned and connected. Instructions shall be included to ensure that controls are positioned and connected. Instructions shall be included to ensure that controls are positioned as necessary to facilitate the exterior check (only for those aircraft where the interior check is performed before the exterior check). On large aircraft, it may be necessary to include an interior check diagram.

3.2.9.3.9 Crew/passenger briefing check. Instructions shall be provided to insure that crew and passenger briefings has been completed prior to starting engines.

3.2.9.3.10 Before starting engine(s). Precautions to be observed and checks to be accomplished before starting engine(s) shall be included. Such checks as should be accomplished before starting engine(s), but which could not be properly accomplished during the interior check shall be included. Instructions for positioning all important controls and checking all important indicators shall be included. Insofar as practicable, all controls shall be positioned as required for engine starting. Functional checks shall be included for those systems that can be checked before the engines are started. For those aircraft in which engine power is not necessary, flight controls shall be checked for free and correct movement. Instructions shall be provided on the use of external power or auxiliary power units and any necessary switching involved in its use.



**MIL-PRF-63029D(AV)**

3.2.9.3.11 Starting engine(s). The complete procedure for starting the engine(s) shall be provided, including the order of starting for multi-engine aircraft. Except when significant differences in procedures are required for multi-engine aircraft, engine start procedures shall not be repeated. For jet and turbine powered aircraft, the means to avoid hot starts and procedures to follow when a hot start is experienced shall be included. Procedures for engaging rotors for rotary wing aircraft shall be given.

3.2.9.3.12 Engine ground operations. When required, warm-up and ground operation power setting shall be specified. Any special precaution or limitation shall be stated. For rotary wing aircraft a requirement for flight control checks before the rotor is engaged shall be included, if applicable.

3.2.9.3.13 Before taxiing. All checks to be accomplished before taxiing, such as check flight controls for free and correct movement (for those aircraft which require engine power to perform this check), windows and doors, control locks, and hydraulic pressure checks shall be included.

3.2.9.3.14 Taxiing. Any unusual taxiing characteristics or techniques shall be described, including special instructions for engine cooling, reverse pitch, and use of brakes. A requirement that flight instruments be checked during taxiing shall be included.

3.2.9.3.15 Engine runup. Instructions shall include, but not be limited to, checking engine propeller/rotor operation, including power, ignition, and use of brakes.

3.2.9.3.16 Before takeoff. All checks, which must be accomplished immediately prior to takeoff/departure, shall be listed.

3.2.9.3.17 Lineup check. When aircraft configuration or mission requirements preclude performance of some of the takeoff checks before taxiing onto the active runway, a lineup check shall be provided. This may include activation of anti-icing/deicing system switches, transponder switches, setting or aligning gyros, and stabilizing power prior to starting takeoff.

3.2.9.3.18 Takeoff. Takeoff techniques required to produce the results shown on the takeoff charts in Chapter 7 shall be covered in detail. When appropriate, manipulation of brakes and throttles/power levers, etc., shall be described. Detailed information shall be given regarding unique reactions of the aircraft during takeoff. Criteria for continuing a takeoff or aborting under various circumstances shall be included. Operational consideration and general rules contributing to hover capability and power availability shall be stated. Unique hover/taxi, sideward and rearward flight techniques and power check shall be included. The necessity for a prepared runway shall be discussed for various conditions of altitude and weight of aircraft which may be required to operate from temporary or unfinished runways.

3.2.9.3.19 After takeoff. All actions and techniques to be accomplished immediately after takeoff shall be listed. If flap retraction procedures differ under various conditions including, but not limited to, heavy weight and weather, it shall be so stated. When applicable,

**MIL-PRF-63029D(AV)**

minimum airspeed and altitude for retracting flaps shall be covered. A minimum flap retraction airspeed chart shall be included for aircraft of highly variable gross weight. All actions needed to establish the required climb shall be covered, including the airspeed at which climb should be started.

3.2.9.3.20 Climb. A description of unique climb techniques required to produce the results stated in the climb charts in Chapter 7 shall be included. Unusual characteristics of the aircraft in climb shall be described. Since the preceding paragraph includes the climb checklist, this paragraph shall contain discussion only.

3.2.9.3.21 Cruise. An explanation shall be provided for all actions that must be performed when the transition from climb to cruise is made. Any particular matters that must be considered during cruise flight shall be described. Reference shall be made to Chapters 2 and 7 concerning fuel system management and other actions that should be considered during flight. Actual procedures shall not be covered here.

3.2.9.3.22 Descent-arrival. A checklist and a discussion of this phase of operation shall be included as appropriate. The checklist shall include all checks which must be made immediately before and during a descent preparatory to landing. Special instructions regarding various types of descent shall be included as applicable, including any special devices that may be provided to facilitate descent.

3.2.9.3.23 Before landing. All checks that must be made immediately before entering the traffic pattern until the landing is committed shall be covered.

3.2.9.3.24 Landing. This paragraph shall include a landing checklist and a narrative discussion of the landing problems and techniques. The landing checklist shall include all actions to be performed from the time the landing is committed until it is effected. Landing techniques required to produce the results stated in the landing charts in Chapter 7 shall be included. Braking techniques and devices used during the landing and after-landing roll shall be described. Approach and landing airspeed corrections required to compensate for gusts shall be covered. In addition landing techniques from the viewpoint of recommended maximum and minimum approach and landing airspeeds as related to aircraft flight classification, aircraft strength, aircraft touchdown bounce characteristics, and other aircraft characteristics shall be included. Reference shall be made to Chapter 7 for supplemental information provided by landing and approach speed charts. Coverage of approach and landing shall include cautions, when applicable, in the use of the engine during approach, performing a go-around, for the use of the angle-of-attack indicator in making an approach, etc. Shipboard landing techniques, when applicable, shall be included for rotary wing aircraft when unusual characteristics dictate.

3.2.9.3.25 Touch and go landings/go-around. All instructions including, but not limited to, trim changes and flap settings for executing these procedures shall be included. Proper throttle/power lever technique shall be emphasized, when applicable.

**MIL-PRF-63029D(AV)**

3.2.9.3.26 After landing. All checks and operations to be performed from immediately after landing until the parking area is reached shall be included.

3.2.9.3.27 Engine shutdown. A checklist shall be provided covering proper procedures and precautions for stopping engines.

3.2.9.3.28 Before leaving the aircraft. A checklist of settings of all controls, control locks, and safety devices for securing the aircraft shall be provided for pilots and crew. The following shall be included:

In addition to established requirements for reporting any system defects or unusual and excessive operations such as hard landings, the flight crew shall also make entries on DA Form 2408-13-1 to indicate when any limits of the operator's manual have been exceeded.

3.2.9.3.29 Changes. Specific checks may be deleted or added when approved by the contracting activity (6.2).

3.2.9.4 Section III - Instrument flight. Unique qualities and capabilities of the aircraft under instrument flight conditions shall be briefly described. Only those procedures and techniques that are used for instrument flight that are different from normal procedures in FM 1-240 shall be discussed in this section. Instrument flight conditions to be considered shall include instrument takeoff, climb, cruise, descent, and approaches; holding; and automatic approaches.

3.2.9.5 Section IV - Flight characteristics. This section shall describe in detail unique flight characteristics of the particular aircraft that may be different from FM 1-203. Emphasis shall be placed on advantageous flight characteristics as well as on any dangerous tendencies. The extent of coverage will depend principally on the type of aircraft being discussed.

3.2.9.5.1 Stalls. The power-off and power-on stalling characteristics of the airplane in the takeoff, landing, and cruise configurations shall be described. Stalling characteristics shall also be included for the approach configuration if sufficiently different from landing. A definition of power-off and power-on as used in the discussion shall be included. Information about the stall warning shall also be included. Normal and accelerated stalls shall be covered, and recommended procedures for initiating stalls shall be included. Stall recovery technique shall be emphasized. For helicopters, appropriate information shall be included on blade stalls.

3.2.9.5.2 Stall chart (fixed wing only). Stalling airspeeds (with power-on and power-off configurations) for takeoff, landing, and cruise shall be presented showing the variations of bank angle and gross weight.

3.2.9.5.3 Spins (fixed wing only). Spin characteristics and limitations shall be given, including details of any special techniques recommended for recovery. Recovery techniques

**MIL-PRF-63029D(AV)**

shall be given whether or not spins are permitted. Altitude lost in effecting a recovery and minimum altitude at which bailout must be effected if aircraft has not been brought under control shall be stated.

3.2.9.5.4 Diving. The diving characteristics of the aircraft shall be described with particular emphasis on high speed diving and compressibility effects. Dive recovery techniques and precautions shall be given, including any special information regarding power plant operation and trim changes. For highly maneuverable aircraft, dive recovery charts shall be included for various G pullouts given varying parameters of altitude, airspeed, and dive angle.

3.2.9.5.5 Maneuvering flight. Maneuvering flight shall be described, including characteristics under accelerated flight conditions. Stick forces shall be included, emphasizing conditions that may result in stick reversal.

3.2.9.5.6 Flight controls. Detailed coverage of the effectiveness and unusual reactions that may be encountered in the operation and use of the flight controls shall be included. All the various types of flight controls, such as ailerons, elevators, rudders, stabilators, trim tabs, speed brakes, slats, cyclic stick, and collective pitch shall be described. The text shall state when and how the various controls are used to achieve maximum benefits and what precautions must be observed. The capabilities and limitations of power-boosted systems when power boost is inoperative shall be covered.

3.2.9.5.7 Level flight. Characteristics of level flight under slow, cruising, and high speed conditions shall be described.

3.2.9.5.8 External loads. Changes in flight characteristics due to external loads shall be described.

3.2.9.5.9 Asymmetrical loads. Coverage of characteristics and techniques to be employed when operating with asymmetrical loads or configurations shall be presented.

3.2.9.6 Section V - Adverse environmental conditions. This section shall provide information relative to operations that are unique to the specific aircraft under adverse environmental conditions (snow, ice, rain, turbulent air flight, extreme cold and hot weather, desert operations, and high altitude operations) for parameters including, but not limited to, gross weight and aircraft configuration. This section shall be primarily narrative in nature. Checklists shall be avoided; they shall be used only to cover specific procedures that are characteristic of all weather operations. This section shall not include a description of equipment. An introductory paragraph shall be included explaining the function of this section. In addition coverage of duties to be accomplished before leaving the aircraft, including, but not limited to, leaving the canopy slightly open, positioning of doors, battery care, and installing covers shall be included for applicable environmental conditions.

3.2.9.6.1 Cold weather operations. A brief discussion of the general problems involved in maintaining satisfactory operation in extreme cold shall be included. The relationship of

**MIL-PRF-63029D(AV)**

proper engine shutdown to subsequent engine starting shall be emphasized. Operations under icing conditions shall be covered. Any special problems resulting from operations when snow is present shall be included.

3.2.9.6.2 Preparation for flight. Special problems including, but not limited to, application of heat, removal of ice and snow from the aircraft surfaces, fuel and oil tank vents, Pitot tubes, and props, and supplying external power shall be addressed.

3.2.9.6.3 Engine starting. Any special precautions that must be observed before starting the engines shall be included. Cold weather starting techniques shall be explained including the use of special fuels and carburetor heat.

3.2.9.6.4 Warm-up and ground testing. This shall include, but not be limited to, coverage of carburetor heat, cowl flap position, and technique of switching from a special starting fuel. If oil dilution is available, the fuel boil-off procedure shall be covered, including a reference to the oil dilution table. The importance of ground testing of systems which may be adversely affected by cold weather shall be included.

3.2.9.6.5 Taxiing and hovering instructions. The unique techniques and precautions to be observed when taxiing on snow, ice, or slush covered water shall be explained. Wheels shall be visually checked by operator/ground crew to ensure they are turning.

3.2.9.6.6 Before takeoff. A check for ice and snow buildup on the aircraft shall be included.

3.2.9.6.7 Takeoff. Unique techniques and precautions to be observed when taking off under cold weather conditions shall be included. The effect of snow or ice covered runways on takeoff, of extremely cold weather on engine and aircraft performance, etc. shall be covered.

3.2.9.6.8 During flight. Any special precautions that must be observed during flight in extreme cold, such as cycling propeller governing systems, shall be described. Procedures for dealing with inflight icing shall be described.

3.2.9.6.9 Descent. Any special instructions regarding descent as may be applicable to cold weather operation shall be included, such as switching on the auxiliary power unit early to ensure that it is sufficiently warmed up prior to landing.

3.2.9.6.10 Landing. Unique techniques and precautions to be observed during landing in cold weather shall be included. The use of brakes and reverse pitch propellers when landing on snow or ice covered runways shall be covered. Any restrictions regarding the use of landing or dive flaps when landing on snow or slush covered runways or slush covered water where ice is suspected shall be included.

3.2.9.6.11 Engine shutdown. The proper method of shutting down the engine shall be given, including a table showing the required oil dilution time for various temperatures. The techniques and precautions to be observed in using oil dilution shall be covered. Operation of

**MIL-PRF-63029D(AV)**

systems depending on engine oil (including, but not limited to, supercharger clutch and propeller governor), to ensure that these systems are supplied with diluted oil, shall be included. Complete instructions for purging normal fuel from the system and replacing with special fuel shall be included. Time, speed or other requirements for turbine temperature stabilization prior to shutdown shall be stated.

3.2.9.6.12 Desert and hot weather operations. The same requirements and procedures outlined in cold weather operations shall apply to desert and hot weather operation.

3.2.9.6.13 Turbulence and thunderstorm operations. Comments on the general qualities of the aircraft in turbulence and thunderstorms shall be included. A description of the techniques to be used shall be given and all preparations to be made before entering turbulence or thunderstorms shall be included.

3.2.9.6.14 Rain. General coverage of the problem of rain during each phase of flight, including before takeoff, takeoff, climb, and cruise, shall be included. Performance of the rain removal systems shall be described.

3.2.10 Chapter 9 - Emergency Procedures.

3.2.10.1 General. This chapter shall clearly and concisely describe the procedures to be followed in dealing with emergencies that could reasonably be encountered. Minor malfunctions that do not adversely affect the continued safe operation of the aircraft are not described in this chapter. Compound or multiple failure emergency procedures have not been included in this section. Emergency procedure paragraph titles shall be based on how the pilot recognizes the emergency rather than what caused the emergency (for example, "Low RPM" not "Governor control failure"). Complete coverage is required regarding the feel, characteristics, and reaction of the aircraft during various emergencies affecting flight. All precautions to be observed in coping with an emergency shall be included. This chapter shall contain an emergency amplified checklist. Emergency procedures in connection with the utility systems shall be described in Chapter 2, Section IX. Emergency operation of utility systems shall be included in this chapter only insofar as it may affect safety of flight. Emergencies shall be divided into one of ten categories:

- a. Engine
- b. Propeller/rotor
- c. Fire
- d. Fuel
- e. Electrical
- f. Hydraulic

**MIL-PRF-63029D(AV)**

- g. Landing and ditching
- h. Flight controls
- i. Bailout/ejection
- j. Mission equipment (when applicable)

Within an emergency classification, emergencies that have identical corrective actions may be combined under one paragraph heading. Those checks that must be performed immediately in an emergency procedure shall be underlined. The TM shall state that such underlined steps must be performed immediately without reference to the checklist.

3.2.10.2 Section I - Aircraft systems. This section shall contain emergency procedures to be performed in the event of an aircraft system malfunction under various conditions.

- a. The following shall be included in the TM:

Emergency operation of mission equipment is contained in this chapter insofar as its use affects safety of flight. Emergency procedures are given in checklist form when applicable. A condensed version of these procedures is contained in the condensed checklist TM 1-XXXX-XXX-CL.

- b. The following note shall be included in the TM:

**NOTE**

**The urgency of certain emergencies requires immediate and instinctive action by the pilot. The most important single consideration is aircraft control. All procedures are subordinate to this requirement.**

- c. The following statement shall be included in the TM:

Terms may be defined as necessary to simplify the procedural memory steps within the existing emergency procedures. The term shall be used as an emergency procedure step instead of listing the individual steps used to define the term. For example, the term “EMER SHUTDOWN” is defined as engine stoppage without delay and is accomplished as follows:

1. Throttle - off.
2. FUEL switches - OFF.
3. BAT switch - OFF.



**MIL-PRF-63029D(AV)**

In TMs for rotary wing aircraft, the definitions of emergency terms shall be included near the beginning of Chapter 9.

d. The following definitions shall be placed in the TM:

(1) LAND AS SOON AS POSSIBLE is defined as landing at the nearest suitable landing area without delay. The primary consideration is to ensure the survival of occupants.

(2) LAND AS SOON AS PRACTICABLE is defined as landing at a suitable landing area. The primary consideration is the urgency of the emergency.

(3) AUTOROTATE is defined as adjusting the flight controls as necessary to establish an autorotational descent (for rotary wing only).

3.2.10.2.1 Emergency equipment and exits. The following emergency equipment and exits shall be illustrated in the manual.

a. The aircraft interior shall be illustrated showing life support equipment permanently installed in the aircraft including, but not limited to, fire axes, flares, pyrotechnic pistols, and hand fire extinguishers (Figure 48).

b. If the aircraft is large enough to permit movement of personnel, emergency stations and routes of degrees to be followed in flight and after crash landing on land or water shall be indicated for all personnel. Coding shall be used to differentiate between routes and exits to be used in flight and those to be used after a crash landing (Figure 48). This illustration shall be an interior view or as viewed by the occupants of the aircraft. It may be combined with the emergency equipment diagram and the emergency entrance diagram, unless the resulting illustration would be confusing.

c. A diagram shall be included to show points at which emergency personnel can enter into the aircraft after it has crash landed. This illustration may be combined with the routes of escape and exits diagram, unless the resulting illustration would be confusing.

3.2.10.2.2 Engine. Emergency procedures shall be described in the event of an engine malfunction under a variety of conditions.

3.2.10.2.2.1 Flight characteristics under partial power conditions. A description of the characteristics and reactions of the aircraft when flying with one or more inoperative engines or with an engine having only partial power capability shall be included. Emphasis shall be given to any special precautions which must be observed and any dangerous tendencies of the aircraft. Information shall be included on how to determine which engine is inoperative. The

**MIL-PRF-63029D(AV)**

problems of maintaining altitude, directional control, and any other special considerations shall be discussed.

3.2.10.2.2.2 Engine malfunction under specific conditions. Additional paragraphs shall be included as necessary to indicate action to be taken in the event of engine malfunction under various conditions. Partial engine malfunctions as well as complete engine failure shall be described. A complete checklist procedure to be followed in shutting down the malfunctioning engine and establishing continued flight shall be included. Insofar as possible, shutdown procedure shall be identical to that required in the event of engine fire. Recommended best techniques and procedures for crash landing while operating within avoidance areas shall be discussed.

3.2.10.2.2.3 Engine malfunction during takeoff and low altitude/low airspeed flight. This shall include an abort during the takeoff run, immediately after liftoff and continued flight. Coverage shall be included for both complete engine failure and partial loss of power. For rotary wing aircraft, differentiation between engine malfunction while at a hover and engine malfunction after takeoff (in translational lift) shall be included. Information shall be included, but not limited to, jettisoning external stores, landing gear retraction, pilot techniques, and best airspeed for minimum power required (partial loss of power).

3.2.10.2.2.4 Engine malfunction during cruise. Reference shall be made to the chart data in Chapter 7 covering cruise control with one or more engines inoperative. The effect of loss of each engine on the various aircraft systems and equipment shall be included. Procedures to be followed in the event of partial power loss as well as for the complete engine failure shall be included.

3.2.10.2.2.5 Engine malfunction during final approach. For multi-engine aircraft, procedures shall be provided for loss of one engine while on final approach in the landing configuration. Information shall be included concerning application of maximum controllable power, jettisoning external stores if applicable, landing gear position, use of flaps, pilot techniques, and airspeed requirements.

3.2.10.2.2.6 Engine restart during flight. Instructions for proper means for restarting an engine in flight and resuming normal flight shall be presented. Special emphasis shall be placed on parameters such as altitude, airspeed, and rpm. If considered advantageous, they may be presented in chart form. A warning shall be included that the engine should not be restarted unless it can be determined that it will be reasonably safe to do so.

3.2.10.2.2.7 Maximum glide. This shall include glide requirements that will result in maximum range with no power available. This information is required for all single-engine and twin-engine aircraft. A graph showing glide distance attainable from the service ceiling to sea level shall be included (Figure 49).

3.2.10.2.2.8 Autorotational descent. A chart which presents autorotational rate of descent versus indicated airspeed at normal rotor speed shall be provided (Figure 50). The indicated airspeeds for minimum rate of descent and maximum glide distance shall be shown on the

**MIL-PRF-63029D(AV)**

chart. Data and/or instructions for determining autorotational descent information for variations in aircraft configurations shall also be provided.

3.2.10.2.2.9 Landing with one or more engines inoperative. The recommended procedure shall be described, including important precautions. A brief discussion of any changes that include, but are not limited to, the use of landing gear, wing flaps, and slats, during such landing shall be included. For single-engine and twin-engine aircraft, proper landing procedures with no power shall be emphasized. For rotary wing aircraft, reference shall be made to the height velocity diagram.

3.2.10.2.2.10 Go-around with one or more engines inoperative (fixed wing). Recommended procedures shall be described, including important precautions.

3.2.10.2.2.11 Height velocity. This paragraph shall discuss the minimum height for safe landing following loss of power for both single or multi-engine helicopters. Plots of height required for safe autorotational landing after loss of power and initial engine failure shall be included as applicable. For a multi-engine helicopter a recommended approach corridor with the critical engines inoperative shall be shown on the plot. Regions of caution, avoidance, and safe operation shall be shown (Figure 51). The plots shall be based on initiation of the necessary manual collective pitch control motion after at least a two-second delay following loss of power, or as approved by the contracting activity (6.2).

3.2.10.2.3 Propeller/ rotor, transmissions, and drive systems. Emergency procedures shall be described in the event of propeller/rotor, transmission, or drive system failure.

3.2.10.2.3.1 Propeller failure. Instructions shall be given regarding recommended procedures in the event of a runaway propeller and other types of propeller failure. Instructions shall be included regarding action to be taken if propeller does not feather properly.

3.2.10.2.3.2 Tail rotor failure and directional control malfunctions. Instructions shall be given regarding all modes of directional control malfunctions and tail rotor failures. Coverage shall include emergency procedures to be used in the event of failures during takeoff, hovering, in flight, and while landing. Instructions for maintaining powered flight as opposed to autorotation shall be included.

3.2.10.2.3.3 Malfunctions of main rotor transmission and drive systems. This shall describe and differentiate between malfunctions with the drive system between the engine and transmission, and malfunctions of the drive system between the transmission and main rotor. Actual and erroneous instrument/warning light indications shall be discussed, including procedures for specific malfunctions.

3.2.10.2.3.4 Other emergencies. Other emergencies such as ground resonance and mast bumping shall be described. Restrictions and preventive actions shall be described.

3.2.10.2.4 Fire. Emergency procedures shall be included for aircraft fires as follows:

**MIL-PRF-63029D(AV)**

3.2.10.2.4.1 Engine fire. Instructions shall be included regarding the recommended method of dealing with engine fires on the ground and during flight. Insofar as possible, engine shutdown procedures shall be identical to those used during engine failure.

3.2.10.2.4.2 Fuselage fire. Instructions shall be included regarding procedures to be followed when a fuselage fire breaks out. Warnings regarding dangers involved in using fire extinguishing agents shall be included.

3.2.10.2.4.3 Wing fire. Instructions shall be included on means of dealing with wing fires, including shutting down systems which may be feeding the fire.

3.2.10.2.4.4 Electrical fire. Instructions for dealing with an electrical fire shall be included. If certain aircraft fire extinguishers are not to be used for electrical fires, that information shall be included.

3.2.10.2.4.5 Smoke and fume elimination. Instructions shall be given for most rapid means of dissipating smoke and toxic fumes.

3.2.10.2.5 Fuel system. Procedures shall be given for dealing with fuel system failures and shall include a description of metering system failures, fuel pump failures, and control linkage failures (loss of fuel control with fuel input in a fixed position). Emergency procedures shall be included for each condition.

3.2.10.2.6 Electrical system. Instructions shall be given for methods of dealing with electrical system failures. Procedures shall be expressed as actions to be taken involving circuit breakers. For push-pull types, procedures shall indicate in or out. Where the circuit breakers are a switch type, procedures shall indicate off or on.

3.2.10.2.7 Hydraulic system. Instructions shall be given for dealing with hydraulic system component failures.

3.2.10.2.8 Landing and ditching. Instructions shall be given regarding landing and ditching emergency procedures as follows:

3.2.10.2.8.1 Emergency descent. This shall describe means of accomplishing an emergency descent. Emergency descent is a maximum effort in which damage to the aircraft or power plant is considered secondary to getting the aircraft on the ground.

3.2.10.2.8.2 Landing emergencies. Preparation, warning signals to crew, approach, crew/passenger positions, harness locks, landing technique, routes, and methods of crew exits shall be included for both hard and soft ground. Landings with one or more landing gears retracted, flat tires, no wing flaps, and landing on unprepared runways shall also be covered. Information regarding pilot techniques for forced landings in trees or wooded areas shall also be included.

**MIL-PRF-63029D(AV)**

3.2.10.2.8.3 Body positions. The body positions to be used by passengers and crew in emergency landings shall be illustrated.

3.2.10.2.8.4 Ditching. Instructions shall be included for ditching the aircraft. The ditching capabilities of the aircraft and the advantages of ditching versus bailout shall be included. The following shall be described: preparation; warning signals to crew; approach; crew/passenger positions; ditching equipment, such as ditching belts and bulkheads; landing techniques; duties of each crewmember immediately after ditching; and methods of crew exits.

3.2.10.2.8.5 Ditching and crash landing stations. As applicable, an illustration shall be included showing the position of each crewmember during ditching and crash landing.

3.2.10.2.9 Flight controls. This section shall describe procedures to be employed in event of flight control failure.

3.2.10.2.10 Bailout/eject. For all aircraft with established crew bailout or ejection procedures, the techniques, precautions, and warning signals for leaving the aircraft in flight shall be described, including instructions for separation from the seat. Bailout procedures to be used when seat ejection fails shall be included. The proper method of preparing the aircraft for bailout and method of jettisoning pilot's compartment enclosures and doors shall be described. A pictorial sequence of operations for ejection shall be provided, including alternate methods of removing safety pins where applicable.

3.2.10.2.11 Mission equipment. Emergency procedures shall be outlined for malfunctioning mission equipment that constitutes a safety hazard.

3.2.10.2.12 Emergency jettisoning. All means of accomplishing emergency jettisoning of fuel, cargo, and equipment shall be covered. Appropriate cautions relative to possible damage that may result, sudden shifting of CG, etc. shall be included.

3.2.11 Appendix A - References. Appendix A is a listing of official publications cited within the manual applicable to flight crews. The appendix shall contain only those publications referenced in the manual, and shall not contain blank forms. (See 3.1.26).

3.2.12 Appendix B - Abbreviations and Terms. Definitions of all abbreviations and terms used throughout the TM shall be included in this appendix.

3.2.13 Index. The index shall list in alphabetical order, every titled paragraph, figure, and table contained in the TM. (See 3.1.27).

3.3 Operator's checklist.

**MIL-PRF-63029D(AV)**

3.3.1 General. The condensed checklist (CL) manual shall consist of a series of controls (or checks) and the required actions. The sequence of items (or checks) appearing in the condensed checklist manual shall be identical to those appearing in the amplified checklist of the operator's manual. In unusual circumstances, explanatory material may be used in the condensed checklist manual in the form of warnings, cautions, and notes, only if specified by the contracting activity (6.2).

The condensed checklist shall provide a condensed version of the amplified checklist. The contents of the condensed checklist shall be as described in the following paragraphs.

3.3.1.1 Standard operator's checklist. Unless otherwise specified by the contracting activity (6.2), the operator's TM checklist shall be prepared for publication as a loose-leaf manual. It shall comply with the following requirements, except those which are designated as applying specifically to alternate operator's checklists.

3.3.1.2 Alternate operator's checklist. The contracting activity (6.2) shall have the option to specify that a one or two page alternate operator's checklist be prepared instead of the standard operator's checklist.

3.3.1.3 Size. The standard operator's checklist shall be prepared for a final page size of 4 1/2 inches wide by 8 inches in length. See Figure 52. The alternate operator's checklist shall be prepared for a final page size of 11 inches wide by 8-1/2 inches in length. The usable area for preparation of the alternate operator's checklist shall be 10 inches wide by 7-1/2 inches in length.

3.3.1.4 Type style. The standard operator's checklist type style, size and spacing shall be in accordance with Figure 53. The alternate operator's checklist type style shall be a sanserif type. Type size and spacing shall be in accordance with Figure 53

3.3.1.5 Cover. The cover (Figure 56) shall comply with the requirements of 3.1.6.

3.3.1.6 Marginal copy. Marginal copy for standard and alternate operator's checklist TMs shall consist of the publication number, page number, and change number, when applicable.

3.3.1.7 Page numbers. Page numbers in the standard and alternate operator's checklist TMs shall consist of a capital letter and an Arabic numeral separated by a dash. The letter shall correspond to specific parts of the manuals, N for Normal, E for Emergency, and P for Performance. Page numbers for basic manual pages shall be centered on the bottom of the page. Pages containing general information and scope shall be numbered with lower case Roman numerals; i, ii, etc.

3.3.1.8 Change numbers and symbols. For standard operator's checklist TMs, each page (Figure 55) containing changed material shall bear the appropriate change number (C1, C2) and shall be located adjacent to the page number. Changes to the text, including new material or added pages shall be indicated by a vertical bar in the left margin extending close to the entire area of the material affected. Change symbols show current changes only. For

**MIL-PRF-63029D(AV)**

alternate operator's checklist TMs, only revisions shall be prepared, therefore change numbers and symbols shall not apply.

3.3.1.9 Page arrangement. In the standard checklist, all text shall be prepared in a single column page. The alternate checklist shall be prepared in three columns equally spaced across the 11-inch page which is turned sideways. The alternate checklist shall be printed on card stock and consist of normal procedures on one side and emergency procedures on the opposite side. When authorized by the contracting activity (6.2), duplicate pages of the checklist TM may be prepared indicating configuration or equipment differences. The pages shall be numbered identically, with differences indicated by the use of designator symbols in the upper right corner of the page. The following statement shall be added to the general information page of each checklist utilizing duplicate pages:

Duplicate pages have been provided. Aircraft applicability is indicated in the upper right corner of the checklist TM pages affected. Remove and discard pages which are not applicable to the assigned aircraft.

For alternate operator's checklist TMs, the following statement shall be added following the date or supersession notice and preceding the text:

This -CL applies only to the (model number) model of the (aircraft nomenclature). or  
Use only for the (model number) model of the (aircraft nomenclature).

3.3.1.10 Splitting of procedures. For standard operator's checklist TMs, whenever possible, material for inflight emergency procedures shall be written so that the procedure is contained on a single page. Performance data and procedures such as exterior, interior and before leaving aircraft inspections need not meet this requirement. Each classification of emergency procedures such as engine, propeller/rotor, fire, and fuel shall begin on a right-hand page. For alternate operator's checklist TMs, procedures may be split between columns but shall not be split between a page and the following page.

3.3.1.11 Fold-out pages. Fold-out pages shall not be used for operator's checklist TMs.

3.3.1.12 Use of color. Only black print shall be used for operator's checklist TM's.

3.3.1.13 Definitions of symbols. Symbols used in the checklists shall be the same as those found in 3.2.9.3.2.

3.3.1.14 Emergency procedures pages. Page borders for emergency procedures shall conform to paragraph 3.1.28. However, for operator's alternate checklists, page borders for emergency procedures shall be placed in the left and right margins only, instead of on three sides of the page.

3.3.2 Detailed requirements for standard operator's checklists. Operator's standard checklists shall be prepared in accordance with the following outline indicated below:



**MIL-PRF-63029D(AV)**

- a. General information and scope
- b. Normal procedures
- c. Emergency procedures
- d. Performance data

When required by the contracting activity (6.2), a list of crewmembers' duties shall be prepared for normal and emergency procedures.

3.3.2.1 General information and scope. The checklist shall indicate its purpose, how and when it is to be used, and scope.

3.3.2.2 Normal procedures. The contents of the normal procedures of this checklist are a condensation of the amplified checklists appearing in the normal procedures or crew duties portion of the applicable operator's manual. A through-flight checklist is provided in this section and consists of items marked by an asterisk. In addition to through-flight, this checklist may be used for combat/tactical operations when authorized by the commander. Procedures shall be highly abbreviated and shall use abbreviations which are defined in the operator's TM.

3.3.2.3 Emergency procedures. The requirements of this section of the condensed checklist (CL) are identical to those for the normal procedures, except that the information is drawn from the amplified checks in the emergency procedures portion of the operator's manual. The emergency requirements are subdivided into 10 classifications as listed in 3.2.10.1. The underlined items are the steps that must be performed immediately without reference to the checklist. Procedures shall be highly abbreviated and shall use abbreviations which are defined in the operator's (-10) TM.

3.3.2.4 Performance data. This section shall consist of charts, tables, and checklists for use during preflight, takeoff, cruise, landing, and shutdown.

3.3.2.4.1 Performance data charts. The contracting activity (6.2) shall specify the use of performance data charts in the checklist and the format these charts shall follow. The data to be included in the performance data charts shall be the same data base as the charts appearing in the performance data portion of the operator's manual.

3.3.2.4.2 Performance checks. When applicable, detailed performance checks of selected procedures, as indicated by the contracting activity (6.2), shall follow performance data charts. The symbol (★) shall precede those checks for which a detailed procedure is included in the performance data section. The detailed performance checks included in this section shall appear in the same order/sequence as they appear in Chapter 8 checklist.

**MIL-PRF-63029D(AV)**

3.3.2.5 Through-flight checklist. If a through-flight checklist is prepared, it shall be included in the normal procedures section following the abbreviated checklist. It shall consist of all through-flight checks from the normal procedures section of the applicable operator's manual. The checks shall be numbered sequentially.

3.3.2.6 Reporting errors. Information for reporting errors and making recommendations shall be placed in the front of the standard operator's checklist only. The information in 3.2.1.4 shall be entered in the checklist; however, DA Form 2028-2's shall not be placed in the back of the checklist.

3.3.3 Detailed requirements for alternate operator's checklists. Alternate operator's checklists shall include normal and emergency procedures. The procedures shall be written in the same manner as 3.3.2.2 and 3.3.2.3.

3.4 Maintenance test flight checklist.

3.4.1 General. The general provisions shall cover overall qualities of the TMs that will be produced.

3.4.2 Detailed requirements. Detailed requirements shall deal with specific format and detailed preparation of maintenance test flight checklists.

3.4.2.1 Cover/title page. Layout for the cover shall conform to Figure 56. The title shall identify the type, model, and series of subject aircraft.

3.4.2.2 Reporting of errors. Information for reporting errors and making recommendations shall be placed in the front of the checklist. The procedures in 3.2.1.4 shall be followed; however, DA Form 2028-2's shall not be placed in the back of the MTF checklist.

3.4.2.3 Table of contents. A table of contents (Figure 57), listing chapters and main paragraphs in the same order and with the exact titles used in the text, shall be placed after the warning page.

3.4.2.4 Chapter 1 - Introduction.

3.4.2.4.1 General. This chapter shall contain information of a general nature including the definition of an MTF, the purpose, and instructions specific to the manual. The following statement shall be placed at the beginning of Chapter 1.

**NOTE**

**A maintenance test flight is an exceptionally demanding operation and requires a thorough flight readiness inspection (pre-flight). The flight readiness inspection is prescribed in TM 1-XXXX-XXX-10 (operator's manual) and must be completed prior to each MTF. Emergency**

## MIL-PRF-63029D(AV)

**procedures are found in the applicable operator's manual (-10) and checklist (-CL) and are not duplicated in this publication. Prior to each maintenance test flight, the pilot shall contact maintenance/quality control personnel to determine the maintenance that has been performed. This manual should be used only by qualified maintenance test flight pilots as required by AR 95-1.**

3.4.2.4.2 Purpose. The purpose of the MTF manual shall be to provide complete instructions for performing an MTF for a specific model, type, and series aircraft. For the specific criteria which require a general or limited MTF, reference shall be made to TM 1-1500-328-23 and the applicable aviation unit and intermediate maintenance manuals.

3.4.2.4.3 Definitions. The following definitions shall be placed near the beginning of chapter 1.

- a. Maintenance test flight. A flight for which the primary mission is to determine airworthiness, i.e., that the airframe, power plant accessories and items of equipment are functioning in accordance with predetermined requirements in the intended operational environment.
- b. Warnings, cautions, and notes. Warnings, cautions, and notes are used to emphasize important and critical instructions and are used for the following conditions .

**WARNING**

**Highlights an essential operating or maintenance procedure, practice, condition, statement, etc. which if not strictly observed, could result in injury to, or death of, personnel or long term health hazards.**

**CAUTION**

**Highlights an essential operating or maintenance procedure, practice, condition, statement, etc. which, if not strictly observed, could result in damage to, or destruction of, equipment or loss of mission effectiveness.**

**NOTE**

**Highlights an essential operating or maintenance procedure, condition, or statement.**

3.4.2.4.4 General Information. The following information shall be described in the manual.

- a. The manual shall cover only MTFs of aircraft (insert type, model, and series) and in no way supersedes any information contained in TM 1-XXXX-XXX-10 or-CL, but is to be used in conjunction with the -10 or -CL. For the purpose of MTFs only, the MTF manual shall satisfy all of the requirements of the -CL from Interior Check through Engine Shutdown.
- b. Crew requirements shall be as specified in TM 1-1500-328-23 and TM 1-XXXX-XXX-10.

**MIL-PRF-63029D(AV)**

c. The duration of a general or limited test flight shall be in accordance with the requirements of TM 1-1500-328-23.

3.4.2.4.5 Special instructions. The following special items of interest shall be included in Chapter 1.

- a. Cargo and passengers shall be prohibited on MTFs.
- b. Forms and records shall be checked prior to the MTF to determine what maintenance has been performed and the type of MTF required (i.e., general or limited).
- c. The configuration of the aircraft shall be established prior to each MTF in order to determine performance parameters.
- d. A thorough post test flight inspection shall be performed to the extent necessary to ensure that deficiencies that may have developed as a result of the MTF are detected.
- e. When an MTF is required to ensure proper operation of a specific system(s), references shall be made to the applicable maintenance manuals for the limits of that system.
- f. An asterisk (\*) preceding a check requires that the test flight check sheet be annotated with a specific reading. Also a check (✓) for satisfactory performance, or an (X) for problem detected shall be recorded and a short statement entered in the remarks block of the check sheet.
- g. A check sheet (Figure 58) shall be developed for recording the results of test flights. When a test flight is performed to determine if specific equipment or systems are operating properly, completion of only that portion of the MTF check sheet applicable to the specific equipment or system being tested shall be required. Continuation sheets may be used when necessary. Items that prove to be unsatisfactory during the test flight and require corrective action, shall be listed in the remarks block during flight and transferred to DA Form 2408-13-1 immediately after termination of the flight. The sheet shall be attached to the DA Form 2408-13-1 upon completion. After accumulation of two or more sheets, the data shall be reviewed to determine if trends are developing.

3.4.2.5 Chapter 2 - Maintenance Test Flight Checklist.

3.4.2.5.1 General. This chapter shall contain the MTF requirements for specific Army aircraft. The TM shall note that criteria for performing MTFs shall be in accordance with TM 1-1500-328-23. The requirements contained in this chapter shall ensure a thorough inspection of the aircraft before flight, during flight, and upon completion of the MTF. The troubleshooting reference (right side of the checklist) shall be cross indexed to the troubleshooting guides which are contained in Chapter 3, the troubleshooting chapter of the applicable maintenance manuals, or both.

3.4.2.5.2 Checklist format. All checklist titles shall be left justified and in 10 point boldfaced type (Figure 59). The main titles shall not be numbered. Checklist entries shall be listed numerically in Arabic numbers in the order they are to be performed and shall be blocked. Checklist entries shall have the first letters of each line of type aligned. Placarded items shall be boldfaced capital letters. If a series of checks continues from a right-hand page to a left-hand page, requiring that the page be turned to continue the procedure, the checklist title shall be repeated at the upper corner of the left-hand page followed by "(Cont.)". Unless otherwise specified by the contracting activity (6.2),

**MIL-PRF-63029D(AV)**

checklist items shall include those which are contained in the applicable aircraft operator's checklist, plus those MTF checks peculiar to the aircraft in question. The format of the checklist items shall be patterned after the following example.

**PRIOR TO MAINTENANCE TEST FLIGHT**

1. Forms and records - Check
2. A thorough flight readiness inspection in accordance with the requirements contained in TM 1-XXXX-XXX-10 - Performed
3. Special pre-flight checks - Accomplished
4. Crew members - Briefed

3.4.2.5.3 Troubleshooting reference. Applicable references to the troubleshooting guides (Chapter 3) shall be listed to the right of each checklist step under the "Troubleshooting Reference" heading. All troubleshooting references which apply to the step shall be listed. A dash between references shall mean "through" and a comma shall mean "and". The references shall list the possible conditions, abnormal conditions, or indications which could be encountered while performing the procedures.

3.4.2.5.4 Checklist symbols. When a step on the checklist deals with an item of equipment that is installed or available, the step shall be preceded by the symbol "O".

3.4.2.5.5 Designator symbols. A table showing designator symbols shall be included at the beginning of Chapter 2.

#### 3.4.2.6 Chapter 3 - Troubleshooting Guides.

3.4.2.6.1 General. This chapter shall contain troubleshooting information cited in the checklists that are found in Chapter 2. The troubleshooting guides (Figure 60) shall list possible conditions, indications, and probable causes. The checklist shall note that the information is to be used only as a quick reference and may not be all encompassing.

3.4.2.6.2 Troubleshooting guides. The guides shall appear in the MTF checklist in the following order:

Troubleshooting Guide A - Starting (including APU)

Troubleshooting Guide B - Instruments

Troubleshooting Guide C - Electrical

Troubleshooting Guide D - Caution Panel

Troubleshooting Guide E - Power Plant

Troubleshooting Guide F - Propellers/Rotors (Power Train)

Troubleshooting Guide G - Hydraulic

**MIL-PRF-63029D(AV)**

Troubleshooting guide H - Flight Controls

Troubleshooting guide I - Vibrations

Troubleshooting Guide J - Communications/Navigation Equipment

Troubleshooting guide K - Stability and Control Systems

3.4.2.6.3 Additions or deletions. Additions or deletions to the troubleshooting guides listed in paragraph 3.4.2.6.2 shall be made with approval of the contracting activity (6.2).

3.4.2.7 Chapter 4 - Special/Detailed Procedures.

This chapter shall contain those special/detailed procedures that are referenced in Chapter 2. Complete instructions for each procedure shall be listed and numbered sequentially in Arabic numerals. Examples of special/detailed procedures include rotor smoothing techniques, speed trim checks, engine conditioning, engine starting, etc. (Figure 61). The special/detailed procedures shall be specified by the contracting activity (6.2).

3.4.2.8 Chapter 5 - Charts and Forms.

3.4.2.8.1 General. Forms and charts (Figure 62), shall be prepared, as necessary, to help perform and record MTFs. Charts shall be prepared that shall include, but not be limited to, bleed band opening envelope, turbine engine analysis check, and power adjusting. A list of required charts, including the contents, size, and format, shall be provided by the contracting activity (6.2). The number of foldouts shall be kept to a minimum. Fold-up charts shall not be used. The forms shall be used to record readings, pressures, rpm, etc. obtained during MTFs.

3.4.2.8.2 List of charts. The chapter shall include a complete listing of charts including the figure number, title, and page number. The charts shall be listed in order of their appearance.

3.4.2.8.3 Maintenance test flight check sheets. A check sheet, similar to the one in Figure 58, shall be provided for use by the person(s) conducting the checks.

3.4.2.8.4 Metric conversion chart. A chart, similar to Figure 63, shall be included at the back of the manual.

3.4.2.8.5 Appendixes. Appendixes shall immediately follow the last chapter of the TM and shall begin on a right-hand page. Appendixes may be included when specified by the contracting activity (6.2).

#### 4. VERIFICATION

4.1 General. This section shall include all activities to be performed to determine that the TM to be offered for acceptance conforms to the requirements in Section 3 of the specification. The requirements shall be verified by following the procedures detailed in the TM to determine if the desired results can be achieved.

**MIL-PRF-63029D(AV)**

4.1.1 Validation. The PDEP of the TM shall be validated by the contractor. A 100 percent validation of the procedures outlined in the TM shall be performed for technical accuracy and adequacy of content. Validation includes, but is not limited to, the actual performance by contractor personnel of operating procedures. It also shall include a review of instructions and associated checklists and technical accuracy and adequacy. Transitions from, references to, and sequences of tasks/task segments, shall be validated by the contractor in the final PDEP product as a whole.

a. Tasks in the PDEP may be validated at any time. There is no requirement that they be done together. The only requirement is that the task selected for validation be performed completely, so that the task can be evaluated for technical adequacy. No task segment which stops short of achieving the task goal shall be considered as validated.

b. When deemed necessary, the contractor validation and Government verification may be done concurrently.

4.1.1.1 Performance. The PDEP shall be reviewed for:

a. Conformance to applicable requirements of the governing documents. This task shall include editorial review of the manuscript.

b. Technical accuracy and adequacy of the content. This shall include the actual performance of all of the procedures to operate the applicable aircraft under all conditions and to properly perform the proper checks. It shall also include, but not be limited to, a review of the essential need and adequacy of illustrations in the text and the adequacy of references cited.

4.1.2 Verification. All procedures outlined in the TM are subject to verification unless specifically excluded in contract documents. Representatives of the contracting activity shall verify the contractor's validation. The contracting activity may use one or more of the methods listed in paragraphs a through c below. The methods listed are in addition to reviewing the publication for conformance to the requirements of the governing documents. Verification may be accomplished by:

a. Performing 100 percent of the operating procedures in the TM by using military operator personnel of the type and qualifications of those expected to operate the aircraft. Each procedure shall be performed successfully at least once. All performances shall be monitored by a Government subject matter expert and a master copy of the publication being verified shall be updated and given a final desk review. The desk review shall include a check of those portions of the publication not subject to hands-on performance, such as index, content, proper style, format, and adequacy of writing. When resources and time constraints limit the feasibility of performing a contractor validation and Government verification as separate entities, these requirements may be combined.

b. Reviewing the technical content of the publication by having Government personnel perform the operating instructions specified by the contracting activity.

c. Witnessing the contractor's validation at the contractor's facility as scheduled by the contractor.

## 5. PACKAGING



**MIL-PRF-63029D(AV)**

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

**6. NOTES**

(This section contains information of a general or explanatory nature which may be helpful but is not mandatory.)

6.1 Intended Use. This specification is to be used for information and guidance in writing technical manuals for operator's manuals and checklists and MTF checklists for Army aircraft.

6.2 Acquisition requirements. Acquisition documents must specify the following:

- a. Title, number, and date of the specification.
- b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1).
- c. Addition of sections and appendixes to the format already established to cover peculiar system applications (see 3.1.2).
- d. Front matter will be other than as specified (see 3.1.5).
- e. A separate cover page and title page are required (see 3.1.6).
- f. Use of an abbreviated title page (see 3.1.6).
- g. Omit date from the cover page (see 3.1.6).
- h. Placement of information such as the supersession notice on the reverse side of the title page (see 3.1.6).
- i. Inclusion of a warning page (see 3.1.7).
- j. The TM number (see 3.1.10).
- k. The publication date (see 3.1.11)
- l. Supersession notice will be placed other than as specified (see 3.1.13).
- m. The type of revision (see 3.1.20).
- n. Use of new change symbols (see 3.1.20.2).
- o. Do not prepare a change record (see 3.1.21).

**MIL-PRF-63029D(AV)**

- p. Use of photographic illustrations (see 3.1.22.3).
- q. Use of more than three variables if other than as specified (see 3.1.23.1).
- r. Priorities for preparing graphical data that is other than as specified (see 3.1.23.1.3).
- s. Use of four division scale grids for graphical data presentation (see 3.1.23.2.7).
- t. Minimal minor grid spacing if other than as specified (see 3.1.23.2.7).
- u. Data range is other than as specified (see 3.1.23.2.9).
- v. Dimensional data is other than as specified (see 3.1.24).
- w. Use of manufacturers' names in the operator's manual or checklist (see 3.1.25).
- x. Include an index if other than as specified (see 3.1.27).
- y. Prepare duplicate pages (see 3.2.1.2).
- z. Inclusion of malfunction isolation charts (see 3.2.3.1).
- aa. Provide a list of primary, alternate, and emergency fuels (see 3.2.3.16.3).
- ab. Add sections describing avionics equipment to Chapter 3 (see 3.2.4.2).
- ac. Include an appendix for mission avionics equipment (see 3.2.5.2).
- ad. Describe lateral CG limitations (see 3.2.6.4.1).
- ae. Expression for airspeeds if other than as specified (see 3.2.6.5).
- af. Add sections to allow for added limits or restrictions for specific aircraft (see 3.2.6.8).
- ag. Include a statement about usable oil capacity (see 3.2.7.3.1).
- ah. Lateral CG limits (see 3.2.7.7).
- ai. The basis for performance data charts if other than as specified (see 3.2.8.1.1).
- aj. A configuration that is other than as specified (see 3.2.8.1.4).
- ak. Add data charts for alternate fuels (see 3.2.8.1.5).
- al. Whether standard day, standard conditions, standard temperature, or density altitude should be mentioned (see 3.2.8.1.6).
- am. Create performance data charts other than as specified (see 3.2.8.1.10).
- an. Create performance data charts other than as specified (see 3.2.8.1.11).

**MIL-PRF-63029D(AV)**

- ao. Additional use of charts (see 3.2.8.3.b).
- ap. Add charts to supplement the takeoff chart (see 3.2.8.3.1.5).
- aq. Alternate aircraft configurations for drag chart (see 3.2.8.3.1.6).
- ar. Provide particular altitudes, configurations, and temperatures for cruise chart (see 3.2.8.3.1.7).
- as. For airspeed calibration chart, calibration data for airspeed, altitude, and temperature may be omitted (see 3.2.8.3.1.9).
- at. If data is needed for an optimum cruise chart (see 3.2.8.3.1.10).
- au. Flap settings and other applicable information will be provided for the rotation/takeoff airspeed chart (see 3.2.8.3.2.5).
- av. Provide particular altitudes, configurations, and temperatures for cruise chart (see 3.2.8.3.2.13).
- aw. If single engine data are to be placed on cruise charts for multi-engine aircraft (see 3.2.8.3.2.13).
- ax. Flap settings and other aircraft configurations for the approach speed chart (see 3.2.8.3.2.15).
- ay. Indicate if the landing chart will be valid for configurations other than as specified (see 3.2.8.3.2.16).
- az. For airspeed calibration chart, calibration data for airspeed, altitude, and temperature may be omitted (see 3.2.8.3.2.17).
- ba. If data is needed for an optimum cruise chart (see 3.2.8.3.2.18).
- bb. Indicate if specific checks are to be added to or deleted from the instrument flight section (see 3.2.9.3.29).
- bc. State time delay period before initiation of collective pitch control motion following a loss of power (see 3.2.10.2.2.11).
- bd. Inclusion of warnings, cautions, and notes (see 3.3.1).
- be. The operator's checklist should be prepared as other than a loose-leaf manual (see 3.3.1.1).
- bf. The operator's alternate checklist should be prepared instead of the operator's standard checklist (see 3.3.1.2).
- bg. The duplicate pages of the operator's checklist are to be prepared (see 3.3.1.9).
- bh. Prepare a list of crewmembers' duties (see 3.3.2).

**MIL-PRF-63029D(AV)**

- bi. Use of performance data charts and the form of the charts (see 3.3.2.4.1).
- bj. Select detailed performance checks (see 3.3.2.4.2).
- bk. Select checklist items other than as specified (see 3.4.2.5.2).
- bl. Additions or deletions to the troubleshooting guides (see 3.4.2.6.3).
- bm. List of special/detailed procedures (see 3.4.2.7).
- bn. List of required charts and format (see 3.4.2.8.1).
- bo. Include appendixes (see 3.4.2.8.5).
- bp. Submission, along with the draft TM, of an aerodynamic report illustrating the derivation of the data entered on the charts included in the TM. The report should include an analysis leading to the establishment of lift and drag values used in the calculations, aircraft efficiency and compressibility correction factors, methods of computing power or thrust required and available, a discussion of duct loss and propeller efficiencies, and adequate references to appropriate wind tunnel or flight test data. Calculation methods need to be fully explained and a sample calculation given. The calculations should be presented in sufficient detail to permit ready review and check of conclusions and to enable additional calculations to be made by the contracting activity.
- bq. Packaging requirements (see 5.1).

6.3 Technical Manuals. The requirement for technical manuals should be considered when this specification is applied on a contract. If technical manuals are required, specifications and standards that have been cleared and listed in DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL) must be listed on a separate Contract Data Requirements List (DD Form 1423), which is included as an exhibit to the contract. The technical manuals must be acquired under separate contract line item in the contract.

#### 6.4 Definitions.

6.4.1 Caution. Highlights an essential operating or maintenance procedure, practice, condition, statement, etc. which, if not strictly observed, could result in damage to, or destruction of, equipment or loss of mission effectiveness.

6.4.2 Complete revision. A complete revision requires rewrite or reorganization of the technical content of the material and is prepared in accordance with the current content specification and as outlined by this specification.

6.4.3 Draft equipment publication (DEP). Those publications prepared during the full scale development phase of the equipment which are used for Technical Test I (TTI) and user tests, usually with prototype models of equipment. The DEP is also used for coordination and review by user agencies and for verification. The DEP also designates the publication that is sent for user coordination during revision of the DA equipment publications. It is an updated version of the PDEP. The term replaces preliminary technical manual

**MIL-PRF-63029D(AV)**

6.4.4 Final draft equipment publication (FDEP). Those publications prepared during the final development or initial production phase of the equipment and used for printing of the DA equipment publication. The term replaces final reproducible copy.

a. The FDEP is the final document with illustrations, ready for transmittal to the US Army Publication and Printing Command for printing and publication as an authenticated DA equipment publication. It includes all necessary changes and final resolutions of all comments and recommendations made as a result of technical and user testing, if conducted, service test, validation/verification, user coordination, and maintenance literature conference.

b. This definition replaces terms formerly used to refer to publications used for the above purpose and phase of development.

6.4.5 Nonsuperseding revision. A revision which does not supersede the preceding edition. When a new manual is needed to cover a different configuration of a system or equipment for which there is a high degree of commonality, a nonsuperseding revision can be published to minimize cost. A nonsuperseding revision will stand on its own and shall be identified by a unique TM identification number.

6.4.6 Note. Highlights an essential operating or maintenance procedure, condition, or statement.

6.4.7 Pickup revision. A pickup revision incorporates the basic TM, all previous changes and the new data that would require the issuance of an additional change. Only those changed, revised, or added pages shall have the current change number and date. Other existing pages shall be reissued without changes to dates, change symbols or other modification.

6.4.8 Preliminary draft equipment publication (PDEP). Those publications prepared during the development phase of the equipment which are used for validation and early technical and user testing. The PDEP need not conform to format requirements of the applicable specification. It may be in the form of printed books or manuscript, or they may be a package of documentation such as a draft maintenance allocation charts, engineer drawings, or technical data extracted from the Logistics Support Analysis Record (LSAR). The PDEP replaces the review draft copy.

6.4.9 Updated revision. An updated revision incorporates the basic manual, all previous changes, and new data that would require the issuance of an additional change. The update is prepared by incorporating applicable portions of pages in the TM without requiring rewrite or reorganization of the technical content of the material. It is prepared in the style and format of the basic TM.

6.4.10 Warning. Highlights an essential operating or maintenance procedure, practice, condition, statement, etc. which if not strictly observed, could result in injury to, or death of, personnel or long term health hazards.

6.5 Subject term (key word) listing.

- Avionics
- Center-of-gravity (CG)
- Checklist, alternate
- Checklist, standard
- Condition heading
- Cover

**MIL-PRF-63029D(AV)**

Data, graphical  
Data, performance  
Diagram, moment  
Equipment, mission  
Instruments, flight  
Limits, operating  
Number, publication  
Page, warning  
Procedures, emergency  
Procedures, normal  
Statement, distribution  
Symbol, designator  
System, flight control  
System, hydraulic  
System, power train  
System, utility  
Test flight, maintenance  
Through-flight  
Weight and balance

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL  
CUSTODIANS:

Army-TM

PREPARING ACTIVITY

Army-AV  
Project No. TMSS-A332

REVIEW ACTIVITIES:

Army SC

MIL-PRF-63029D(AV)

TM 1-XXXX-XXX-10  
CHAPTER 4  
MISSION EQUIPMENT

4.1 PRIMARY SIDEHEAD.

\_\_\_\_\_

4.1.1 First Subordinate Paragraph. \_\_\_\_\_

\_\_\_\_\_

4.1.1.1 Second Subordinate Paragraph. \_\_\_\_\_

\_\_\_\_\_

- a. This is a first level procedural step. It does not have titles.
  - (1) This is a second level procedural step. It does not have a title either.

4.2 PRIMARY SIDEHEAD.

\_\_\_\_\_

4.2A ADDED PRIMARY SIDEHEAD.

\_\_\_\_\_

4.2.1 First Subordinate Paragraph. \_\_\_\_\_

\_\_\_\_\_

4.2.1.A Added First Subordinate Paragraph. \_\_\_\_\_

\_\_\_\_\_

4.2.1.B Added First Subordinate Paragraph. \_\_\_\_\_

\_\_\_\_\_

4.2.1.1 Second Subordinate Paragraph. \_\_\_\_\_

\_\_\_\_\_

- a. First level procedural step followed by an added first level procedural step.
  - a1. Added first level procedural step.
    - (1) Second level procedural step followed by an added second level procedural step.
    - (1A) Added second level procedural step.

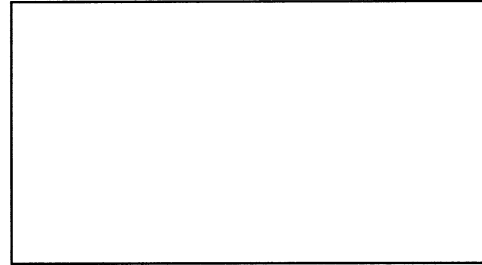


Figure 4-1. Control Panel

Figure 4-2. deleted

Figure deleted

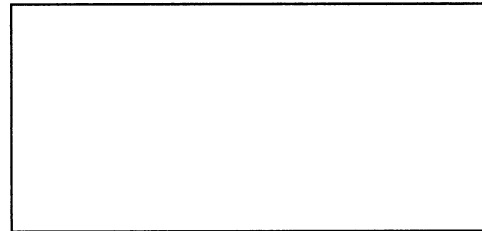


Figure 4-2.1 Control Switch


Figure added

4-1/(4-2blank) Change 1

FIGURE 1. Example of text format



MIL-PRF-63029D(AV)

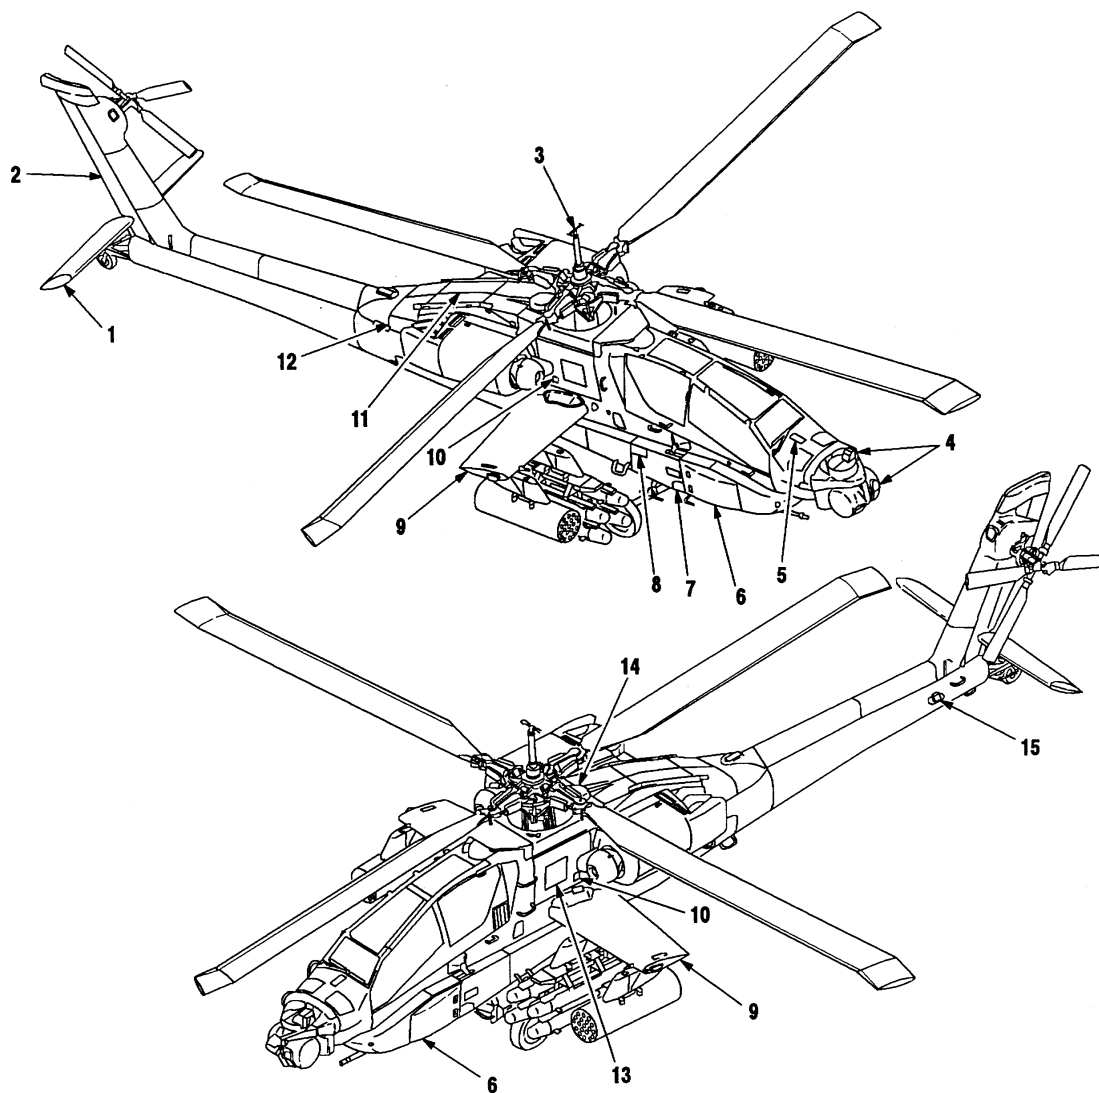

- |                                       |  |
|---------------------------------------|--|
| 1. STABILATOR                         | 9. INTERCOMM ACCESS DOOR                               |
| 2. VERTICAL STABILIZER                | 10. MAIN TRANSMISSION OIL LEVEL SIGHT GAGE ACCESS DOOR |
| 3. AIR DATA SENSOR                    | 11. AFT EQUIPMENT BAY (CATWALK AREA) ACCESS DOORS      |
| 4. TADS AND PNVs TURRETS              | 12. HYDRAULIC GROUND SERVICE PANEL ACCESS DOOR         |
| 5. CANOPY JETTISON HANDLE ACCESS DOOR | 13. HYDRAULIC OIL LEVEL SIGHT GAGE ACCESS DOOR         |
| 6. FORWARD AVIONICS BAY ACCESS DOOR   | 14. INFRARED COUNTERMEASURE DEVICE MOUNT               |
| 7. MOORING LUG ACCESS DOOR            | 15. CHAFF PAYLOAD MODULE MOUNT                         |
| 8. FIRE EXTINGUISHER ACCESS DOOR      |  |

FIGURE 2. Aircraft general arrangement diagram (sheet 1 of 2)

MIL-PRF-63029D(AV)

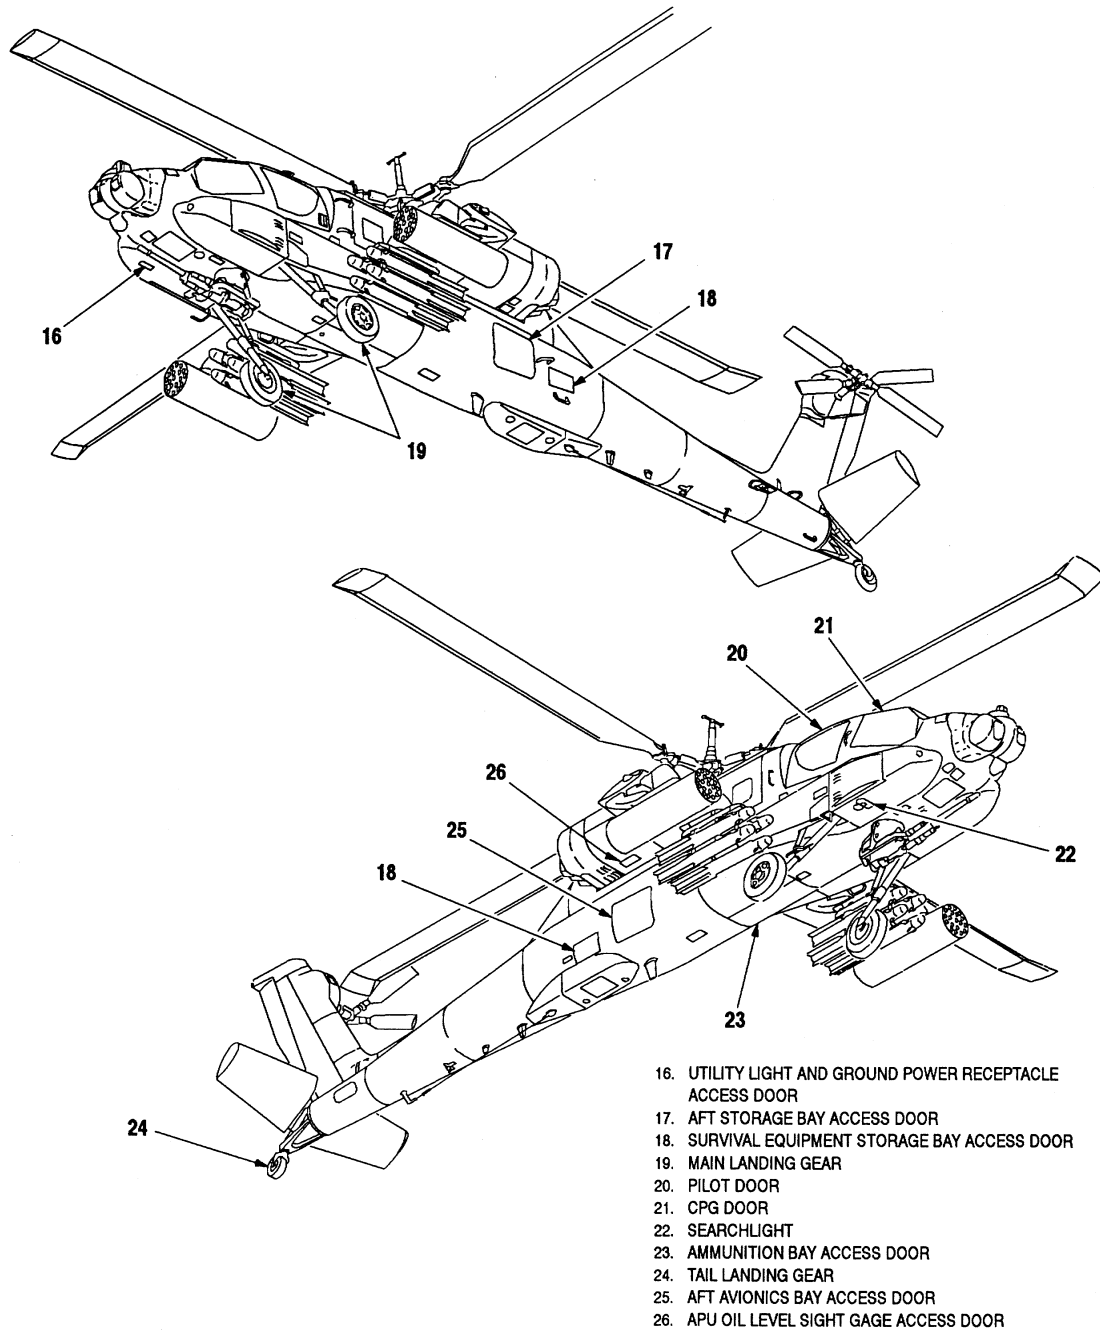


FIGURE 2. Aircraft general arrangement diagram (sheet 2 of 2)

## MIL-PRF-63029D(AV)

USE	STYLE AND SIZE <sup>1</sup>	LOCATION	REMARKS
1. Title	Universal Bold Condensed 12 <sup>2</sup>	Centered, just below <sup>3</sup> publication number <sup>4</sup>	Includes model designator symbol only if applicable
2. Sub-Title	Universal Bold Condensed 10	Centered, 6 points below <sup>3</sup> title	Used only if required to distinguish similar graphs
3. Condition heading	Universal Bold 8 <sup>2</sup>	Centered, 6 points below <sup>3</sup> title or subtitle	Separate conditions; one line desirable
4. NOTE:	Universal Bold 8	As required	Notes on graph page very undesirable - text preferred
5. Note information	Universal Medium 7	Following NOTE:	Use only if required to prevent misuse
6. EXAMPLE and number	Universal Bold Condensed 10	Centered over example text	Usually located near upper left of page
7. WANTED	Universal Bold 8	Indented 18 points; 12 points below EXAMPLE	
8. Wanted text	Universal Medium 7	Left margin justified; 6 points below WANTED	Parameter names only maximum of three
9. KNOWN and METHOD	Universal Bold 8	Indented 18 points; 6 points below preceding text	
10. Known text	Universal Medium 7	Left margin justified; 6 points below KNOWN	Format: Parameter = Value, Units
11. Method Text	Universal Medium 7	Left margin justified; 6 points below METHOD	One line per step do not repeat known values
12. Primary scale values	Universal Bold 8	One minor grid division outside grid border	Oriented to read from bottom of page
13. Primary scale titles	Universal Bold 8	One minor grid division outside scale value numbers	Oriented to read from right (vertical scales) or bottom (horizontal scales) of page
14. Secondary scale values	Universal Medium 7	Two minor grid divisions outside grid border	Additional secondary scales may be added
15. Secondary scale titles	Universal Medium 7	One minor grid division outside scale values	
16. Primary data line labels	Universal Bold X X = 1 minor grid division	At mid point, 1 minor grid width to left or above lines	Parallel to data lines ori- ented to read from bottom.
17. Primary data line values	Universal Bold X X = 1 minor grid division	Interrupting data lines near mid-point	Alternates values staggered; if negative use (-) and (+)
18. Limit line labels	Universal Bold X X = 1 minor grid division	Parallel to limit line, near midpoint, in prohibited area	
19. Maximum Performance or Recommended operation	Universal Bold X X = 1 minor grid division	Location and orientation dependent on layout	
20. Time limited or restricted operation	Universal Bold X X = 1 minor grid division	Parallel to limit line, at midpoint in restricted area	
21. DATA BASIS:	Universal Bold 8	Left justified 6 points <sup>5</sup> above figure number	
22. Data basis text	Universal Medium 7 Initial <sup>5</sup> letter(s) only upper case	Following DATA BASIS: <sup>5</sup>	Includes data type, and source data document(s)
23. Figure number and title	Italic Medium 8 Initial <sup>5</sup> letter(s) only upper case	Centered, 6 points above <sup>3</sup> page number <sup>4</sup>	Includes figure number, title and if applicable sub-title and sheet ___ of ___

NOTES:

- <sup>1</sup>Size requirements apply to the final printed product. A 10% tolerance is allowed, however deviation on any page should be in the same direction.
- <sup>2</sup>For independent sub-graphs on the same page, reduce heading type size by two points.
- <sup>3</sup>Spacing is designed for heading information, Data Basis, and Figure information to be marginal copy to provide the full 7 by 9 inch area for the graph. If the full layout area is not required, or used, increase spacing to provide a balanced appearance.
- <sup>4</sup>Publication and page number specifications are the same as for all other (non-graph) pages.
- <sup>5</sup>Data basis text, figure number and figure title have first letter only upper case capitalization. All other types all upper case capitalization.

FIGURE 3. Graphical type standards

## MIL-PRF-63029D(AV)

<u>USE</u>	<u>COLOR</u>	<u>LENGTH</u>	<u>WEIGHT</u>	<u>REMARKS</u>
1. Primary Data	Black	To limits or operational range	1 0 00	Most even value Alternate lines Use if increments change
2. Grid Lines	Grey	Correspond to Primary scales	0 00	Major increments Minor increments
3. Transfer Grid	Grey	1/3 to 1 major grid	0,00	Direction of transfer only
4. Grid Border	Black	Primary scale length	1	Over outside grid
5. Primary Scale Tick Marks	Black	1/2 to 1 minor grid division	1	Inside grid border major grid only
6. Secondary Scale Tick Marks	Black	1 minor grid 1/2 minor grid	0 (Major) 00 (Minor)	Outside grid border
7. Limit Lines	Black	As required	1	
8. Maximum Performance or Recommended Operation	Black	As required	1 0	Major lines Use if multiple lines
9. Restricted or Time Limited Operation	Grey	As required	00 (Border)	Shaded area shaded with black border line
10. Extrapolated Data	Black Dashed	As required	1,0,00	Use for data beyond source data conditions
11. Beyond Limit Data	Black Dotted	As required	1,0,00	Use for data beyond operating limits to aid interpolation

## Line Definitions

<u>Weight</u>	<u>Number</u> <sup>2</sup>	<u>Width:</u>	<u>inches</u>	<u>millimeters</u>
Very Fine	000		0.004	0.1
Fine	00		0.008	0.2
Medium	0		0.012	0.3
Heavy	1		0.016	0.4
Very heavy	2		0.020	0.5
Dashed: 5 to 10 x width line lengths, 3 to 5 x width gap space				
Dotted: 1 to 2 x width line lengths, 2 to 3 x width gap space				

<sup>1</sup>  
**NOTES:** Line weight requirements apply to the final printed product. A 20% deviation is allowed, however, deviation on any page should be in the same direction.

<sup>2</sup>  
Corresponds to rapidograph pen numbering system.

FIGURE 4. Graphical line standards

MIL-PRF-63029D(AV)

<b>TM 1-XXXX-XXX-10</b>	
<b>TECHNICAL MANUAL OPERATOR'S MANUAL FOR ARMY XX-X HELICOPTER</b>	
<p><b>WARNING</b> — This document contains export-controlled technical data whose export is restricted by the Arms Export Control Act (Title 22, U.S.C., Sec 2751 et seq) or Executive Order 12470. Violation of these export laws are subject to severe criminal penalties.</p>	
<p>"Approved for public release; distribution is unlimited."</p>	
<p><b>DESTRUCTION NOTICE</b> — For unclassified, limited documents, destroy by any method that will prevent disclosure of contents or reconstruction of the document.</p>	
<p><b>HEADQUARTERS DEPARTMENT OF THE ARMY</b></p> <p>30 AUGUST 19XX</p>	
	<p><b>WARNING DATA</b></p>
	<p><b>TABLE OF CONTENTS</b></p>
	<p><b>INTRODUCTION</b></p>
	<p><b>DESCRIPTION AND OPERATION</b></p>
	<p><b>AVIONICS</b></p>
	<p><b>MISSION EQUIPMENT</b></p>
	<p><b>OPERATING LIMITS AND RESTRICTIONS</b></p>
	<p><b>WEIGHT/BALANCE AND LOADING</b></p>
	<p><b>PERFORMANCE DATA</b></p>
	<p><b>NORMAL PROCEDURES</b></p>
	<p><b>EMERGENCY PROCEDURES</b></p>
	<p><b>REFERENCES</b></p>
	<p><b>ABBREVIATIONS AND TERMS</b></p>
	<p><b>ALPHABETICAL INDEX</b></p>

FIGURE 5. Example of front cover

## MIL-PRF-63029D(AV)

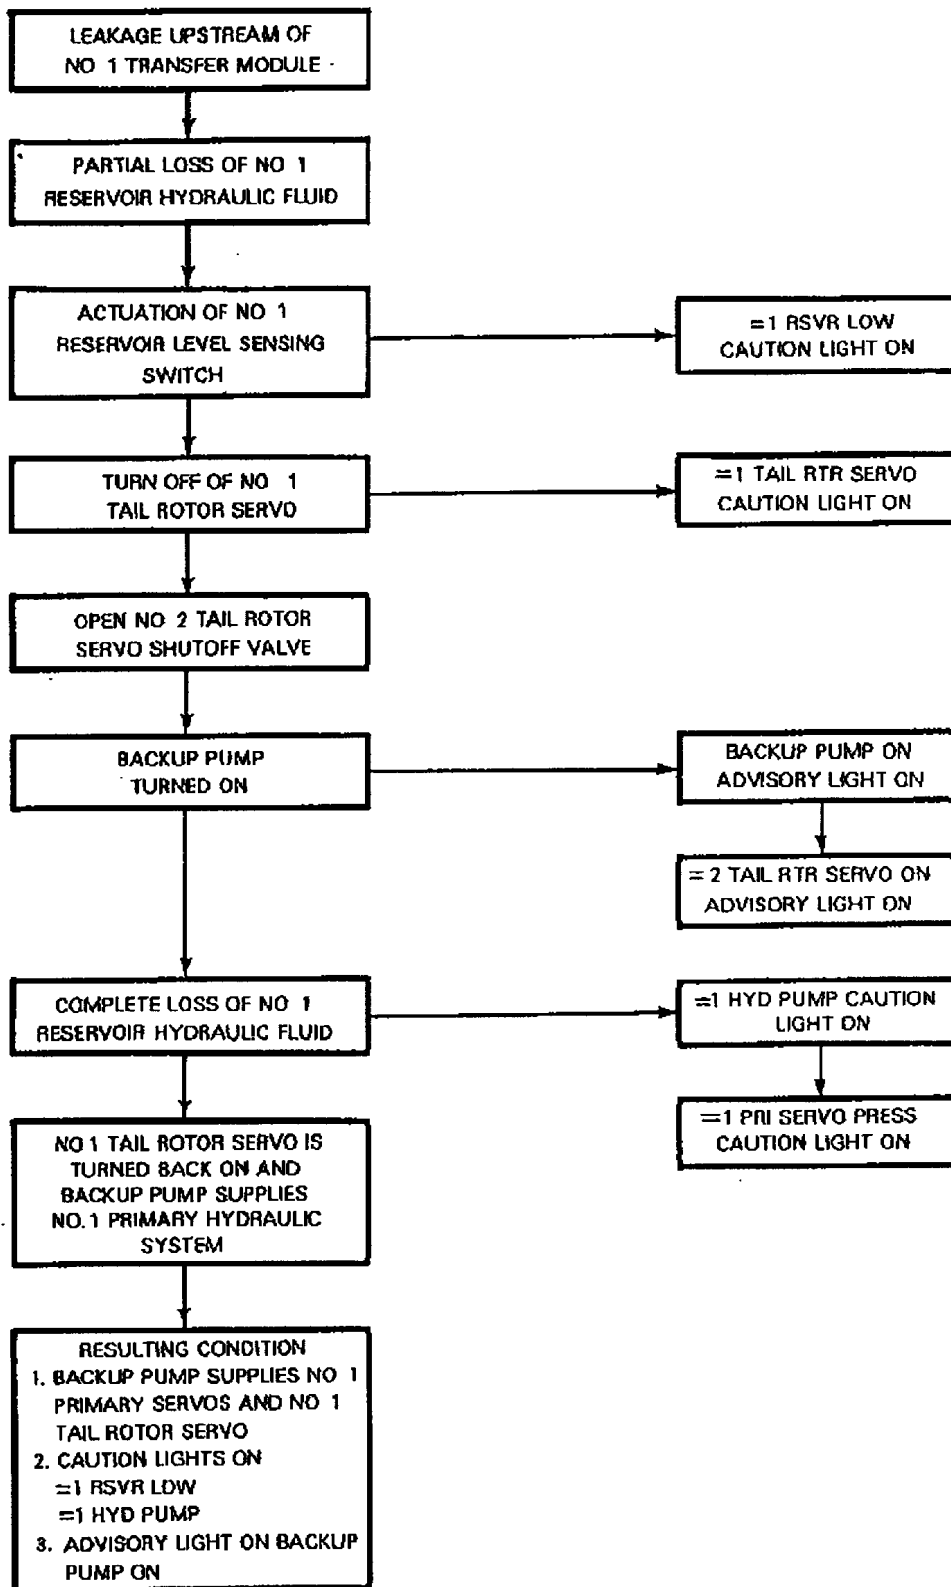


FIGURE 6. Example of flight crew oriented malfunction isolation chart

MIL-PRF-63029D(AV)

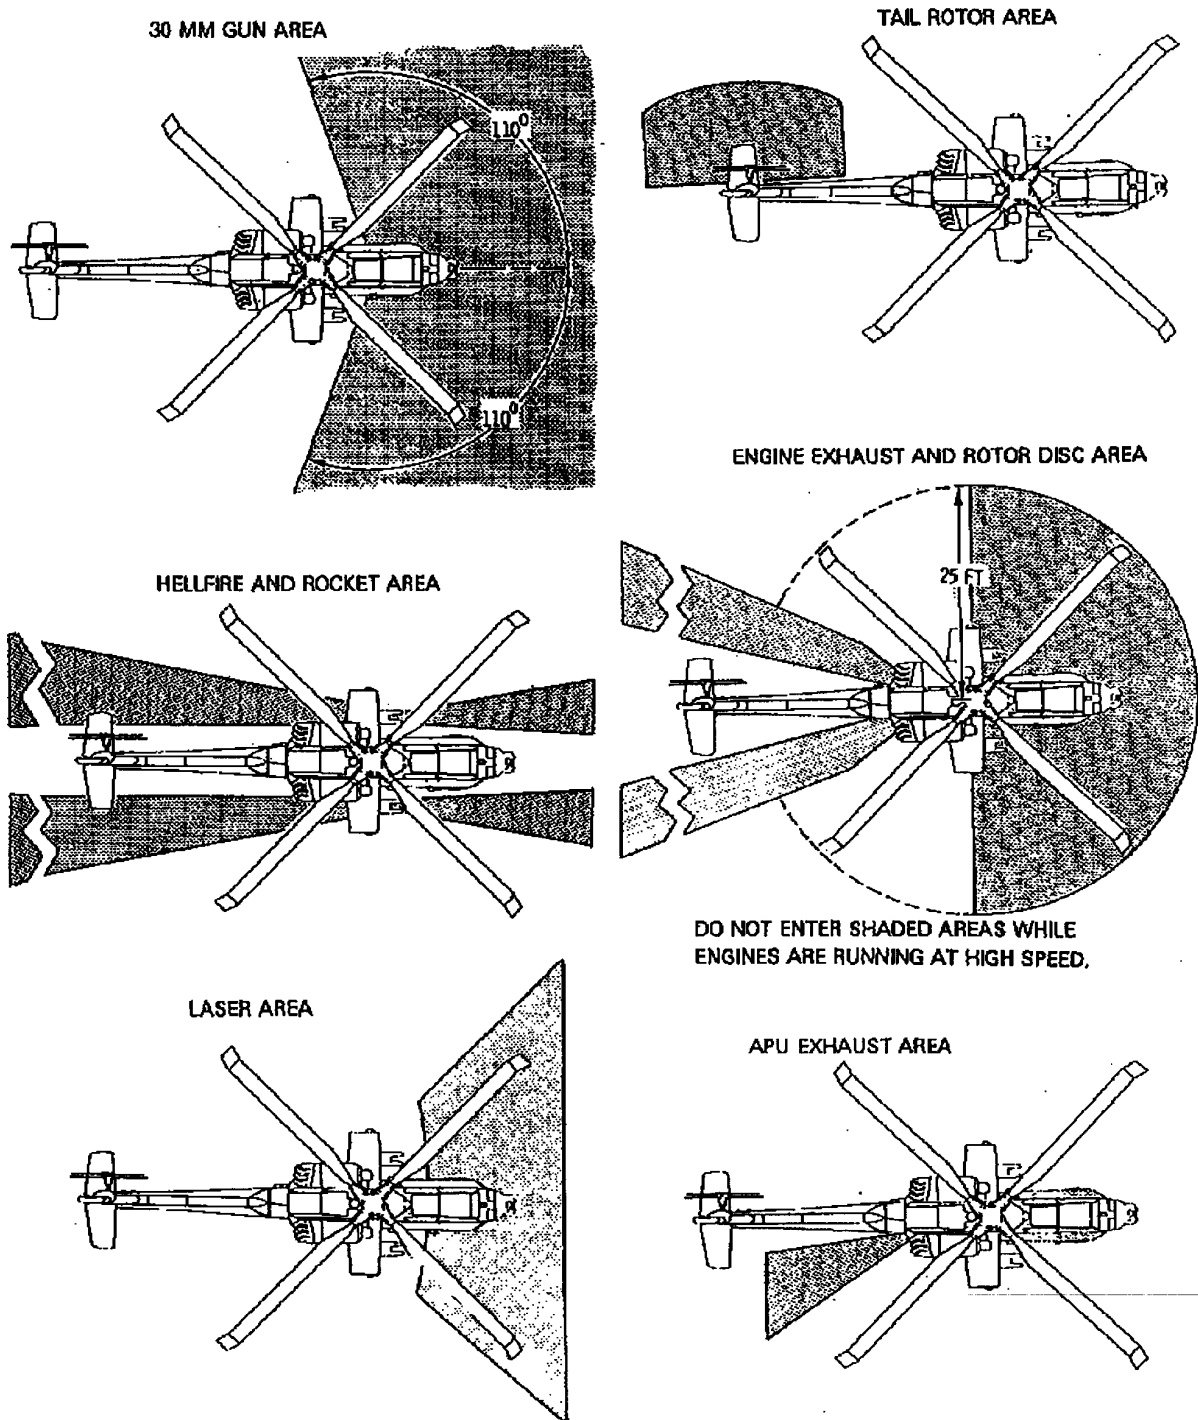


FIGURE 7. Example of danger area diagram



MIL-PRF-63029D(AV)

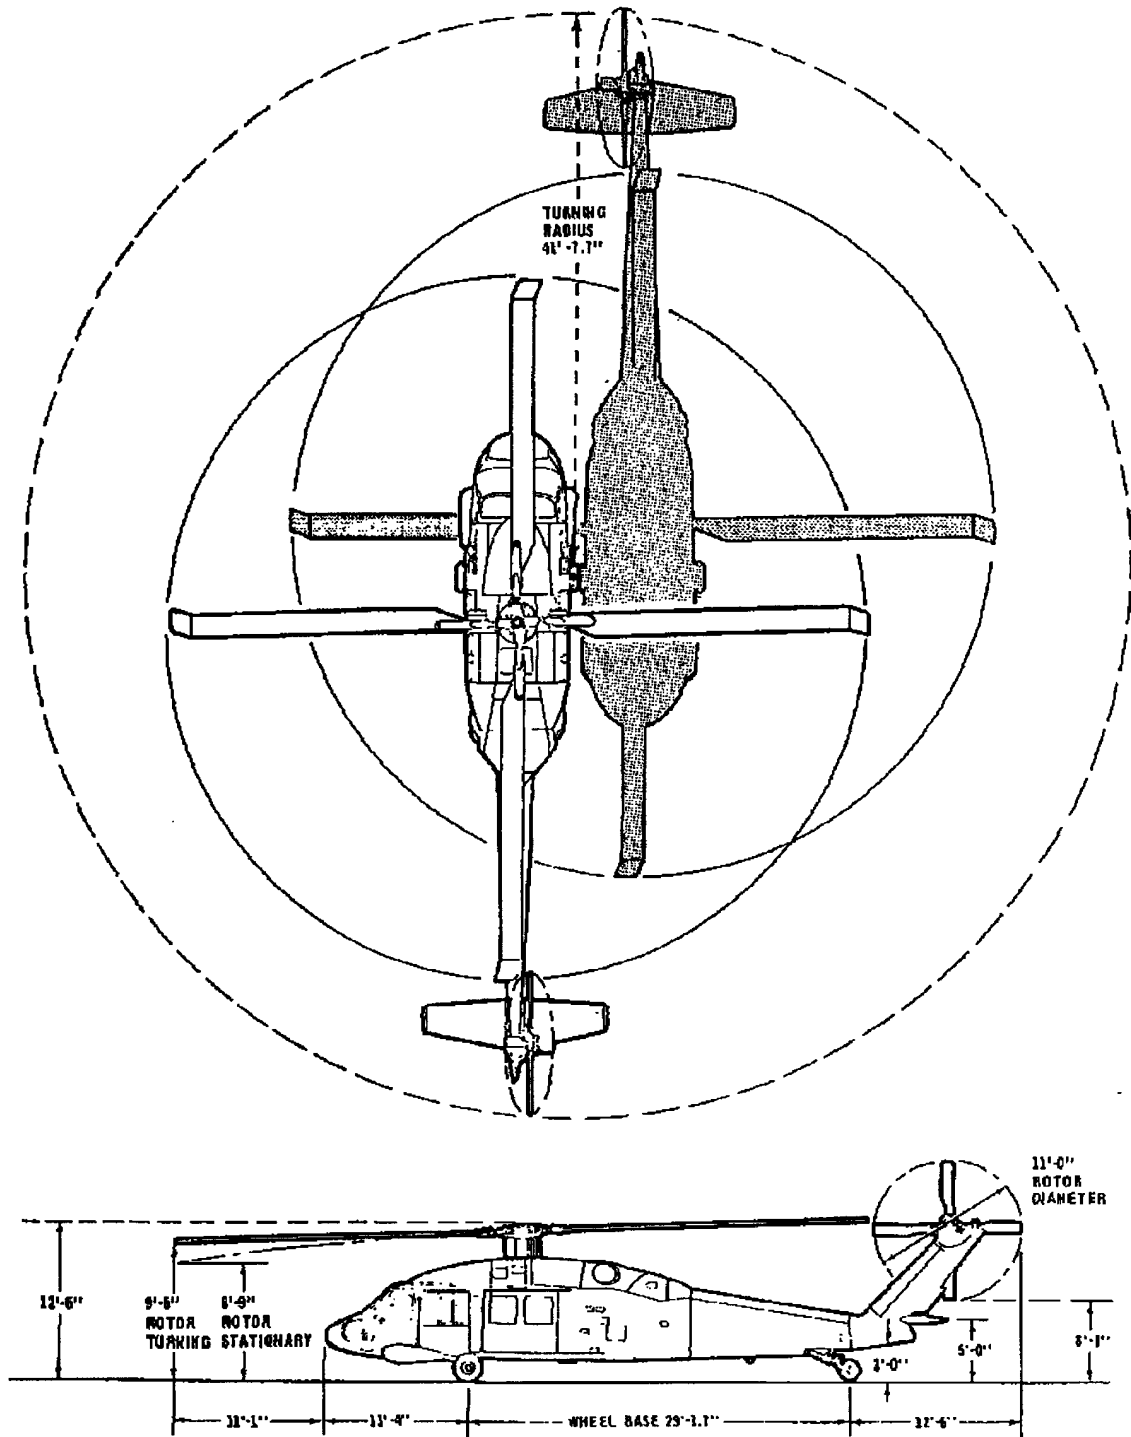


FIGURE 8. Example of turning radius and dimensions diagram

## MIL-PRF-63029D(AV)

TM 1-16XX-XXX-10


Table 2-1. Main Differences

ITEM	RU-21E	RU-21H
Maximum takeoff gross weight	9,650 pounds Special equipment operators (2)	10,200 pounds
Maximum landing weight	9,168 pounds	9,700 pounds
Wing span	45 ft 10.5 in	50 ft 3 in
Minimum ground turning radius	29 ft 8.75 in	31 ft 11 in
Mission antennas	Fixed type  None	Fixed type plus two retractable belly mounted mission antennas  Mission antennas deice boots
Fuel system	Four quantity indicator gages installed	Two quantity indicator gages installed
Emergency equipment	Four first aid kits installed	Two first aid kits installed
Oxygen system	Two 64 cubic foot cylinders servicing pilot, copilot and two operator stations	Four 64 cubic foot cylinders servicing pilot and copilot, and provisions for two personnel in cabin area
Communications	Audio control panel C-1611/AIC (four installed)  FM liaison set AN/ARC-131 (two installed)  Voice security TSEC/KY-28 (two installed, one for pilot and copilot and one for mission operators)  HF command set	Audio control panels C-1611/AIC (two installed)  FM liaison set AN/ARC-131 (one installed)  Voice security TSEC/KY-28 (two installed, one used with FM and one with UHF)  Complete provisions only
Crew	Minimum crew normal mission; two pilots and two operators	Minimum crew normal mission; two pilots
Miscellaneous equipment	Plotting board behind pilot's seat  Rack for five M-16 rifles  Shock mounted racks both sides of cabin	None  None  Shock mounted racks on right side of cabin

FIGURE 9. Example of main differences table

## MIL-PRF-63029D(AV)

TM 1-15XX-XXX-10

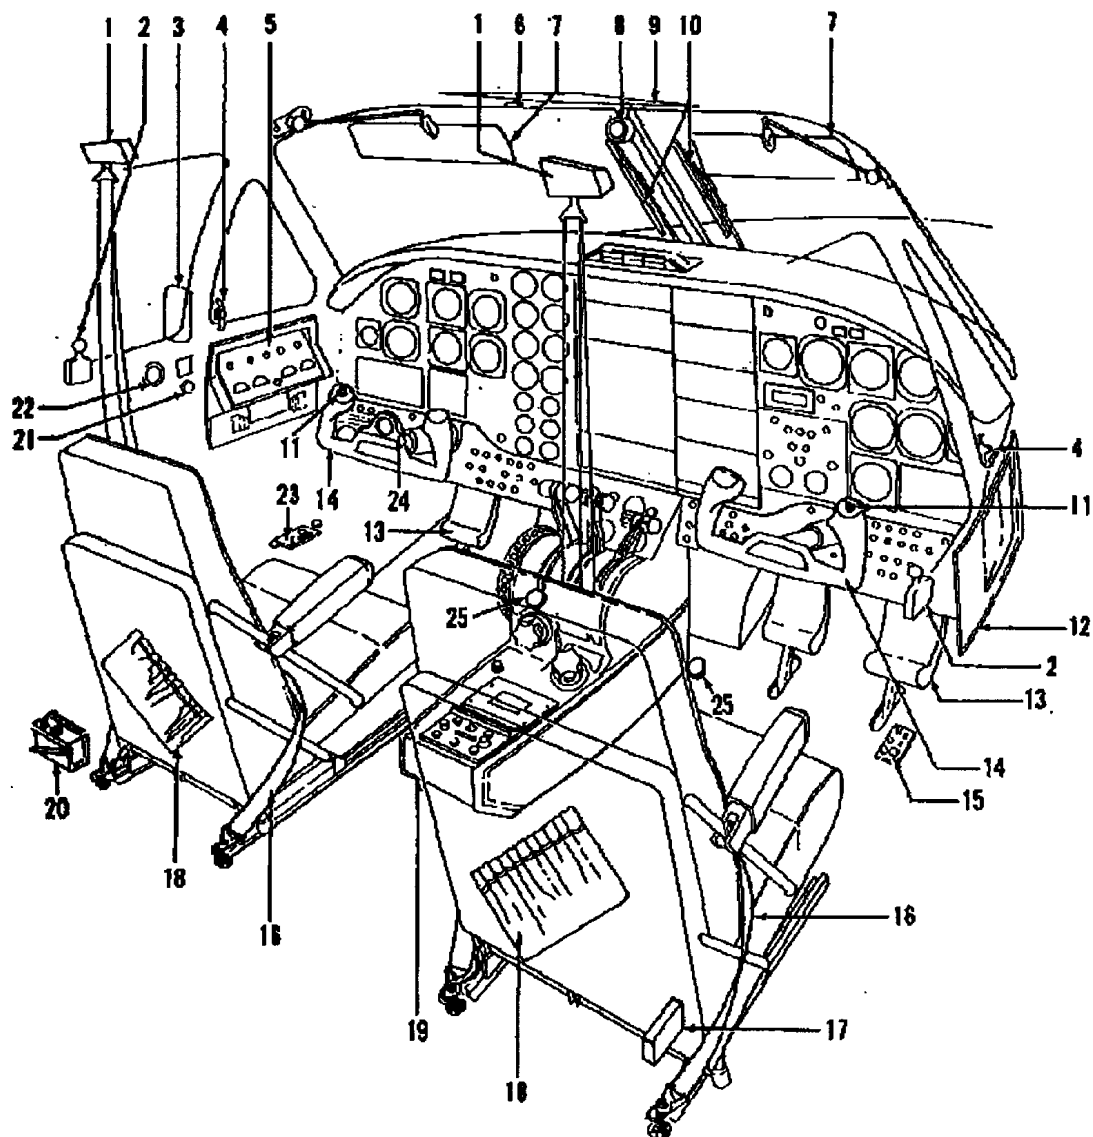

- |                                     |  |
|-------------------------------------|--|
| 1. Shoulder harness inertia reel    | 14. Control wheel                                      |
| 2. Shoulder harness lock lever      | 15. Oxygen regulator control panel                     |
| 3. External rear view mirror        | 16. Seat belt  |
| 4. Storm window lock                | 17. Vertical gyro circuit breaker box                  |
| 5. Fuel management panel            | 18. Utility pocket                                     |
| 6. Free air temperature gage        | 19. Control pedestal                                   |
| 7. Sun visor                        | 20. Audio control panel                                |
| 8. Magnetic compass                 | 21. External mirror adjustment knob                    |
| 9. Overhead control panel           | 22. Oxygen system gage                                 |
| 10. Windshield wipers               | 23. Oxygen system controls and regulator control panel |
| 11. Microphone switch               | 24. Eight-day clock                                    |
| 12. Copilot's circuit breaker panel | 25. Foot microphone switch                             |
| 13. Rudder pedals                   |  |

FIGURE 10. Compartments

## MIL-PRF-63029D(AV)

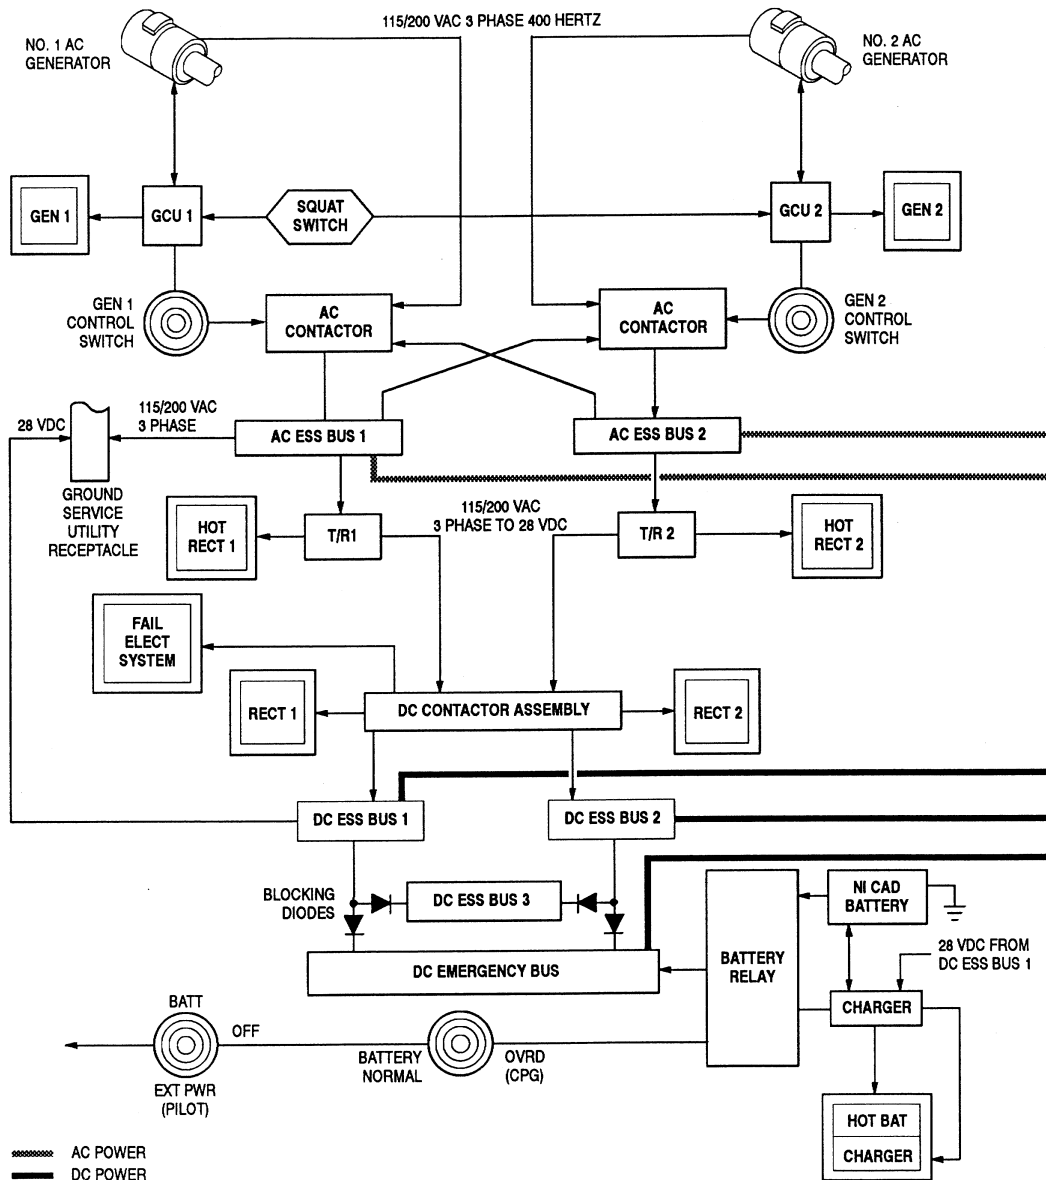


FIGURE 11. Example of electrical power supply and distribution system (sheet 1 of 2)

## MIL-PRF-63029D(AV)


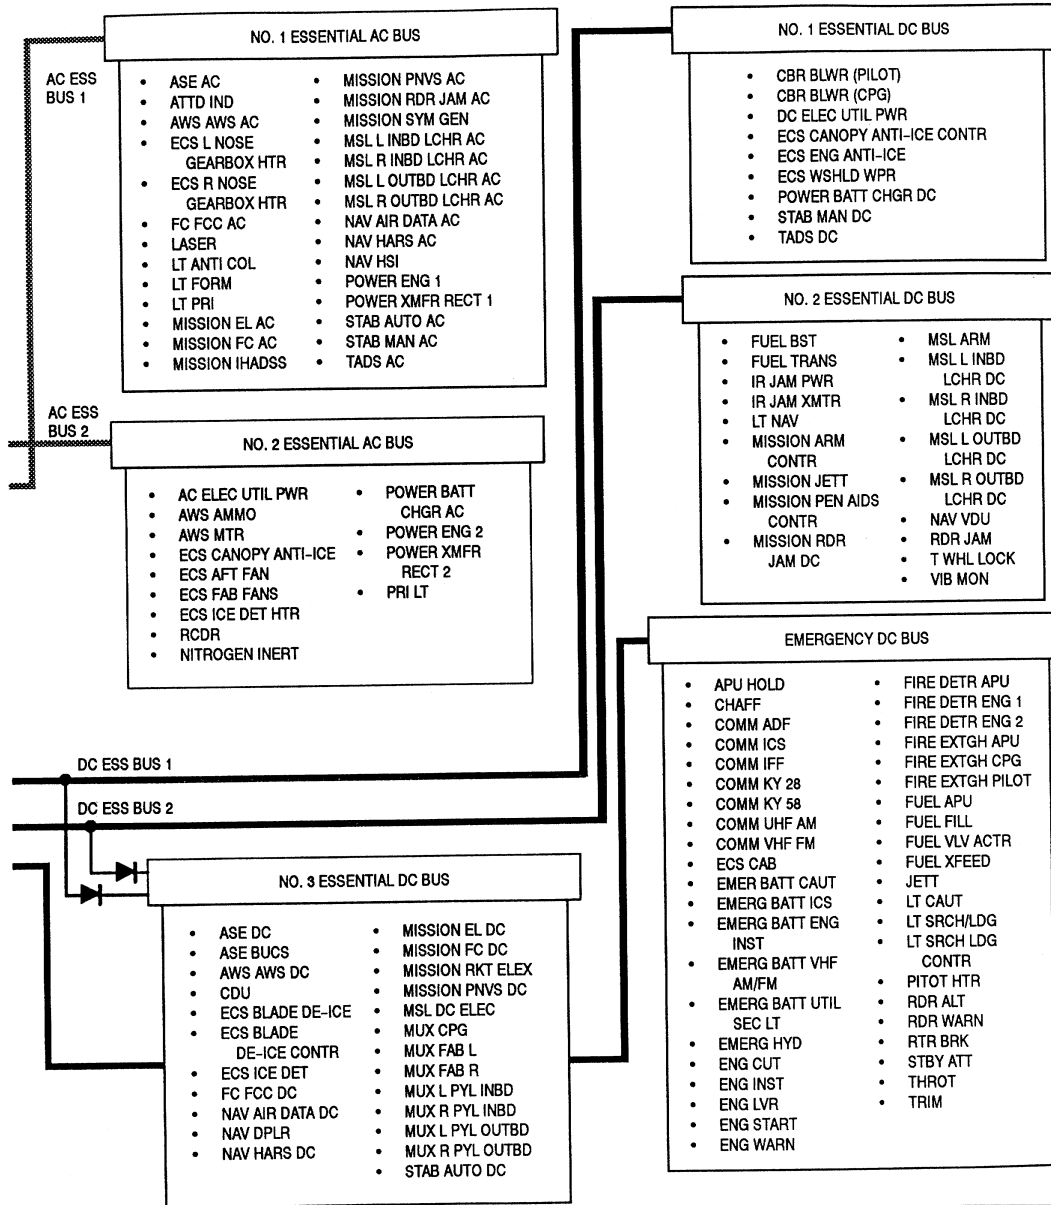


FIGURE 11. Example of electrical power supply and distribution system (sheet 2 of 2)


## MIL-PRF-63029D(AV)

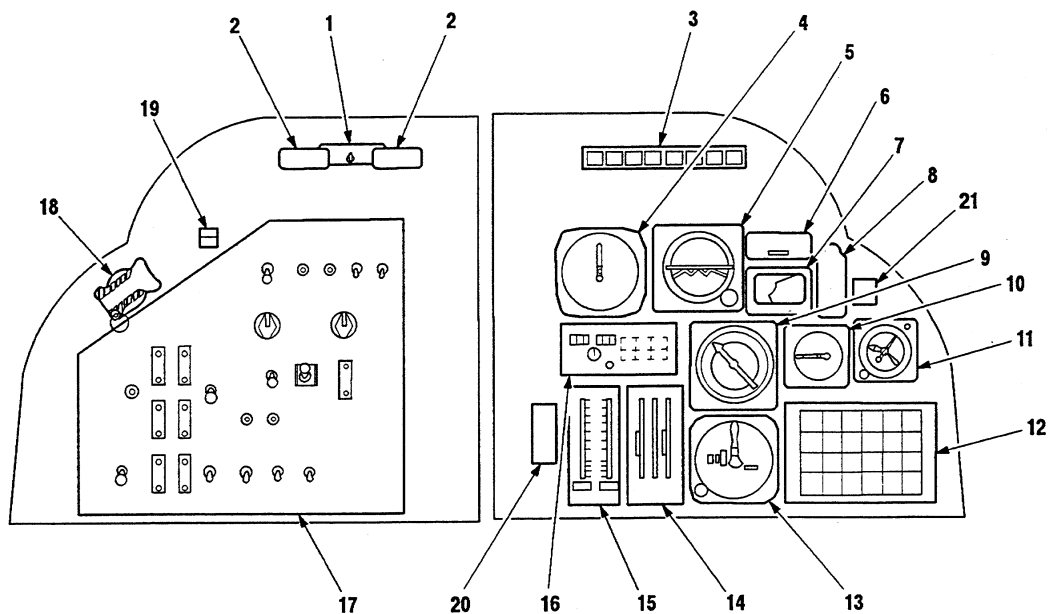

1. FIRE EXTINGUISHER BOTTLE SELECT SWITCH
2. ENGINE FIRE PULL HANDLES
3. MASTER CAUTION, WARNING PANEL
4. AIRSPEED INDICATOR
5. REMOTE ATTITUDE INDICATOR
6. RADIO CALL PLACARD
7. STABILATOR POSITION INDICATOR
8. STABILATOR/AIRSPEED PLACARD
9. RADIO MAGNETIC INDICATOR (RMI)
10. VERTICAL SPEED INDICATOR (VSI)
11. CLOCK
12. CAUTION /WARNING PANEL
13. BAROMETRIC ALTIMETER
14. ENGINE (N<sub>p</sub>), ROTOR (N<sub>r</sub>) INDICATOR
15. ENGINE TORQUE INDICATOR
16. SELECTABLE DIGITAL DISPLAY PANEL
17. FIRE CONTROL PANEL
18. CANOPY JETTISON HANDLE
19. ARM SAFE INDICATOR
20. ENGINE INSTRUMENT DIM / TEST PANEL
21. FUEL TRANSFER INDICATOR (UNMODIFIED CAUTION/WARNING PANEL)

FIGURE 12. Instrument panel

## MIL-PRF-63029D(AV)


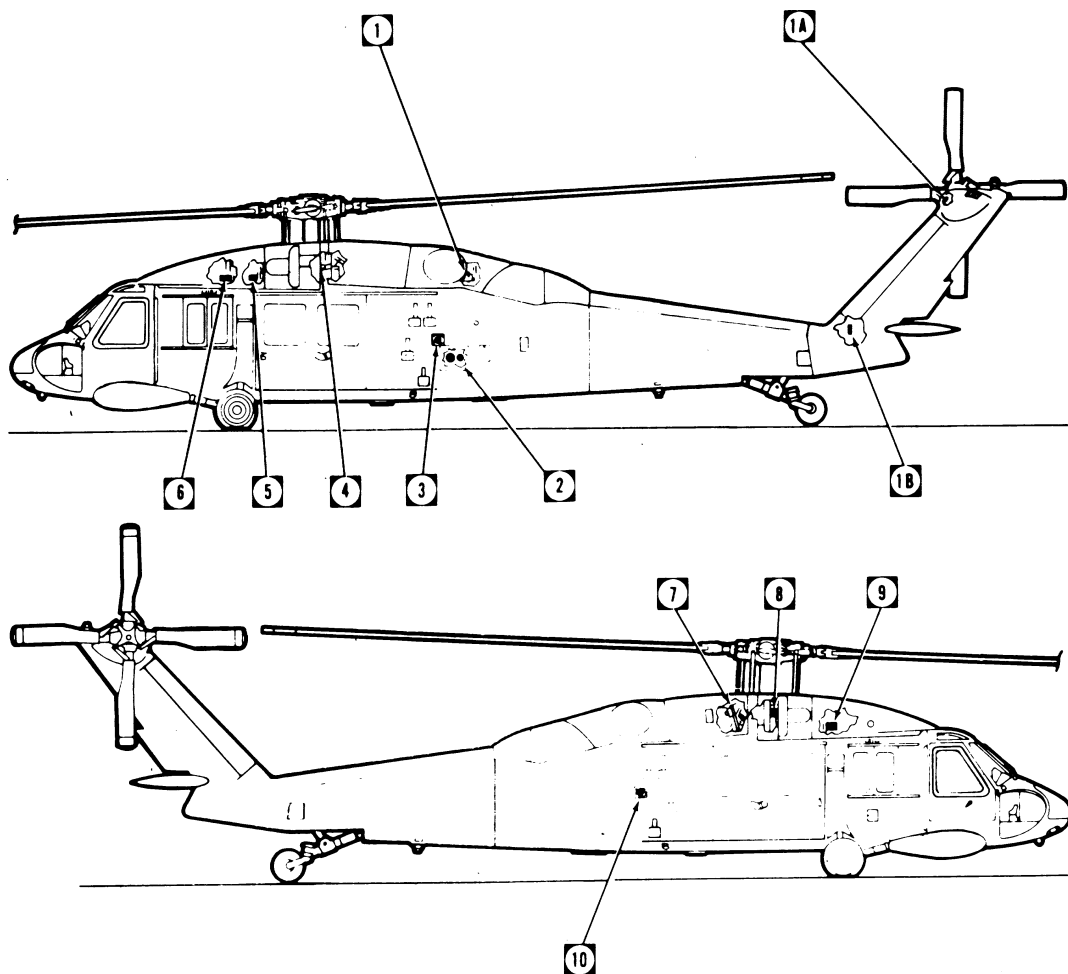


1. AUXILIARY POWER UNIT
- 1A. TAIL ROTOR GEAR BOX OIL LEVEL SIGHT GAGE
- 1B. INTERMEDIATE GEAR BOX OIL LEVEL SIGHT GAGE
2. CLOSED CIRCUIT AND PRESSURE REFUELING PORTS
3. NO. 1 (LEFT) FUEL TANK GRAVITY REFUEL PORT
4. NO.1 ENGINE OIL LEVEL SIGHT GAGE
5. NO. 1 HYDRAULIC PUMP MODULE
6. BACKUP HYDRAULIC PUMP MODULE
7. MAIN TRANSMISSION OIL FILLER PORT AND DIP STICK
8. NO. 2 ENGINE OIL FILLER PORT AND SIGHT GAGE
9. NO. 2 HYDRAULIC PUMP MODULE AND PUMP MODULE FLUID FILLER PUMP
10. NO. 2 (RIGHT) FUEL TANK GRAVITY REFUEL PORT

FIGURE 13. Servicing diagram (sheet 1 of 2)



MIL-PRF-63029D(AV)

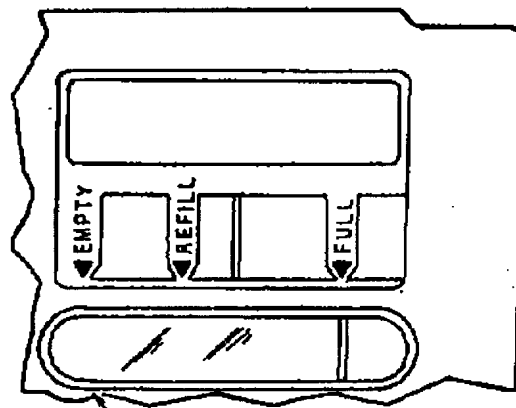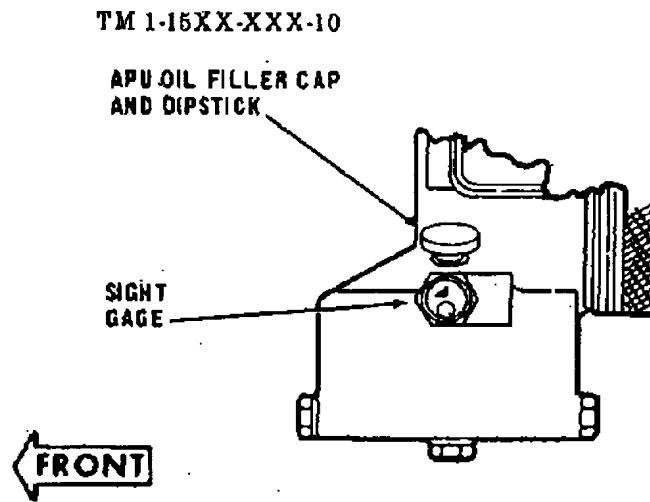

NO. 1, NO. 2 AND BACKUP  
HYDRAULIC PUMP MODULES  
FWD LEVEL INDICATOR

FIGURE 13. Servicing diagram (sheet 2 of 2)

MIL-PRF-63029D(AV)

Servicing Table of Approved Fuels, Oils, and Fluids

System	Specification
Fuel.....	MIL-T-5624 (JP-4) <sup>1</sup>
Crashworthy System—	
Total: 208.5 U.S. gallons (789.2 liters).	
Usable: 206.5 U.S. gallons (781.6 liters)...	
Internal Auxiliary Tanks—	
Usable: 300 U.S. gallons (1135.5 liters)....	
Oil:	
Engine.....	MIL-L-23699 <sup>2,4</sup> *MIL-L-7808 <sup>2,4</sup>
Transmission.....	MIL-L-23699 <sup>2,4</sup> *MIL-L-7808 <sup>2,4</sup>
42° Gearbox.....	MIL-L-23699 <sup>2,4</sup> *MIL-L-7808 <sup>2,4</sup>
90° Gearbox.....	MIL-L-23699 <sup>2,4</sup> *MIL-L-7808 <sup>2,4</sup>
Hydraulic System.....	MIL-H-5606 <sup>5,7</sup> MIL-H-83282 <sup>5,7</sup>
Main Rotor Grip.....	MIL-L-46152 <sup>8,9</sup> MIL-L-23699 <sup>2,4,8</sup> *MIL-L-7808 <sup>2,4</sup> MIL-L-2104 <sup>8,9</sup> MIL-L-46167 <sup>8,9</sup>
Pillow Block Oil.....	MIL-L-23699 <sup>2,4</sup> *MIL-L-7808 <sup>2,4</sup> MIL-L-2104 <sup>8,9</sup> MIL-L-46152 <sup>8,9</sup> MIL-L-46167 <sup>8,9</sup>

FOOTNOTES

<sup>1</sup> Army Standard fuel is MIL-T-5624 (JP-4) NATO code is F-40 Alternate fuels are MIL-T-5624 (JP-5) (NATO F-44) and MIL-T-83133 (JP-8) (NATO F-34). Emergency fuel is MIL-G-5572 (any AV gas) (NATO F-12, F-18, F-22). Refer to TM 55-9150-200-24.

The helicopter shall not be flown when emergency fuel has been used for a total cumulative time of 50 hours. (25 hours when TCP is used in fuel.)

CAUTION

\* Lubrication oil made to MIL-L-7808 by Shell Oil Company under their part number 307, qualification number 7D-1 shall not be used in the engine or aircraft systems. It contains additives which are harmful to seals in the systems.

<sup>2</sup> \* MIL-L-7808 NATO code is 0-148. For use in ambient temperatures below minus 32°C/25°F. May be used when MIL-L-23699 oil is not available. Not for use in main rotor hub P/N 204-012-101-31.

CAUTION

Under no circumstances shall MIL-L-23699 oil be used in ambient temperatures below minus 32°C/25°F.

<sup>3</sup> MIL-L-23699 NATO code is 0-156. For use in ambient temperatures above minus 32°C/25°F. Not for use in main rotor hub P/N 204-012-101-31.

<sup>4</sup> Do not mix MIL-L-2104, MIL-L-46152, MIL-L-46167, MIL-L-23699, and for MIL-L-7808 oils, except during an emergency. If the oils are mixed the system shall be flushed within six hours and filled with the proper oil. An entry on DA Form 2408-13 is required when the oils are mixed.

<sup>5</sup> MIL-H-5606 NATO code is H-515. For use in ambient temperatures below minus 35°C/30°F. (Refer to TB 55-1500-344-25.)

<sup>6</sup> For use in ambient temperatures above minus 35°C/30°F.

CAUTION

Prolonged contact with hydraulic fluid or its mist can irritate eyes and skin. After any prolonged contact with skin, immediately wash contacted area with soap and water. If liquid contacts eyes, flush immediately with clear water. If liquid is swallowed, do not induce vomiting; get immediate medical attention. When fluid is decomposed by heating, toxic gases are released.

<sup>7</sup> It is not advisable to mix MIL-H-5606 and MIL-83282 fluids, except during an emergency. An entry on DA Form 2408-13 is required when the fluids are mixed. When changing from MIL-H-5606 to MIL-H-83282, not more than two percent of MIL-H-5606 may be present in the system.

<sup>8</sup> Refer to stencil on grip assembly to determine proper lubrication requirements.

<sup>9</sup> MIL-L-2104, MIL-L-46152, and MIL-L-46167, must be used in hub P/N 204-012-101-31 as follows:

Average Temp Range	Specification
+ 5°C and above.....	MIL-L-2104, Grade 40, NATO Code 0-230
- 18°C to + 5°C.....	MIL-L-2104, Grade 30, NATO Code 0-230 or MIL-L-46152, Grade 30
- 29°C to - 18°C.....	MIL-L-2104, Grade 10, NATO Code 0-230 or MIL-L-46152, Grade 10W30
- 54°C to - 20°C.....	MIL-L-46167, DEXRON II Automatic transmission fluid.

Approved domestic commercial fuels (spec. ASTM-D-1655-70): Manufacturers designation—

Jet B—JP4 Type	Jet A—JP5 Type	Jet A-1—JP8 Type
American JP-4	American Type A	
Aerojet B	Aerojet A Richfield A	Aerojet A-1 Richfield A-1
B.P.A.T.G. Caltex Jet B		B.P.A.T.K. Caltex Jet A-1
Conoco JP-4	CITGO A	
Gulf Jet B	Conoco Jet-50	Conoco Jet-60
EXXON Turbo Fuel B	Gulf Jet A	Gulf Jet A-1
Mobil Jet B	EXXON A	EXXON A-1
Philjet JP-4		
Aeroshell JP-4	Mobil Jet A	Mobil Jet A-1
	Philjet A-50	
	Aeroshell 640	Aeroshell 650
	Superjet A-1	Superjet A-1
	Jet A Kerosine	Jet A-1 Kerosine
Chevron B	Chevron A-50	Chevron A-1
Texaco Avjet B	Avjet A	Avjet A-1
Union JP-4	76 Turbine Fuel	

Approved foreign commercial fuels:

Country	F-40	F-44
Belgium	BA-PF-2B	
Canada	3GP-22F	3-6P-24e
Denmark	JP-4 MIL-T-5624	
France	Air 3407A	
Germany (West)	VTL-9130-006	UTL 9130-007/UTL 9130-010
Greece	JP-4 MIL-T-5624	
Italy	AA-M-C-1421	AMC-143
Netherlands	JP-4 MIL-T-5624	D. Eng Rd 2493
Norway	JP-4 MIL-T-5624	
Portugal	JP-4 MIL-T-5624	
Turkey	JP-4 MIL-T-5624	
United Kingdom (Britain)	D. Eng Rd 2454	E. Eng Rd 2498

NOTE: Anti-icing and Biocidal Additive for Commercial Turbine Engine Fuel—The fuel system icing inhibitor shall conform to MIL-I-27686. The additive provides anti-icing protection and also functions as a biocide to kill microbial growths in helicopter fuel systems. Icing inhibitor conforming to MIL-I-27686 shall be added to commercial fuel, not containing an icing inhibitor, during refueling operations, regardless of ambient temperatures. Refueling operations shall be accomplished in accordance with accepted commercial procedures. Commercial product "PRIST" conforms to MIL-I-27686.

Approved domestic commercial oils for Mil-L-7808: Manufacturers designation—

PQ Turbine Oil 8365  
ESSO/ENCO Turbo Oil 2389  
RM-184A/RM-201A

FIGURE 14. Example of table of approved fuels, oils, and fluids (sheet 1 of 2)

**MIL-PRF-63029D(AV)****CAUTION**

Do not use Shell Oil Co., part No. 307, qualification No. 7D-1 oil (MIL-L-7808). It can be harmful to seals made of silicone.

---

**Approved domestic commercial oils for MIL-L-23699: Manufacturers designation—**

PQ Turbine Lubricant 5247/6423/6700/7731/8878/9595  
 Brayco 899/899-G/899-S  
 Castrol 205  
 Jet Engine Oil 5  
 STO-21919/STO-21919A/STD-6530  
 HATCOL 3211/3611  
 Turbo Oil 2380 (WS-6000)/2395 (WS-6459)/2392/2393  
 Mobil Jet II RM-139A/Mobil Jet II RM-147A/Avrex S Turbo 260/Avrex S Turbo 265  
 Royco 899 (C-915)/899SC/Stauffer Jet II  
 AeroShell Turbine Oil 500  
 AeroShell Turbine Oil 550  
 Chevron Jet Engine Oil 5  
 Stauffer 6924/Jet II  
 SATO 7377/7730, TL-8090

---

**Approved domestic commercial fluids for MIL-H-5606: Manufacturers designation—**

"PO" 4226  
 Brayco 757B  
 Brayco 756C  
 Brayco 7561D  
 Hyspin A  
 Univis J41  
 Aero HFB  
 Petrofluid 5606B  
 Petrofluid 4607  
 Royco 756C/D  
 Royco 782  
 XSL 7828  
 PED 3565  
 PED 3337  
 TL-5874  
 Aero Hydroil 500  
 YT-283  
 FP-221

**Approved domestic commercial fluids for MIL-H-83282:**

Brayco Micronic 882  
 Hanover R-2  
 HF 832  
 XRM 230A  
 XRM 231A


---

FIGURE 14. Example of table of approved fuels, oils, and fluids (sheet 2 of 2)


MIL-PRF-63029D(AV)

COLOR MARKING CODES


- W - White
- R - Red
- G - Green
- NVG—Aircraft with Instruments Modified for Night Vision Goggles




**ENGINE OIL PRESSURE**  
 R ■ 25 PSI Minimum—Engine Idle  
 G ■ 80 to 100 PSI Continuous  
 R ■ 100 PSI Maximum




**ENGINE OIL TEMPERATURE**  
 R ■ 93°C Maximum Below 30°C FAT  
 93°C to 100°C Below 30°C FAT-10 Minute Limit  
 100°C Maximum At 30°C FAT and Above




**TRANSMISSION OIL TEMPERATURE**  
 R ■ 110°C Maximum



**TRANSMISSION OIL PRESSURE**  
 R ■ 30 PSI Minimum  
 G ■ 40 to 60 PSI Continuous  
 R ■ 70 PSI Maximum




**AIRSPEED NOSE MOUNTED PITOT TUBE**  
 R ■ 112 Knots Maximum  
 Refer to Figure 5-2, Airspeed Operating Limits for Additional Limitations.



**AIRSPEED ROOF MOUNTED PITOT TUBE**  
 R ■ 124 Knots Maximum  
 Refer to Figure 5-2, Airspeed Operating Limits for Additional Limitations.

FIGURE 15. Example of instrument/display operating ranges and markings (sheet 1 of 2)

MIL-PRF-63029D(AV)

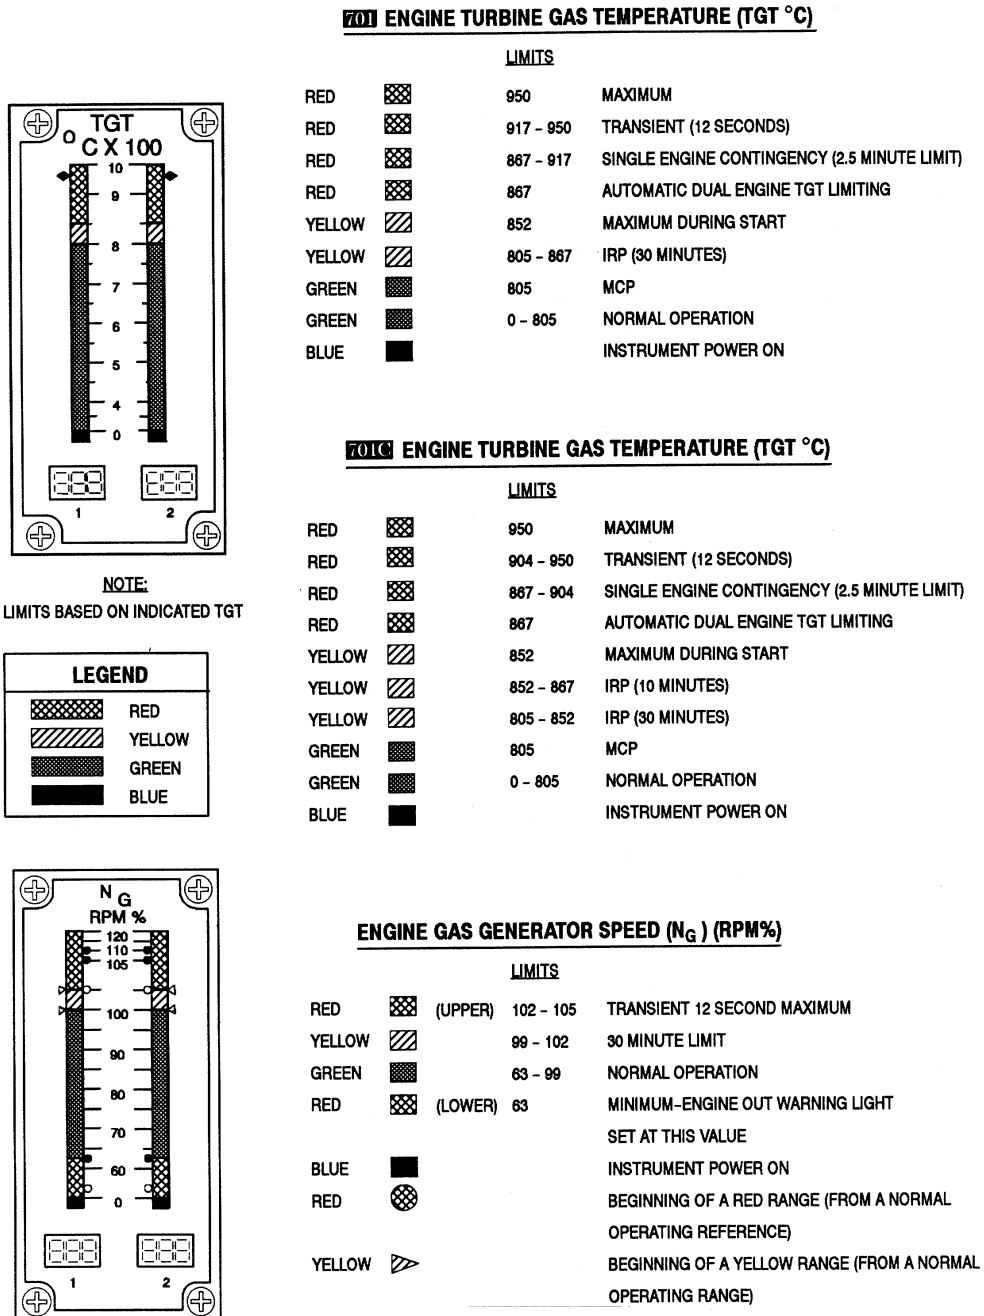

MIL-PRF-63029D(AV)

**AIRSPED OPERATING LIMITS**

**EXAMPLE**

**WANTED**


INDICATED AIRSPEED  
AND DENSITY ALTITUDE

**KNOWN**

GROSS WEIGHT=8500 LB  
PRESSURE ALTITUDE=7500 FEET  
FAT = -20°C  
ROOF MOUNTED SYSTEM

**METHOD**

ENTER PRESSURE ALTITUDE  
MOVE RIGHT TO FAT  
MOVE DOWN TO GROSS WEIGHT  
MOVE LEFT, READ INDICATED  
AIRSPEED=110 KNOTS  
REENTER PRESSURE ALTITUDE  
MOVE DOWN, READ DENSITY  
ALTITUDE =5000 FEET

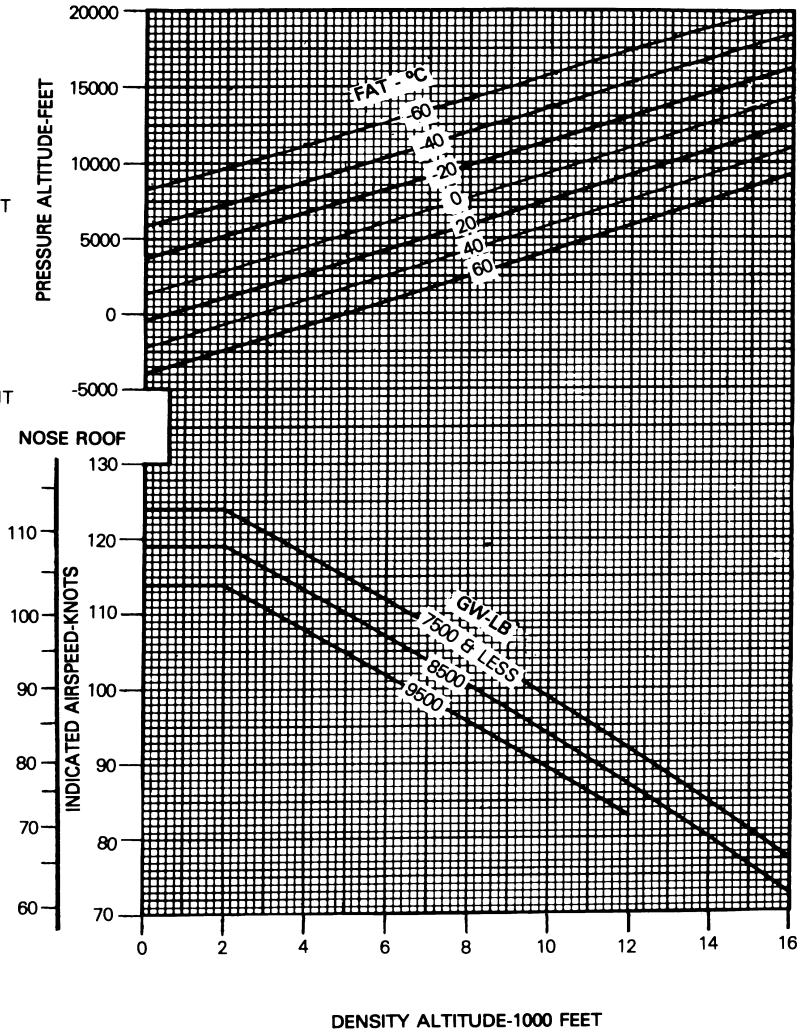

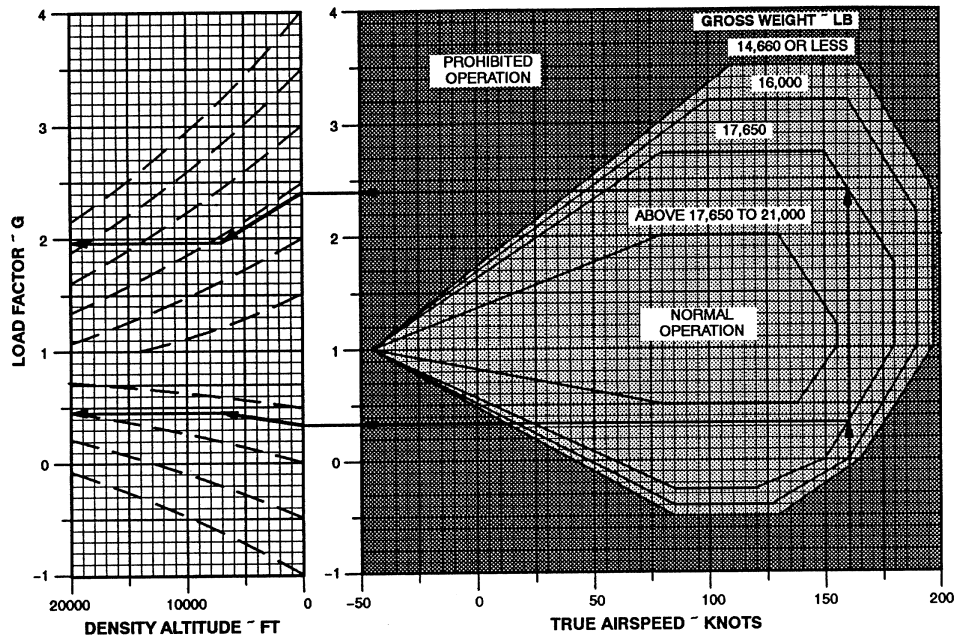
DATA BASIS: DERIVED FROM FLIGHT TEST

FIGURE 16. Airspeed operating limits chart

## MIL-PRF-63029D(AV)

## FLIGHT ENVELOPE

FLIGHT ENVELOPE AH-64A
---------------------------

**EXAMPLE****WANTED**

MAXIMUM AND MINIMUM LOAD FACTOR

**KNOWN**

GROSS WEIGHT = 17,650 POUNDS  
 DENSITY ALTITUDE = 7000 FEET  
 AIRSPEED = 160 KTAS

**METHOD**

ENTER AT  $V = 160$  KT. MOVE UP TO UPPER AND LOWER ENVELOPE BOUNDARIES FOR GROSS WEIGHT = 17,650 POUNDS.  
 MOVE LEFT TO DENSITY ALTITUDE OF ZERO FEET.  
 SLIDE TO LEFT ALONG DASHED LINES TO 7000 FEET DENSITY ALTITUDE.  
 MOVE LEFT TO LOAD FACTOR SCALE, READ MAX  $G = 1.96$ , MIN  $G = 0.46$ .

FIGURE 17. Flight envelope chart



MIL-PRF-63029D(AV)

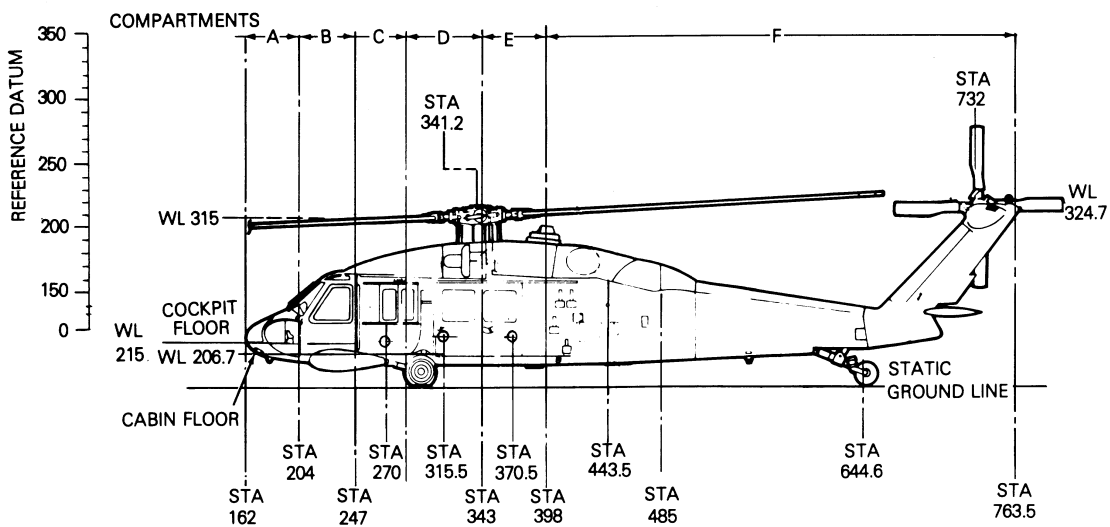
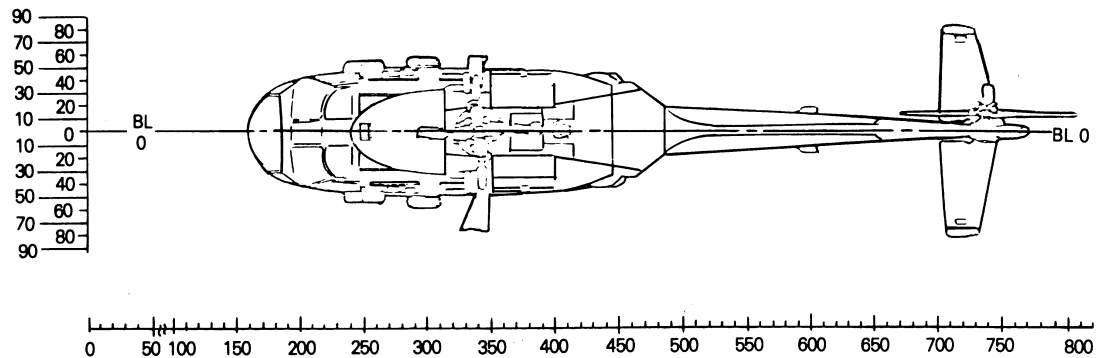


FIGURE 18. Aircraft compartments and stations (sheet 1 of 2)

MIL-PRF-63029D(AV)

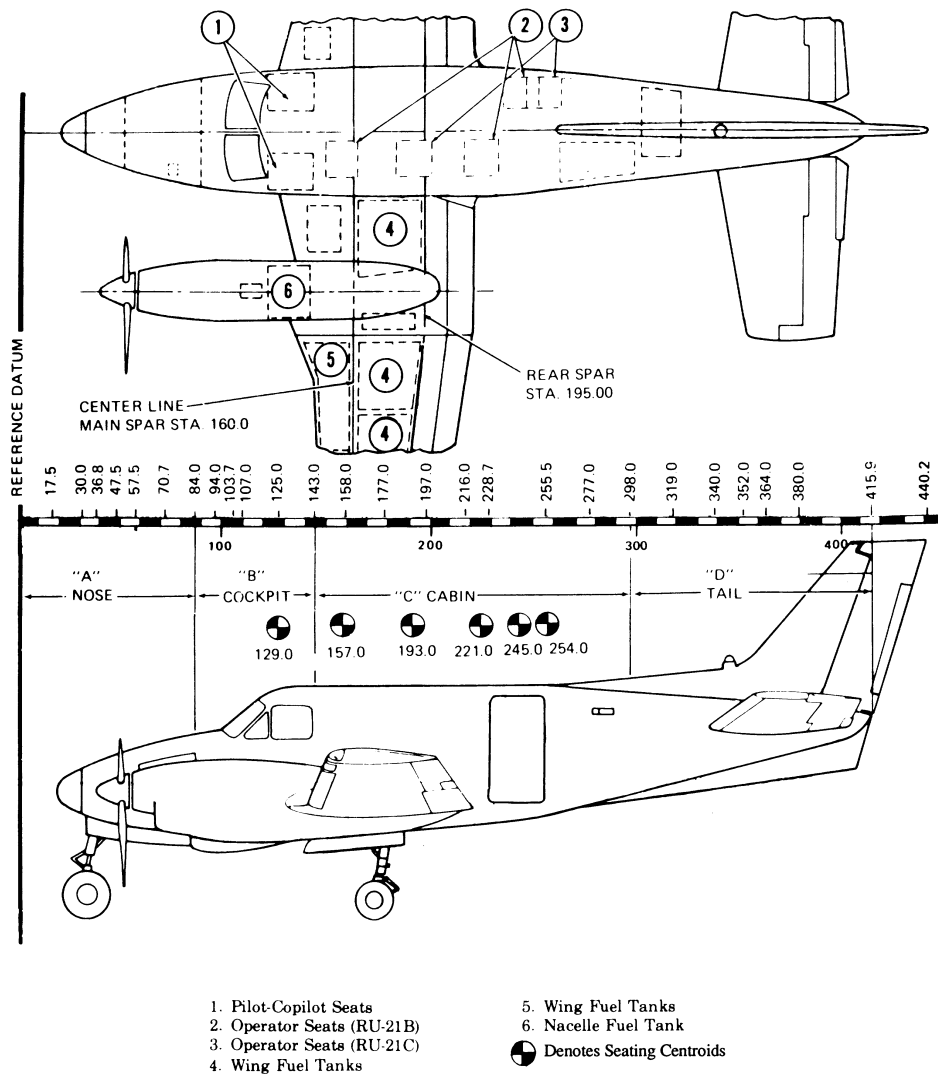


FIGURE 18. Aircraft compartments and stations (sheet 2 of 2)

MIL-PRF-63029D(AV)

**EXAMPLE**

**FUEL MOMENTS**

**WANTED**

FUEL MOMENT

**KNOWN**

FUEL QUANTITY  
MAIN 1700 POUNDS

**METHOD**

FOR MAIN TANK ENTER  
AT 1700 POUNDS AND  
MOVE RIGHT TO MAIN LINE.  
MOVE DOWN READ  
MOMENT / 1000 = 710

ITEM	STA	WEIGHT LBS	MOM/1000
230-GALLON TANK (IB OR OB)	321	150	48
450-GALLON TANK (IB)	316	234	74


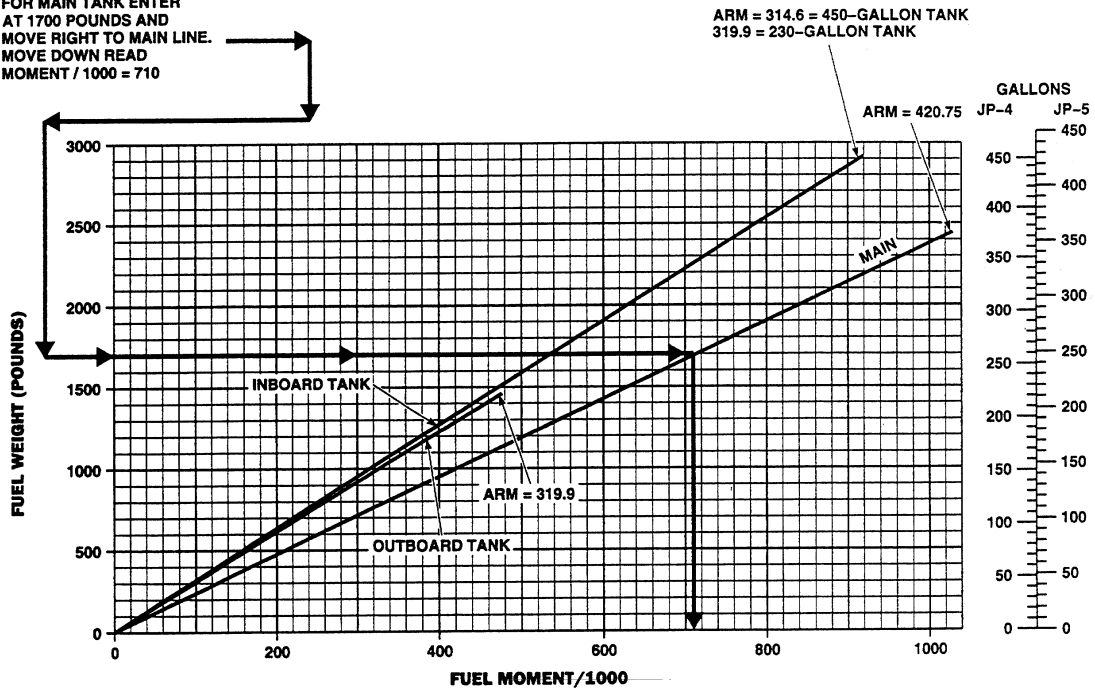


FIGURE 19. Fuel moment chart

MIL-PRF-63029D(AV)

PERSONNEL MOMENTS

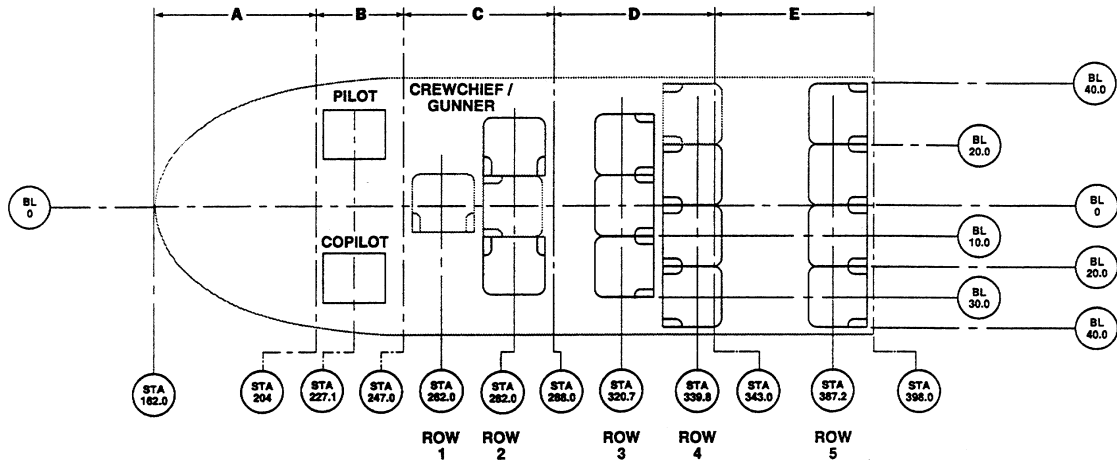

SEAT WEIGHT - AND MOMENT TABLE\*

ITEM	ROW	WEIGHT	MOM / 1000
CREWCHIEF / GUNNER (2)	2	43	12
TROOPS (3)	3	48	15
TROOPS (3)	4	48	16
TROOPS (4)	5	63	25
<b>TOTAL-12 SEATS</b>		<b>202</b>	<b>68</b>
<b>ALTERNATE SEATING (BROKEN LINES)</b>			
FORWARD TROOP SEAT (1)	1	16	4
REAR FACING TROOP SEAT (1)	2	16	5
REAR FACING TROOP SEAT (1)	4	16	6
<b>TOTAL-15 SEATS</b>		<b>250</b>	<b>83</b>

\*SEAT WEIGHT AND MOMENTS SHOULD BE INCLUDED ON CHART C

EXAMPLE

**WANTED:**  
PERSONNEL MOMENTS

**KNOWN:**  
2 PERSONNEL IN ROW 3  
TOTAL WEIGHT 480 POUNDS

**METHOD:**  
ENTER WEIGHT AT 480 POUNDS—MOVE RIGHT TO ROW 3.  
MOVE DOWN. READ MOMENT / 1000=154





FIGURE 20. Personnel moments chart (sheet 1 of 3)

MIL-PRF-63029D(AV)


PERSONNEL MOMENTS

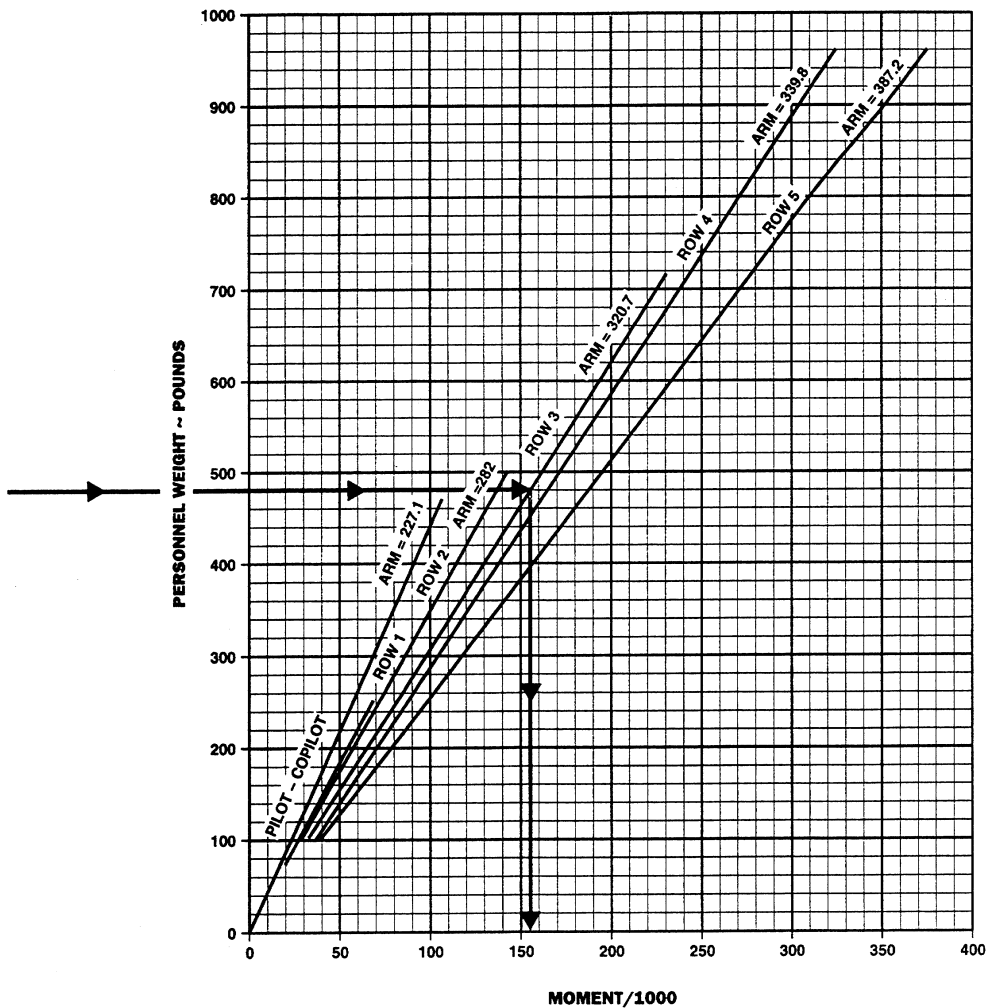

DATA BASIS: CALCULATED

FIGURE 20. Personnel moments chart (sheet 2 of 3)

MIL-PRF-63029D(AV)

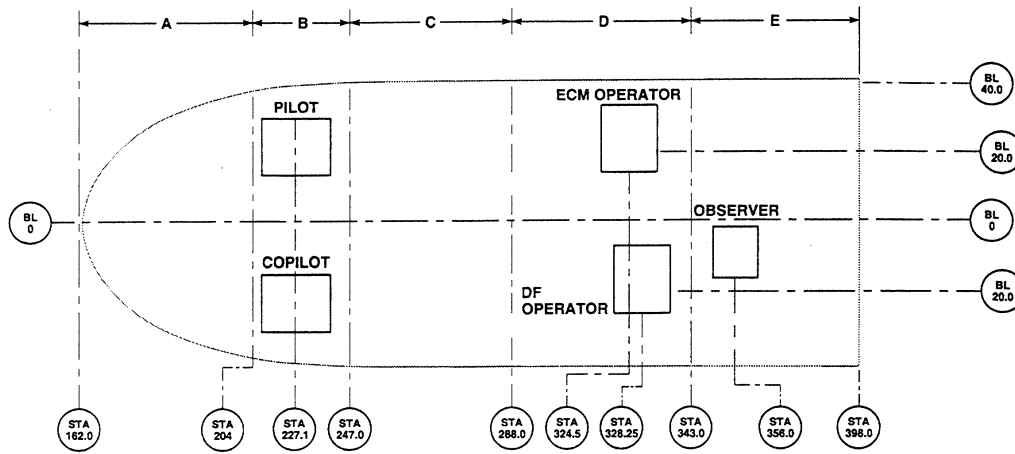

* ITEM	STA	WEIGHT	MOM / 1000
OBSERVER SEAT	356.0	18	6
TOTAL - 1 SEAT	-	18	6


\* SEAT WEIGHT AND MOMENTS SHOULD BE INCLUDED ON CHART C.

**EXAMPLE**

**WANTED**  
PERSONNEL MOMENTS

**KNOWN**  
PERSONNEL AT STA 356  
OBSERVER - 210 POUNDS

**METHOD**  
ENTER WEIGHT AT 210  
POUNDS - MOVE RIGHT  
TO OBSERVER ARC (STA 356.0)  
MOVE DOWN READ  
MOMENT / 1000 = 75

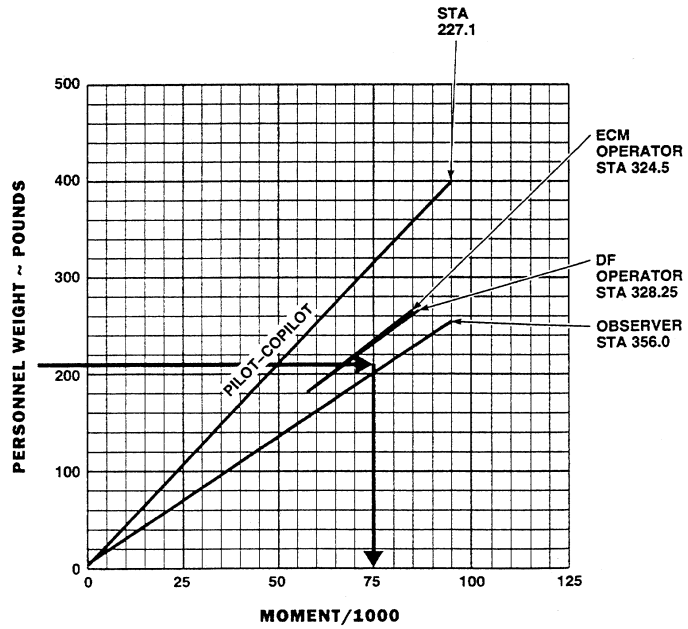

DATA BASIS: CALCULATED

FIGURE 20. Personnel moments chart (sheet 3 of 3)

## MIL-PRF-63029D(AV)

Item	Qty	Inboard Station 2,3 or Outboard Station 1, 4		Item	Qty	Inboard Station 2,3 or Outboard Station 1, 4	
		Accum Weight (lb)	Moment (in.-lb/100)			Accum Weight (lb)	Moment (in.-lb/100)
Missile	1	98.5	188	H519 Rocket	1	20.6	41
Missile	2	197.0	376	Rocket	2	41.2	81
Missile	3	295.5	564	Rocket	3	61.8	122
Missile	4	394.0	751	Rocket	4	82.4	162
				Rocket	5	103.0	203
				Rocket	6	123.6	243
				Rocket	7	144.2	284
				Rocket	8	164.8	324
				Rocket	9	185.4	365
				Rocket	10	206.0	406
				Rocket	11	226.6	446
				Rocket	12	247.2	487
				Rocket	13	267.8	527
				Rocket	14	288.4	568
				Rocket	15	309.0	608
				Rocket	16	329.6	649
				Rocket	17	350.2	690
				Rocket	18	370.8	730
				Rocket	19	391.4	771

FIGURE 21. Armament loading data chart



MIL-PRF-63029D(AV)

**EXAMPLE**

**WANTED**

CARGO MOMENT FOR A GIVEN CARGO WEIGHT AND FUSELAGE STATION

**KNOWN**

CARGO WEIGHT 1000 LBS  
LOCATION FS105

**METHOD**

ENTER INTERNAL CARGO WEIGHT  
MOVE RIGHT TO FS105  
MOVE DOWN TO BASE-LINE AND  
READ 1050 INCH POUNDS/100

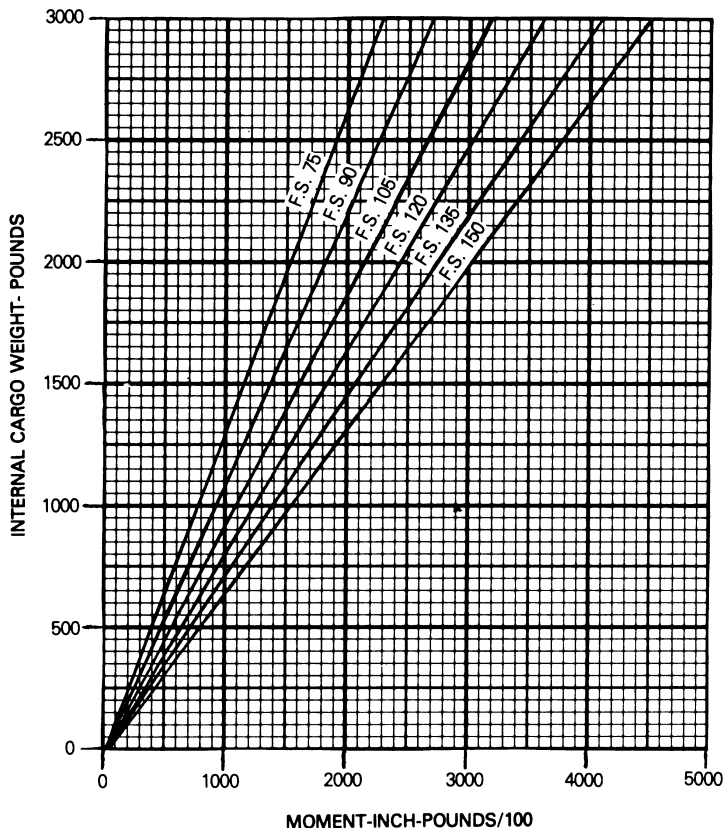


FIGURE 22. Cargo moments chart

MIL-PRF-63029D(AV)

**EXAMPLE**

**WANTED**

DETERMINE CENTER OF GRAVITY FOR KNOWN WEIGHT AND MOMENT

**KNOWN**

GROSS WEIGHT EQUALS 8460 POUNDS, MOMENT/100 EQUALS 11,900 INCH-POUNDS

**METHOD**

MOVE RIGHT FROM 8460 POUNDS TO A POINT APPROXIMATELY 1/2 OF THE DISTANCE BETWEEN 11,800 AND 12,000 INCH-POUND DIAGONAL LINES. FROM THIS POINT PROJECT DOWN TO READ 140.6 ON THE CENTER OF GRAVITY SCALE (FUSELAGE STATION IN INCHES).

**NOTE**

WHEN CG IS WITHIN SHADED AREA AFT OF STATION 140.0, APPROACHES SHOULD BE TERMINATED TO A 5-FOOT HOVER FOR ADEQUATE TAIL ROTOR CLEARANCE.

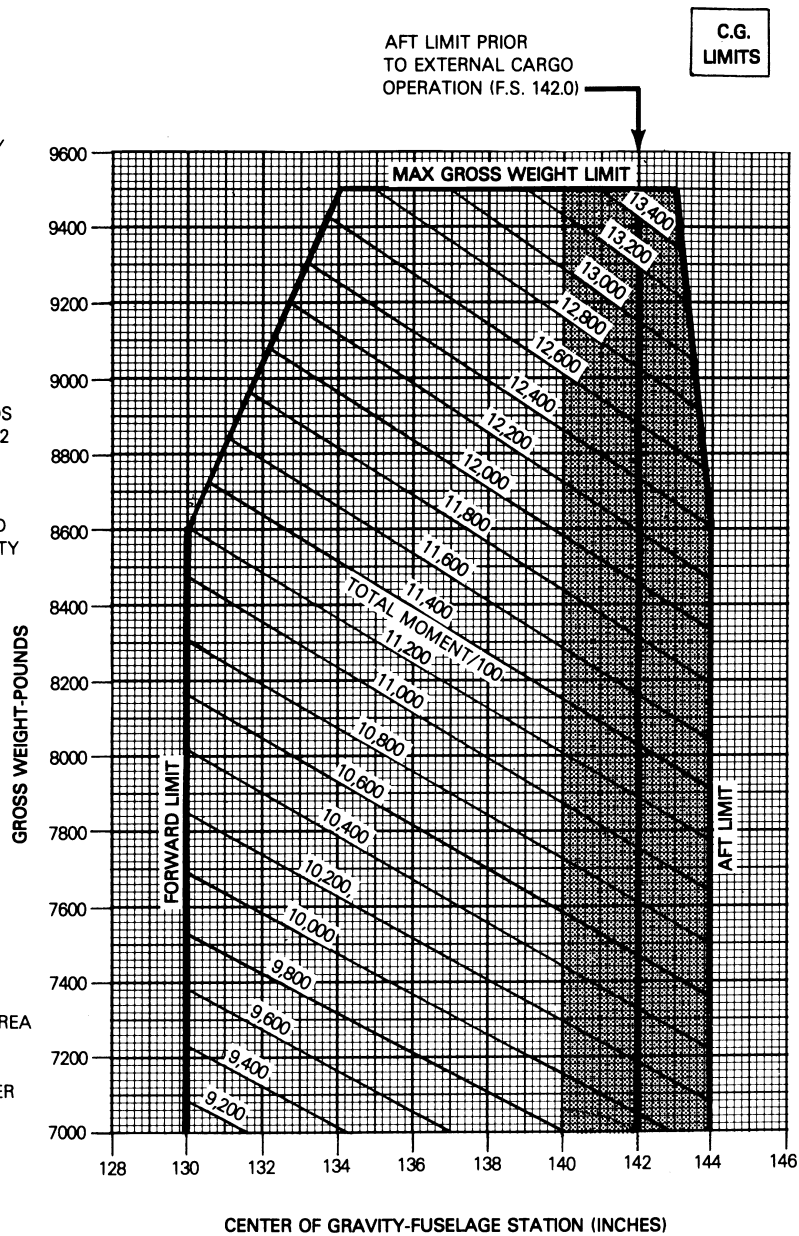


FIGURE 23. Center-of-gravity limits (sheet 1 of 2)

MIL-PRF-63029D(AV)

# CENTER OF GRAVITY LIMITS

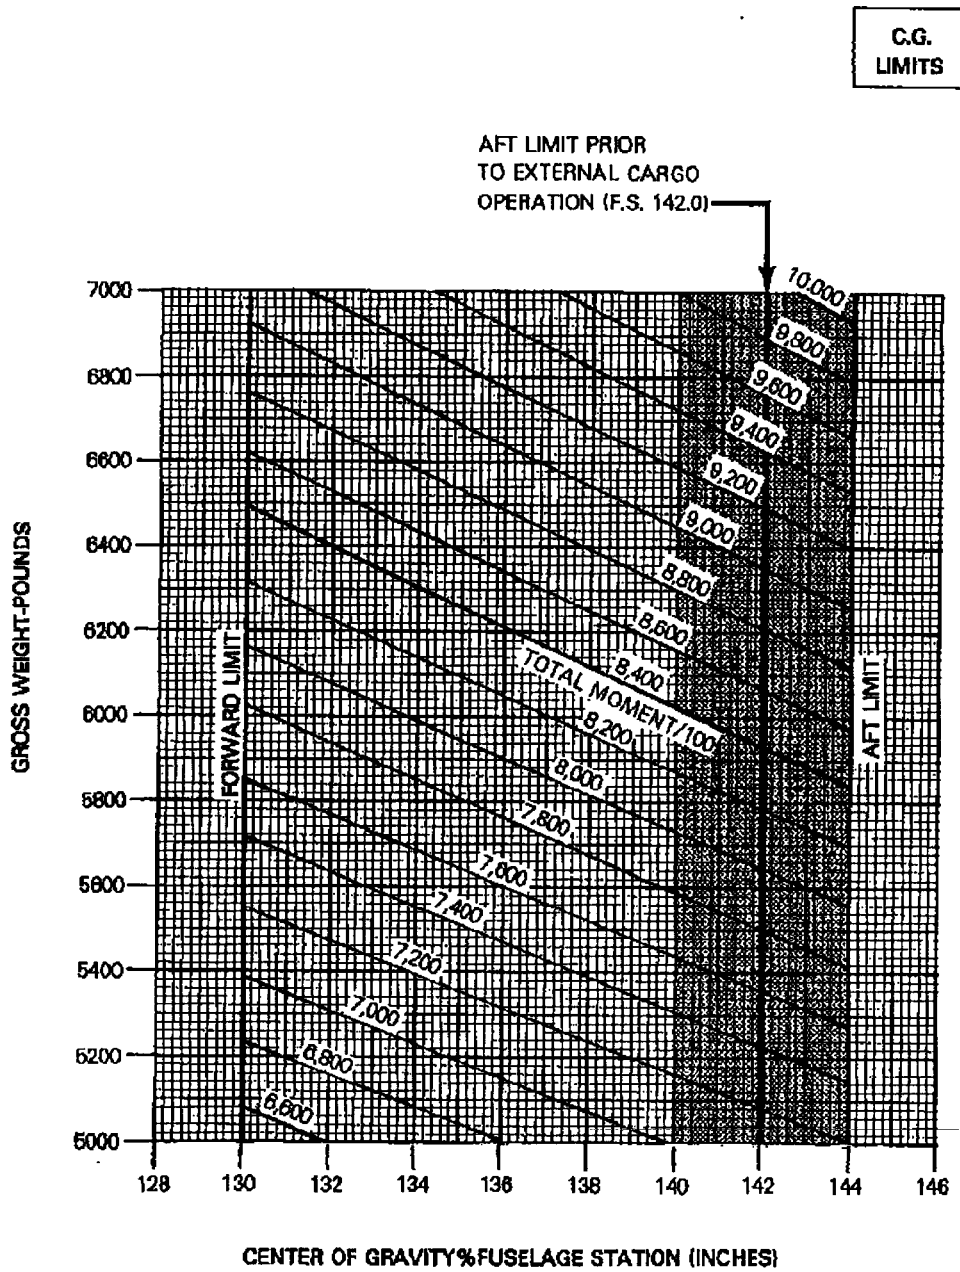


FIGURE 23. Center-of-gravity limits (sheet 2 of 2)

MIL-PRF-63029D(AV)

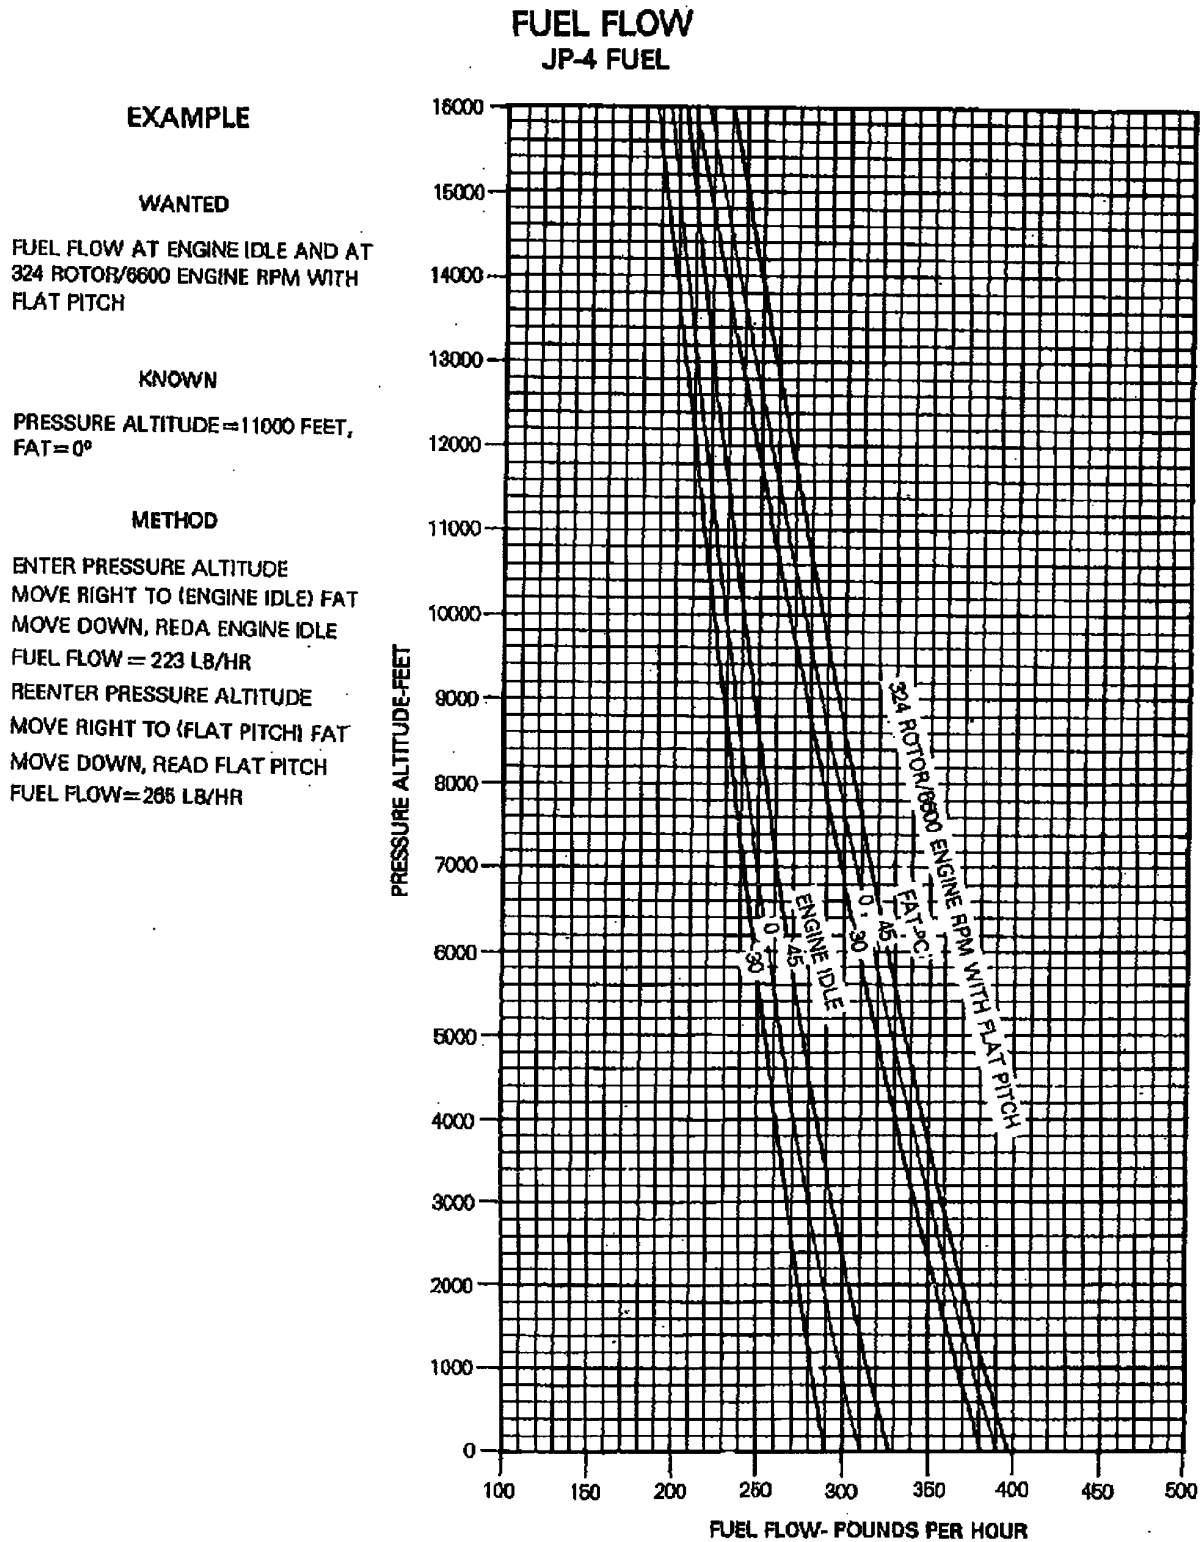


FIGURE 24. Fuel flow chart

MIL-PRF-63029D(AV)

**MAXIMUM TORQUE AVAILABLE**  
**30-MIN LIMIT 100% N<sub>1</sub> ANTI-ICE OFF**  
**ZERO AIRSPEED**

MAXIMUM TORQUE AVAILABLE/RP  
 AH-64A  
 T700-GE-701

**EXAMPLE**

**WANTED**

SPECIFICATION TORQUE AVAILABLE  
 30-MIN. LIMIT.

**KNOWN**

FAT = +20 °C.

PRESSURE ALTITUDE = 4000 FT.

**METHOD**

ENTER AT KNOWN FAT = +20 °C.  
 MOVE RIGHT TO PRESSURE ALTITUDE = 4000 FT. THEN MOVE DOWN TO READ 97.5% TORQUE AVAILABLE PER ENGINE. THIS DOES NOT EXCEED 2-ENGINE RED LINE. FOR DUAL ENGINE OPERATION, TORQUE IS LIMITED TO 100% PER ENGINE.

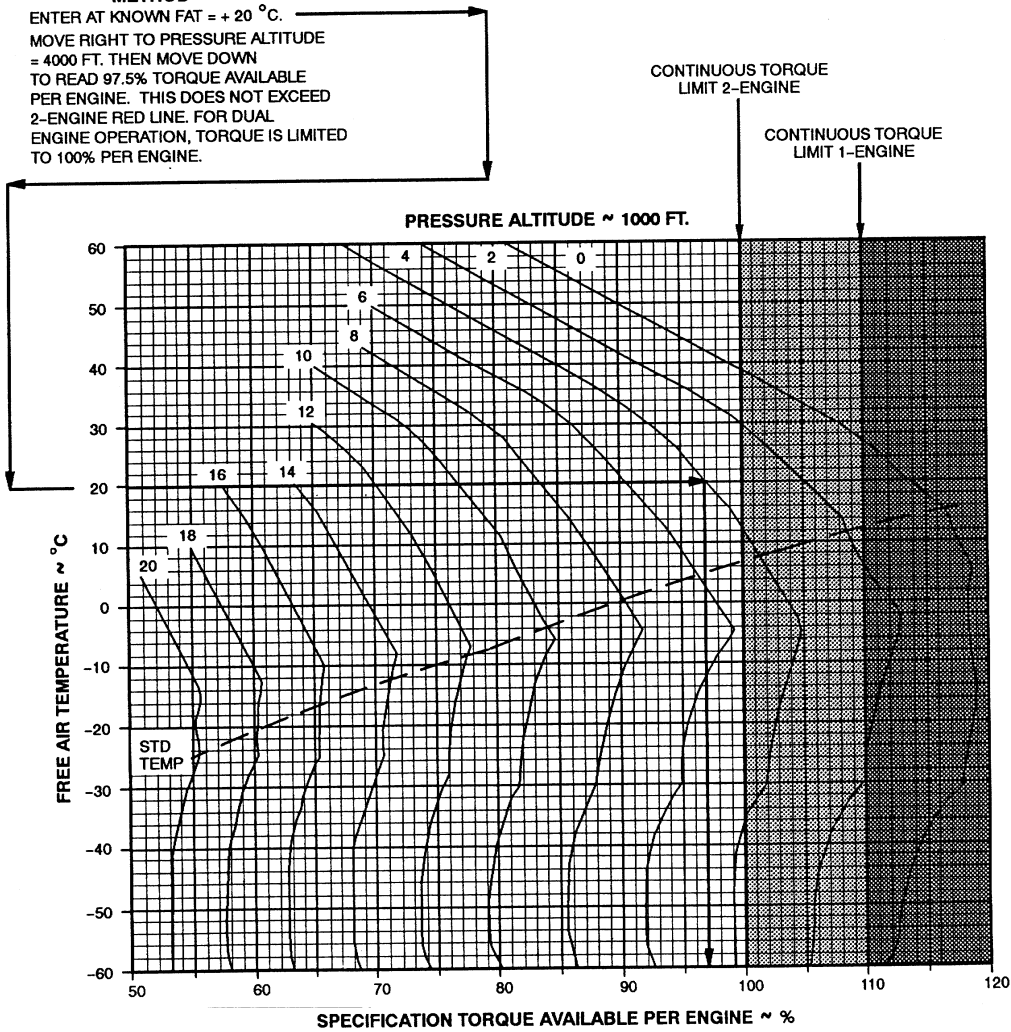


FIGURE 25. Maximum torque available (insert time) (RW)



MIL-PRF-63029D(AV)

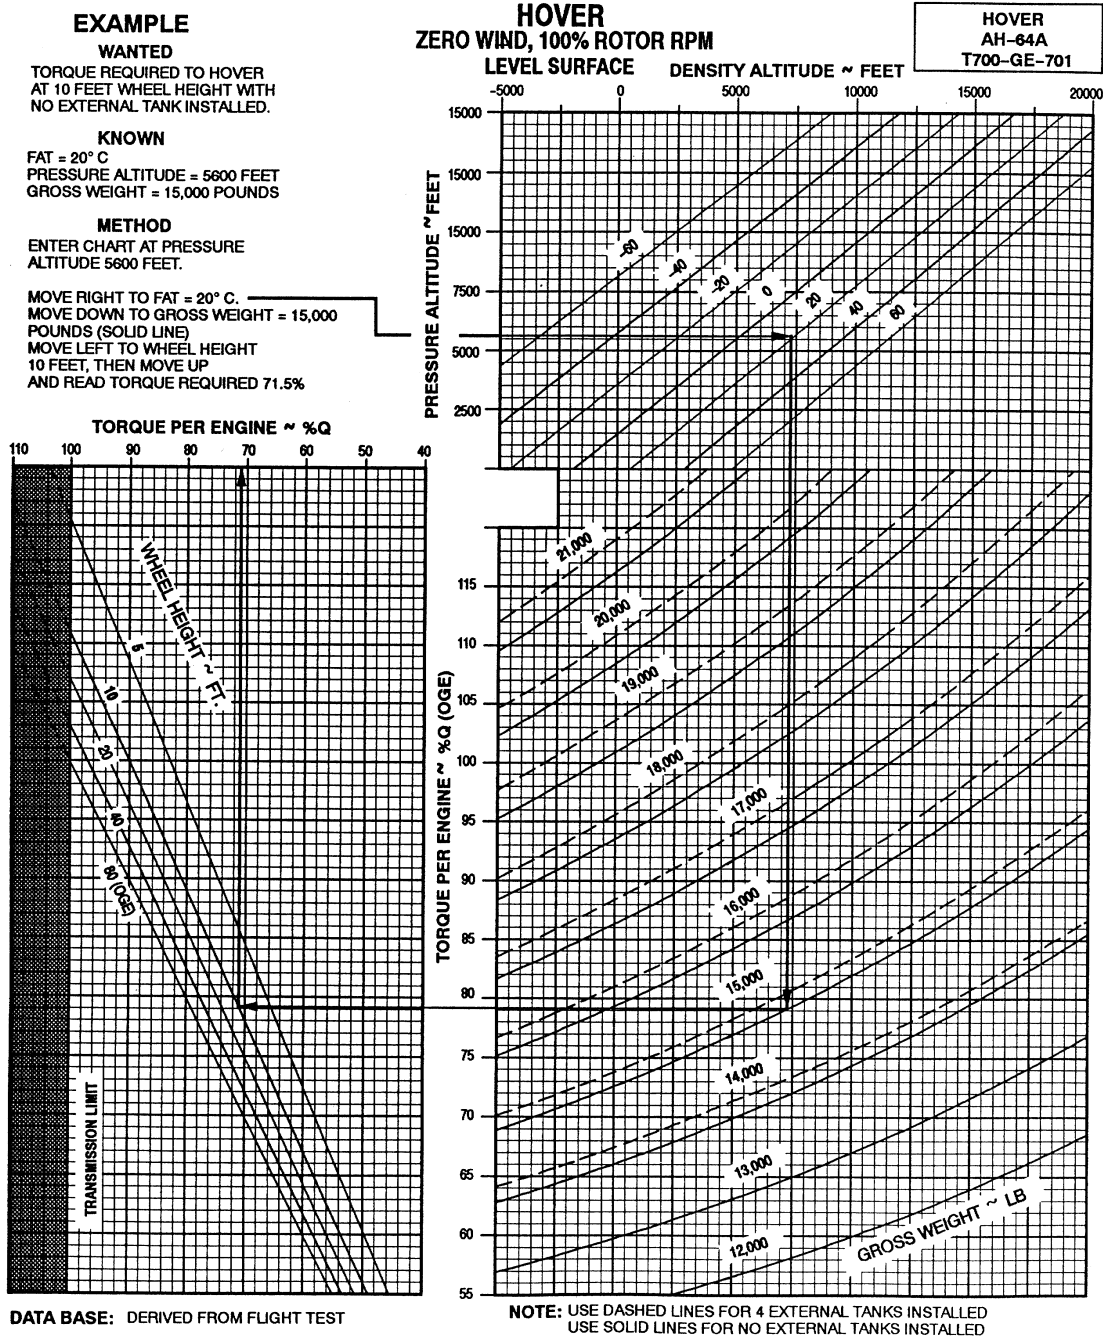


FIGURE 26. Hover chart

MIL-PRF-63029D(AV)

**TAKEOFF**


LEVEL ACCELERATION, 3 FT SKID HEIGHT  
 324 ROTOR/6800 ENGINE RPM MAXIMUM TORQUE AVAILABLE  
 CALM WIND LEVEL SURFACE ALL CONFIGURATIONS  
 CLIMBOUT AT 32 KIAS ROOF, 30 KIAS NOSE

**EXAMPLE I**

**WANTED**  
 DISTANCE TO CLEAR OBSTACLE

**KNOWN**  
 MAXIMUM HOVER HEIGHT = 10 FEET  
 OBSTACLE HEIGHT = 50 FEET

**METHOD**  
 ENTER MAX HOVER HEIGHT  
 MOVE RIGHT TO OBSTACLE HEIGHT  
 MOVE DOWN, READ DISTANCE  
 TO CLEAR OBSTACLE = 700 FEET

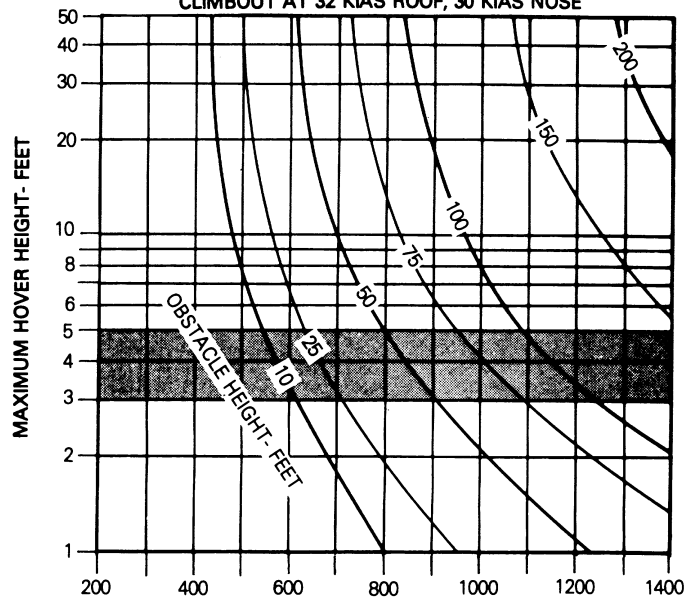

**EXAMPLE II**

**WANTED**  
 DISTANCE TO CLEAR OBSTACLE

**KNOWN**  
 MAX HOVER HEIGHT = 8 FEET  
 OBSTACLE HEIGHT = 50 FEET  
 CLIMBOUT AIRSPEED = 40 KNOTS

**METHOD**  
 ENTER MAX HOVER HEIGHT  
 MOVE RIGHT TO CLIMBOUT TRUE AIRSPEED  
 MOVE DOWN TO OBSTACLE HEIGHT  
 MOVE LEFT READ DISTANCE  
 TO CLEAR OBSTACLE = 630 FEET

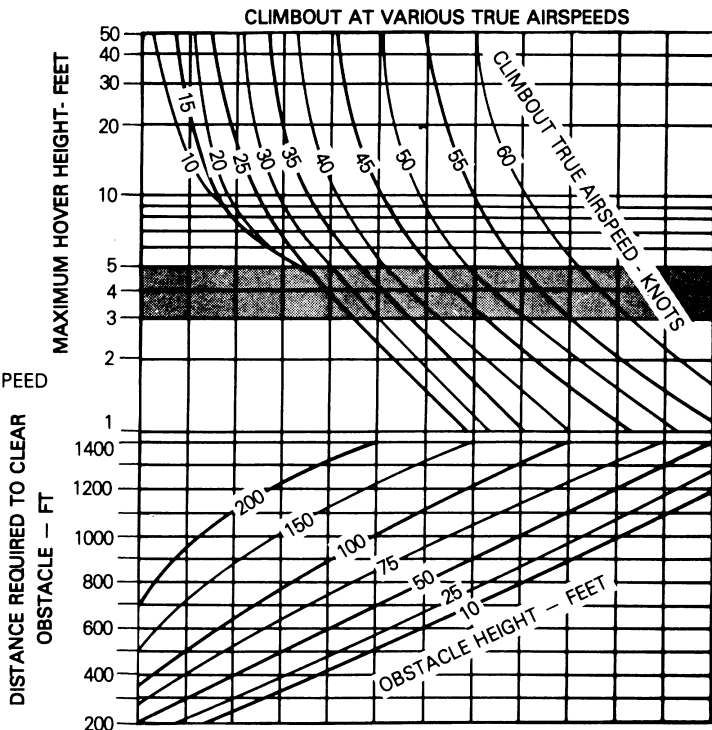


FIGURE 27. Takeoff chart



MIL-PRF-63029D(AV)

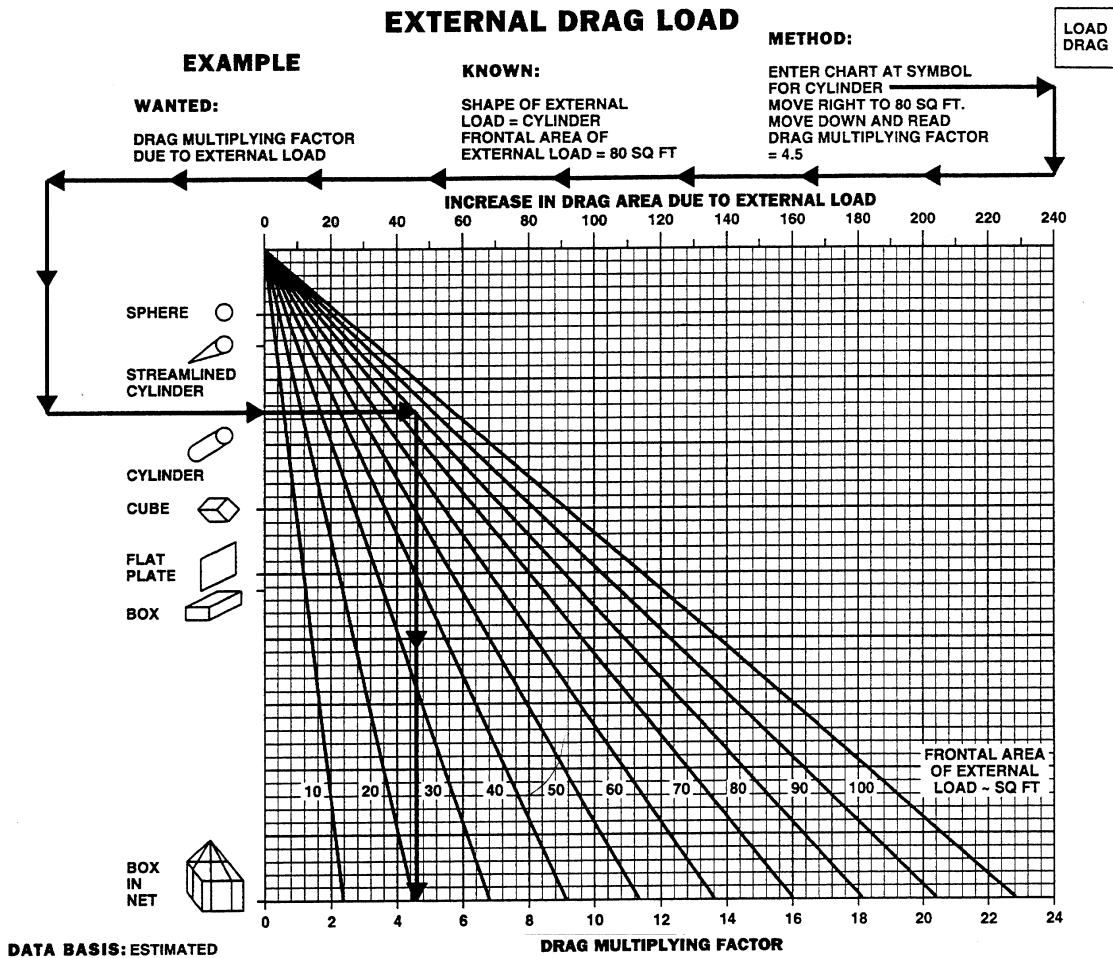


FIGURE 28. Drag chart (sheet 1 of 3)

MIL-PRF-63029D(AV)

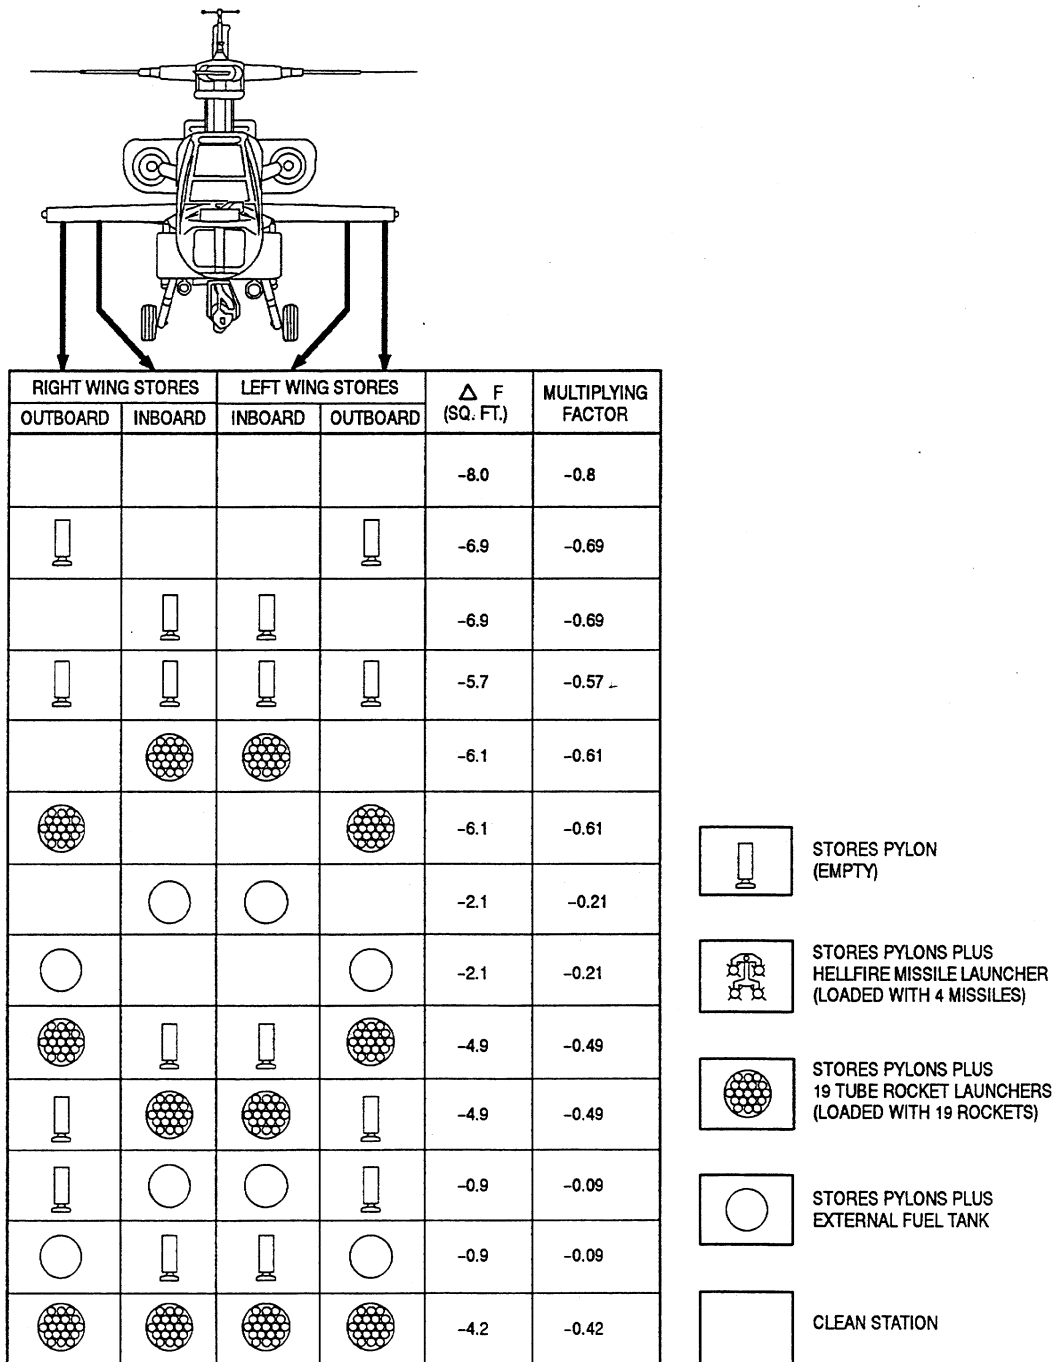


FIGURE 28. Drag chart (sheet 2 of 3)

MIL-PRF-63029D(AV)

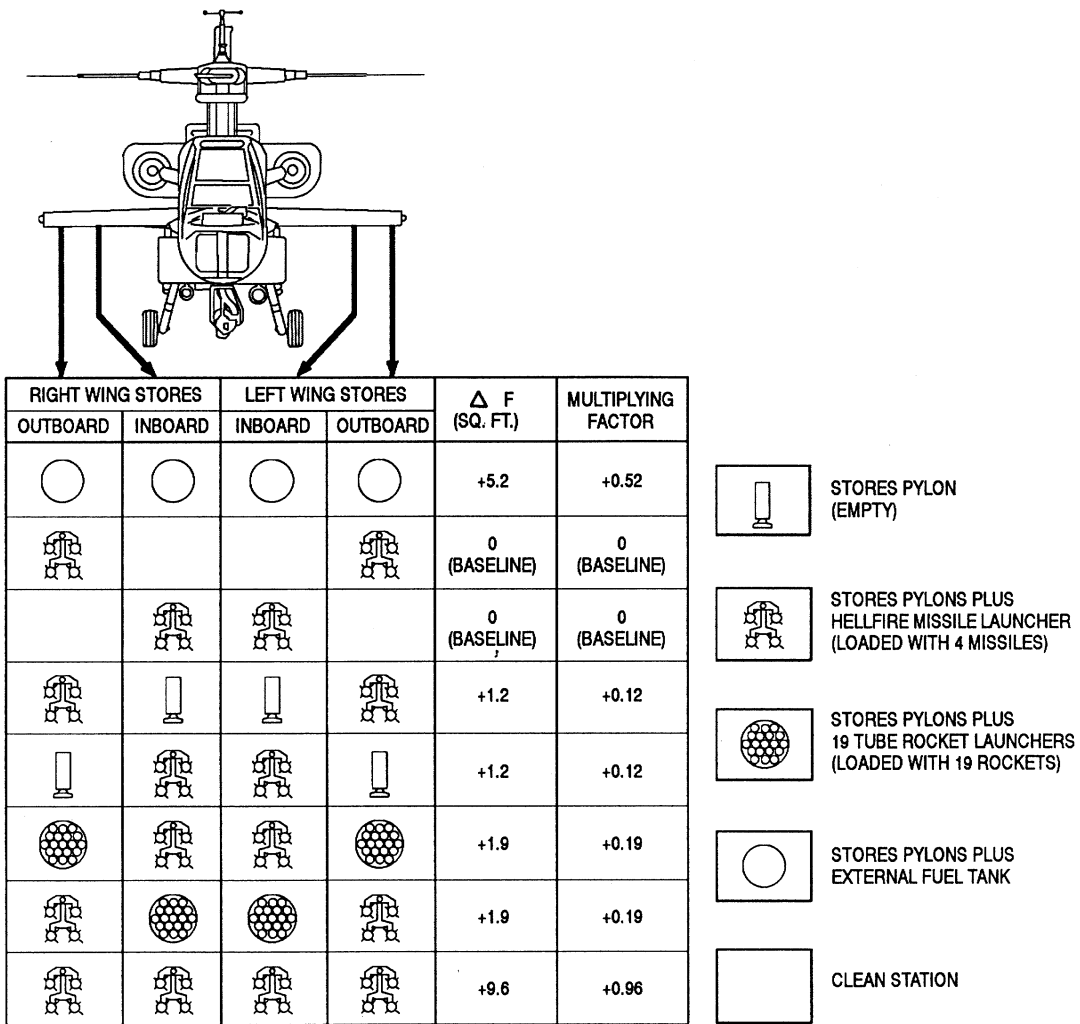


FIGURE 28. Drag chart (sheet 3 of 3)

MIL-PRF-63029D(AV)

**CRUISE**  
**PRESSURE ALTITUDE SEA-LEVEL**  
 100% RPM, 8 HELLFIRE CONFIGURATION, JP-4 FUEL

FAT = +10°C

**EXAMPLE**

**WANTED**

TORQUE REQUIRED AND FUEL FLOW  
 FOR 76 ROCKET CONFIGURATION

**KNOWN**

PRESSURE ALTITUDE = S.L., FAT = +10C,  
 GW = 14,000 LB, 4 LOADED ROCKET  
 LAUNCHERS (76 ROCKETS), IAS = 150 KN

**METHOD**

FROM DRAG CHART (FIG 7-30) OBTAIN  
 MULTIPLYING FACTOR = 0.42  
 ENTER CRUISE CHART AT IAS = 150 KN  
 MOVE RIGHT TO BROKEN  $\Delta Q$  LINE  
 MOVE UP TO READ  $\Delta Q = 12.8$   
 MULTIPLY  $\Delta Q$  BY MULTIPLYING FACTOR  
 TO GET CHANGE IN TORQUE = 5.4%  
 RE-ENTER CRUISE CHART AT IAS = 150 KN  
 MOVE DOWN AND READ INDICATED  
 TORQUE PER ENGINE = 84.2%  
 TORQUE REQUIRED =  $84.2 \cdot 5.4 = 78.8\%$   
 RE-ENTER CRUISE CHART AT 78.8%  
 MOVE UP AND READ FUEL FLOW = 1183 LB/HR

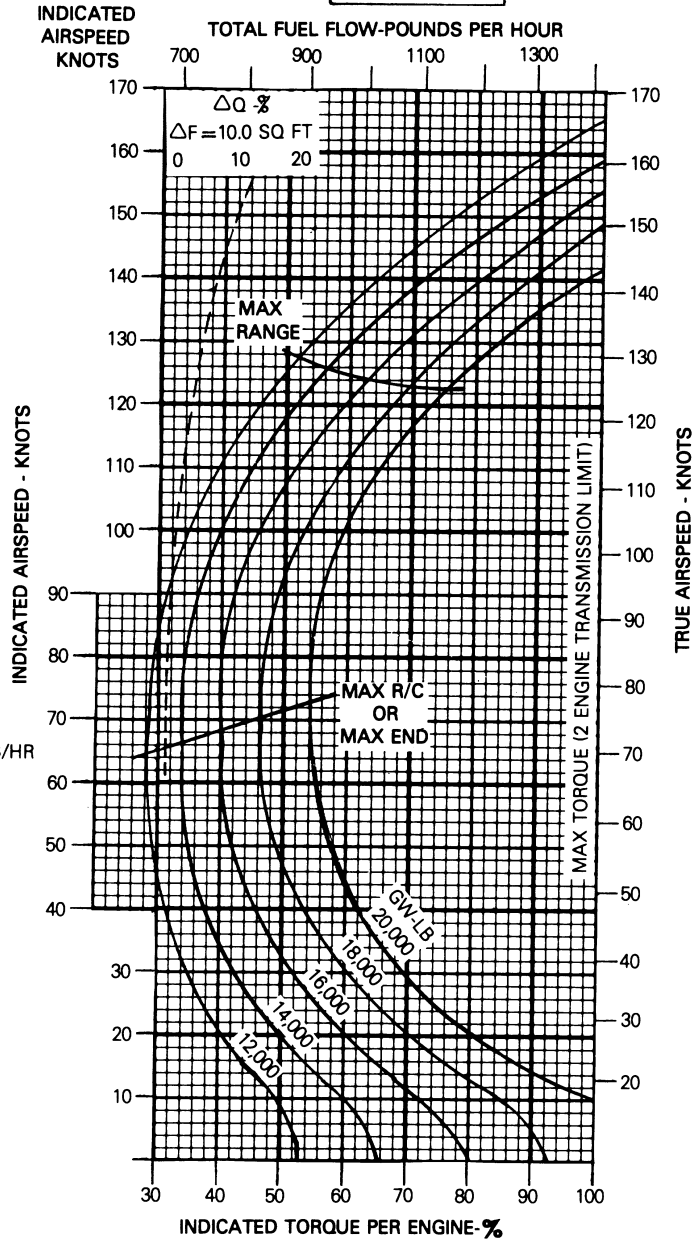


FIGURE 29. Cruise chart (RW)

MIL-PRF-63029D(AV)

**CLIMB-DESCENT**

314 ROTOR/6400 ENGINE RPM

**EXAMPLE**

**WANTED**


CALIBRATED TORQUE CHANGE  
FOR DESIRED R/C OR R/D

**KNOWN**

GROSS WEIGHT = 6000 LB  
DESIRED R/C = 1200 FT/MIN

**METHOD**

ENTER R/C  
MOVE RIGHT TO GROSS WEIGHT  
MOVE DOWN, READ CALIBRATED  
TORQUE CHANGE = 12.5 PSI

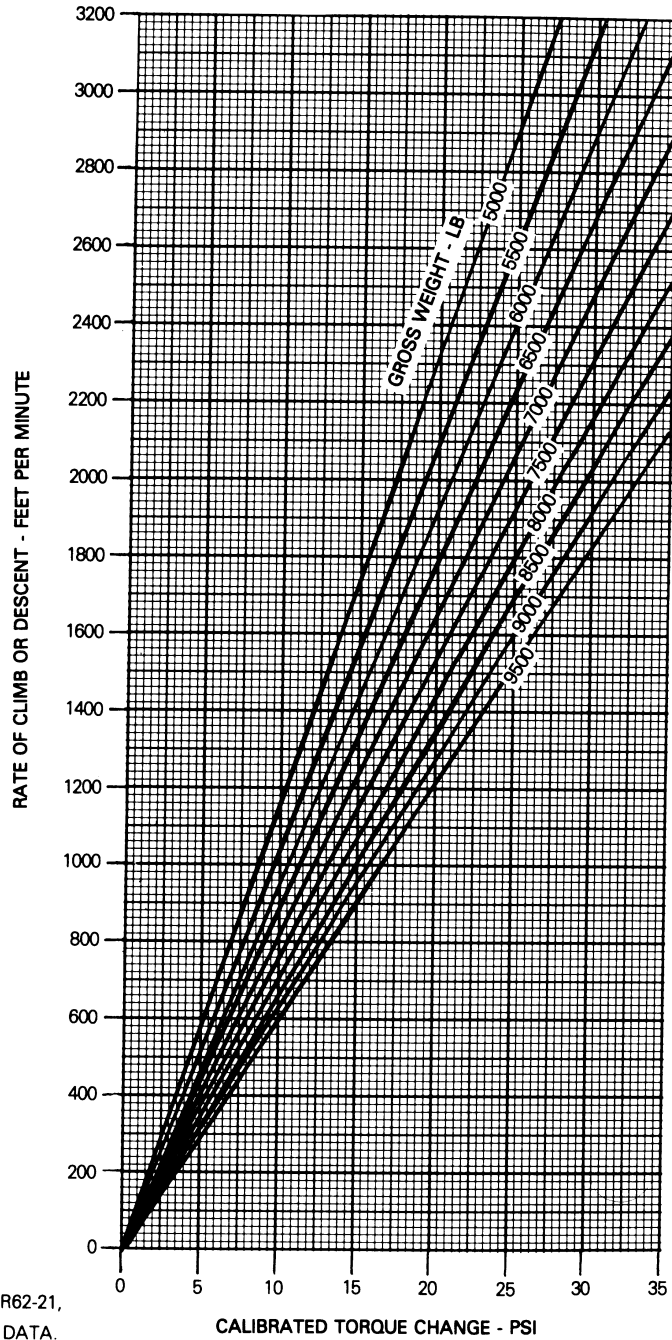


DATA BASIS: DERIVED FROM FLIGHT TEST FTC-TDR62-21,  
DECEMBER 1962, AND CALCULATED DATA.

FIGURE 30. Climb-descent chart

MIL-PRF-63029D(AV)

AIRSPEED CALIBRATION - NORMAL SYSTEM

EXAMPLE

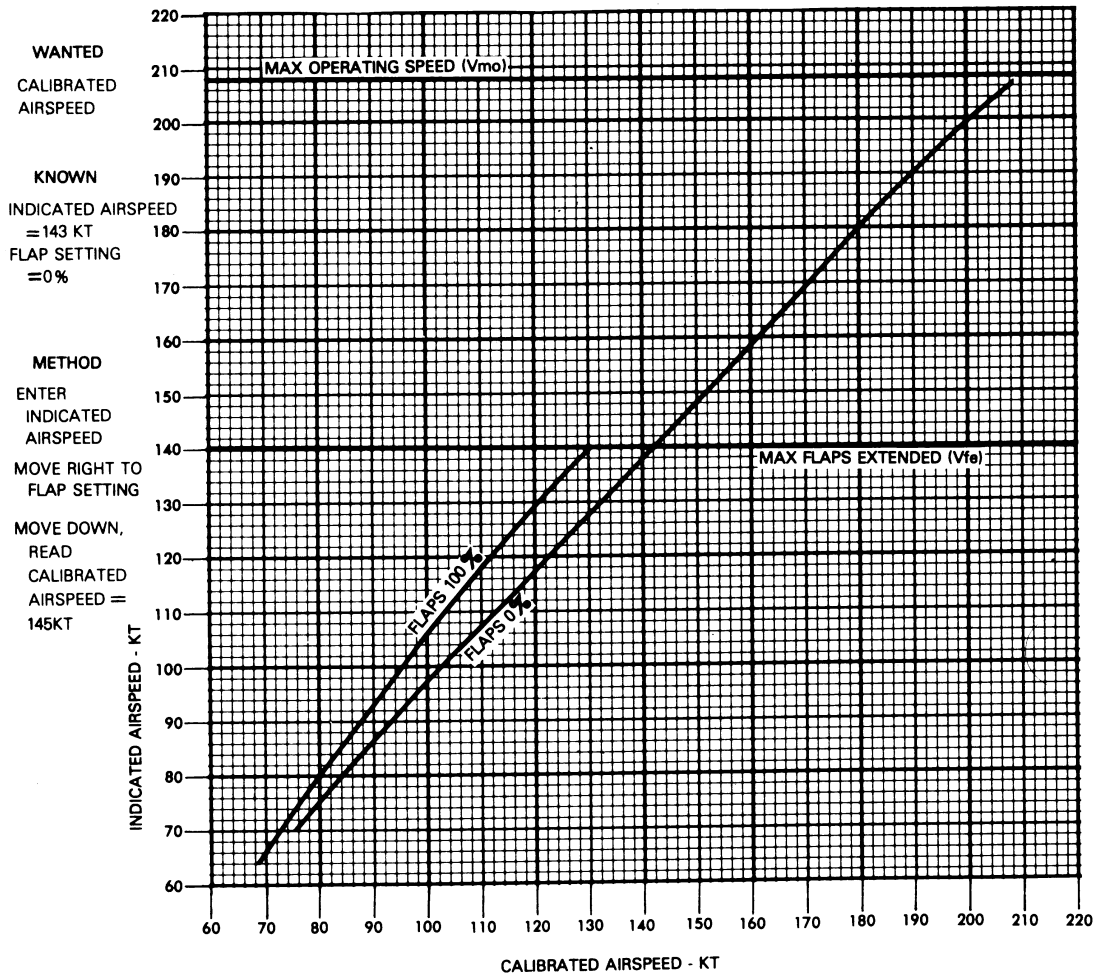

DATA BASIS: DERIVED FROM FLIGHT TEST

FIGURE 31. Airspeed calibration chart (sheet 1 of 2)



MIL-PRF-63029D(AV)



**TEMPERATURE  
CONVERSION/CORRECTION**


TEMPERATURE CONVERSION  
/CORRECTION  
RU-21A, RU-21D  
T74-CP-700

**EXAMPLE**

**WANTED**  
TRUE FAT

**KNOWN**  
INDICATED FAT =  $-2^{\circ}\text{C}$   
TRUE AIRSPEED = 154 KT

**METHOD**  
ENTER INDICATED FAT HERE  
MOVE RIGHT TO TRUE AIRSPEED  
MOVE DOWN READ TRUE  
FAT =  $-4^{\circ}\text{C}$

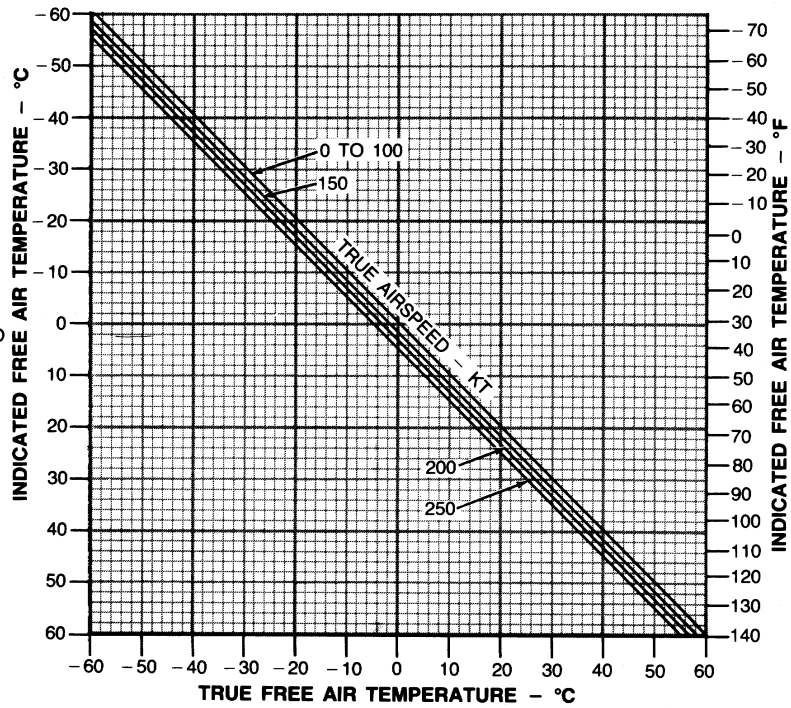


AP 001611

FIGURE 31. Airspeed calibration chart (sheet 2 of 2)



MIL-PRF-63029D(AV)

ALTIMETER CORRECTION - NORMAL SYSTEM

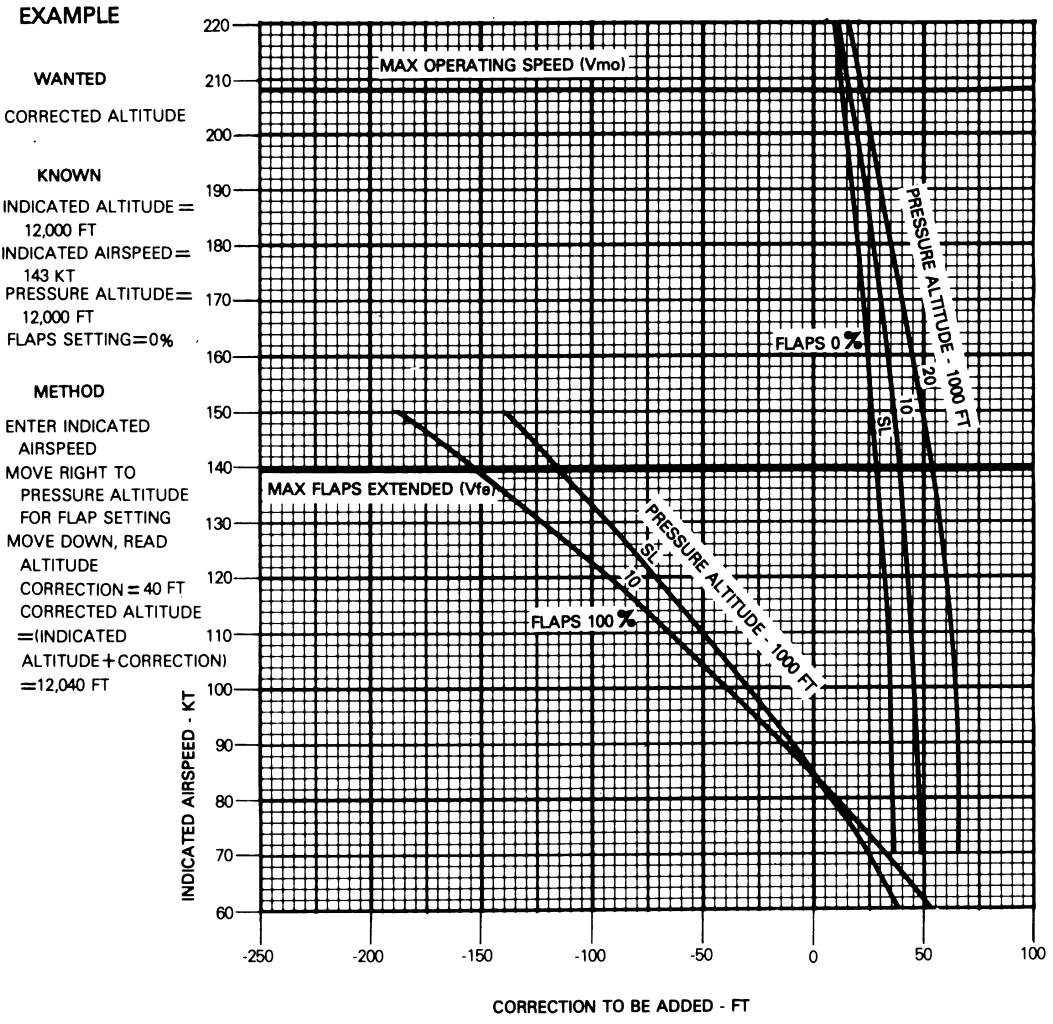

DATA BASIS: DERIVED FROM FLIGHT TEST

FIGURE 32. Airspeed-altimeter correction chart

## MIL-PRF-63029D(AV)

## CROSSWIND - TAKEOFF OR LANDING


## EXAMPLE

## KNOWN

CLEAN CONFIGURATION  
 RUNWAY 21  
 WIND VELOCITY = 23KT  
 WIND DIRECTION = 190°  
 NORMAL ROTATION AIRSPEED = 93KT

## METHOD

DETERMINE RUNWAY WIND ANGLE,  
 $210^\circ - 190^\circ = 20^\circ$   
 ENTER WIND VELOCITY  
 MOVE RIGHT TO RUNWAY WIND  
 ANGLE =  $20^\circ$   
 MOVE DOWN TO NORMAL ROTATION  
 AIRSPEED LINE = 93 KTS  
 THE INTERSECTION FALLS WITHIN THE  
 RECOMMENDED AREA

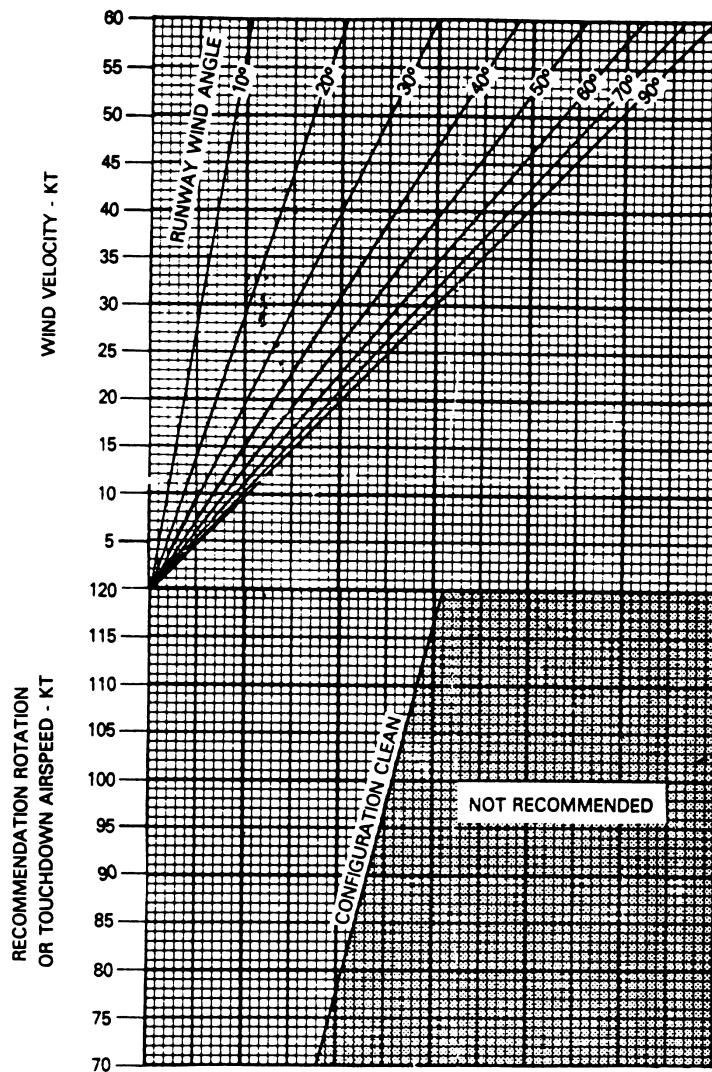

DATA BASIS: FLIGHT TEST

FIGURE 33. Crosswind takeoff or landing chart (FW)

MIL-PRF-63029D(AV)

**TORQUE AVAILABLE FOR TAKEOFF**

PROP SPEED 2200 RPM  
FUEL JP-4 AIRSPEED 0 KNOTS

**EXAMPLE**

**WANTED**

TORQUE AVAILABLE FOR TAKEOFF


**KNOWN**

FAT=12°C  
PRESSURE ALTITUDE=4307FT

**METHOD**

ENTER FAT  
MOVE RIGHT TO  
PRESSURE ALTITUDE=4307 FT

MOVE DOWN, READ  
TORQUE AVAILABLE PER ENGINE=1159 FT-LB

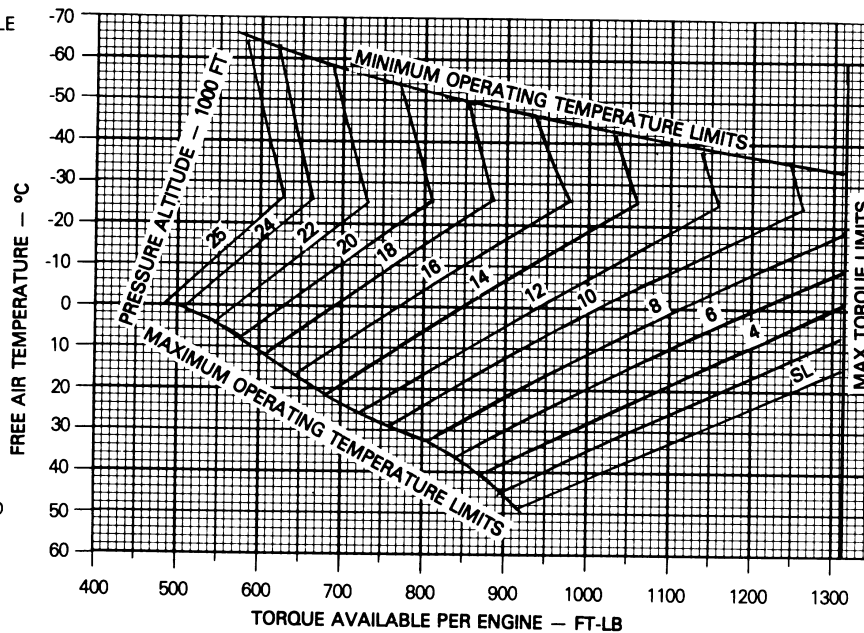

DATA BASIS: CALCULATED FROM ENGINE MODEL SPEC

FIGURE 34. Torque available for takeoff chart (FW)

MIL-PRF-63029D(AV)

TAKEOFF - NORMAL

CALM WINDS FLAPS 0 PERCENT POWER - TAKEOFF  
LEVEL HARD SURFACE

EXAMPLE

WANTED


REQUIRED GROUND ROLL AND OBSTACLE  
CLEARANCE DISTANCES

KNOWN

FAT = 12°C  
PRESSURE ALTITUDE = 4307 FT  
TAKEOFF WEIGHT = 9650 LB  
OBSTACLE HEIGHT = 71 FT

METHOD

ENTER FAT  
MOVE RIGHT TO PRESSURE ALTITUDE = 4307 FT  
MOVE DOWN TO TAKEOFF WEIGHT = 9650 LB  
MOVE LEFT TO OBSTACLE HEIGHT = 71 FT  
MOVE DOWN, READ TOTAL DISTANCE REQUIRED  
TO CLEAR OBSTACLE = 4375 FT  
MOVE LEFT TO OBSTACLE HEIGHT = 0 FT  
MOVE DOWN, READ GROUND ROLL DISTANCE  
= 2725 FT

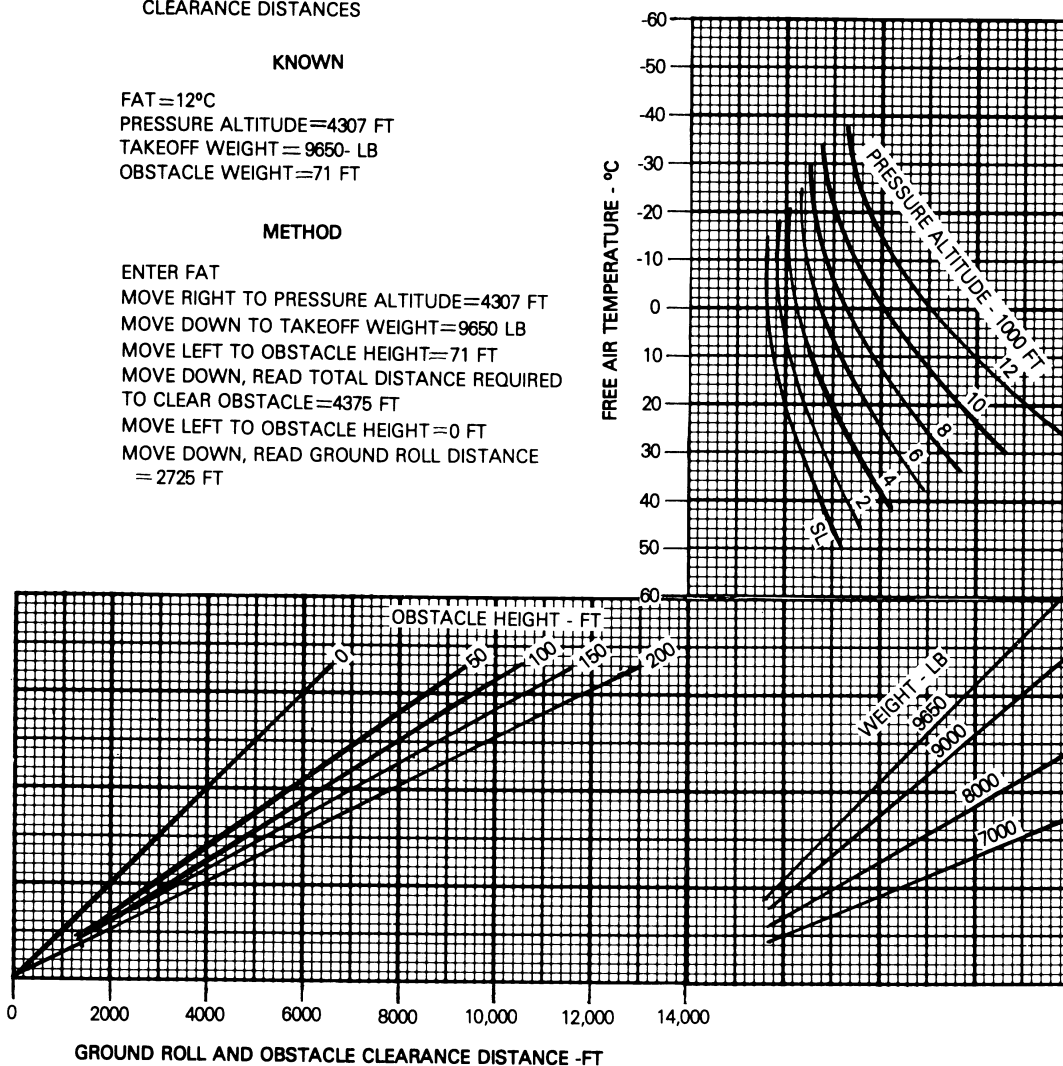

DATA BASIS: CALCULATED

FIGURE 35. Takeoff - normal chart (FW)

MIL-PRF-63029D(AV)

## NORMAL ROTATION/TAKEOFF AIRSPEED

### FLAPS 0 PERCENT

**EXAMPLE****WANTED**


NORMAL ROTATION, TAKEOFF, AND OBSTACLE  
CLEARANCE AIRSPEEDS FOR KNOWN TAKEOFF  
WEIGHT

**KNOWN**

TAKEOFF WEIGHT = 9650 LBM

**METHOD**

ENTER TAKEOFF WEIGHT  
MOVE RIGHT TO ROTATION AIRSPEED. TAKEOFF  
AIRSPEED AND OBSTACLE CLEARANCE  
AIRSPEED LINES  
MOVE DOWN FROM ROTATION AIRSPEED LINE  
READ INDICATED AIRSPEED FOR ROTATION 96 KT  
MOVE DOWN FROM TAKEOFF AIRSPEED LINE,  
READ INDICATED AIRSPEED FOR TAKEOFF 99 KT  
MOVE DOWN FROM OBSTACLE CLEARANCE  
AIRSPEED LINE, READ INDICATED AIRSPEED  
FOR OBSTACLE CLEARANCE 110 KT

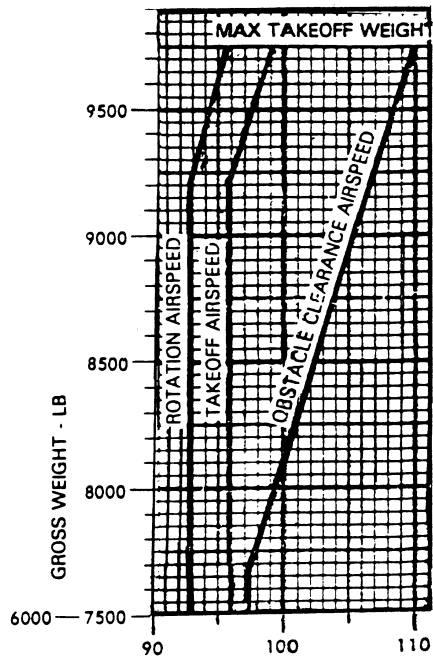

**DATA BASIS:** FLIGHT TEST

FIGURE 36. Normal rotation/takeoff airspeed chart (FW)



MIL-PRF-63029D(AV)

### ACCELERATION CHECK

POWER - TAKEOFF CALM WINDS  
FLAPS 0 PERCENT LEVEL HARD SURFACE

ACCELERATION  
CHECK  
RU-21D  
T74-CP-700

#### EXAMPLE

##### WANTED


AIR SPEED REQUIRED AT  
VARIOUS ACCELERATION  
CHECK POINTS

##### KNOWN

TAKEOFF AIRSPEED FOR  
KNOWN GROSS WEIGHT  
OF 9,650 LB = 96 KT  
GROUND ROLL DISTANCE  
= 2500 FT

##### METHOD

ENTER INDICATED  
AIR SPEED HERE  
MOVE RIGHT TO GROUND  
ROLL DISTANCE LINE  
= 2500 FT  
MOVE DOWN THE GUIDE  
LINE TO THE 1000 FT  
GROUND ROLL DISTANCE  
LINE  
MOVE LEFT, READ INDICATED  
AIRSPEED REQUIRED AT  
1000 FT MARKER = 57 KT

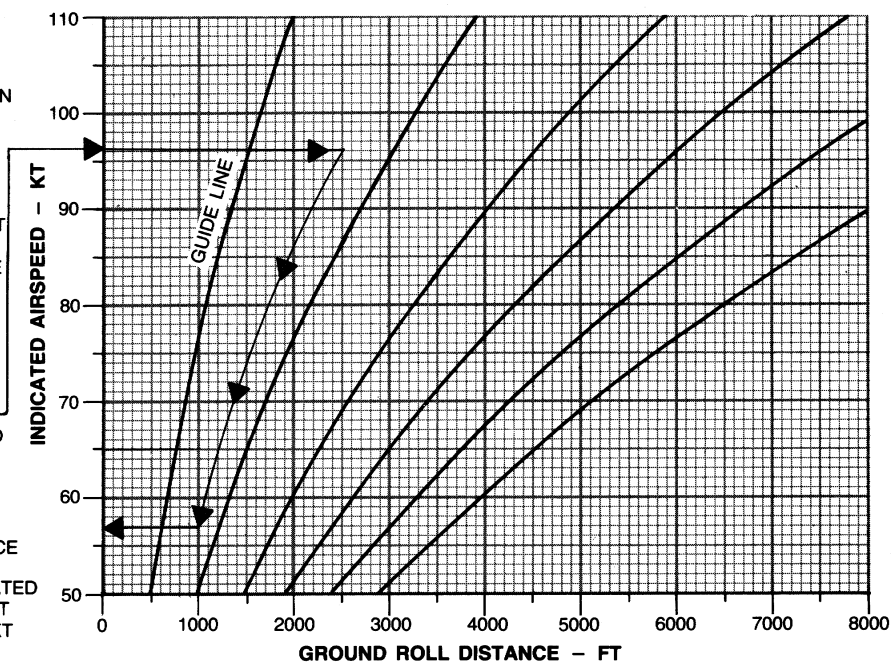

DATA BASIS: ESTIMATED

G  
AP 001539

FIGURE 37. Acceleration check distance chart (FW)

MIL-PRF-63029D(AV)

**ACCELERATE-STOP DISTANCE**  
 CALM WINDS FLAPS 0 PERCENT POWER-TAKEOFF  
 LEVEL HARD SURFACE

**ACCELERATE-STOP**  
 RU-21D  
 T74-CP-700

**EXAMPLE**

**WANTED**


DISTANCE REQUIRED TO ACCELERATE TO TAKEOFF AIRSPEED,  
 THEN STOP

**KNOWN**

FAT = 12°C  
 PRESSURE ALTITUDE = 4307 FT.  
 TAKEOFF WEIGHT = 9650 LB

**METHOD**

ENTER FAT HERE →  
 MOVE RIGHT TO PRESSURE ALTITUDE = 4307 FT.  
 MOVE DOWN TO TAKEOFF WEIGHT = 9650 LB.  
 MOVE LEFT TO ACCELERATE-STOP DIST. = 5050 FT.

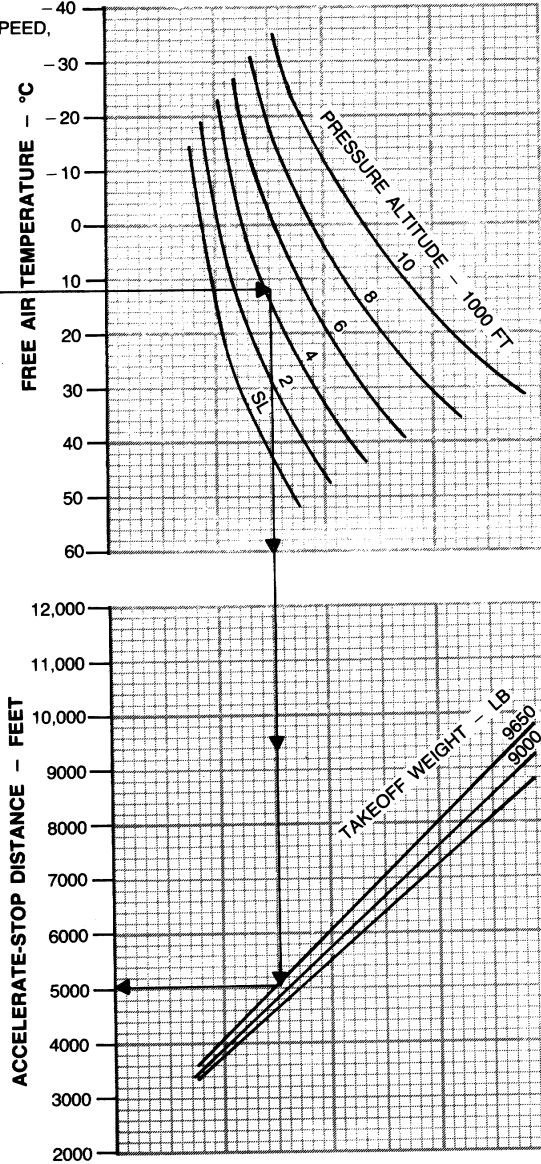

DATA BASIS: ESTIMATED

G  
 AP 003224

FIGURE 38. Accelerate - stop distance chart (FW)



MIL-PRF-63029D(AV)

**Accelerate After Lift-Off**  
**Flaps 40°**  
**Power 100%**

**EXAMPLE**

**WANTED**

GROUND ROLL DISTANCE AND  
 TOTAL DISTANCE OVER 50 FT,  
 OBSTACLE.

**KNOWN**

FREE AIR TEMPERATURE — 25°C  
 PRESSURE ALTITUDE — 3966 FT.  
 HEADWIND COMPONENT — 9.5 KTS  
 GROSS WEIGHT — 12500 LBS.

**METHOD**

ENTER AT FAT  
 MOVE RIGHT TO PRESSURE ALTITUDE  
 MOVE DOWN TO 1ST REF. LINE  
 FOLLOW GUIDE LINE TO GROSS WEIGHT  
 MOVE DOWN TO 2ND REF. LINE  
 FOLLOW GUIDE LINE TO WIND SPEED  
 MOVE DOWN TO 3RD REF. LINE  
 CONTINUE STRAIGHT DOWN  
 READ GROUND ROLL EQUAL 3300 FT.  
 FOLLOW GUIDE LINE TO 50 FT  
 READ TOTAL DISTANCE EQUAL 8550 FT.

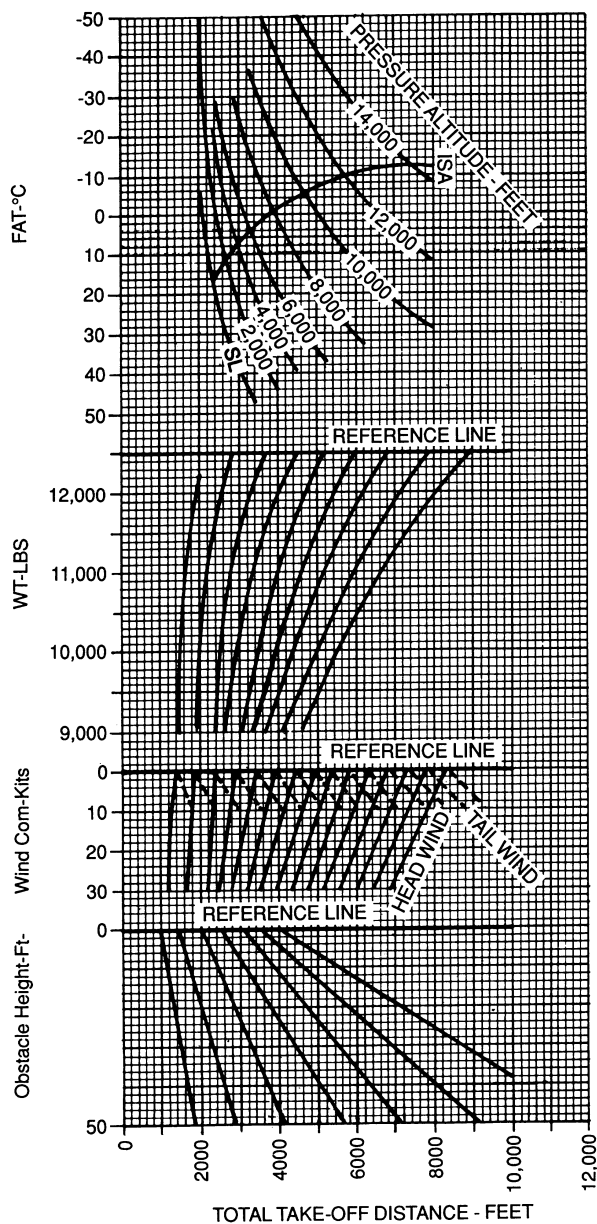


FIGURE 39. Accelerate after lift-off chart (FW)

MIL-PRF-63029D(AV)

**MINIMUM SINGLE ENGINE CONTROL AIRSPEED (V<sub>mc</sub>)**

POWER - TAKEOFF GEAR DOWN  
FLAPS 0 PERCENT PROP FEATHERED

MINIMUM SINGLE ENGINE CONTROL AIRSPEED  
RU-21D  
T74-CP-700

**EXAMPLE**

**WANTED**

MINIMUM SINGLE ENGINE CONTROL AIRSPEED  
AT A GIVEN FAT AND PRESSURE ALTITUDE

**KNOWN**


FAT = 12°C  
PRESSURE ALTITUDE = 4307 FT

**METHOD**

ENTER FAT HERE →  
MOVE RIGHT TO PRESSURE ALTITUDE = 4307  
FT  
MOVE DOWN TO RUDDER LIMITED LINE  
MOVE LEFT, READ MINIMUM CONTROL INDICATED AIRSPEED = 84 KNOTS

**NOTE**

AT SOME WEIGHTS A STALL CONDITION CAN OCCUR AT AIRSPEEDS HIGHER THAN THE RUDDER LIMITED V<sub>mc</sub>

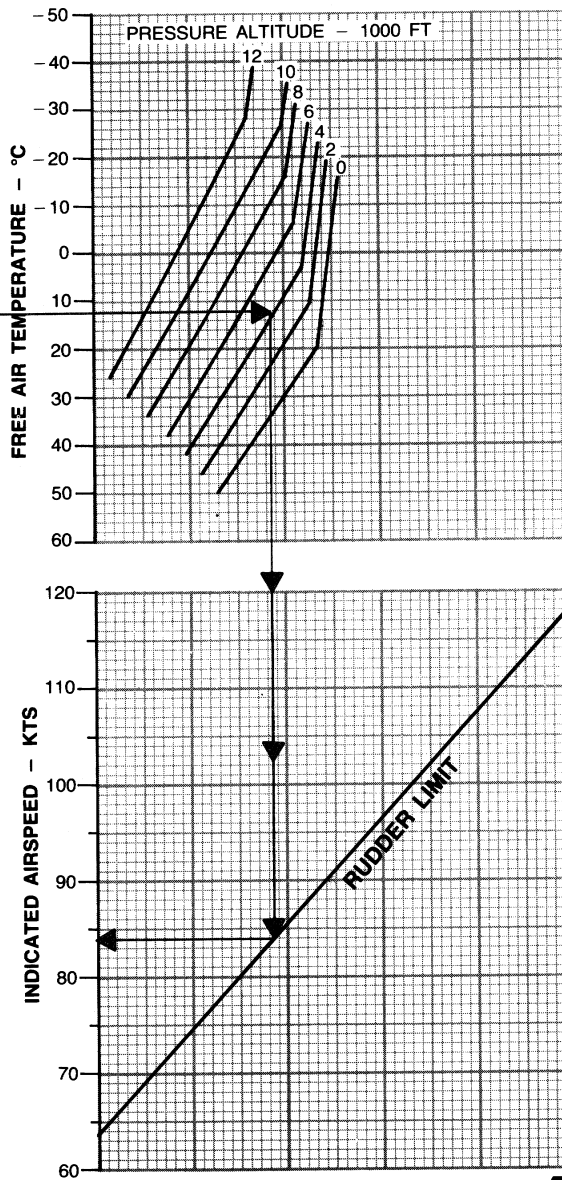

DATA BASIS: FLIGHT TEST

G ■  
R ■  
AP 004559

FIGURE 40. Minimum single engine control airspeed chart (FW)

MIL-PRF-63029D(AV)



# SINGLE ENGINE CLIMB TAKEOFF CONFIGURATION

SINGLE-ENGINE CLIMB  
RU-21D  
T74-CP-700

FLAPS 0 PERCENT PROPELLER FEATHERED POWER - TAKEOFF

## EXAMPLE

### WANTED




WEIGHT TO OBTAIN A POSITIVE SINGLE ENGINE R/C AT LIFTOFF AND SINGLE ENGINE R/C AFTER THE GEAR IS RETRACTED

### KNOWN

FAT = 12°C  
PRESSURE ALTITUDE = 4307 FT

### METHOD

ENTER FAT HERE →  
MOVE RIGHT TO PRESSURE ALTITUDE = 4307 FT  
MOVE DOWN TO 0 FT/MIN R/C FOR GEAR DOWN, READ WEIGHT TO OBTAIN POSITIVE R/C AT LIFTOFF = 9650 LB  
MOVE DOWN TO WEIGHT = 9650 LB FOR GEAR UP CLIMB  
MOVE LEFT READ SINGLE ENGINE R/C AFTER GEAR RETRACTION = 175 FT/MIN

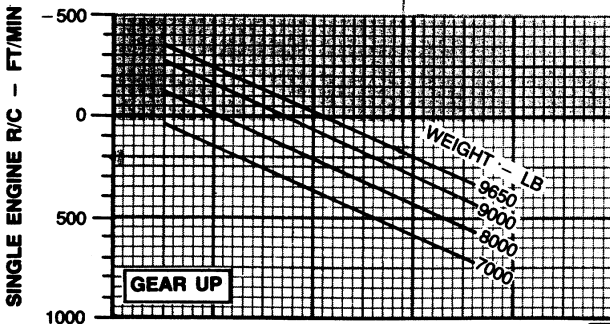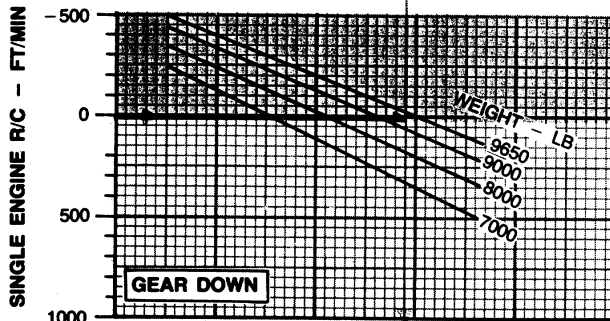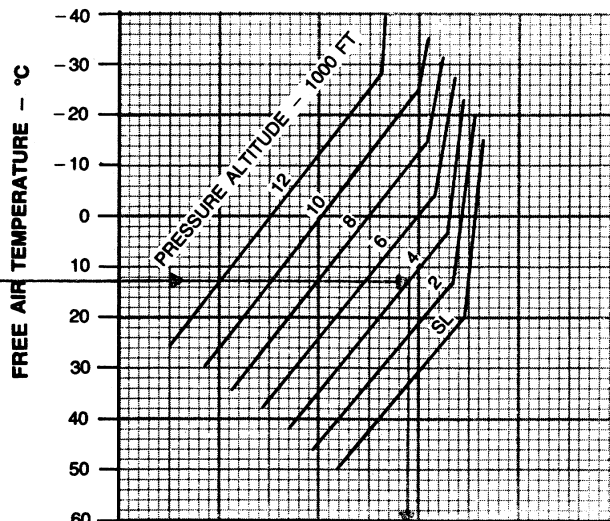

DATA BASIS: CALCULATED

AP 001389

FIGURE 41. Single engine climb chart(FW) (sheet 1 of 2)

MIL-PRF-63029D(AV)

**Single Engine Gradient of Climb**  
**Flaps 40%**  
**Power - 100%**  
**Landing Gear-Up**

**EXAMPLE**

**WANTED**

GRADIENT OF CLIMB

**KNOWN**

FREE AIR TEMPERATURE — 25°C  
 PRESSURE ALTITUDE — 3966 FT.  
 GROSS WEIGHT — 12150 LBS

**METHOD**

ENTER AT FAT  
 MOVE RIGHT TO PRESSURE ALTITUDE  
 MOVE DOWN TO REFERENCE LINE  
 FOLLOW GUIDE LINE TO GROSS WEIGHT  
 MOVE DOWN READ GRADIENT OF CLIMB  
 EQUAL 2.4%

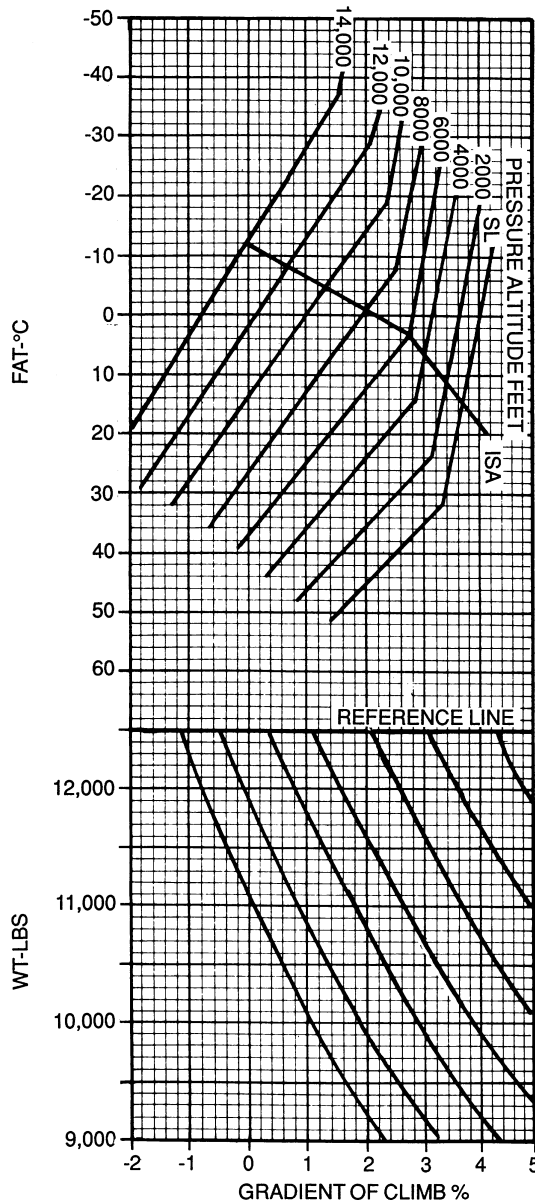


FIGURE 41. Single engine climb chart (FW) (sheet 2 of 2)



MIL-PRF-63029D(AV)

**CRUISE CLIMB**  
 GEAR UP FLAPS 0 PERCENT CALM WIND  
 POWER - MAXIMUM CRUISE CLIMB

**CRUISE CLIMB**  
 RU-21D  
 T74-CP-700

**EXAMPLE**

**WANTED**

TIME, FUEL AND DISTANCE REQUIRED TO CLIMB

**KNOWN**


INITIAL FAT = 12°C  
 INITIAL PRESSURE ALTITUDE = 4307 FT  
 INITIAL WEIGHT = 9650 LBS  
 FINAL FAT = -5°C  
 FINAL PRESSURE ALTITUDE = 12,000 FT

**METHOD**

ENTER FAT HERE →  
 MOVE RIGHT TO PRESSURE ALTITUDE →  
 MOVE DOWN TO INITIAL WEIGHT →  
 MOVE LEFT, READ TIME, FUEL AND DISTANCE →

**NOTE**

READ GRAPH FOR INITIAL CONDITIONS. SECONDLY, READ FOR FINAL CONDITIONS WITH INITIAL WEIGHT. DIFFERENCE BETWEEN READINGS IS TIME, FUEL AND DISTANCE TO CLIMB.  
 TIME TO CLIMB (10-3) = 7 MIN  
 FUEL TO CLIMB (100-32) = 68 LB  
 DISTANCE TO CLIMB (20-6) = 14 N. M.

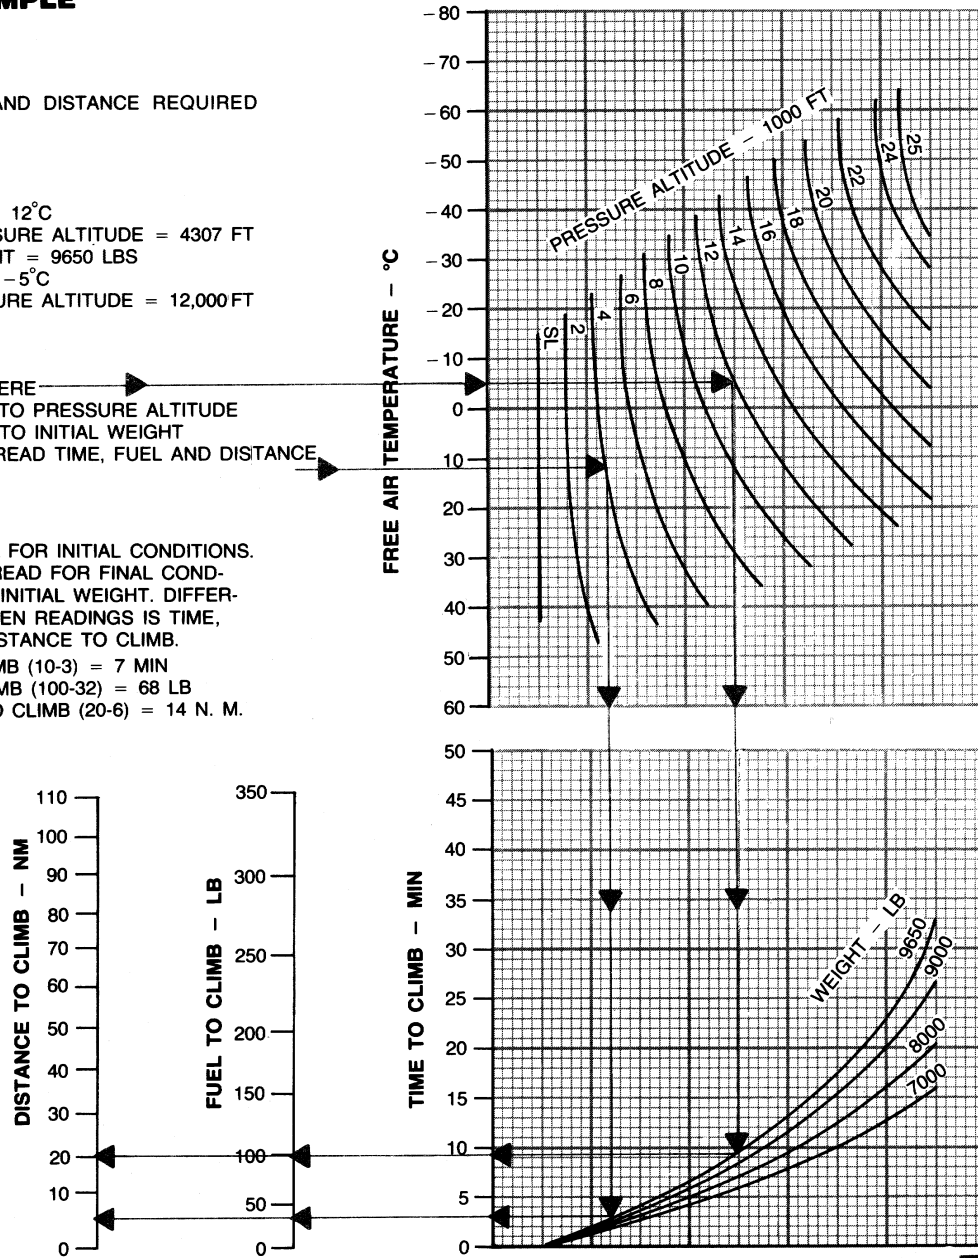

DATA BASIS: FLIGHT TEST

AP 001391

FIGURE 42. Cruise climb chart

MIL-PRF-63029D(AV)



**CLIMB/DESCENT**

**CLIMB/DESCENT  
RU-21D  
T74-CP-702**

**EXAMPLE**

**WANTED**


RATE OF CLIMB OR DESCENT AS A RESULT OF CHANGE IN HORSEPOWER

**KNOWN**

HORSEPOWER CHANGE = 200 HP  
WEIGHT = 9000 LB

**METHOD**

ENTER HORSEPOWER CHANGE HERE  
MOVE RIGHT TO WEIGHT = 9000 LB  
MOVE DOWN, READ RATE OF CLIMB OR DESCENT = 1050 FT/MIN

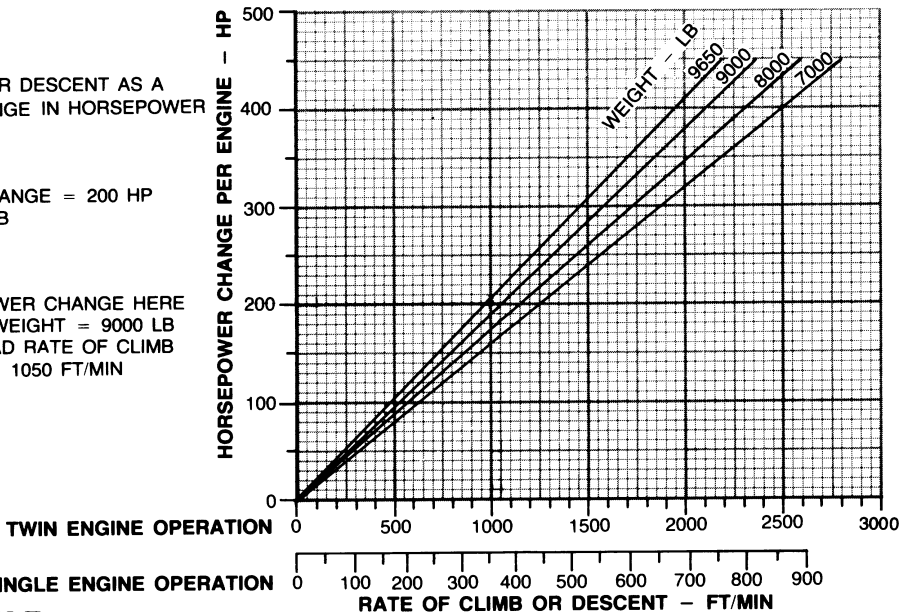

**EXAMPLE**

**WANTED**


TORQUE CHANGE FOR CLIMB OR DESCENT AS A RESULT OF CHANGE IN HORSEPOWER OR RPM

**KNOWN**

HORSEPOWER CHANGE = 200  
PROP RPM = 1900 RPM

**METHOD**

ENTER HORSEPOWER CHANGE HERE  
MOVE RIGHT TO RPM = 1900 RPM  
MOVE DOWN, READ TORQUE CHANGE PER ENGINE = 560 FT LB

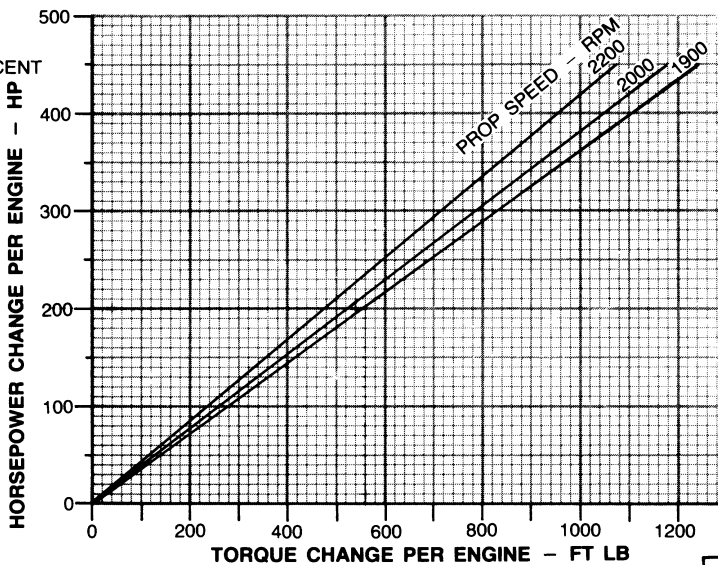

DATA BASIS: CALCULATED


AP 001418

FIGURE 43. Climb/descent chart (FW)

MIL-PRF-63029D(AV)

FAT 30°C

**CRUISE**  
 TWIN ENGINE  
 RPM-1900  
 PRESSURE ALTITUDE 8000 FEET  
 FLAPS 0 PERCENT FUEL JP-4 GEAR UP  
 Fuel Flow Per Engine-LB/HR

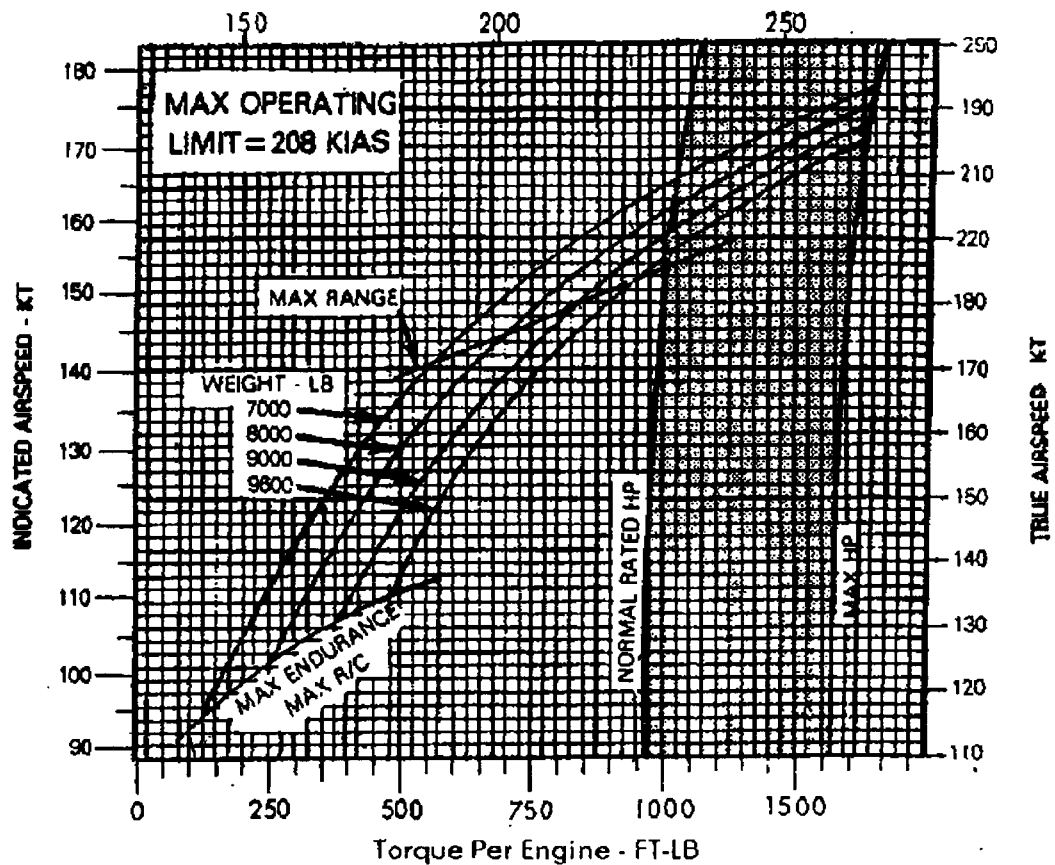

DATA BASIS: ESTIMATED

FIGURE 44. Cruise chart (FW)



MIL-PRF-63029D(AV)

# APPROACH SPEED


GEAR DOWN

## EXAMPLE

**WANTED**  
RECOMMENDED APPROACH SPEED  
FOR KNOWN WEIGHT

**KNOWN**  
WEIGHT=8855 LB  
FLAP SETTING=DOWN

**METHOD**  
ENTER WEIGHT  
MOVE RIGHT TO APPROACH SPEED  
LINE, FLAPS DOWN  
MOVE DOWN, READ INDICATED  
AIRSPEED=103 KT

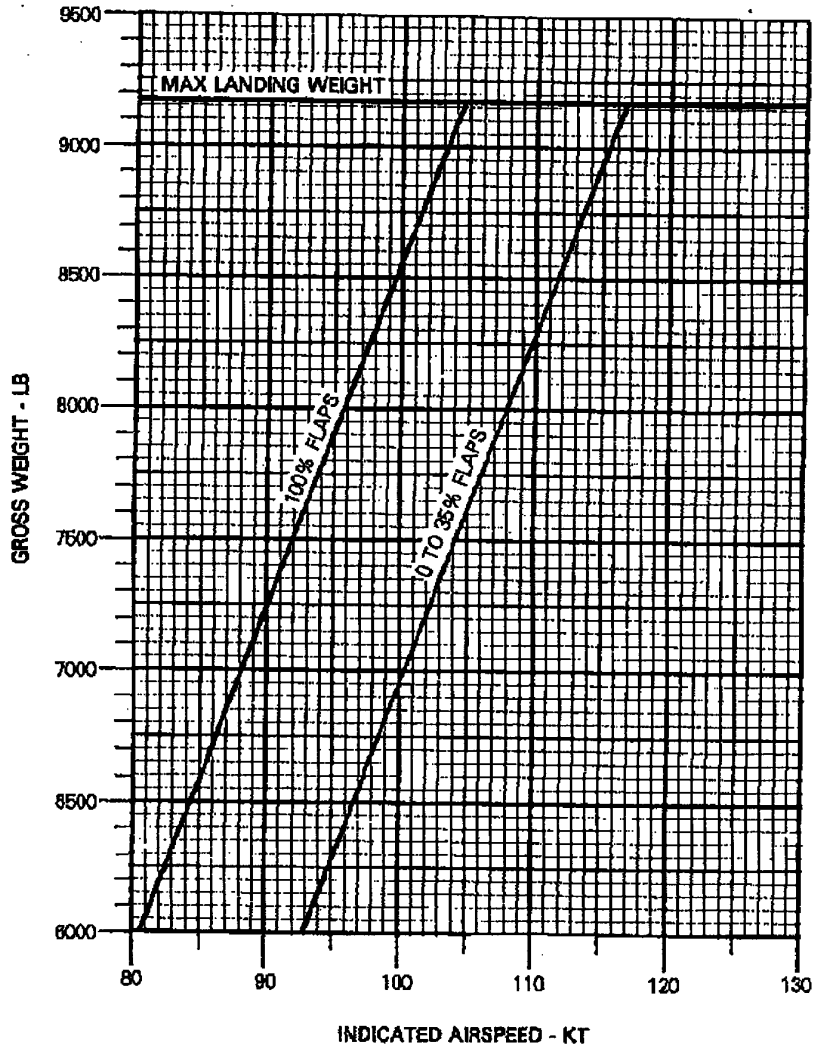

DATA BASIS: FLIGHT TEST

FIGURE 45. Approach speed chart (FW)

MIL-PRF-63029D(AV)

# LANDING

CALM WINDS LEVEL, DRY, HARD SURFACE  
MAX BRAKING AND IDLE POWER ON RUNWAY

## EXAMPLE

### WANTED




LANDING DISTANCE

### KNOWN

WEIGHT - 8855 LB  
PRESSURE ALTITUDE - 4484 FT  
FAT - 18°C  
FLAPS DOWN

### METHOD

ENTER FAT  
MOVE RIGHT TO PRESSURE ALTITUDE - 4484 FT  
MOVE DOWN TO WEIGHT - 8855 LB  
MOVE LEFT TO FULL BRAKING WITH FLAPS DOWN  
MOVE STRAIGHT DOWN, READ LANDING DISTANCE - 2150 FT

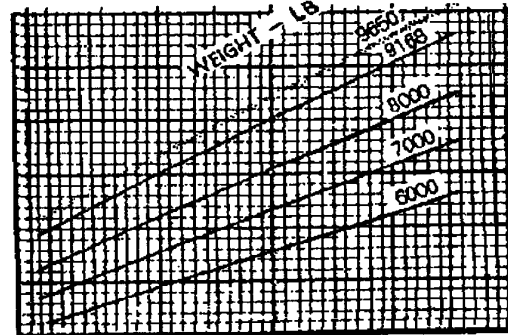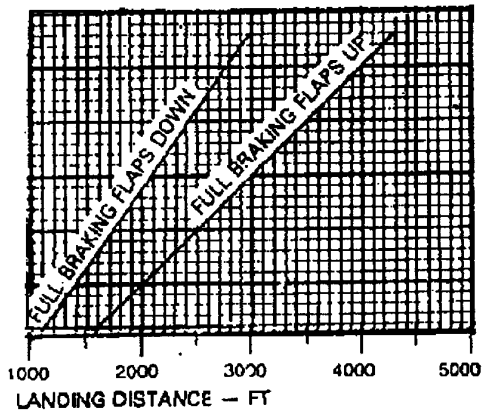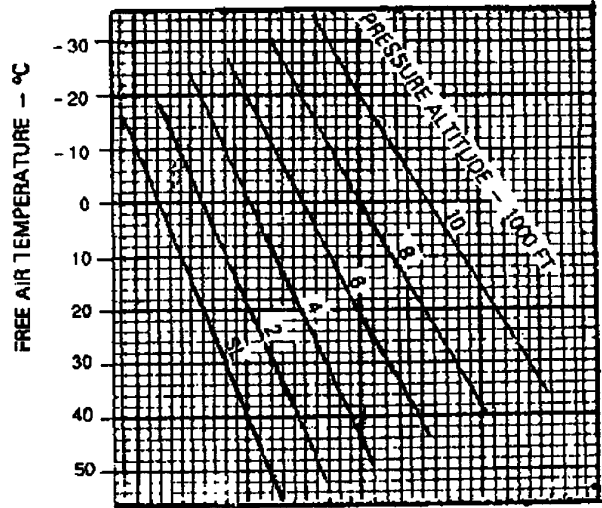

DATA BASIS: CALCULATED

FIGURE 46. Landing chart (FW)

**MIL-PRF-63029D(AV)****8.20 ENGINE RUN-UP****CAUTION**

**Minimize movement of the cyclic during ground run-up, to preclude damage to the input quill seal and the main drive shaft.**

- \*1 . Gas producer - 70 to 72 percent rpm.

**NOTE**

**This check should be made while holding throttle lightly against engine idle stop.**

- \*2. Engine oil pressure - 25 psi minimum at engine idle.
- \*3. Transmission oil pressure - Check.
- \*4. Master caution light - **OFF**.
- \*5. **SCAS** power switch - **ON**. Check No-Go lights illuminated.

**CAUTION**


**If fuel quantity gage does not coincide with the visual inspection of fuel quantity, the possibility exists that fuel is restricted from flowing to the aft call by malfunction of improper installation of the flapper check valve. If this condition does exist, it prevents a serious center of gravity hazard and should be thoroughly investigated by maintenance before flight.**

- \*6. Fuel quantity - Press to test.
- \*7. Avionics - **ON**.
- \*8. Force Trim Switch - **ON**. Check force gradients as follows:  
Press cyclic momentary interrupt switch (pilot then gunner) ensuring magnetic brakes release.
- ⑨ Force Trim Switch - **ON**. Check force gradients operational.  
Press cyclic momentary interrupt switch (pilot then gunner) ensuring magnetic brakes release.



**FIGURE 47. Example of amplified checklist format and style**

MIL-PRF-63029D(AV)

CABIN EMERGENCY HATCH JETTISON PROCEDURE

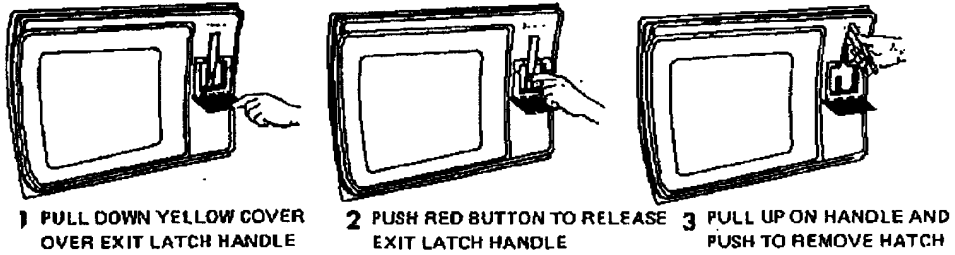

EMERGENCY ESCAPE ROUTES

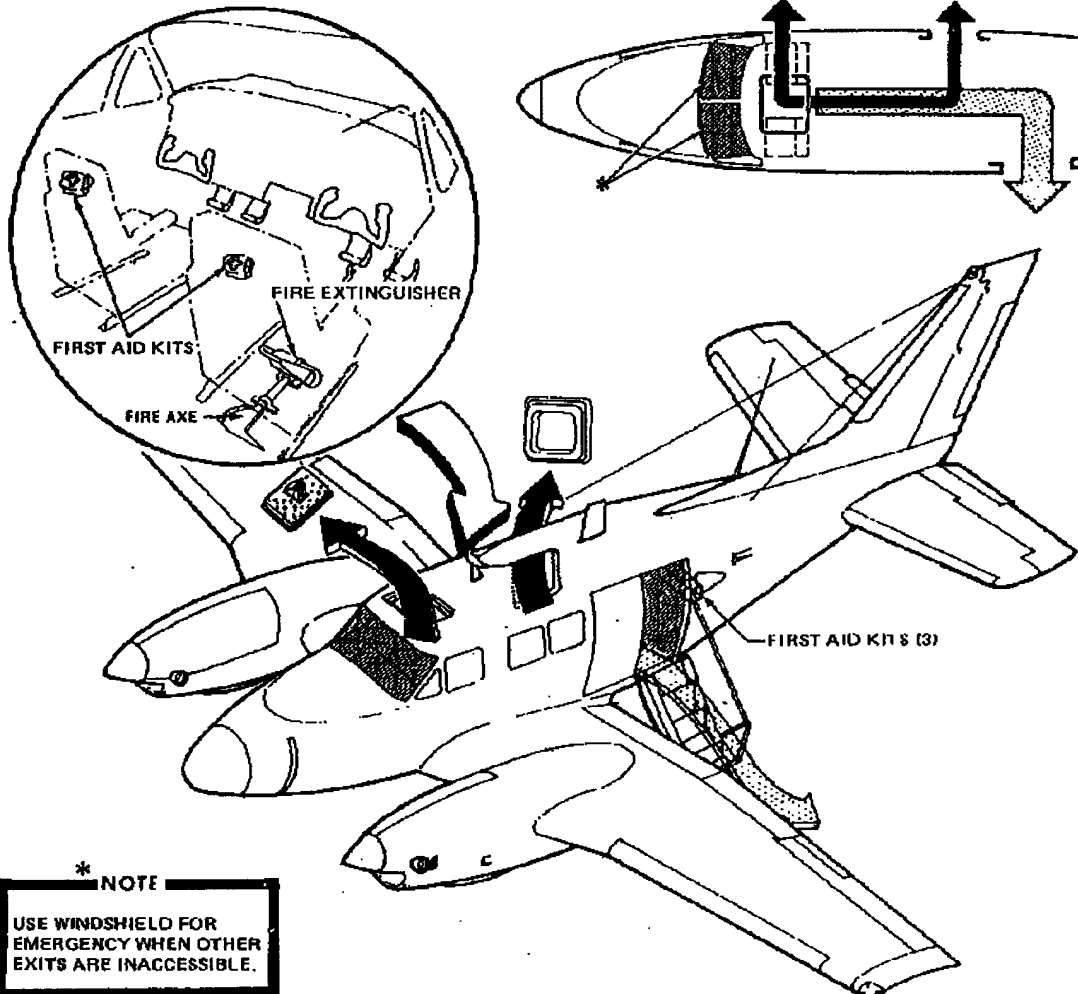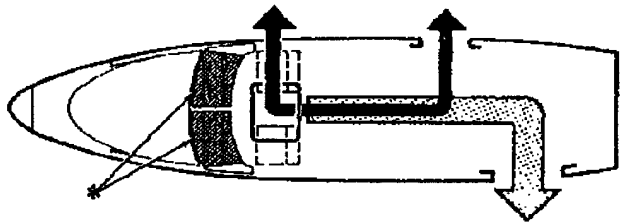

**\* NOTE**  
 USE WINDSHIELD FOR EMERGENCY WHEN OTHER EXITS ARE INACCESSIBLE.

- DITCHING EMERGENCY EXITS AND EMERGENCY ENTRANCE ALL SERIES
- DITCHING AND GROUND EMERGENCY EXIT ONLY
- BAIL-OUT, DITCHING AND GROUND EMERGENCY EXIT

FIGURE 48. Emergency equipment and emergency exits (sheet 1 of 2)

MIL-PRF-63029D(AV)

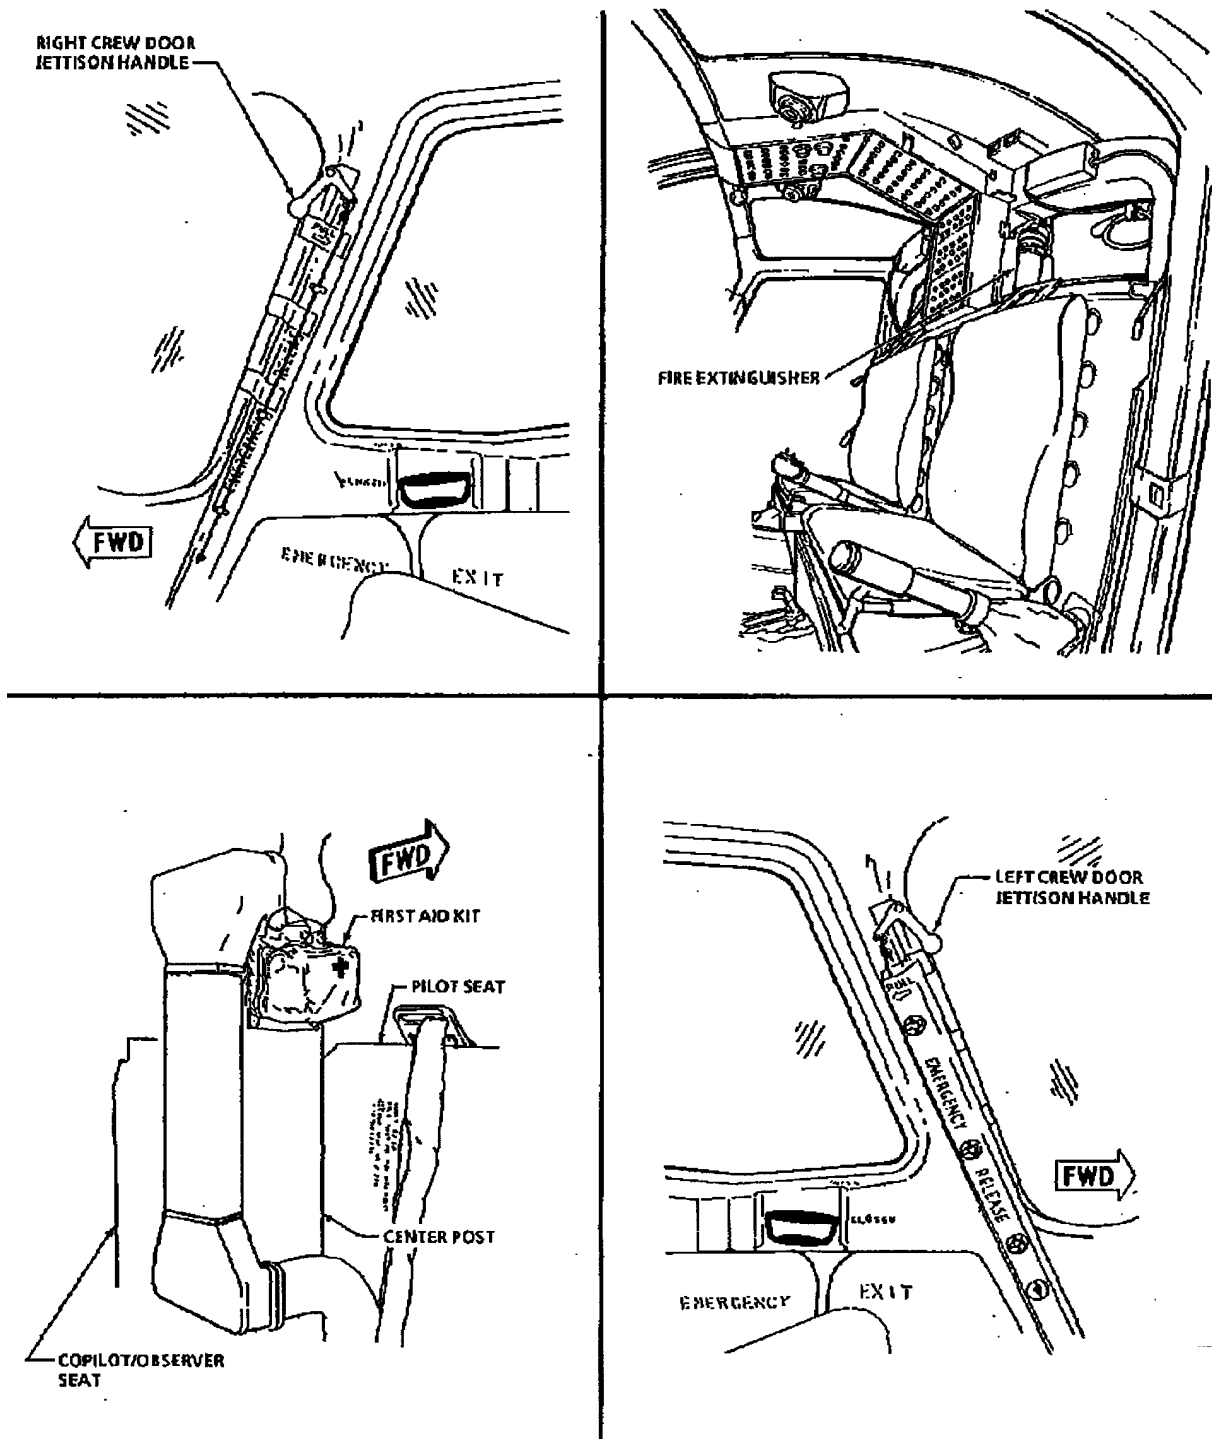


FIGURE 48. Emergency equipment and emergency exits (sheet 2 of 2)

MIL-PRF-63029D(AV)

# MAXIMUM GLIDE DISTANCE

POWER OFF (PROPELLERS FEATHERED)  
GEAR AND FLAPS UP ZERO WIND


WEIGHT - LBS.	BEST GLIDE SPEED KIAS
9650	112
9000	108
8000	102
7000	94
6000	87

## EXAMPLE

**WANTED**  
MAXIMUM GLIDE DISTANCE

**KNOWN**  
HEIGHT ABOVE TERRAIN = 7400 FT

**METHOD**  
ENTER HEIGHT ABOVE TERRAIN  
MOVE RIGHT TO MAXIMUM GLIDE  
DISTANCE LINE  
MOVE DOWN, READ MAXIMUM  
GLIDE DISTANCE = 22NM

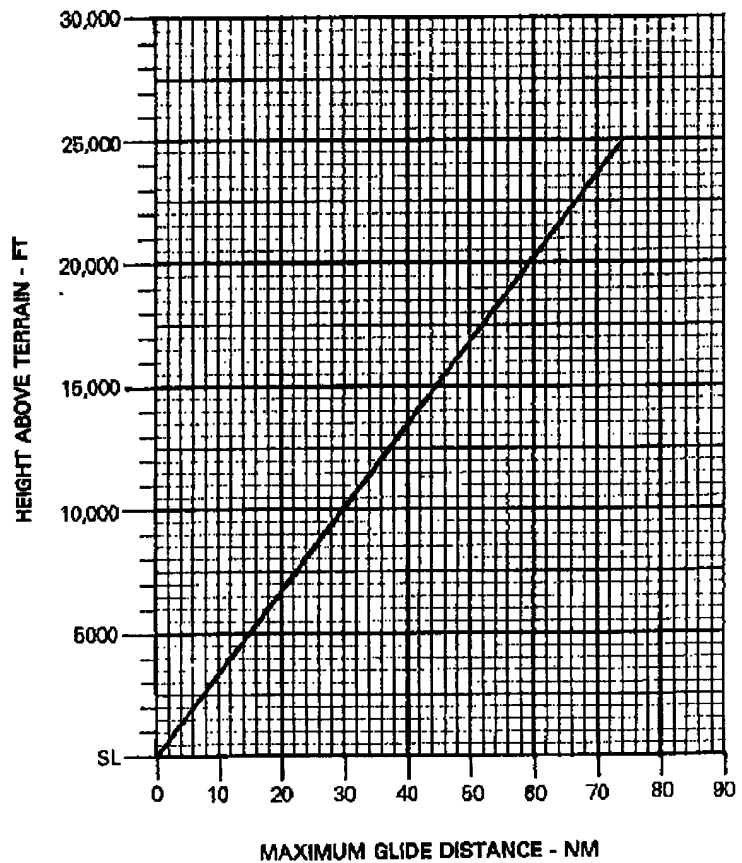

DATA BASIS: ESTIMATED

FIGURE 49. Maximum glide distance (FW)

MIL-PRF-63029D(AV)

### AUTOROTATIONAL GLIDE CHARACTERISTICS POWER OFF

**EXAMPLE**

**WANTED**


GLIDE RATIO AND RATE OF DESCENT

**KNOWN**

AIRSPEED — 80 KIAS ROOF  
ROTOR RPM — 314

**METHOD**

ENTER INDICATED AIRSPEED  
MOVE UP TO 314 ROTOR RPM LINE  
MOVE LEFT, READ GLIDE RATIO — 4.5  
CONTINUE UP 80 KIAS TO 314 ROTOR  
RPM LINE ON UPPER GRAPH. MOVE  
LEFT, READ RATE OF DESCENT — 1726  
FPM

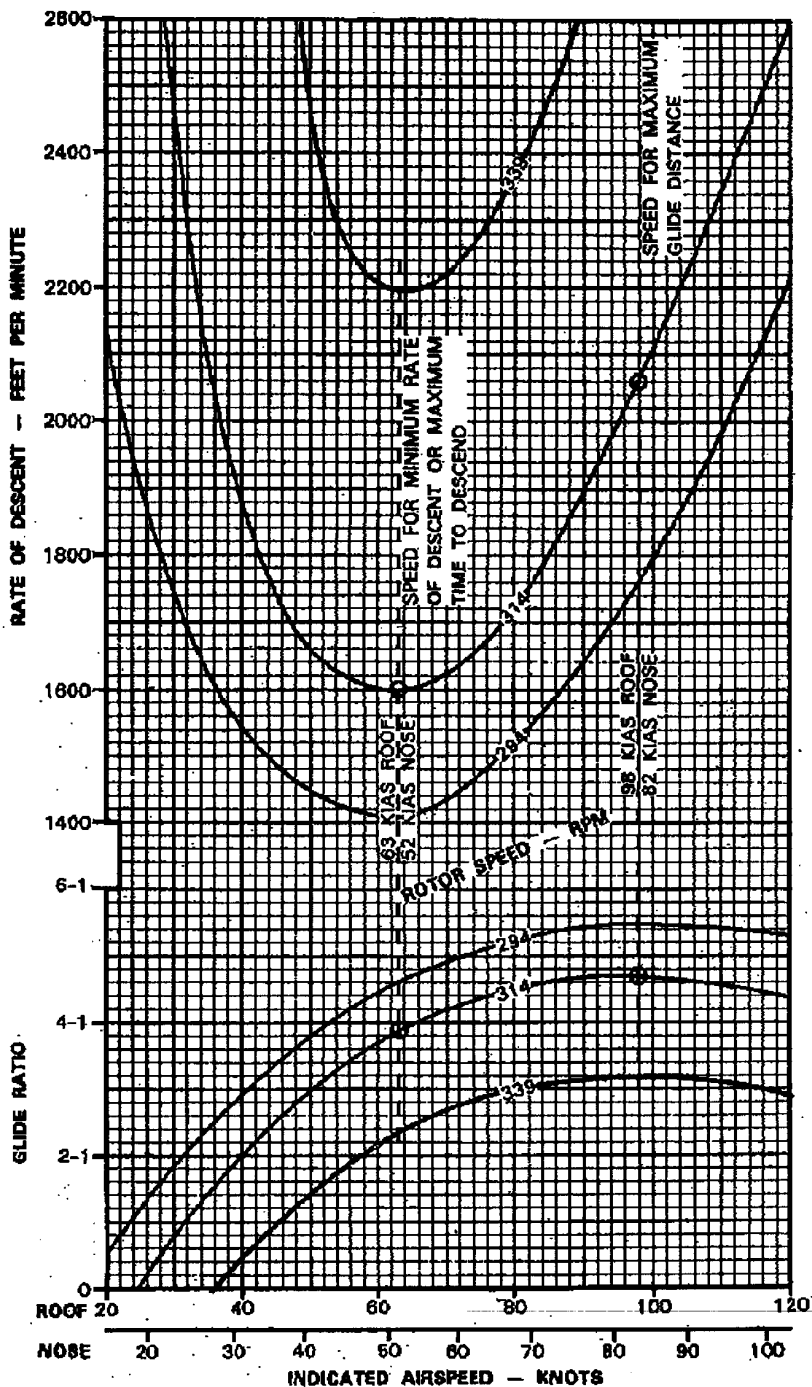

DATA BASIS: CALCULATED DATA

FIGURE 50. Autorotational descent



MIL-PRF-63029D(AV)

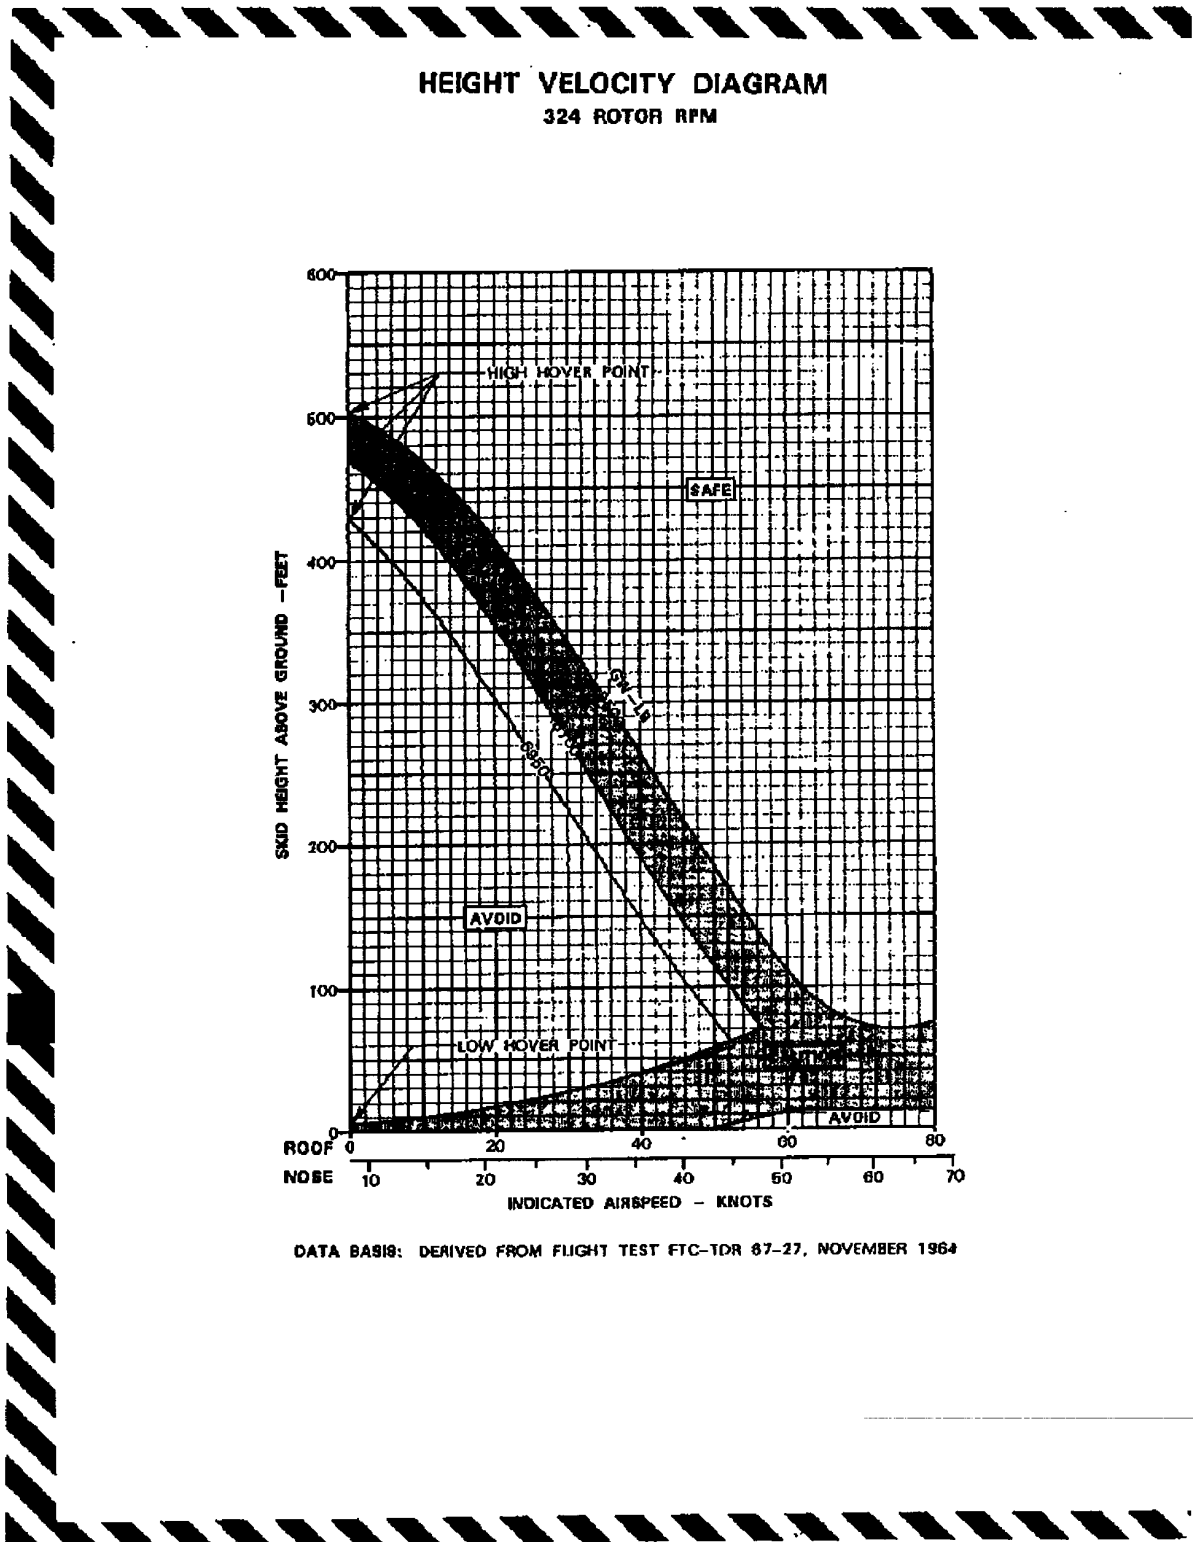


FIGURE 51. Height velocity diagram

MIL-PRF-63029D(AV)

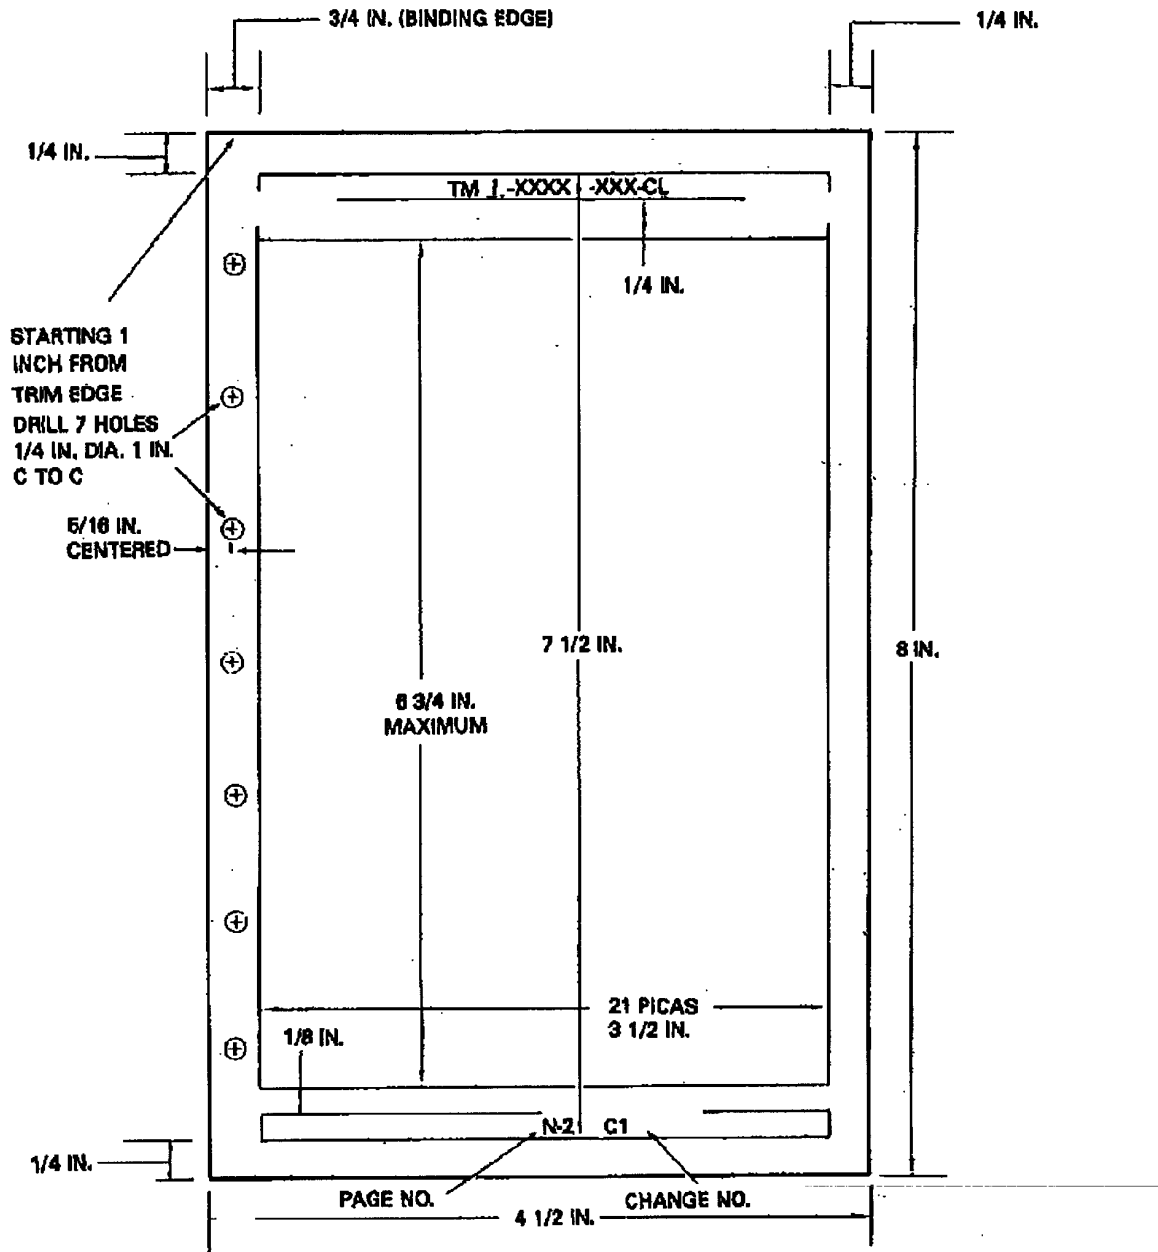


FIGURE 52. Page dimensions for condensed checklist and MTF checklist

## MIL-PRF-63029D(AV)

## STANDARD CHECKLIST

USE	TYPE STYLE AND SIZE	CAPITALIZATION	SPACING
1. GENERAL INFORMATION AND SCOPE	10 PT MEDIUM		
2. MARGINAL COPY	10 PT BOLD	CAPITALS	
3. NORMAL AND EMERGENCY PROCEDURES TEXT*	(a) PRIMARY HEADINGS 14 PT BOLD AND SUBORDINATE HEADINGS 12 BOLD, (b) ITEM TO BE CHECKED 10 PT MEDIUM, (c) ACTION TO BE TAKEN 10 PT MEDIUM.		1 PICA BETWEEN PRIMARY AND SUBORDINATE HEADINGS, BETWEEN SUBORDINATE HEADING AND CHECKS, OR BETWEEN CHECKS AND NEXT PRIMARY OR SUBORDINATE HEADING.
4. IMMEDIATE ACTION TEXT	10 PT MEDIUM UNDERLINED		1 PICA BETWEEN PRIMARY AND SUBORDINATE HEADINGS, BETWEEN SUBORDINATE HEADING AND CHECKS, OR BETWEEN CHECKS AND NEXT PRIMARY OR SUBORDINATE HEADING.
5. PERFORMANCE DATA	NO LARGER THAN 12 PT AND NO SMALLER THAN 8 PT BOLD	CAPITALS	

## ALTERNATE CHECKLIST

USE	TYPE STYLE AND SIZE	CAPITALIZATION	SPACING
1. MARGINAL COPY	10 PT BOLD	CAPITALS	4 ¼ PICAS (¾ IN.) FROM EDGE OF PAPER
2. NORMAL AND EMERGENCY PROCEDURES TEXT*	PRIMARY HEADINGS- 16 PT BOLD SUBORDINATE HEADINGS- 16 PT MEDIUM ITEM TO BE CHECKED AND ACTION TO BE TAKEN - 8 PT MEDIUM	CAPITALS  CAPITALS	¼ PICA (6 POINTS) ABOVE AND BELOW HEADINGS
3. IMMEDIATE ACTION TEXT	8 PT MEDIUM UNDERLINED		¼ PICA (6 POINTS) SPACE ABOVE AND BELOW HEADINGS

\*INDENTIONS SHALL BE 1 EM AND 2 EMS AS NEEDED.

FIGURE 53. Standard and alternate operator's checklist - type style and spacing requirements

MIL-PRF-63029D(AV)

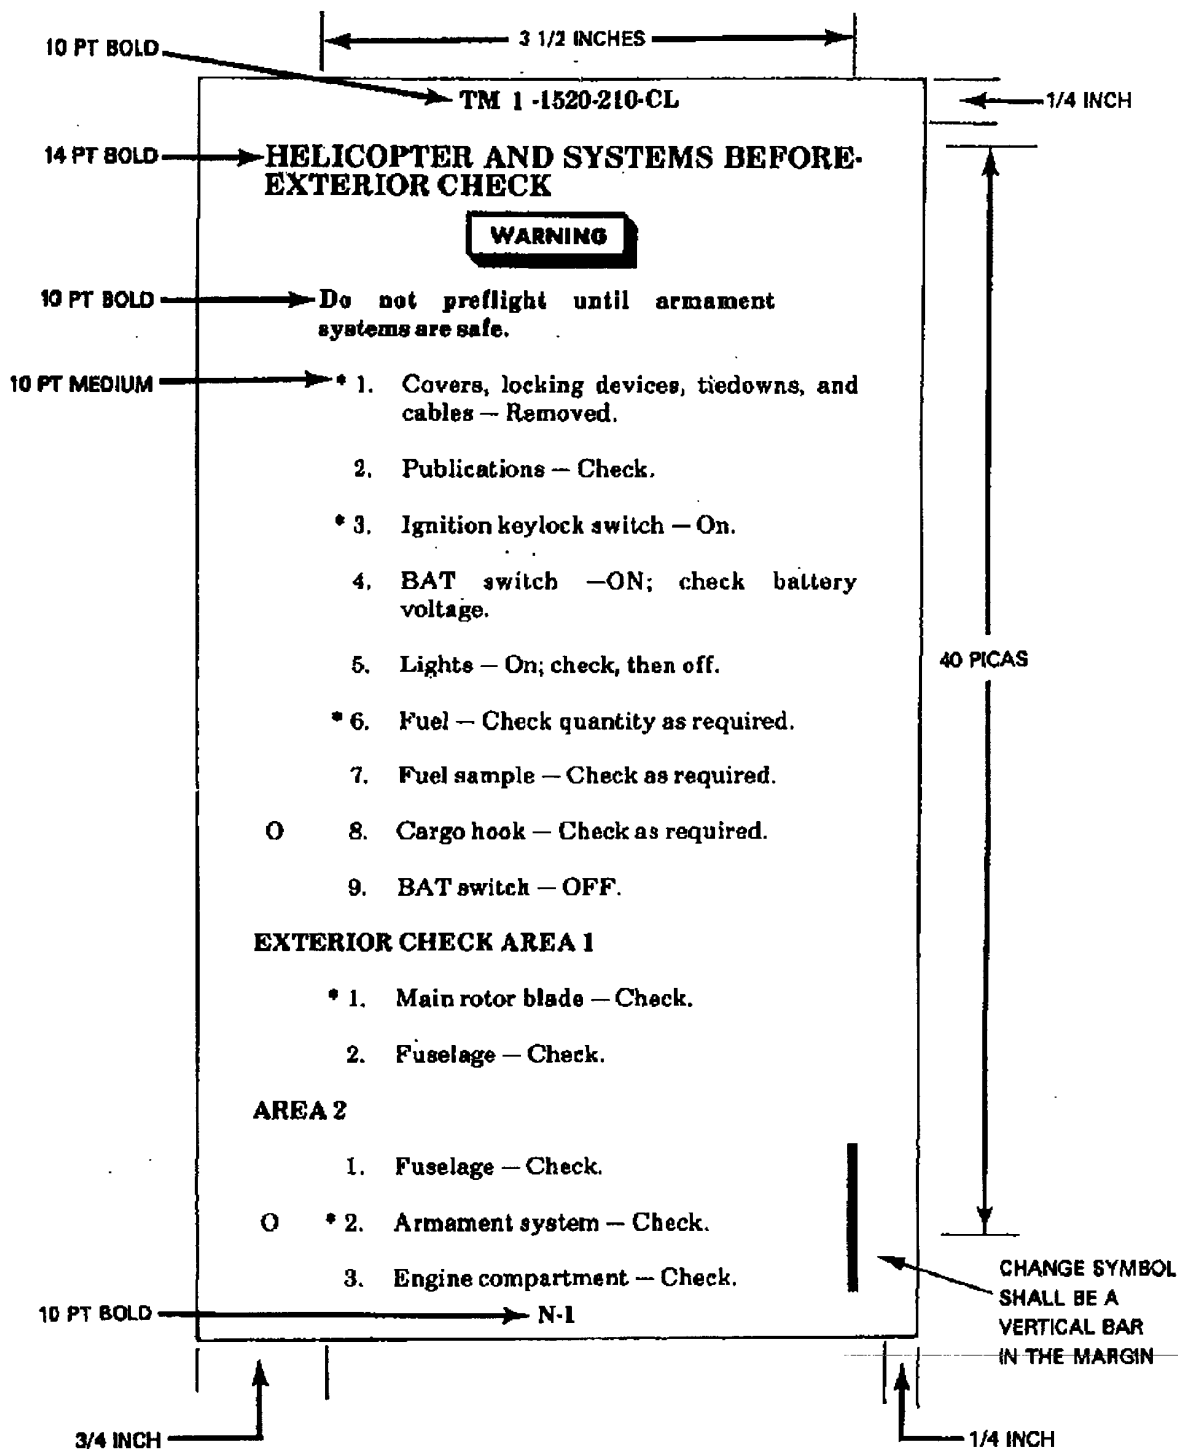


FIGURE 54. Example of condensed checklist/MTF (normal procedures) page

## MIL-PRF-63029D(AV)

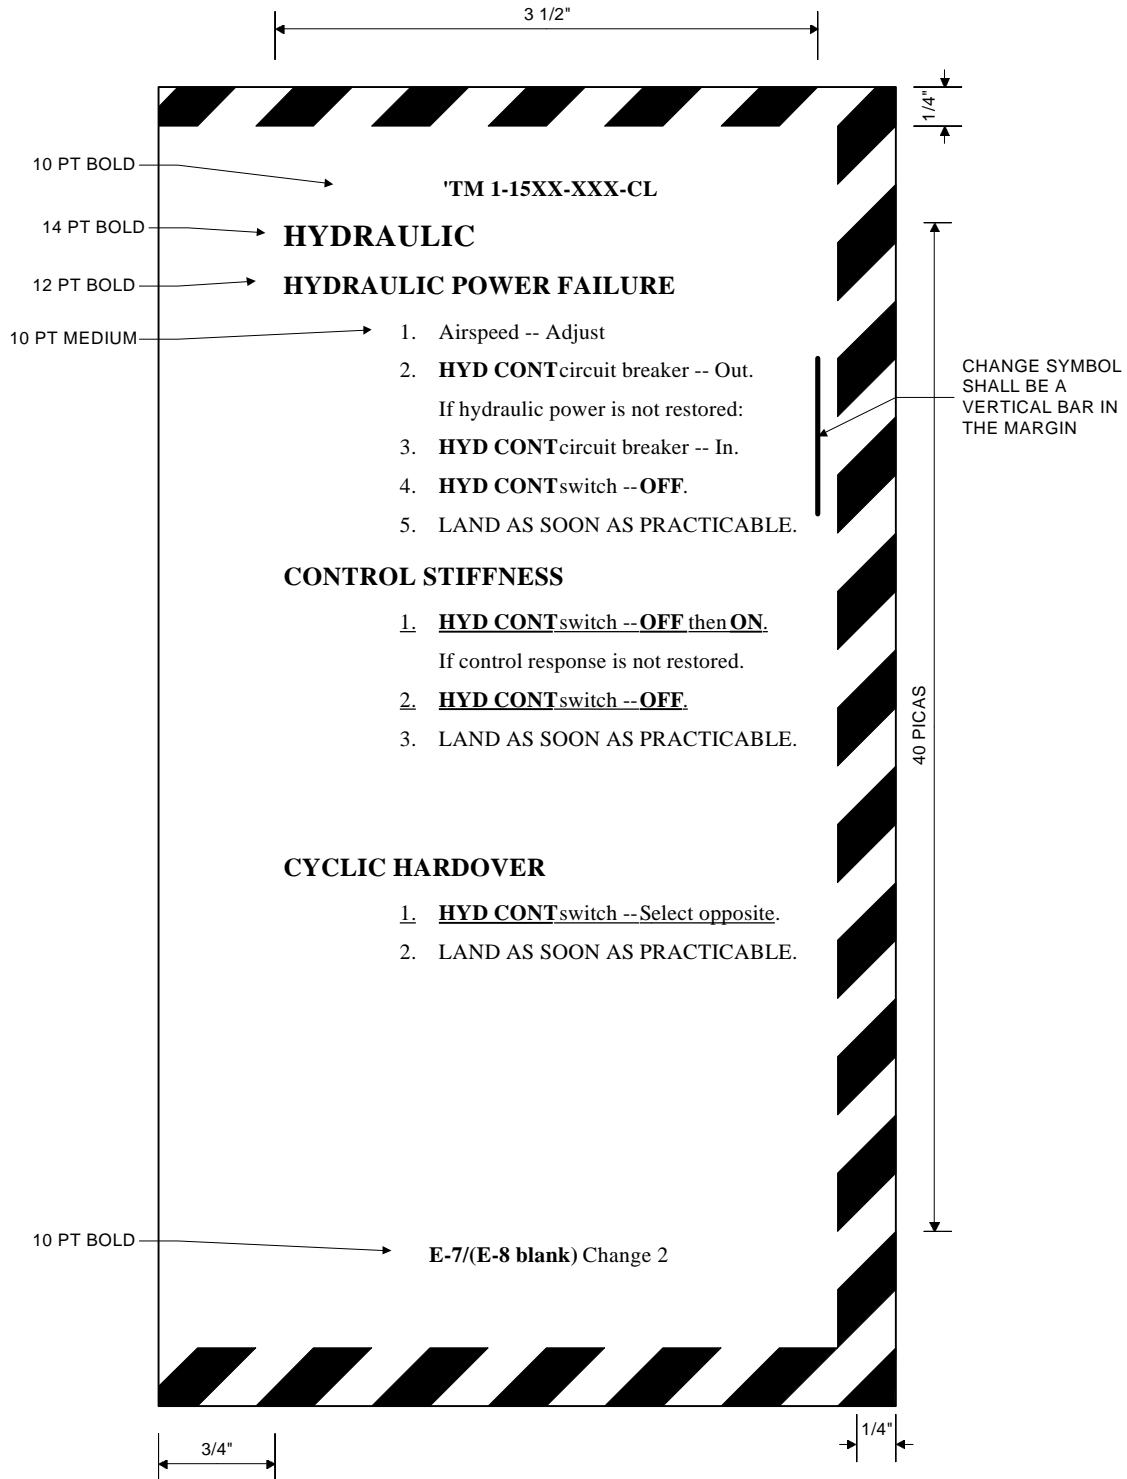


FIGURE 55. Example of condensed checklist (emergency procedures) page

MIL-PRF-63029D(AV)

**TM 55-XXXX-XXX-MTF**

**MAINTENANCE TEST  
FLIGHT MANUAL**

**ARMY MODEL  
(Model Designator) HELICOPTER**

TM 55-XXXX-XXX-MTF is published for the use of all concerned.

\*This manual supersedes TM 55-XXXX-XX-MTF, 28 February 1979, including all changes.

**HEADQUARTERS  
DEPARTMENT OF THE ARMY**

**20 December 1985**

FIGURE 56. Example of cover





## MIL-PRF-63029D(AV)

PURPOSE OF TEST FLIGHT:		ACFT S/N:	DATE:
PILOT:		UNIT:	
SYMBOLS:      √ = SATISFACTORY      X = DEFICIENCY			
PRIOR TO MAINTENANCE		7. DOPPLER UPDATE _____	
TEST FLIGHT		INFLIGHT CHECKS	
1. FORMS AND RECORDS		1. RAD ALT CHECK	
2. FLIGHT READINESS INSPECTION		2. CONTROL RIGGING	
BEFORE STARTING ENGINE CHECK		3. SCAS	
1. FAT _____ °		4. COLLECTIVE ANTICIPATOR CHECK	
2. ALTIMETER		5. HYDRAULIC SYS CHECK	
3. CWA SYSTEM		6. AUTOROTATION NR _____ %	
4. ENGINE HISTORY		7. VIBRATION ANALYSIS	
5. MPD		8. PYLON ISOLATION MOUNT CHECK	
STARTING ENGINE AND RUNUP		9. FLIGHT INSTRUMENTS	
CHECKS		VSD PAGE	
1. START PEAK TGT _____ °C		AIRSPEED INDICATION	
START TIME _____		HEADING INDICATION	
2. CYCLIC FWD _____ (b) AFT _____ (b)		BAROMETRIC ALTIMETER	
R _____ (b) L _____ (b)		VSI	
COLLECTIVE _____ (b) T/R _____ (b)		ATTITUDE INDICATOR	
3. HYDRAULIC SYSTEM		STANDBY FLIGHT INSTRUMENTS	
4. ENG IDLE SPEED CHECK		SLIP INDICATOR	
5. CONTROL OVERSPEED CHECK		STANDBY AIRSPEED INDICATOR	
6. SCAS		STANDBY ATTITUDE INDICATOR	
HEADING HOLD		STANDBY ALTIMETER	
SCAS TEST		MAGNETIC COMPASS	
7. COMPT BLWR		10. COMMUNICATION	
8. DEFOG BLWR		FM 1 _____ UHF _____	
9. HTR		FM 2 _____ HF _____	
10. PITOT HTR		VHF _____ FM HOMING _____	
11. FUEL BOOST		KY58 _____ TRANSPONDER _____	
12. ENGINE ANTI ICE		KY75 _____ APR 39 _____	
13. BATT PRHT		ATHS _____	
14. INSTRUMENTS R/U		11. NAV SYSTEM	
XMSN OIL P _____ PSI		WAYPOINT 1 _____	
XMSN OIL T _____ °C		2 _____	
ENG OIL P _____ PSI		3 _____	
ENG OIL T _____ °C		CIRCULAR ERROR _____	
NG _____ % TGT _____ °C		ENGINE SHUTDOWN CHECKS	
MAST TRQ _____ %		1. INSTRUMENTS S/D	
ENG TRQ _____ %		XMSN OIL P _____ PSI	
15. POWER ASSURANCE CHECK		XMSN OIL T _____ °C	
ALTIMETER _____ (Hg) in		ENG OIL P _____ PSI	
PA _____ ft FAT _____ °C		ENG OIL T _____ °C	
TGT _____ °C NG _____ %		NG _____ % TGT _____ °C	
ENG TRQ (chart) _____ %		MAST TRQ _____ %	
ENG TRQ (indicated) _____ %		ENG TRQ _____ %	
ENG HEALTH _____ %		BATT V _____	
AIRCRAFT HOVER CHECKS		2. THROTTLE CHECK	
1. HOVER POWER NG _____ %		3. POST TEST FLIGHT INSP	
TGT _____ °C TRQ _____ %		4. COMPLETE UPDATE FORMS	
2. CONTROL RESPONSE CHECK		AND RECORDS	
3. SCAS		5. SPECIAL EQUIPMENT LIST	
4. POWER CYLINDER CHECK			
5. ENGINE RESPONSE			
FUEL CONTROL CHECK			
6. HOVER BOB UP			

FIGURE 58. Example of check sheet

## MIL-PRF-63029D(AV)

TM 55-XXXX-XXX-MTF		TROUBLESHOOTING REFERENCE
<p><b>PROCEDURE</b></p> <p><b>ENGINE START (CONT)</b></p> <p>k. NR/NP — Check indication.</p> <p>l. Engine and transmission instruments — Within limits.</p> <p><b>ENGINE RUNUP — PILOT</b></p> <p>1. DC GEN switch — DC GEN. Check CPO MFD activates and initial page displays. Select VSD.</p> <p>2. AC GEN switch — AC GEN.</p> <p>3. FUEL BOOST switch — OFF.</p> <p>4. ESNTL BUS switch — RUN.</p> <p>5. GPU — Disconnect (if used).</p> <p style="text-align: center;"><b>NOTE</b></p> <p>Ensure compass controller synchronization knob causes heading tape on CPO MFD to move. When nulled the magnetic compass heading tape and standby compass should correlate.</p> <p>6. Gyro Compass — Nulled.</p> <p style="text-align: center;"><b>NOTE</b></p> <p>Navigation accuracy can be degraded when FAST ALIGN is used to align AHRS. Therefore, only NORMAL ALIGN should be used to align AHRS when precise navigation is required.</p> <p>7. Pilot MFD NAV ALIGN key — Press. Initiate NAV alignment. Check pitch ladder displayed on CPO MFD.</p>	<p>C7, 8 D1</p> <p>C12</p> <p>C6</p>	
2-14		
↑		
10 PT BOLD		

FIGURE 59. Example of checklist page

MIL-PRF-63029D(AV)

TM 55-XXXX-XXX-MTF	
TROUBLESHOOTING GUIDE H — FLIGHT CONTROLS	
CONDITION	PROBABLE CAUSE
H1. Cyclic binding in certain areas with FORCE TRIM OFF.	<ul style="list-style-type: none"><li>a. Wiring harness binding at base of cyclic stick.</li><li>b. Foreign matter in base of stick.</li><li>c. Foreign matter under deck</li><li>d. Rough spot in friction device.</li><li>e. Rod end bearings worn or dirty.</li></ul>
H2. With FORCE TRIM OFF, cyclic continues moving after small force applied or moves without cyclic input.	<ul style="list-style-type: none"><li>a. Moves forward or aft only.<ul style="list-style-type: none"><li>(1) Cyclic centering spring improperly adjusted.</li><li>(2) Improperly rigged force gradient</li></ul></li><li>b. Moves mostly in a 45 degree angle.<ul style="list-style-type: none"><li>(1) Servo cylinder control head bolts too tight.</li><li>(2) Defective servo.</li></ul></li><li>c. Moves with less than 0.5 pound of force. Friction improperly adjusted.</li></ul>

CAPITALIZE  
PLACARDED  
ITEMS

FIGURE 60. Example of troubleshooting page

TM 1-XXXX-XXX-MTF

**CHAPTER 4. SPECIAL  
PROCEDURES**

← 14 PT BOLD

**4-1. General.** This chapter contains special procedures which were referenced in Chapter 2.

**a. Calibration Procedures — Gyromagnetic Compass.**

**NOTE**

- Magnetic compass must be accurate prior to complete gyromagnetic compass calibration. Refer to DA PAM 738-751.
  - Compass calibration should be performed away from metal buildings and other areas that may affect compass headings.
  - MFDs for pilot and CPO are identical. Use one MFD to represent compass calibration data and instructions. Use the other MFD to call up and display heading information. Perform two consecutive normal navigation alignments on the same spot gyromagnetic compass calibration is to be performed to stabilize true heading.
1. CPO MFD FDL MENU key — Press.
  2. GROUND SETUP key — Press.
  3. Pilot MFD HSD key — Press.
  4. CPO MFD COMPASS CAL key — Press.
  5. CPO MFD — Observe prompting message.
  6. MFK — Enter magnetic variation value to 0.1 degree accuracy.

4-1

FIGURE 61. Example of special/detailed procedures page

MIL-PRF-63029D(AV)

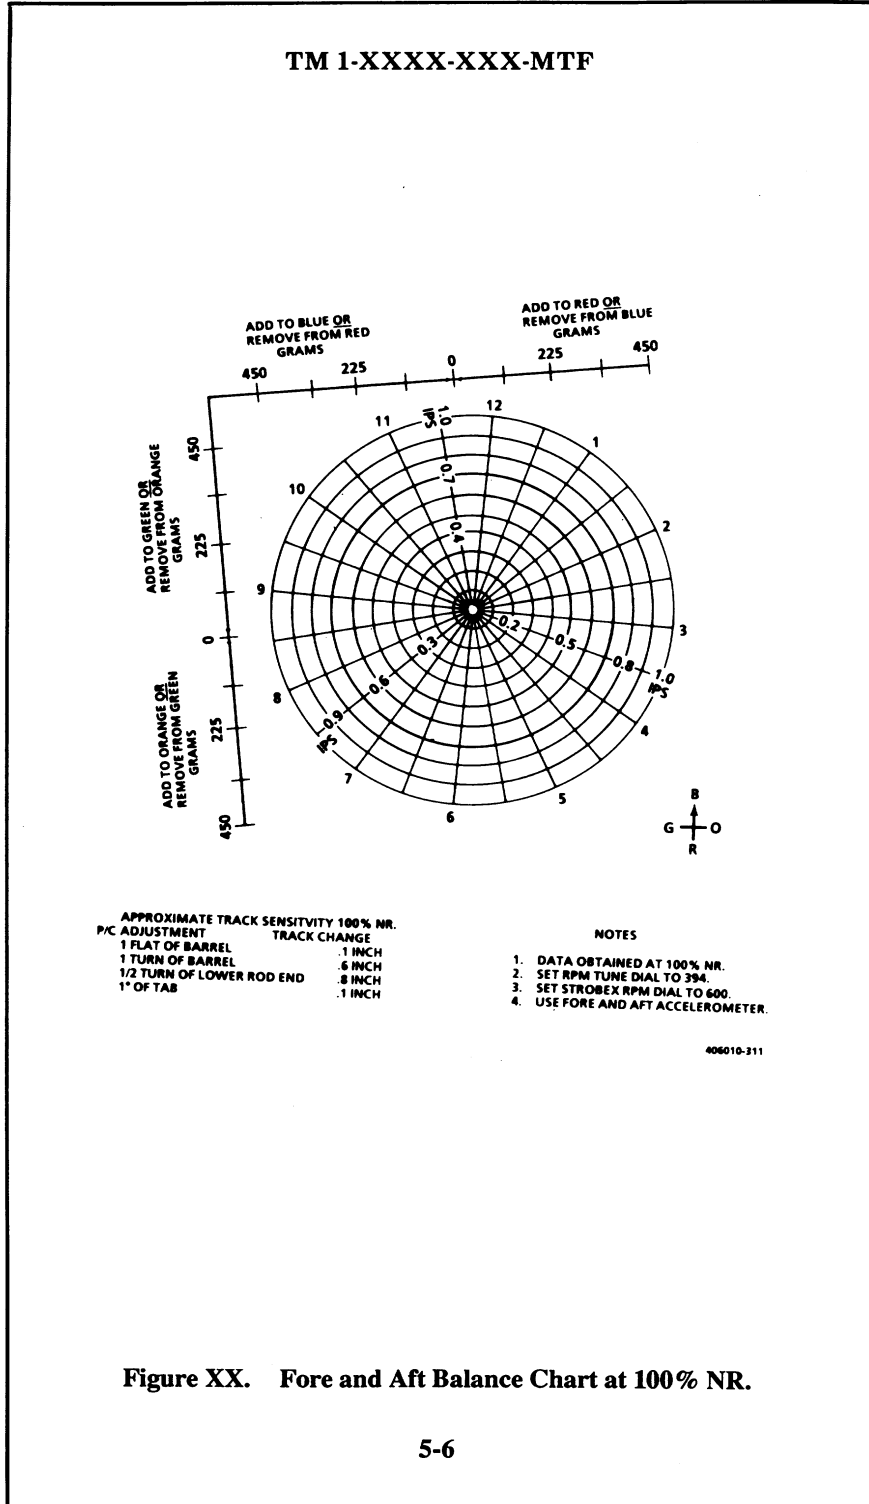


Figure XX. Fore and Aft Balance Chart at 100% NR.

## MIL-PRF-63029D(AV)

TM 1-XXXX-XXX-MTF

BLADE COLOR CODE	BLADE SERIAL NUMBER	TAB SETTING	NUMBER OF BALANCE WEIGHTS	
			212-010-710-1 WEIGHTS	970-4 WEIGHTS
BLUE				
ORANGE				
RED				
GREEN				

406010-308

Sample

Figure XX. OH-58D Rotor Smoothing Log

5-8

## MIL-PRF-63029D(AV)

## TM 1-XXXX-XXX-MTF

**The Metric System and Equivalents****Linear Measure**

1 centimeter = 10 millimeters = .39 inch  
1 decimeter = 10 centimeters = 3.94 inches  
1 meter = 10 decimeters = 39.37 inches  
1 dekameter = 10 meters = 32.8 feet  
1 hectometer = 10 dekameters = 328.08 feet  
1 kilometer = 10 hectometers = 3,280.8 feet

**Weights**

1 centigram = 10 milligrams = .15 grain  
1 decigram = 10 centigrams = 1.54 grains  
1 gram = 10 decigrams = .035 ounce  
1 dekagram = 10 grams = .35 ounce  
1 hectogram = 10 dekagrams = 3.52 ounces  
1 kilogram = 10 hectograms = 2.2 pounds  
1 quintal = 100 kilograms = 220.46 pounds  
1 metric ton = 10 quintals = 1.1 short tons

**Liquid Measure**

1 centiliter = 10 milliliters = .34 fl. ounce  
1 deciliter = 10 centiliters = 3.38 fl. ounces  
1 liter = 10 deciliters = 38.82 fl. ounces  
1 dekaliter = 10 liters = 2.64 gallons  
1 hectoliter = 10 dekaliters = 26.42 gallons  
1 kiloliter = 10 hectoliters = 264.18 gallons

FIGURE 63. Example of metric conversion chart



# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

## INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

### I RECOMMEND A CHANGE:

1. DOCUMENT NUMBER  
MIL-PRF-63029D

2. DOCUMENT DATE (YYMMDD)  
960823

3. DOCUMENT TITLE MANUALS, TECHNICAL: REQUIREMENTS FOR OPERATOR'S MANUAL AND CHECKLIST FOR AIRCRAFT

### 5. REASON FOR RECOMMENDATION

### 6. SUBMITTER

a. NAME (Last, First, Middle Initial)

b. ORGANIZATION

c. ADDRESS (Include Zip Code)

d. TELEPHONE (Include Area Code)  
(1) Commercial  
(2) AUTOVON  
(if applicable)

7. DATE SUBMITTED  
(YYMMDD)

### 8. PREPARING ACTIVITY

a. NAME

US ARMY AVIATION AND TROOP COMMAND

b. TELEPHONE (Include Area Code)

(1) Commercial (2) AUTOVON  
(314) 263-1613 693-1613

c. ADDRESS (Include Zip Code)

ATTN: AMSTA-R-EDS  
4300 GOODFELLOW BLVD  
ST. LOUIS, MO 63120-1798

**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:**  
DEFENSE QUALITY AND STANDARDIZATION OFFICE  
5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466  
Telephone (703) 756-2340 AUTOVON 289-2340