

NOT MEASUREMENT SENSITIVE

MIL-B-40006D
29 September 1992
SUPERSEDING
MIL-B-40006C(IH)
31 March 1977

MILITARY SPECIFICATION

BUCKLE, GENERAL OFFICERS' BELT, GOLD PLATED

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of belt buckle used by General Officers' (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

NN-P-71 - Pallets, Material Handling Wood Stringer Construction
2-Way and 4-Way (Partial)
PPP-B-636 - Box, Shipping, Fiberboard
PPP-B-676 - Boxes, Setup
UU-P-553 - Paper, Wrapping, Tissue

MILITARY

MIL-B-1462 - Belt, General Officer
MIL-P-15011 - Pallets, Material Handling, Wood Post Construction, 4-Way
Entry

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in preparing this document should be address to:
Director, The Institute of Heraldry, US Army, Cameron Station, Alexandria, VA
22304-5050, by using the Standardization Document Improvement Proposal (DD Form
1426) appearing at the end of this document.

AMSC N/A

FSC 8315

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

MIL-B-40006D

STANDARDS

FEDERAL

FED-STD-151 - Metal, Test Methods

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by
Attributes

MIL-STD-129 - Marking for Shipment and Storage

MIL-STD-147 - Palletized Unit Loads

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from: Standardization Document Order Desk, Building 4D, Section D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

THE INSTITUTE OF HERALDRY (TIOH)

B-6-3 - BUCKLE, BELT, GENERAL OFFICERS', GOLD PLATED

(Copies of specifications, standards, drawings and specification sheets required by the contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

(Figure 1 is a miniature copy of an Institute of Heraldry drawing and is for information only.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are issues of the documents cited in the solicitation (see 6.2)

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM-D-3951 - Standard Practice for Commercial Packaging

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other information services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail

MIL-B-40006D

specifications or MS standards), the text of this document takes precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard sample. Unless otherwise specified (see 6.2), the contracting officer shall furnish a standard sample of the buckle which shall be used for matching color and finish only. Variation from this specification may appear in the standard sample; however, in such cases the specification shall govern.

3.2 First article. Unless otherwise specified (see 6.2), a sample of the buckle shall be submitted or made available by the manufacturer to the contracting officer or his authorized representative for approval before production is commenced. The approval of the first article sample authorizes the commencement of production but does not relieve the contractor of responsibility for compliance with all applicable provisions of this specification. The first article sample shall be manufactured by the contractor in the same facility to be used for the manufacture of the production items.

3.3 Materials. Materials shall conform to the referenced specifications and the requirements specified herein.

3.3.1 Copper base alloy. The copper base alloy shall be roll polished, free from pits, scale (including red oxide), dents, nicks, cracks, scratches, segregations and foreign inclusions that will not be removed in later processing. When tested as specified in 4.6.5, the chemical composition of the copper base alloy shall be as specified in Table I.

TABLE I. CHEMICAL COMPOSITION

Alloy	Copper	Lead (Max)	Iron (Max)	Zinc	Other (Max)
Red Brass	84.0 to 86.0	.05	.05	Remainder	.15

3.3.2 Screw post and thumb nut. The screw post and thumb nut shall be fabricated from any type brass and shall conform to the details and dimensions of Drawing B-6-3.

3.3.3 Solder. The solder shall be a hard silver alloy solder having a melting point of not less than 1075 degrees Fahrenheit.

3.3.4 Gold for plating. The gold for plating shall be 24 karat.

3.3.5 Lacquer. Lacquer shall be a pale clear synthetic lacquer. The use of a pigmented lacquer shall not be permitted.

3.4 Design. The embossed design of the buckle shall be an exact replica of the design on the Government furnished hubs (see 3.7), from which the contractor's working dies shall be extracted. The working die shall be tooled and polished to remove any dents, nicks, scratches or other imperfections.

MIL-B-40006D

3.5 Construction. The buckle shall be constructed in accordance with drawing B-6-3 (See Figure 1). The buckle shall be made from red brass specified in 3.3.1. The coat of arms shall be pierced as shown on Figure 2 and shall be dapped to fit the contour of the buckle tongue. Two screw posts specified in 3.3.2 shall be soldered, or fused, to the back of the coat of arms on the vertical center line, equidistant from the top and the bottom and $9/16$ inch (1.43 cm) \pm $1/64$ inch (0.04 cm) apart. After finishing, the coat of arms shall be mounted on the tongue buckle by means of two thumb nuts specified in 3.3.2. The embossed wreath shall be dapped to fit the contour of the slotted body and shall have five screw posts soldered or fused to the back of the wreath. One post shall be located on the intersection of the vertical center line and center of ring of the slotted body. The remaining four posts shall be located at the intersections of the center line of the ring and two horizontal lines $13/32$ inch \pm $1/64$ inch (0.52 cm \pm 0.04 cm) above and below the horizontal center line. The areas to receive the thumb nut farthest away from the belt loop shall be counter sunk. The coat of arms shall be centered on the buckle tongue and the embossed wreath shall be centrally aligned on the slotted body. When the tongue is engaged into the slotted body, the tongue buckle shall lie flush within the slotted body and be locked in this position. The center lines of the coat of arms and this wreath shall be aligned.

3.5.1 Stamping, trimming and piercing. The embossed areas shall be struck in a manner to insure a well defined die struck edge. When applicable, embossed areas shall be trimmed and pierced to the die struck outline. All edges shall be clean and smooth, free from burrs, drag, step and rough edges. The piercing and trimming operations, when applicable, shall not damage or distort the design or alter the shape of the insignia.

3.5.2 Soldering. All soldering shall be accomplished using solder specified in 3.3.3. Joints shall be clean, smooth, strong and free from burned or reduced areas. There shall be no excess solder and all excess flux shall be removed. When tested as specified in 4.6.4, the soldered parts shall not separate.

3.6 Finish.

3.6.1 Coat of Arms. The coat of arms shall be a gold plated with a matte finish and polished highlights.

3.6.2 Buckle tongue. The tongue of the buckle shall be gold plated. The obverse shall be a mirror-like polished finish on the obverse side and the reverse shall be a matte finish.

3.6.3 Wreath. The wreath shall be gold plated with a matte finish and polished highlights.

3.6.4 Slotted body. The slotted body of the buckle shall be gold plated with mirror-like polished finish.

3.6.5 Gold Plating. Gold plating shall be accomplished by electroplating using gold specified in 3.3.4. The use of white metals as an undercoating shall not be permitted. The gold plating shall be uniform, non-porous, continuous and unbroken over the entire plated surface. When tested as specified in 4.6.1, no visible chemical reactions, such as evolution of gases, shall appear.

MIL-B-40006D

3.6.6 Lacquering. The obverse and reverse of finished buckles shall be lacquered with lacquer specified in 3.3.5. The dry lacquer film shall be continuous, level, adherent and free from lint, dust and other foreign matter. When tested as specified in 4.6.2, there shall be no change in appearance of the lacquered surface except the following will be permitted:

- (a) A slight overall yellowing of the highlights.
- (b) Not more than 2 dark spots, no larger than 1/16 inch (0.16 cm) diameter, widely distributed on the buckle and not more than three such additional spots shall be permitted on the edge of the buckle.

3.7 Government loaned property. Hubs for the wreath and the coat of arms shall be furnished by the Government and shall be used to make the contractor's working dies necessary for one contract or order (see 3.4). Unless otherwise specified (see 6.2), forming dies for the tongue and slotted body shall be furnished by the Government.

3.8 Marking. The contractor shall stamp his trademark or other identifying mark legibly and inconspicuously on the back of the buckle tongue. There shall be no signs of penetration or unevenness on the surface opposite the marked area. The marking shall not distort any part of the buckle.

3.9 Workmanship. Buckles shall be clean, well made, and shall meet the acceptable quality level established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements; however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

- a. First article inspection (see 4.4).

MIL-B-40006D

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspection shall be performed in accordance with the test conditions specified in 4.5 and 4.6.

4.4 First article sample inspection. Inspection and testing of the first article sample (see 3.2), shall be made of a completely fabricated buckle for all provisions of this specification applicable to the end product examination and tests.

4.5 Quality conformance inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated (see 6.4).

4.5.1 Inspection of components.

4.5.1.1 Testing of components. In addition to the quality assurance provisions of the subsidiary specifications and drawings, inspection shall be performed on components and materials listed in Table II for the test characteristics shown therein. The inspection level shall be S-1 and the requirements shall be applicable to the lot average.

Table II. TESTING OF COMPONENTS

Component and lot expressed in terms of	Characteristic	Rqm't Para	Test Method	Rqm't applicable to lot average	#determ per sample unit	Results Reported as	Sample Unit
Copper base alloy (1 lb)	Chemical composition	3.3.1	4.6.5	X	2 for each element	Nearest 0.1% for each element	4 oz of material

4.5.1.1.1 Certification of compliance. Materials listed below may be accepted on the basis of the contractor's certificate of compliance for requirements specified in applicable paragraphs of this specification.

<u>COMPONENTS</u>	<u>CHARACTERISTICS</u>	<u>RQM'T PARA</u>
Screw post & thumb nut	Material identification	3.3.2
Hard Solder	Material identification and melting point	3.3.3
Gold for plating	Material identification	3.3.4
Lacquer	Material identification	3.3.5

4.5.1.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operation or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance. In-process inspection shall be conducted to see that accomplished of the following is in accordance with the specification requirements.

MIL-B-40006D

REQUIREMENT, OPERATION OR ASSEMBLYROM'T PARA

Gold plating of coat of arms	3.6.1
Soldering of screw posts to back of coat of arms and wreath	3.5
Gold plating of wreath	3.6.3
Thickness of metal for coat of arms and wreath	B-6-3

4.5.2 Inspection of the end item.

4.5.2.1 Visual examination of the buckle. Examination shall be made at a distance of approximately 16 to 22 inches. The defects found during examination shall be classified in accordance with 4.5.2.1.1 and 4.5.2.1.2. The lots shall be inspected in accordance with 4.5.2.1.3. The unit of product for the examinations in 4.5.2.1.1 and 4.5.2.1.2 shall be one completely fabricated buckle.

4.5.2.1.1 Examination of buckle for defects in color, finish, design, construction and workmanship. Defects designated by an asterisk (*) shall be classified as major when seriously affecting appearance or serviceability and minor when affecting appearance or serviceability but not seriously.

TABLE III. DEFECTS

EXAMINE	DEFECT	CLASSIFICATION		
		Major (*)	Minor	
Color and finish	Color and finish of buckle does not compare favorably with the standard sample.....	-	*	-
	Pits, scale, pin holes, crack, rupture, segregation or foreign inclusion.....	-	*	-
	Buff, drag or cloudy finish.....	-	*	-
Plating	Not plated when required	*	-	-
	Not type specified	*	-	-
	Not smooth, continuous or adherent	*	-	-
	Cut through or porous	*	-	-
Lacquer	Not lacquered when required.....	x	-	-
	Foreign matter embedded in finish, i.e., lint, dust, etc.....	-	*	-
	Hazy, rainbow effect, cloudy, or powdering...	-	*	-
	Not smooth, continuous or adherent, i.e., flaking, blistering, peeling or has run/sag.	-	-	*
	Not set to touch, i.e., tacky when gentle pressure is applied to coating.....	-	-	x
Design	Details altered, does not conform to Government hub, drawing, or standard sample.....	x	-	-
	Any detail struck over resulting in double impression.....	-	*	-
	Any significant detail not clear, marred, missing, reduced or obliterated, i.e., does			

MIL-B-40006D

TABLE III. DEFECTS (Continued)

EXAMINE	DEFECT	CLASSIFICATION		
		Major (*)	Minor	
Workmanship	not compare favorably with approved sample..	-	*	-
	Any area not pierced as indicated by drawing or standard sample.....	x	-	-
	Metal marks such as nicks, cracks, dents, digs, gouges or scratches.....	-	*	-
	Not trimmed to die-struck edge.....	-	-	x
	Die-struck edge not well defined.....	-	-	x
	Any sharp or rough edge, burr, drag or step..	-	*	-
	Coat of arms or wreath not closely dapped to fit contour of tongue or slotted body, as applicable.....	-	*	-
	Any component missing, bent, twisted, broken, deformed or otherwise impaired.....	-	*	-
	Piercing not clean and smooth.....	-	*	-
	Piercing operation distorts coat of arms or wreath.....	-	*	-
	Component parts not completely joined by solder.....	-	*	-
	Any area burned or reduced in soldering or acid cleaning.....	-	*	-
	Soldered area not clean and not smooth, i.e., flux or excess solder not removed.....	-	*	-
	Penetration of marking to opposite surface, unevenness, or distortion.....	x	-	-
Assembly	Centerline of coat of arms and wreath out of alignment.....	x	-	-
	Tongue buckle does not lie flush within the slotted body or tongue buckle not locked in slotted body.....	x	-	-
	Coat of arms or wreath not securely mounted on the tongue buckle, i.e., one or more thumb nuts missing.....	x	-	-
	Thumb nuts not securely tightened.....	-	-	x
Marking	Missing illegible, incorrect or incomplete...	-	-	x

4.5.2.1.2 Examination of the buckle for defects in dimensions. Any dimension which is not within the specified tolerance shall be classified as a defect.

4.5.2.1.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels and the acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

MIL-B-40006D

	Inspection Level	AQL	
		Major	Total
For defects applicable to 4.5.2.1.1	I	0.065	2.5
For defects applicable to 4.5.2.1.2	S-3	(one class)	4.0

4.5.2.2 End item testing. Testing of the completely fabricated buckle shall be performed in accordance with Table IV for the characteristics shown therein. The sample unit shall be one buckle. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units. Requirements are applicable to the individual unit.

TABLE IV. TESTING OF END ITEM

Characteristic	Requirement Paragraph	Test Method	# determ Per Sample /Unit	Results Reported as
Acid test for gold plating	3.6.5	4.6.1	1	Pass or Fail
Tests for lacquer:				
Liver of sulfur	3.6.6	4.6.2	1	Pass or Fail
Tackiness test	3.6.6	4.6.3	1	Pass or Fail
Test for soldered joints	3.5.2	4.6.4	3	Pass or Fail

4.5.3 Examination for count of buckle for intermediate containers. Buckles packaged for shipment shall be examined to determine conformance with package markings and specified quantity. The sample unit for this examination shall be one box (intermediate container). The lot size shall be the number of intermediate containers. Any box containing less than the specified marked quantity of buckles shall be classified as a defect. The inspection level shall be S-2 and the AQL shall be 4.0 defects per sample unit.

4.5.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

MIL-B-40006D

<u>EXAMINE</u>	<u>DEFECT</u>
Marking (exterior and interior)	Omitted, incorrect, illegible, or improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping or taping, inadequate strapping. Bulging or distortion of containers.
Content	Number of intermediate packages is more or less than required.

4.6 Tests.

4.6.1 Acid test for gold plating. The test acid shall be applied as follows: Place a drop of acid of not less than 1/16 inch (0.16 cm) in diameter on three different spots on the front face of the buckle allowing the drops to remain for not less than two (2) minutes during which time the surface of the buckle shall be inspected to determine compliance with the requirements of 3.6.5. A minimum of two spots must withstand the acid test. The test acid shall be applied at room temperature (60 to 80 degrees Fahrenheit) and shall consist of a solution containing 50 percent by volume of chemically pure nitric acid (specific gravity 1.42) and an equal volume of distilled water. If the test buckle has been lacquered, the lacquer shall be removed prior to testing.

4.6.2 Liver of sulfur test. Buckles shall be immersed in a 2 percent by weight CHEMICALLY PURE liver of sulfur (potassium sulfide) water solution at a temperature of 100 degrees Fahrenheit \pm 10 degrees Fahrenheit for a period of 3 minutes. The buckles shall then be removed and rinsed in warm, then cold, then hot water, after which it shall be wiped gently with an absorbent cellulose material or whirled to remove residual moisture, allowed to dry at room temperature (60 to 80 degrees Fahrenheit) for one (1) hour and then be examined to determine compliance with 3.6.6.

4.6.3 Tackiness test. At room temperature (60 to 80 degrees Fahrenheit), press a piece of tissue paper against the lacquered surface for 15 seconds, using any pressure capable to being exerted between thumb and two fingers, after which the pressure shall be released and the buckle inspected to determine compliance with 3.6.6.

4.6.4 Tests for hard soldered joints. Hard soldered joints to be tested shall be placed in an oven maintained at 1075 degrees Fahrenheit \pm 5 degrees Fahrenheit for not less than 15 minutes. While at this temperature, the items shall be lifted by the coat of arms, wreath or soldered edge and the joints examined for compliance with 3.5.2.

4.6.5 Chemical composition test. Chemical composition shall be determined in accordance with Method Number 111.1 of FED-STD-151. Results shall be evaluated to determine compliance with the requirements specified in 3.3.1.

5. PACKAGING

MIL-B-40006D

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Each buckle shall be completely enclosed in a wrap of not less than three thickness of tissue paper conforming to Type I, Class 1 of UU-P-553. Ends of the wrap shall be folded back to prevent unwrapping. Each wrapped buckle shall be packaged in a set-up paperboard box conforming to Variety 1, Class A, Style 4 of PPP-B-676. Inside dimensions of the paperboard box shall be 3-1/2 inches (8.89 cm) in length, 2-1/2 inches (6.35 cm) in width and 7/8 inch (2.22 cm) in depth.

5.1.1.2 Intermediate packaging. Sixty buckles packaged as specified in 5.1.1.1 shall be placed flat, three in length, four in width and five deep in a snug-fitting fiberboard box conforming to Type SF, Class Domestic, Grade 200 of PPP-B-636. Closure shall be in accordance with the appendix of the container specification.

5.1.2 Commercial. Buckles packaged as specified in 5.1 shall be packed in accordance with the applicable requirements of ASTM-D-3951.

5.2 Packing. Packing shall be commercial as specified (see 6.2).

5.2.1 Commercial. Buckles packaged as specified in 5.1 shall be packed in accordance with the applicable requirements of ASTM-D-3951.

5.3 Palletization. Unitized loads, commensurate with the level of packing specified in the contract or order, shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, Type I, Class 1, Style 1, Size A, Wood Group I, II, III or IV of MIL-P-15011, or, 4-way, Type IV, V or VIII, Class 1, Style A, Size 2, Wood Group I, II, III or IV, Grade A of NN-P-71. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The buckle covered by this specification is used with the general officer's belt specified in MIL-B-1462.

6.2 Acquisition requirements. Acquisition documents should specify the following:

MIL-B-40006D

- a. Title, number and date of this specification.
- b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).
- c. Whether a standard sample is to be furnished (see 3.1).
- d. When forming dies for tongue and slotted body will not be furnished unless otherwise specified (see 3.7).
- e. When a first article is not required (see 3.2).
- f. Drawing (see 3.5).
- g. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
- h. When palletization is required (see 5.3).

6.3 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item should be a preproduction sample, a first production sample or a standard production item from the contractor's current inventory as specified in 4.4. The first article should consist of one completed buckle. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or tests, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Government-loaned property. The contracting officer should arrange to loan the property listed in 3.7.

6.5 Subject term (key word) listing.

Catch
Coat of Arms
Insignia

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - IH

Preparing activity:
Army - IH

Review activities:
Army - GL
DLA - CT

(Project No. 8315-0363)

MIL-B-40006D

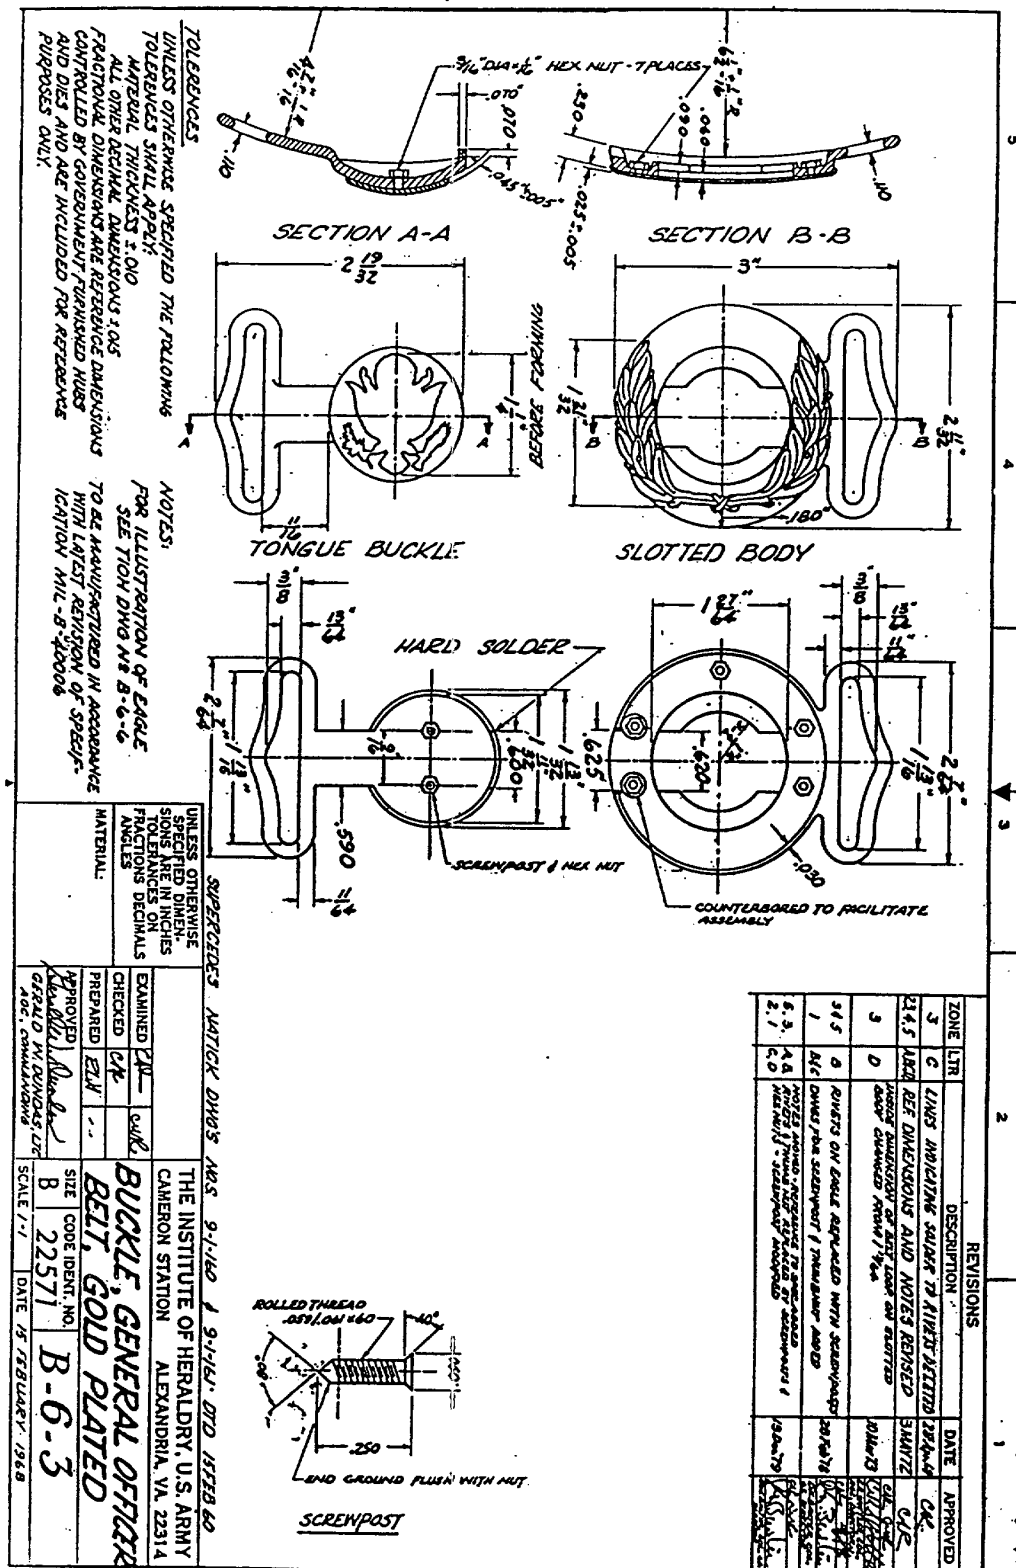


FIGURE 1. Buckle, general Officer Belt, Gold Plated

MIL-B-40006D

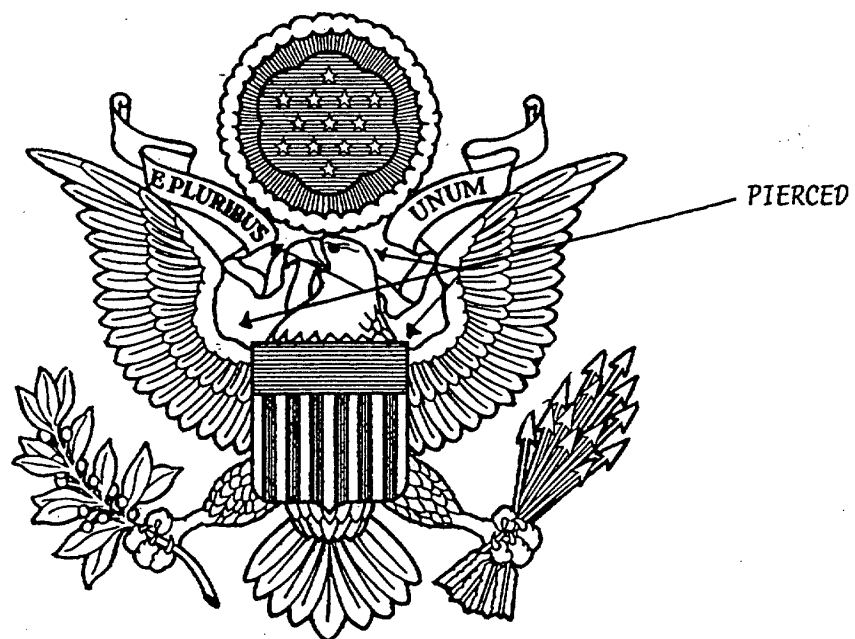


FIGURE 2. Coat of Arms

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:		1. DOCUMENT NUMBER MIL-B-40006D	2. DOCUMENT DATE (YYMMDD) 920929
3. DOCUMENT TITLE BUCKLE, GENERAL OFFICERS' BELT, GOLD PLATED			
4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)			
5. REASON FOR RECOMMENDATION			
6. SUBMITTER			
a. NAME (Last, First, Middle Initial)		b. ORGANIZATION	
c. ADDRESS (Include Zip Code)		d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)
8. PREPARING ACTIVITY			
a. NAME The Institute of Heraldry		b. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (703) 274-6636 284-6636	
c. ADDRESS (Include Zip Code) Bldg 15, Technical & Production Division Cameron Station Alexandria, VA 22304-5050		IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	