

INCH-POUNDMIL-B-81935/5B
AMENDMENT 1
19 April 1991

MILITARY SPECIFICATION SHEET

BEARING, PLAIN, ROD END, SELF-ALIGNING, SELF-LUBRICATING,
NARROW, INTERNALLY THREADED, -65°F to +325°F

This amendment forms a part of MIL-B-81935/5B, dated 1 June 1987 and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 3

Substitute the table containing terminal thread, K, and P dimensions with the following table:

| Dash No. | Terminal Thread | K +.005 | P +.005 |
|----------|-----------------|------------|------------|
| 3 & 4 | 1/4 -28UNJF-3A | .062 | .110 |
| 5 | 5/16-24UNJF-3A | .062 | .110 |
| 6 | 3/8 -24UNJF-3A | .093 | .110 |
| 7 | 7/16-20UNJF-3A | .093 | .110 |
| 8 | 1/2 -20UNJF-3A | .093 | .110 |
| 10 | 5/8 -18UNJF-3A | .125 | .110 |
| 12 | 3/4 -16UNJF-3A | .125 | .110 |
| 14 | 7/8 -14UNJF-3A | .156 | .110 |
| 16 | 1 -12UNJF-3A | .156 | .110 |

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


FSC 3120

Under the heading "Part number," delete and substitute the following:

"Part number: The part number consists of the letter M, the basic number of this specification sheet, followed by a two digit dash number from table I, followed by an alpha code letter 'K' for a keyway or 'W' for a deep square slot keyway (no code when a keyway is not desired) and an alpha code letter 'L' to designate a left handed thread (no 'L' code would designate right handed threads)

Example:

M81935/5-04WL

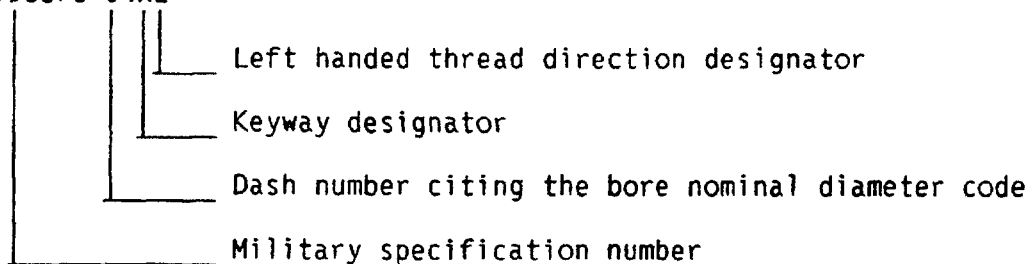

Custodians:

Navy - AS
Air Force - 11
Army - AV

Preparing Activity:

Navy - AS
(Project 3120-0711-04)

Reviewer activities:

Navy - SH
Air Force - 99
Army - AR, AT, MI
DLA - IS

User activity:

Navy - SH