

MIL-B-87114/1B (AS)  
23 November 1981  
SUPERSEDING  
MIL-B-87114/1A(AS)  
30 June 1981

## MILITARY SPECIFICATION SHEET

BOLTS, 1000 HEAD, RIBBED-TORQ-SET RECESS, CLOSE TOLERANCE,  
ALLOY STEEL, LONG THREAD, 95 KSI FSU

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirement for procuring the bolts described herein shall consist of this document and the latest issue of specification MIL-B-87114.

APPLICATION CRITERIA: These bolts, together with MS14179 nut are for use in bolted joints and access panels that require frequent opening.

COMPANION PARTS: MS14179 Nut, Plate, Self-Locking, Floating, Two Lug, Reduced Rivet Spacing, Steel, Vespel Insert, 500 Cycles Reuse, Replaceable Nut, 160 KSI Ftu, 450°F.

BOLTS RECESS: Bolts recess shall be in accordance with MS14191.

DRIVER BIT: The recess driver bit shall be accordance with MIL-B-9946.

### GENERAL REQUIREMENTS:

Material Alloy Steel: AISI 4340 per MIL-S-5000 or AISI 8740 per MIL-S-6049 or AMS 6324.

Heat Treatment: Rockwell "C" 36 to 40.

Plating: Cadmium plate in accordance with QQ-P-416, Type II, Class 2.

Surface texture in accordance with ANSI B46.1 "D" diameter, conical surface of head, thread flanks, and thread root shall not exceed 32 microinches, other surfaces shall not exceed 125 microinches.

Dimensions:

Dimensions in inches.

Dimensions to be met after plating.

Tolerances: Unless otherwise specified, dimensions  $\pm 0.010$   
and angles  $\pm 2^\circ$ .

FSC 5306

## MIL-B-87114/1.B (AS)

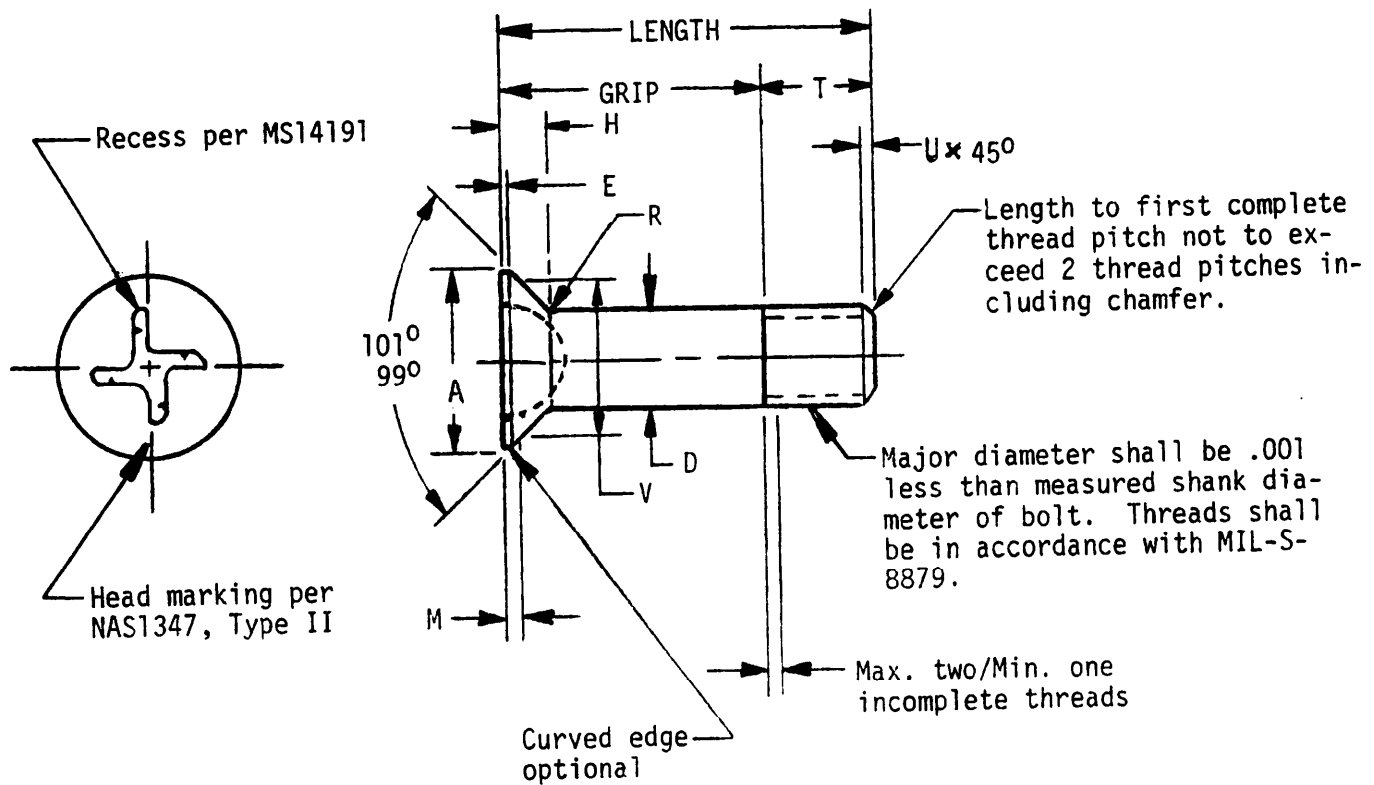


Figure 1 Bolt 100° Flush Head

Table 1 Bolt Dimensions

Dia. Dash No.	Normal Size	Thread UNJF3A MIL-S-8879	A Dia Max Ref (a)	D Dia.		E Max	H Max Ref (a)
				Max	Min		
3	No. 10	.1900-32	.383	.1895	.1885	.015	.084
4	1/4	.2500-28	.512	.2495	.2485	.018	.111
5	5/16	.3125-24	.638	.3120	.3110	.021	.138

## MIL-B-87114/1B (AS)

Table I (cont'd)

Dia. Dash No.	R Rad		T Min Ref (a,b)	U	Y (c)	Z (d)	Recess & Driver Size (e)
	Max	Min					
3	.030	.010	.430	.045	.0045	.0030	10
4	.030	.010	.539	.045	.0045	.0030	1/4
5	.040	.010	.639	.052	.0045	.0030	5/16

Table II Mechanical Properties

Dia. Dash No.	Double Shear Min(lbs)(f)	Tension Min (lbs) (g)	M Gage Protrusion		V Gage Dia.		Fatigue Loading (h)	
			Max	Min	Max	Min	High Ten- sion Load (lbs) +2%	Low Ten- sion Load (lbs) +2%
3	5,400	3,180	.0300	.0275	.3147	.3135	1,190	119
4	9,330	5,820	.0360	.0330	.4245	.4243	2,180	218
5	14,600	9,200	.0410	.0375	.5389	.5387	3,470	347

Table I, II, notes:

(a) Reference dimensions are for design purposes only and are not for inspection or manufacturing.

(b) T min = H max (MS14179) +5 (Thread pitch) - $\emptyset$ .096 for diameter dash no. 3 and 4, and - $\emptyset$ .109 for diameter dash no. 5.

(c) Concentricity: Conical surface of head to "D" diameter within .003 full indicator measurement (FIM) "D" diameter to thread pitch diameter within "Y" FIM. Recess to shank shall be concentric to each other within  $\emptyset$ .010 FIM.

(d) Shank Straightness: Within "Z" FIM per inch of length.

(e) Bolts recess shall be in accordance with MS 14191.

(f) Based on MIL-HDBK-5 shear stress area.

## MIL-B-87114/1B (AS)

(g) Based on head strength.

(h) High fatigue load is 37.5% of ultimate tensile strength listed in Table II Low load is 10% of high load.

Table III Grip Lengths

Grip Dash No.	Grip $\pm .010$	Diameter Dash Numbers		
		3	4	5
		Length $\pm .015$		
02	0.125	0.580 (a)	0.684 (a)	0.847 (a)
03	0.188	0.643	0.747	0.909
04	0.250	0.705	0.804	0.971
05	0.312	0.767	0.871	1.034
06	0.375	0.830	0.934	1.097
07	0.438	0.893	0.977	1.159
08	0.500	0.955	1.059	1.221
09	0.562	1.017	1.121	1.284
10	0.625	1.080	1.184	1.347
11	0.688	1.143	1.247	1.409
12	0.750	1.205	1.309	1.471
13	0.812	1.267	1.371	1.534
14	0.875	1.330	1.434	1.597
15	0.938	1.393	1.497	1.659
16	1.000	1.455	1.559	1.721
17	1.062	1.517	1.621	1.784
18	1.125	1.580	1.684	1.847
19	1.188	1.643	1.747	1.909
20	1.250	1.705	1.809	1.971
21	1.312	1.767	1.871	2.034
22	1.375	1.830	1.934	2.097
23	1.438	1.893	1.997	2.159
24	1.500	1.955	2.059	2.221
25	1.562	2.017	2.121	2.284
26	1.625	2.080	2.184	2.347
27	1.688	2.143	2.247	2.409
28	1.750	2.205	2.309	2.471
29	1.812	2.267	2.371	2.534
30	1.875	2.330	2.434	2.597
31	1.938	2.393	2.497	2.659
32	2.000	2.455	2.559	2.721
34	2.125	2.580	2.684	2.784
36	2.250	2.705	2.809	2.909
38	2.375	2.830	2.934	3.034
40	2.500	2.955	3.059	3.159
42	2.625	3.080	3.189	3.284
44	2.750	3.205	3.309	3.409
46	2.875	3.330	3.434	3.534
48	3.000	3.455	3.559	3.659

## MIL-B-87114/1B (AS)

Note (a) - Short bolts listed above heavy line shall be threaded to within two thread pitches of head to shank intersection, but thread shall not enter the fillet radius. Table II tensile requirements do not apply to these short bolts.

PART NUMBER EXAMPLE AND CODE:

M87114/1 - 4 - 8  
└───┬───┬───┐  
      .500 Grip - 1.059 Length  
      1/4 - 28 Bolt  
      Basic Part Number

ADMINISTRATIVE AND CONTRACTUAL PROVISIONS:

This document takes precedence over procurement documents specified herein.

Reference documents shall be of the issue in effect on date of invitation for bid.

CUSTODIANS:

Navy - AS

PREPARING ACTIVITY:

Navy - AS  
Project No. 5306-N130

REVIEW ACTIVITY:

**STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL**

**INSTRUCTIONS:** This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

**NOTE:** This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

**DOCUMENT IDENTIFIER (Number) AND TITLE** Bolts, 100° Head, Ribbed-Torq-Set, Close Tolerance  
MIL-B-87114/1(AS) REV. B Alloy Steel, Long Thread, 95 KSI FSU

**NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER**

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY (Printed or typed name and address — Optional)

TELEPHONE NO.

DATE

**DD FORM 1426**  
1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

**FOLD**

**DEPARTMENT OF THE NAVY**



**NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES**

**OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300**

**BUSINESS REPLY MAIL**  
**FIRST CLASS      PERMIT NO. 12503      WASHINGTON D. C.**

**POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY**

Commanding Officer  
Naval Air Engineering Center (9311)  
Lakehurst, NJ 08733



**FOLD**