

MIL-C-27072/21A
~~24 September 1987~~
~~SUPERSEDING~~
MIL-C-27072/21(USAF)
2 October 1964

MILITARY SPECIFICATION SHEET

CABLE, SPECIAL PURPOSE, ELECTRICAL, MULTICONDUCTOR,
(2 CONDUCTORS) AND SINGLE SHIELDED
M27072/21LDDA*

This specification is approved by all Depart-
ments and Agencies of the Department of Defense.

The requirements for acquiring the cable described herein shall
consist of this specification and the latest issue of MIL-C-27072.

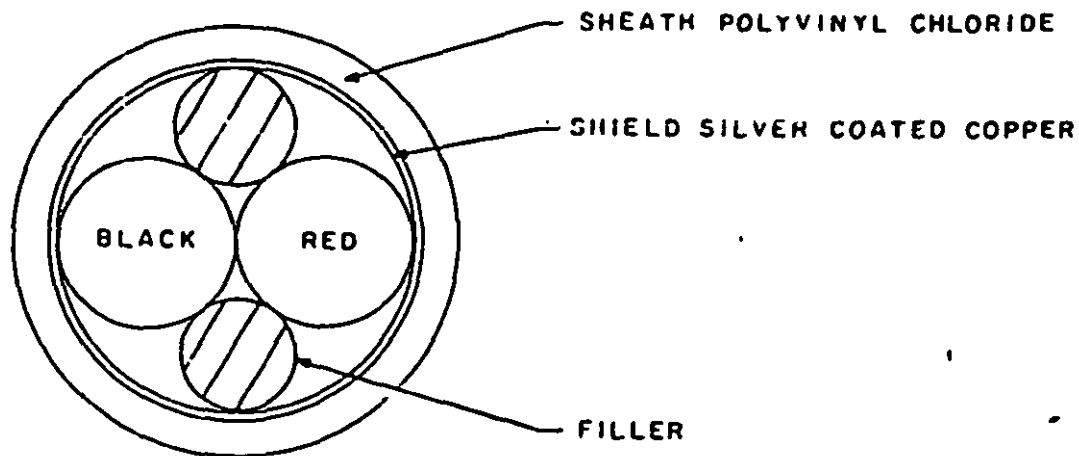


FIGURE 1. Cable configuration.

* The complete part number requires a color code designator (see table I).

MIL-C-27072/21A

DESIGN DATA:

Design and construction: See figure 1.

Number of conductors: Two.

Conductor size/stranding: See table I.

Wire: M16878/48EE*** (see table I).

Jacket undershield: Not applicable.

Shielding: Silver coated copper.

Sheath: Polyvinyl chloride.

Temperature rating: 105°C.

REQUIREMENTS:

Visual and dimensional:

Components:

Basic wire: Silver coated.

Dimension: See table I.

Primary insulation:

Material: Polytetrafluoroethylene.

Wall thickness: .050 ±.004 inch (1.27 ±0.10 mm).

Colors:

Black.

Red.

Spark test voltage: 3,400 V rms.

Inspection test voltage: 2,000 V rms.

Impulse dielectric test: 6,500 V peak.

Jacket over insulation: Not applicable.

Color: Not applicable.

Filler:

Material: In accordance with MIL-C-27072.

Lay: 1.75 inch (44.5 mm).

Tape material: Not applicable.

Shield:

Material: Silver coated copper.

Gauge: 36 AWG.

Braid angle: 20 to 40 degrees.

Workmanship: In accordance with MIL-C-27072.

MIL-C-27072/21A

Sheath:

Material: Polyvinyl chloride.

Wall thickness: .030 inch (0.76 mm) nominal.

Tensile strength: In accordance with table V of MIL-C-27072.

Elongation: In accordance with table V of MIL-C-27072.

Tension set: Not applicable.

Tear strength: Not applicable.

Accelerated aging: In accordance with table V of MIL-C-27072.

Oil resistance: Not applicable.

Color: See table IV of MIL-C-27072.

Finished cable:

Weight: For future consideration.

Diameter: See table I.

Conductor resistance: In accordance with MIL-W-16878/4 or MIL-W-16878/21.

Dielectric strength: In accordance with MIL-W-16878/4 or MIL-W-16878/21.

Cold bend: Mandrel size in accordance with table XIII of MIL-C-27072.

Ozone: Mandrel size in accordance with table XIV of MIL-C-27072.

Marking durability: In accordance with MIL-C-27072.

Heat stability: Not applicable.

TABLE I. Construction data.

Part number M27072/21	Conductor			Nominal diameter (in.)	Finished cable diameter (in.) ±10%	Basic wire M16878/4 M16878/21
	Wire size (AWG)	Number of strands	Strand size (AWG)			
LDDA*	22	19	34	.050	.185	BEE***

Asterisks (*) shall be replaced by the appropriate color designator.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Air Force - 99
DLA - ES, IS

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 6145-0908-6)