

INCH-POUND

MIL-C-28754D
21 APRIL 1989
SUPERSEDING
MIL-C-28754C
13 DECEMBER 1982
(See 6.10)

MILITARY SPECIFICATION

CONNECTORS, ELECTRICAL, MODULAR, AND COMPONENT PARTS

GENERAL SPECIFICATION FOR

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the general requirements for
backplane connectors, module connectors, cable connectors, and their
component parts.

Beneficial comments (recommendations, additions, deletions) and any
pertinent data which may be of use in improving this document should
be addressed to: Commander, Naval Sea Systems Command, SEA 5523,
Department of the Navy, Washington, D.C., 20362-5101 by using the
self-addressed Standardization Document Improvement Proposal (DD Form
1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

MIL-C-28754D

1.2 Classification.

1.2.1 Types. Connectors and assemblies covered by this specification are of the following types:

- Type III - Aluminum base plate assembly with contact and bushing set.
- Type IV - Module blade connector assembly on 100 mil grid.
- Type V - Cable connector assembly on 100 mil grid, with a dielectric block containing crimp or solder blade contacts.

1.2.2 Component parts. In addition, this specification covers component parts utilized in type III through type V assemblies, or in related applications.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

- | | |
|------------|---|
| L-P-410 | - Plastic, Polyamide (Nylon), Rigid, Rods, Tubes, Flats, Molded and Cast Parts. |
| L-P-509 | - Plastic, Sheet, Rod and Tube, Laminated, Thermosetting. |
| QQ-A-200 | - Aluminum Alloy, Bar, Rod, Shapes, Structural Shapes, Tube and Wire Extruded; General Specification for. |
| QQ-A-200/8 | - Aluminum Alloy 6061 Bar, Rod, Shapes, Tube and Wire, Extruded. |

MIL-C-28754D

- QQ-A-225 - Aluminum and Aluminum Alloy Bar, Rod, Wire or Special Shapes; Rolled, Drawn or Cold Finished.
- QQ-A-225/1 - Aluminum Alloy Bar, Rod, and Wire, Rolled, Drawn, or Cold Finished, 1100.
- QQ-A-225/6 - Aluminum Alloy Bar, Rod, and Wire, Rolled, Drawn, or Cold Finished, 2024.
- QQ-A-225/8 - Aluminum Alloy 6061 Bar, Rod, Wire and Special Shapes, Rolled, Drawn or Cold Finished.
- QQ-A-225/9 - Aluminum Alloy 7075 Bar, Rod, Wire, and Special Shapes, Rolled, Drawn or Cold Finished.
- QQ-A-250 - Aluminum and Aluminum Alloy Plate and Sheet: General Specification For.
- QQ-A-250/8 - Aluminum Alloy, 5052, Plate and Sheet.
- QQ-A-250/9 - Aluminum Alloy 5456, Plate and Sheet.
- QQ-A-250/11 - Aluminum Alloy 6061, Plate and Sheet.
- QQ-A-591 - Aluminum Alloy Die Castings.
- QQ-B-613 - Brass, Leaded and Nonleaded: Flat Products (Plate, Bar, Sheet and Strip).
- QQ-B-626 - Brass, Leaded and Nonleaded: Rod, Shapes, Forgings and Flat Products with Finished Edges (Bar and Strip).
- QQ-B-750 - Bronze, Phosphor; Bar, Plate, Rod, Sheet, Strip, Flat Wire, and Structural and Special Shaped Sections.
- QQ-C-530 - Copper-Beryllium Alloy Bar, Rod, and Wire (Copper Alloy Numbers 172 and 173).
- QQ-C-533 - Copper-beryllium Alloy Strip (Copper Alloy Numbers 170 and 172).
- QQ-N-290 - Nickel Plating (Electrodeposited).
- QQ-P-35 - Passivation Treatments for Corrosion-resisting Steel.
- QQ-S-635 - Steel Plate, Carbon.
- QQ-S-763 - Steel Bars, Wire, Shapes, and Forgings, Corrosion Resisting.
- QQ-S-766 - Steel, Stainless and Heat Resisting, Alloys, Plate, Sheet, and Strip.

MIL-C-28754D

MILITARY

- MIL-M-14 - Molding Plastics and Molded Plastic Parts, Thermo-setting.
- MIL-C-5541 - Chemical Conversion Coatings on Aluminum and Aluminum Alloys.
- MIL-A-8625 - Anodic Coatings, for Aluminum and Aluminum Alloys.
- MIL-P-13949 - Plastic Sheet, Laminated, Metal Clad, (For Printed Wiring Boards), General Specification For.
- MIL-F-14072 - Finishes For Ground Electronic Equipment.
- MIL-I-43553 - Ink, Marking, Epoxy Base.
- MIL-G-45204 - Gold Plating, Electrodeposited.
- MIL-C-55330 - Connectors, Electrical and Fiber Optic, Packaging of.

(See supplement 1 for list of associated specification sheets.)

STANDARDS

FEDERAL

- FED-STD-H28 - Screw-Thread Standards for Federal Services
- FED-STD-406 - Plastics: Methods of Testing.
- FED-STD-595 - Colors.

MILITARY

- MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts.
- MIL-STD-889 - Dissimilar Metals.
- MIL-STD-1130 - Connections, Electrical, Solderless Wrapped.
- MIL-STD-1285 - Marking of Electrical and Electronic Parts.
- MIL-STD-1344 - Test Methods for Electrical Connectors.
- MIL-STD-45662 - Calibration Systems Requirements.
- MS14033 - Grid Patterns for Solderless Wrapped Electrical Connectors.

MIL-C-28754D

(Unless otherwise indicated, copies of federal and military specifications, standards, and other documents are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government publications. The following other Government publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

PUBLICATIONS

SD-6 - Provisions Governing Qualification.

(Copies of this publication are available from the Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

Y 14.5 - Dimensioning and Tolerancing; Errata. (DOD Adopted)
B 46.1 - Surface Texture (Surface Roughness, Waviness and Lay). (DOD Adopted)

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 582 - Free Machining Stainless and Heat Resisting Steel Bars, Hot-Rolled or Cold-Finished. (DOD Adopted)

MIL-C-28754D

- A 484/A 484M - Standard Specification for General Requirements for Stainless and Heat-Resisting Bars, Billets and Forgings. (DOD Adopted)
- B 122 - Standard Specification for Copper-Nickel-Tin Alloy, Copper-Nickel-Zinc Alloy (Nickel Silver), and Copper-Nickel Alloy Plate, Sheet, Strip, and Rolled Bar. (DOD Adopted)
- B 140 - Copper-Zinc-Lead (Leaded Red Brass or Hardware Bronze) Rod, Bars and Shapes, Specification for. (DOD Adopted)
- B 209 - Standard Specification for Aluminum and Aluminum-alloy Sheet and Plate.
- D 4066 - Standard Specification for Nylon Injection and Extrusion Materials (PA). (DOD Adopted)

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

ELECTRONIC INDUSTRIES ASSOCIATION (EIA)

- 364-11 - Test Procedure No. 11, Resistance to Solvents, Test Procedures for Electrical Connectors.

(Application for copies should be addressed to the Electronic Industries Association, 2001 Eye Street, NW, Washington DC 20006)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

MIL-C-28754D

3. REQUIREMENTS

3.1 Specification sheets. The individual item requirements shall be as specified herein and in accordance with the applicable specification sheet. In the event of any conflict between the requirements of this specification and the specification sheet, the latter shall govern. (If a specific requirement specified herein is not required for an item, it shall be so indicated on the specification sheet; for example, "Shock - N/A.")

3.2 Qualification. Connectors and accessories furnished under this specification shall be products which are authorized by the qualifying activity for listing on the applicable qualified products list at the time of award of contract (see 4.5 and 6.3).

3.3 Material. The material for each part shall be as specified herein. However, when a definite material is not specified, a material shall be used which will enable the connectors and accessories to meet the performance requirements. Acceptance or approval of any constituent material shall not be construed as a guarantee of the acceptance of the finished product.

3.3.1 Metals.

3.3.1.1 Metal parts. All metal parts (other than current carrying parts) exposed to environmental conditions shall be of a corrosion-resistant material or shall be plated or chemically coated to resist corrosion during service life.

3.3.1.2 Dissimilar metals. Where dissimilar metals are used in intimate contact with each other, protection against electrolysis and corrosion shall be provided. Dissimilar metals shall be as defined in MIL-STD-889. Dissimilar metals such as brass, copper, or steel (except corrosion-resisting steel, passivated in accordance with 3.3.1.3) shall not be used in intimate contact with aluminum or aluminum alloys. However, spraying, coating, or plating of dissimilar base metals to provide similar abutting surfaces is permitted. See 6.7 for selection of compatible couples.

MIL-C-28754D

3.3.1.3 Corrosion resisting steel. Where applicable, corrosion resisting steel shall be 300 series, low magnetic permeability in accordance with ASTM A 582, QQ-S-635, QQ-S-763, or QQ-S-766, (see 3.1) and passivated in accordance with QQ-P-35 or to finish E300 as specified in MIL-F-14072.

3.3.2 Base plate. When applicable the metal base plate for type III connectors shall be aluminum-alloy-sheet material in accordance with QQ-A-250/8 or QQ-A-250/11 (see 3.1 and 3.4).

3.3.2.1 Base plate finish. The aluminum base plate shall be anodized in accordance with MIL-A-8625, or chemically treated in accordance with MIL-C-5541.

3.3.3 Insulation (dielectric).

3.3.3.1 Insulator bushings (used on type III). The insulator bushings for type III connectors shall be polyamide (nylon) in accordance with L-P-410 or PA111 of ASTM D 4066. The material shall be self-extinguishing in accordance with method 2021 of FED-STD-406.

3.3.3.2 Connector bodies (used on types IV and V). Connectors shall be glass-fiber-filled diallyl phthalate in accordance with type SDG-F or type GDI-30F of MIL-M-14 (see 3.1). The color shall be green or black.

3.3.4 Contacts.

3.3.4.1 Contact design and construction. Contacts shall be of the design, construction and physical dimensions specified (see 3.1).

3.3.4.2 Contact materials. Type III female contacts shall be made from (d). Male blade type III contacts shall be made from (a), (b), or (c). Wrappost grounding contact for type III connectors shall be made from (e). All other contacts (types IV and V) shall be one of the following materials (see 3.1):

- (a) Phosphor bronze alloy as specified in QQ-B-750, composition A, half hard.

MIL-C-28754D

- (b) Cadmium copper alloy, CABRA (Copper and Brass Association), No 162, in accordance with the following requirements:
 - (1) 99.1 percent copper and 0.9 percent cadmium.
 - (2) Conductivity, 80 percent.
 - (3) Tensile strength of 55,000 to 65,000 pounds per square inch.
- (c) ASTM D 140, alloy B, half hard leaded red brass (hardware bronze), as specified in QQ-B-626 alloy 360 or QQ-B-613, composition 260.
- (d) Beryllium copper as specified in QQ-C-533, minimum 311 Knoop hardness.
- (e) Beryllium copper as specified in QQ-C-530, minimum 192 Knoop hardness.
- (f) Copper alloy sheet, UNS number C72500 in accordance with ASTM B 122.

3.3.4.3 Contact plating. The contacts shall be plated as specified in 3.3.4.3.1 and 3.3.4.3.2.

3.3.4.3.1 Contact plating (see 3.1). All contacts shall be gold plated in accordance with type II, grade C, class 1 of MIL-G-45204 to a thickness of 50 microinches minimum. Contacts shall have a minimum nickel underplating of 50 microinches in accordance with QQ-N-290, class 1. Localized finish specified by individual specification sheet.

3.3.4.3.2 Localized finish. When specified in the individual specification sheet, a localized finish may be used as an alternate to the overall plating specified in 3.3.4.3.1 (see 3.1).

MIL-C-28754D

3.3.5 Housing and cover (used on type V).

3.3.5.1 Housing and cover. The housing and cover shall be either die cast aluminum in accordance with QQ-A-591, extruded aluminum in accordance with QQ-A-200/8, or sheet aluminum in accordance with QQ-A-250/8 or QQ-A-250/9. The type of aluminum used shall be suitable for the manufacturing technique employed.

3.3.5.2 Housing and cover finish. The housing and cover shall be anodized in accordance with MIL-A-8625. The basis metal shall be mechanically prefinished before anodizing to remove surface imperfections or roughness, and to assure uniformity of the finished surface. Minimum depth of anodic surface treatment shall be 0.0004 inch (0.010 mm).

3.3.5.3 Housing and cover finish color (see 3.1). The housing and cover finish shall be black within the color range established by color chips 34052, 35042, 36076, 36081, 37038, and 37056 of FED-STD-595 (see 6.2). Where red is specified, the color range shall be established by color chips 11302, 21302, 22190 and 12199 of FED-STD-595.

3.3.6 Screws. Holddown screws, clamp screws, and other screws used in the connector shall be of passivated, corrosion-resistant steel in accordance with QQ-S-763, classes 302, 304, and 305, condition A.

3.3.7 Cable clamp (used on type V). Cable clamps shall be steel in accordance with QQ-S-635.

3.3.8 Keying pin (used on types IV and V). The keying pin shall be steel in accordance with ASTM A 582.

3.3.9 Grounding. Grounding to the backplane shall be accomplished by one of the following methods (see 3.3.9.1 and 3.3.9.2).

3.3.9.1 Wrappost grounding (nail head). Wrappost grounding contact shall be beryllium copper in accordance with QQ-C-530, minimum hardness Knoop 192.

MIL-C-28754D

3.3.9.2 Tuning fork grounding. The tuning fork contact shall be grounded through a bushing in accordance with QQ-A-225/1, QQ-A-225/6, QQ-A-225/8, or QQ-A-225/9, and finished in accordance with MIL-C-5541.

3.3.10 Pin shields. Individual pin shields shall be aluminum alloy 5052, H34, in accordance with QQ-A-250/8 and anodized black in accordance with MIL-A-8625, type III, class 2, dyed black (see 3.1) or unclad epoxy glass laminate in accordance with MIL-P-13949, type GF.

3.4 Design and construction. Type IV and V connectors and component parts of all type connectors covered by this specification shall be of the design, construction and physical dimensions specified (see 3.1 and 6.2). Drawing interpretation shall be in accordance with ANSI Y 14.5. Type III connectors are composed of the base plate, insulator bushing, contacts, and associated hardware and when assembled is called a backplane (see 3.1). The grid pattern for type III, IV, and V connectors shall be in accordance with MS14033, 0.100 x 0.100 grid.

3.4.1 Threaded parts. Unless otherwise specified (see 3.1), all threaded parts shall be in accordance with FED-STD-H28.

3.4.1.1 Engagement of threaded parts. All threaded parts shall engage by a length of at least 1 1/2 times the nominal diameter of the thread.

3.4.2 Connector assembly. No parts of the connector assembly shall be permanently displaced from their original fitted position upon (see 3.1) completion of the specified tests.

3.4.3 Contacts. Contacts for type III and V connectors shall be as specified (see 3.1), and shall permit individual insertion and removal from the insulator or insulator bushing. The contact shall provide a means of holding or locking it in its applicable insulator or insulator bushing.

3.4.3.1 Contact compliance. The contact shall assure proper operation without dependence on mechanical float, and to assure that minimum force (see 3.1) is transmitted to the connection joining the contact to the interconnecting material during mating and unmating. Contacts assembled to printed circuit boards shall neither move nor display looseness after assembly, nor during and after mate and unmate cycles.

MIL-C-28754D

3.4.3.2 Wrappost (used on type III). Wrappost shall be as specified in the individual specification sheets (see 3.1) and shall meet the wrappost requirements of MIL-STD-1130.

3.4.3.3 Crimp barrel. Crimp barrel shall be as specified in the individual specification sheet (see 3.1).

3.4.4 Inserts (used on type V). Type V connector inserts shall be interchangeable within the connector housing. To prevent improper assembly, inserts shall be polarized as specified (see 3.1).

3.4.4.1 Type IV connector inserts. Type IV connector inserts shall be fabricated as a solid dielectric (see 3.1).

3.4.4.2 Type V contact inserts. Type V contact insert assemblies shall be fabricated as either a solid single piece or a two piece solid dielectric. Both elements of a two piece insert assembly shall be polarized to insure that the assembly shall consist of one top and one bottom insert.

3.4.5 Base plate. The base plate shall be as specified, and shall have punched or drilled holes into which insulator bushings and contacts can be inserted and retained (see 3.1 and 3.4 when applicable).

3.4.6 Pin spacers. Pin spacers shall be as specified in the individual specification sheet (see 3.1).

3.5 Electrical performance requirements.

3.5.1 Insulation resistance. Connectors shall have the insulation resistance specified in table I when tested as specified in 4.8.1. Grounding bushings are not included in this test.

3.5.2 Low signal level contact resistance. Connectors shall not exceed a voltage drop 20 millivolts (mV) per mated contact pair when tested as specified in 4.8.2. Contact positions monitored for low signal level contact resistance shall be deleted from any test circuit which imposes a voltage in excess of 20mV.

MIL-C-28754D

TABLE I. Insulation resistance.

Type	Resistance (megohms)					
	Contact to base plate			Contact to contact and contact to housing or card holder		
	Before humidity	Measured either in chamber or within 1 hour after removal from chamber	After 4 hours drying	Before humidity	Measured either in chamber or within 1 hour after removal from chamber	After 4 hours drying
III	10,000	10	500			
IV				100,000	100	18,000
V				50,000	50	10,000

3.5.3 Contact resistance. Connectors shall not exceed the specified voltage drop value (see 3.1) when tested as specified in 4.8.3.

3.5.4 Crimp or solder joint resistance (type V). Crimp or solder terminated contacts shall not exceed 4 mV voltage drop between the wire and the contact when tested as specified in 4.8.4.

3.5.5 Grounding bushing resistance (type III). Mounting plate to contact resistance shall result in a voltage drop between the mounting plate and grounding contact not exceeding 20 mV when tested as specified in 4.8.5.

MIL-C-28754D

3.6 Mechanical performance requirements.

3.6.1 Engaging and separating forces (type III). The type III backplane shall exhibit the following engaging and separation forces when tested as specified in 4.9.1. Low insertion or standard insertion condition shall be specified by the specification sheet (see 3.1).

3.6.1.1 Standard insertion force. The engaging force shall be 6 ounces (1.6 newtons) maximum and the separating force shall be 2 ounces (0.56 newtons) minimum.

3.6.1.2 Low insertion force (LIF). The average engaging force shall be 2.25 ounces (0.63 newtons) maximum with random readings allowed to 4.00 ounces (1.12 newtons) maximum. Separation force shall be 4 ounces (1.12 newtons) maximum.

3.6.2 LIF normal force (type III). The average normal force shall be greater than 3.5 ounces (0.98 newtons) with random readings of less than 3.00 ounces (0.84 newtons) allowed when tested as specified in 4.9.2.

3.6.3 Wrappost torque (type III). The contact shall withstand a torque of 3 ounce-inches for the 0.100 grid spacings without permanent rotation relative to the mounting plate or relative to the bushing when tested as specified in 4.9.3.

3.6.4 Contact retention.

3.6.4.1 Type III connectors. No contact shall have been pushed out of its bushing, nor shall any bushing have been pushed out of the base plate when tested as specified in 4.9.4. There shall be no visible movement of the contact or bushing.

3.6.4.2 Type IV and V connectors. Each contact as mounted in the connector shall withstand an axial force of 7.5 pounds (33.4 newtons) in either direction for a minimum of 10 seconds when tested as specified in 4.9.4.

3.6.5 Termination tensile strength. When termination tensile strength is specified (see 3.1), terminated contacts are tested as specified in 4.9.5. They shall meet the tensile strength specified in table II.

MIL-C-28754D

TABLE II. Tensile strength.

Wire size	Round wire per axial load (pounds) wire	Flat cable axial load pounds per inch of cable width
16	50	N/A
18	30	N/A
20	20	N/A
22	12	100
24	8	75
26	5	50
28	2.7	N/A
30	1.5	N/A
32	1.0	N/A

3.6.6 Pin shield retention (types IV and V). The pin shield shall withstand, without separation from the connector assembly or damage to the pin shield, a force of 4.0 pounds (17.8 newtons) maintained for a minimum of 10 seconds when tested as specified in 4.9.6.

3.6.7 Fin or header torque (type IV). The connector assembly shall withstand a 6.00 inch-pound (0.68 newton-meters) torque (formats A and B) or a 25.0 inch-pound (2.8 newton-meters) torque (formats C, D and E) applied in both directions along the fin or header in a direction perpendicular to the plane of the fin or header without detrimental effect to the electrical or mechanical structure of the assembly when tested as specified in 4.9.7.

3.6.8 Fin or header cantilever load (type IV). The fin or header shall withstand a force of 2.0 pounds (8.9 newtons) (formats A and B) or 5.0 pounds (22.3 newtons) (formats C, D and E) applied perpendicular to the fin or header surface midway between the two extractor holes when tested as specified in 4.9.8.

MIL-C-28754D

3.6.9 Guide rib strength test (types IV and V). The individual ribs shall withstand a torque of 10.00 inch-pounds (1.13 newton-meters) maintained for a minimum of 10 seconds when tested as specified in 4.9.9. There shall be no detrimental effect to the mechanical structure of the connector assembly.

3.6.10 Solderability. When solderability is specified (see 3.1), the dipped surface of the terminal shall be 95 percent minimum covered with a continuous new solder coating when contacts are tested as specified in 4.9.10. Connectors shall have no cracks, blisters, discoloration, or physical distortion of the connector body or markings detrimental to connector performance.

3.6.11 Resistance to solvents. The connectors shall be visually inspected and shall show no evidence of cracking, crazing, discoloration, distortion or bleeding out of any matter from the material detrimental to connector performance after having been tested in accordance with 4.9.11. Pitting shall not be allowed. The marking and color coding shall be legible.

3.7 Environmental performance requirements.

3.7.1 Operating environmental performance requirements.

3.7.1.1 Current overload. The contact plated surface shall neither peel nor discolor when contacts are tested as specified in 4.10.1.1. The connectors shall meet the requirements of 3.5.3, 3.5.4, and 3.5.5.

3.7.1.2 Vibration. There shall be neither cracking nor breaking, nor shall there be any loosening of parts, nor other visible damage when mated connector assemblies are tested as specified in 4.10.1.2. There shall be no loss of electrical continuity of any of the contact circuits of more than 100 nanoseconds during the test. Connectors shall meet the requirements of 3.5.2, 3.5.3, 3.5.5, 3.6.1, 3.6.2 and 3.6.3.

MIL-C-28754D

3.7.1.3 Barometric pressure (reduced). There shall be neither evidence of cracks, burns, nor other visible, nor dimensional damage which could cause electrical or mechanical breakdown when tested as specified in 4.10.1.3. In addition, at the completion of the temperature-altitude test, the connector shall meet the requirements of 3.7.1.4 and 3.5.1 (pre-humidity).

3.7.1.4 Dielectric withstanding voltage. There shall be neither evidence of arcing, breakdown, nor damage when unmated connector assemblies are tested as specified in 4.10.1.4.

3.7.1.5 Shock (specified pulse). There shall be neither breakage nor loosening of contacts, cracking of inserts, nor other visible or dimensional damage which would cause electrical or mechanical breakdown when mated connectors are tested as specified in 4.10.1.5. There shall be no loss of electrical continuity of any of the contact circuits of more than 100 nanoseconds during test.

3.7.2 Non-operating environmental performance requirements.

3.7.2.1 Temperature cycling. Mated connector assemblies shall show neither evidence of cracking, fracture nor other damage detrimental to the function of the connector when tested as specified in 4.10.2.1.

3.7.2.2 Durability. There shall be no evidence of mechanical degradation that would adversely affect the connector's ability to function, and the voltage drop shall not exceed the specified value (see 3.1) when mated connectors are tested as specified in 4.10.2.2. In addition, after completion of the test, type III connectors shall meet the requirements of 3.6.1 and 3.6.2.

3.7.2.3 Salt spray (corrosion). There shall be neither visual signs of corrosion nor corrosive salts on the basic metal when connectors are tested as specified in 4.10.2.3. Connectors shall meet the requirements of 3.5.2, 3.5.3 and 3.5.5.

3.7.2.4 Humidity. The connector shall meet the requirements of 3.5.1, 3.5.2, 3.7.1.4 and 3.6.4 when tested as specified in 4.10.2.4.

MIL-C-28754D

3.8 Assembly of contact and bushing sets (type III only). The contact and bushing sets when installed into the plate assembly shall satisfy the workmanship standards established by figure 1, when visually inspected at a magnification of 10 power. Contacts shall be installed in the bushing in such a manner that contacts are flush or below the top surface. Bushings shall be free of damage on top surface, and the configuration shall conform to the appendix. Figure 1A is a preferred condition. Figures 1B and 1C are unacceptable conditions. If more than 5 percent of the bushings display any conditions depicted in figures 1D through 1I, the plate is unacceptable.

3.9 Marking. Unless otherwise specified (see 3.1) connectors and component parts shall be permanently and legibly marked with the military part number, contact numbers, date code and manufacturer's source code in accordance with MIL-STD-1285. Other markings which in any way interfere with, obscure, or confuse those specified herein, are prohibited. All markings shall be made using epoxy base ink in accordance with MIL-I-43553 and shall remain legible after all tests. For components too small to mark, marking shall be on the packaging material (see 5.1). Unless otherwise specified in the applicable specification sheet (see 3.1), use contrasting colors.

3.10 Workmanship. The workmanship on connectors supplied under this specification shall assure conformance with the requirements contained herein. The contacts shall be free of burrs and sharp corners which would otherwise damage the plating when mating the connectors. Contacts and the connector body shall be free of cracks, voids, irregularities, and so forth. Housing cable clamps, holddown screws and inserts shall be free of burrs, sharp edges, and flash.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities

MIL-C-28754D

suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspection. The inspections specified herein are classified as follows:

- (a) Materials inspection (see 4.4).
- (b) Qualification inspection (see 4.5).
- (c) Quality conformance inspection (see 4.6).

4.3 Inspection conditions. Unless otherwise specified herein, all inspections shall be performed in accordance with the test conditions specified in 4.3.1, 4.3.2, 4.3.2.1-3, MIL-STD-202, and MIL-STD-1344.

4.3.1 Test equipment and inspection facilities. Test and measuring equipment and inspection facilities of sufficient accuracy, quality, and quantity to permit performance of the required inspection shall be established and maintained by the contractor. The establishment and maintenance of a calibration system to control the accuracy of the measuring and test equipment shall be in accordance with MIL-STD-45662.

MIL-C-28754D

4.3.2 Suppliers certification.

4.3.2.1 Certification requirements. Certification shall consist of an evaluation of the supplier's equipment, facilities, records, and controls which are used to determine the repeatability of the manufacturing and testing processes.

4.3.2.2 Processes requiring certification. The following processes (if used in the manufacturing of components) shall be certified to their applicable specifications in accordance with 4.1.3.1 and this paragraph:

- (a) Nickel plating: QQ-N-290.
- (b) Gold plating: MIL-G-45204.
- (c) Anodizing: MIL-A-8625.

4.3.2.3 Certification approval. Process certification shall be approved by the SEM-QAA.

4.4 Materials inspection. Materials inspection shall be performed to ascertain that the materials listed in table III, used in fabricating the connectors, are in accordance with the applicable referenced specifications or requirements prior to such fabrication.

4.5 Qualification inspection. Qualification procedures will be conducted and governed in accordance with SD-6. Qualification inspection shall be performed at the qualifying activity (a Government laboratory or other laboratory acceptable to the Government) (see 6.4.1) on sample units produced with equipment and procedures normally used in production. Qualification inspection shall consist of the examinations and tests specified in table IV on qualification test samples specified in 4.5.1. The qualification inspection is the initial inspection, or reinspection if qualification status was lost, of the manufacturer's product. It should not be confused with the quality conformance inspection which is used to retain qualification.

MIL-C-28754D

TABLE III. Materials inspection.

Material	Requirement paragraph	Applicable specification
Aluminum	3.3.2, 3.3.2.1, 3.3.5.1, 3.3.5.2, 3.3.9.2, 3.3.10	QQ-A-225/1, QQ-A-225/6, QQ-A-225/8, QQ-A-225/9, QQ-A-250/8, QQ-A-250/9, QQ-A-250/11, MIL-A-8625, QQ-A-200/8, QQ-A-591, MIL-C-5541, ASTM B 209
Copper alloy	3.3.4.2, 3.3.9.1	QQ-C-530, QQ-C-533, QQ-B-750, QQ-B-626, QQ-B-613, ASTM B 140, ASTM B 122
Plastic	3.3.3.1, 3.3.3.2, 3.3.10	L-P-410, ASTM D 4066, L-P-509, MIL-M-14, MIL-P-13949
Nickel-plating	3.3.4.3	QQ-N-290
Gold-plating	3.3.4.3	MIL-G-45204
Steel	3.3.6, 3.3.7, 3.3.8	QQ-S-635, QQ-S-763, QQ-S-766, ASTM A 582
Marking ink	3.9	MIL-I-43553

MIL-C-28754D

TABLE IV. Qualification inspection.

Inspection	Connector type			Requirement paragraph	Method paragraph	Number of units to be inspected	Number of defectives allowed
	III	IV	V				
<u>Subgroup I</u>							
Visual and mechanical examination	X	X	X	3.1, 3.3, 3.4, 3.8, 3.9, 3.10	4.7		
Dielectric withstanding voltage	X	X	X	3.7.1.4	4.10.1.4		
Insulation resistance	X	X	X	3.5.1	4.8.1		
Low signal level contact resistance	X	X	X	3.5.2	4.8.2		
Contact resistance	X	X	X	3.5.3	4.8.3		
Crimp or solder joint resistance			X	3.5.4	4.8.4	12 $\frac{1}{2}$ 3 $\frac{2}{2}$	0
Grounding bushing resistance	X			3.5.5	4.8.5		
Engaging and separating forces	X			3.6.1	4.9.1		
Normal force (LIF only)	X			3.6.2	4.9.2		
Wrappost torque	X			3.6.3	4.9.3		

MIL-C-28754D

TABLE IV. Qualification inspection - Continued.

Inspection	Connector type			Requirement paragraph	Method paragraph	Number of units to be inspected	Number of defectives allowed
	III	IV	V				
<u>Subgroup I</u> <u>(continued)</u>							
Contact retention	X	X	X	3.6.4	4.9.4		
Resistance to solvents	X	X	X	3.6.11	4.9.11		
<u>Subgroup II</u>							
Temperature cycling	X	X	X	3.7.2.1	4.10.2.1		
Current overload	X	X	X	3.7.1.1	4.10.1.1		
Contact resistance	X	X	X	3.5.3	4.8.3		
Grounding bushing resistance	X			3.5.5	4.8.5		
Crimp or solder joint resistance			X	3.5.4	4.8.4		
Vibration	X	X	X	3.7.1.2	4.10.1.2	4 <u>1</u> /	0
Low signal level CR	X	X	X	3.5.2	4.8.2	1 <u>2</u> /	
Contact resistance	X	X	X	3.5.3	4.8.3		
Grounding bushing resistance	X			3.5.5	4.8.5		

MIL-C-28754D

TABLE IV. Qualification inspection - Continued.

Inspection	Connector type			Requirement paragraph	Method paragraph	Number of units to be inspected	Number of defectives allowed
	III	IV	V				
<u>Subgroup II (continued)</u>							
Engaging and separating forces	X			3.6.1	4.9.1		
Normal force (LIF only)	X			3.6.2	4.9.2		
Contact retention	X	X	X	3.6.4	4.9.4		
Pin shield retention		X	X	3.6.6	4.9.6		
Visual examination	X	X	X	3.1, 3.4, 3.8, 3.9, 3.10	4.7		
<u>Subgroup III</u>							
Durability	X	X	X	3.7.2.2	4.10.2.2		
Engaging and separating forces	X			3.6.1	4.9.1		
Normal force (LIF only)	X			3.6.2	4.9.2		
Wrappost torque	X			3.6.3	4.9.3		
Contact retention	X	X	X	3.6.4	4.9.4		

MIL-C-28754D

TABLE IV. Qualification inspection - Continued.

Inspection	Connector type			Requirement paragraph	Method paragraph	Number of units to be inspected	Number of defectives allowed
	III	IV	V				
<u>Subgroup III (continued)</u>							
Salt spray (corrosion)	X	X	X	3.7.2.3	4.10.2.3	4 <u>1</u> / 1 <u>2</u> /	0
Low signal level CR	X	X	X	3.5.2	4.8.2		
Contact resistance	X	X	X	3.5.3	4.8.3		
Grounding bushing resistance	X			3.5.5	4.8.5		
Visual and mechanical examination	X	X	X	3.1, 3.4, 3.8, 3.9, 3.10	4.7		
<u>Subgroup IV</u>							
Shock (specified pulse)	X	X	X	3.7.1.5	4.10.1.5		
Insulation resistance	X	X	X	3.5.1	4.8.1		
Humidity	X	X	X	3.7.2.4	4.10.2.4		
Low signal level CR	X	X	X	3.5.2	4.8.2		

MIL-C-28754D

TABLE IV. Qualification inspection - Continued.

Inspection	Connector type			Requirement paragraph	Method paragraph	Number of units to be inspected	Number of defectives allowed
	III	IV	V				
<u>Subgroup IV (continued)</u>							
Insulation resistance	X	X	X	3.5.1	4.8.1		
Dielectric withstanding voltage	X	X	X	3.7.1.4	4.10.1.4		
Contact retention	X	X	X	3.6.4	4.9.4		
Pin shield retention		X	X	3.6.6	4.9.6	4 $\frac{1}{2}$	0
Fin or header torque		X		3.6.7	4.9.7		
Fin cantilever load		X		3.6.8	4.9.8		
Guide rib strength test		X	X	3.6.9	4.9.9		
Barometric pressure (reduced)		X	X	3.7.1.3	4.10.1.3		
Dielectric withstanding voltage		X	X	3.7.1.4	4.10.1.4		
Insulation resistance		X	X	3.5.1	4.8.1		

MIL-C-28754D

TABLE IV. Qualification inspection - Continued.

Inspection	Connector type			Requirement paragraph	Method paragraph	Number of units to be inspected	Number of defectives allowed
	III	IV	V				
<u>Subgroup IV</u> <u>(continued)</u>							
Visual examination	X	X	X	3.1, 3.4, 3.8, 3.9, 3.10	4.7		
<u>Subgroup V</u>							
Visual and mechanical examination	X	X	X	3.1, 3.3, 3.4, 3.8, 3.9, 3.10	4.7	20 contacts	0
Termination tensile strength			X	3.6.5	4.9.5		
<u>Subgroup VI</u>							
Visual and mechanical examination		X	X	3.1, 3.3, 3.4, 3.8, 3.9, 3.10	4.7	1	0
Solderability		X	X	3.6.10	4.9.10		

1/ Indicates inspection quantity for type IV, V connectors only.

2/ Indicates inspection quantity for type III connectors only.

MIL-C-28754D

4.5.1 Sample. The sample required for qualification shall be prepared in accordance with the appendix.

4.5.1.1 Qualification sample packaging and mailing. The qualification sample described in 4.5.1 and prepared in accordance with the appendix shall be securely packaged and delivered to the qualifying activity.

4.5.2 Inspection routine. The untested sample units shall be sent to the qualifying activity where they will be subjected to the qualification inspection specified in table IV, in the order shown.

4.5.3 Failure. Failures in excess of those allowed in table IV shall result in refusal to grant qualification approval.

4.5.4 Retention of qualification. To retain qualification status after the qualification inspection has been passed, the quality conformance inspection shall be performed and passed every 12 months thereafter. The quality conformance inspection differs somewhat from the qualification inspection and is described fully in 4.6.

4.5.4.1 Noncontinuous production. In the event that no production has occurred on an item during the time between initial qualification and quality conformance inspection, a letter shall be submitted certifying that although the item is not in production currently, the contractor has the capabilities and facilities necessary to produce the item, and that the contractor wishes to retain qualification status on the item. If this break in production is longer than two consecutive inspection periods, each part number involved shall be submitted for quality conformance inspection (see 4.6) at the second inspection period (two years after initial qualification or quality conformance inspection) even if the item is still not in production. When production is resumed, regardless of when this falls in the inspection period, each part number involved must be submitted for quality conformance inspection (see 4.6). If after two consecutive reporting periods there has been no production, the contractor may be required at the discretion of the qualifying activity, to submit a representative product of each part number to be tested in accordance with the qualification inspection requirements.

MIL-C-28754D

4.6 Quality conformance inspection.

4.6.1 Inspection of product for delivery. Inspection of product for delivery shall consist of groups A and B inspection. Delivery of products which have passed the groups A and B inspection shall not be delayed pending the results of the group C inspection (see 6.8.1).

4.6.1.1 Group A inspection. Group A inspection shall be conducted by the contractor and shall consist of the inspections specified in table V. The qualifying activity reserves the right to inspect the facilities, equipment and procedures used in the group A inspection (see 6.8.2)

TABLE V. Group A inspection.

Inspection	Requirement paragraph	Test method paragraph
Visual and mechanical	3.1, 3.3, 3.4, 3.8, 3.9, 3.10	4.7

4.6.1.2 Group B inspection. Group B inspection shall be conducted by the contractor and shall consist of the inspections specified in table VI, in the order shown. The qualifying activity reserves the right to inspect the facilities, equipment and procedures used in the group B inspection (see 6.8.3).

4.6.2 Periodic inspection. Periodic inspection shall consist of:

- (a) Group A quality conformance inspection.
- (b) Group B quality conformance inspection.
- (c) The group C quality conformance inspection shall be conducted on the inspection lot by the qualifying activity in the time period specified in 4.5.1.

MIL-C-28754D

TABLE VI. Group B inspection.

Inspection	Requirement paragraph	Test method paragraph
Contact resistance	3.5.3	4.8.3
Grounding bushing resistance (type III)	3.5.5	4.8.5
Engaging and separating forces (type III)	3.6.1	4.9.1
Normal force (LIF only)	3.6.2	4.9.2
Insulation resistance	3.5.1	4.8.1
Contact retention	3.6.4	4.9.4

4.6.2.1 Group C inspection. Group C inspection shall consist of the inspections specified in table IV, in the order shown. Group C inspection shall be made on sample units which have passed groups A and B inspections (see 6.8.4).

4.7 Visual and mechanical methods of examination and test. Connectors shall be examined to determine that the material, design, construction, physical dimensions, marking and workmanship are in accordance with the applicable requirements (see 3.1, 3.3, 3.4, 3.8, 3.9, and 3.10).

4.8 Electrical tests.

4.8.1 Insulation resistance. The unmated connectors shall be tested in accordance with method 3003 of MIL-STD-1344 and shall meet the requirements of 3.5.1. The following details shall apply:

- (a) Test voltage: 100 Vdc plus or minus 5 percent.

MIL-C-28754D

(b) Points of measurement:

Type III - Contact to base plate.

Types IV and V - Contact to contact and contact to housing or card holder

4.8.2 Low signal level contact resistance. Connectors shall be tested in accordance with method 3002 of MIL-STD-1344 and shall meet requirements of 3.5.2. Test probes should be no more than 0.06 inch (1.52 mm) from the surface of the connector housing.

4.8.3 Contact resistance. Connectors shall be wired and tested in accordance with method 3004 of MIL-STD-1344 and shall meet requirements of 3.5.3. The following details and exceptions shall apply:

- (a) Method of connection (see figure 2).
- (b) Test current shall be 3 amperes, unless otherwise specified (see 3.1).
- (c) Number of activations prior to measurement: 1.
- (d) Number of test activations: 1.
- (e) Number of measurements per activation: 1.

4.8.4 Crimp or solder joint resistance. Connectors with crimp or solder terminated contacts (see 3.1) shall be wired and tested in accordance with method 3004 of MIL-STD-1344 and shall meet requirements of 3.5.4. The following details and exceptions shall apply:

- (a) Method of connection (see figure 3).
- (b) Test current (see 3.1).
- (c) Number of measurements per activation: 1.

MIL-C-28754D

4.8.5 Grounding bushing resistance (type III). Resistance shall be tested as shown on figure 4 and shall meet the requirements of 3.5.5. The test current shall be 3 amperes.

4.9 Mechanical tests.

4.9.1 Engaging and separating forces (type III). The engaging and separating forces should be determined in accordance with Method 2014 of MIL-STD-1344. The test blade of figure 5 shall be inserted into 50 different contacts to a depth of 0.160 inch (4.064 mm), and the engaging and separating forces recorded. The average and maximum forces shall meet the requirements of 3.6.1.

4.9.2 LIF normal force (type III). The force exerted by 50 different contacts shall be measured. All measurements shall be performed on contact sets which were tested under 4.9.1. Normal force shall be measured using equipment which directly indicates the force exerted by each tine or the average force exerted by both tines when the gap between the contact points is 0.020 plus or minus 0.0002 inch. Any equipment used for these measurements must be capable of direct correlation with normal force measurements using conventional force versus deflection techniques. The average and minimum normal forces shall meet the requirements of 3.6.2.

4.9.3 Wrappost torque (type III). The assembled contact and bushing shall be tested in accordance with MIL-STD-202, method 211, test condition E, and shall meet the requirements of 3.6.3.

4.9.4 Contact retention. Connectors shall be tested in accordance with method 2007 of MIL-STD-1344 and shall meet the requirements of 3.6.4. The following details and exceptions shall apply:

- (a) Number of samples - A minimum of 10 contacts per test specimen shall be tested.
- (b) Applied axial load - One pound per second until a 7 1/2 pound load has been reached. Maintain load for 10 seconds (when hook-up wire is used, the wire shall be large enough to withstand the applied load.)

MIL-C-28754D

(c) Maximum allowable contact displacement during application and after removal of specified force - No visible movement (at 3X) of the contact or bushing.

(d) Axial direction - Straight.

4.9.5 Termination tensile strength (type V). Contacts shall be tested in accordance with method 2003 of MIL-STD-1344 and shall meet the requirements of 3.6.5.

4.9.5.1 Termination tensile strength (round wire, type V connector only). The axial load specified in table II (see 3.6.5) shall be applied to each individual wire. Samples of the terminated contact-wire shall be placed in a tensile testing device and sufficient force applied to pull the wire out of the contact or to break the wire. The terminated joint of the contact shall not break or become distorted before the minimum tensile strength specified is reached. The speed of head travel of the tensile device shall be 1 plus or minus 0.25 inch (25.4 plus or minus 6.4 mm) per minute.

4.9.5.2 Termination tensile strength (flat conductor cable only, type V connector). Unmated connectors shall be tested in accordance with method 2003 of MIL-STD-1344 and shall meet the requirements of 3.6.5. The following details and exceptions shall apply:

(a) Axial force shall be in accordance with table II and shall be applied uniformly across the width of the cable.

(b) The cable shall be clamped 6 inches from the mating face of the assembly.

4.9.6 Pin shield retention (types IV and V). Each pin shield shall withstand without separation from its base a force of 4 pounds (18 newtons), minimum and shall meet the requirements of 3.6.6. The force shall be applied to each end of each pin shield in a direction normal to a plane passing through the centerline of both keying pins. The point of application of force shall be midway between the first and second electrical contacts on each end and up 0.06 plus 0.00, minus 0.03 inch (1.52 plus

MIL-C-28754D

0.0, minus 0.76 mm) from the bottom edge of the pin shield. The rate of application of force shall be such that the specified force is obtained in 2 to 5 seconds; the force shall be maintained for 10 to 15 seconds at 25 plus or minus 5°C (see figure 6). For multiple span connectors having rows with 50 contacts, the foregoing tests are also required at points opposite the midpoint between contacts 25 and 26 and between 75 and 76, or 125 and 126, or 175 and 176, or 225 and 226.

4.9.7 Fin or header torque (type IV). The connector assembly shall be mounted in a fixture which restrains the movement of the base of the connector assembly (see figures 7 and 8). Formats A and B will be restrained for 0.5 inches (12.7 mm) maximum from the assembly base, formats C, D, and E will be restrained 1.0 inch (25.4 mm) maximum from the assembly base. The fixture piece shown on figure 7 is only meant as an example of what can be used for formats A and B (with fin). The torque as specified in 3.6.7 shall be applied to the fin or header in each of two opposing directions. The torque shall be applied at a rate so that the specified torque is obtained in 2 to 10 seconds from the time the torque is first applied to the fin or header.

4.9.8 Fin or header cantilever load (type IV). With the connector assembly restrained as specified in 4.9.7, apply the force specified in 3.6.8 at the center of the extractor fin or header along the centerline between the two extractor holes and perpendicular to the plane of the fin or header in two directions (see figure 9). The specified force shall be obtained in 2 to 10 seconds from the time the force is first applied.

4.9.9 Guide rib strength test (types IV and V). The torque specified in 3.6.9 shall be applied in a direction perpendicular to the plane of the ribs and along the full length of the rib using a method similar to that shown on figure 10. The torque shall be applied at a rate so that the specified force is obtained in 2 to 10 seconds from the time the force is first applied to the guide rib.

4.9.10 Solderability (types IV and V). Terminals shall be tested in accordance with method 208 of MIL-STD-202 and shall meet the requirements of 3.6.10.

MIL-C-28754D

4.9.11 Resistance to solvents. Connectors shall be tested in accordance with E1A-364-11 and shall meet the requirements of 3.6.11. The solvent shall be Class I. The connectors tested shall be fully assembled by normal assembly operation.

4.10 Environmental tests.

4.10.1 Operating environmental tests.

4.10.1.1 Current overload.

4.10.1.1.1 Mated contacts. Mated contacts shall be subjected to current overloads of 125 percent of rated current (see 3.1) for 2 hours, and 150 percent of rated current of contacts for 5 minutes. After being cooled to room temperature, connectors shall be tested in accordance with 4.8.3 and shall meet the requirements of 3.7.1.1.

4.10.1.1.2 Crimped or solder joint. The wired crimped or solder joint shall be subjected to current overloads of 125 percent of rated current (see 3.1) for 2 hours, and 150 percent of rated current of contacts for 5 minutes. After being cooled to room temperature, connectors shall be tested in accordance with 4.8.4 and shall meet the requirements of 3.7.1.1.

4.10.1.1.3 Mounting plate to contact. The mounting plate to contact joint shall be subjected to current overloads of 125 percent of rated current (see 3.1) for 2 hours, and 150 percent of rated current of contacts for 5 minutes. After being cooled to room temperature, connectors shall be tested in accordance with 4.8.5 and shall meet the requirements of 3.7.1.1.

4.10.1.2 Vibration. Mated connector assemblies shall be tested in accordance with method 2005 of MIL-STD-1344 and shall meet the requirements of 3.7.1.2. The following details and exceptions shall apply:

- (a) Test conditions III and VE.
- (b) Duration of the random vibration test, level VE, shall be 15 minutes per axis.

MIL-C-28754D

4.10.1.3 Barometric pressure (reduced). The connector shall be tested in accordance with MIL-STD-202, method 105, condition D, and meet the requirements of 3.7.1.3. During the last half hour, 30 Vdc shall be applied between adjacent contacts.

4.10.1.4 Dielectric withstanding voltage. Connector assemblies shall be tested in accordance with method 3001, test condition IV of MIL-STD-1344 and shall meet the requirements of 3.7.1.4. The following details shall apply:

- (a) Magnitude of test voltage and nature of potential - 350 Vac rms at 60 Hz or 500 Vdc.
- (b) Points of application of test voltage:

Type III - Contact and base plate.

4.10.1.5 Shock (specified pulse). Connectors shall be tested in accordance with method 2004 of MIL-STD-1344 and shall meet the requirements of 3.7.2.2. The following details and exceptions shall apply:

- (a) Test condition G.
- (b) Measurements during and after test - The mated connector assemblies shall be monitored for electrical discontinuity by a method which shall at least be sensitive enough to monitor or register, automatically, any electrical discontinuity of 100 nanoseconds.

4.10.2 Non-operating environmental tests.

4.10.2.1 Temperature cycling. Connectors, wired (when applicable) and mated, shall be tested in accordance with method 1003 of MIL-STD-1344 and shall meet the requirements of 3.7.2.1. The following details and exceptions shall apply:

- (a) Test condition letter - A, except maximum temperature extreme shall be 125°C.
- (b) Measurements before and after cycling - Not applicable.

MIL-C-28754D

4.10.2.2 Durability. Connector assemblies complete with wire, contacts, applicable hoods, clamp and associated hardware shall be subjected to 500 cycles of mating and unmating in accordance with method 2016 of MIL-STD-1344. Testing of connectors shall be not greater than 500 cycles per hour. Connectors shall then be tested in accordance with 4.9.1 and 4.9.2. Following this test, mated connectors shall meet the requirements of 3.7.2.3.

4.10.2.3 Salt spray (corrosion). Connectors shall be tested in accordance with method 1001 of MIL-STD-1344 and shall meet the requirements of 3.7.2.4. The following details and exceptions shall apply:

- (a) Applicable salt solution - 5 percent.
- (b) Test condition letter - B.
- (c) Conditioning after exposure - All exposed surfaces of connectors shall be thoroughly washed and dried in a circulating air oven at a temperature of 38 plus or minus 3°C.
- (d) Measurements after exposure - Connectors shall be tested in accordance with 4.8.2, 4.8.3, 4.8.5 and 4.9.3.

4.10.2.4 Humidity. The test sample shall be humidity tested in accordance with MIL-STD-1344, method 1002, type III and shall meet the requirements of 3.7.2.5. Following the test, connectors shall be tested in accordance with 4.8.1, 4.10.1.4 and 4.9.4.

4.11 Inspection of packaging. Sample packages and packs, and the inspection of the preservation-packaging, packing and marking for shipment and storage shall be in accordance with the requirements of section 5 and the documents specified therein.

5. PACKAGING

5.1 Packaging. Packaging shall be in accordance with MIL-C-55330 (see 6.2).

MIL-C-28754D

6. NOTES

(This section contains information of a general explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. Connectors and component parts covered by this specification are intended for use in ground support, airborne, and shipboard electrical and electronic equipment.

6.2 Acquisition requirements. Acquisition documents must specify the following:

- (a) Title, number, and date of this specification.
- (b) Title, number, and date of the applicable specification sheet and the complete part number.
- (c) Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
- (d) Color (see 3.3.5.3).
- (e) Dimensions of base plate and exact number and size of plug connector which the base plate of the type III connector will accommodate (see 3.4).
- (f) Marking, levels of preservation and packaging and packing required (see 5.1).
- (g) Tools if required (see 3.1).
 - (1) Insertion and withdrawal tools.
 - (2) Crimp tool and positioner.
- (h) If requested, original equipment manufacturer (OEM) drawing showing actual dimensions.

MIL-C-28754D

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List, QPL No. 28754, whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. The activity responsible for the Qualified Products List is the Naval Sea Systems Command, (SEA 5523), Department of the Navy, Washington, DC 20362-5101. However, information pertaining to qualification of products may be obtained from the Naval Weapons Support Center, Code 603, Crane, Indiana 47522-5060.

6.4 Definitions. The following definitions are applicable to terms used herein.

6.4.1 Qualifying activity. The agent approved to perform qualification inspections and provide information used by the preparing activity to maintain the qualified products list. Products to be delivered for qualification should be addressed as shown below.

(a) For type III and specification sheet M28754/54:

Commanding Officer
Naval Avionics Center
6000 E. 21st Street
Indianapolis, IN 46219-2189
Attn: Code 444

(b) For types IV and V deliver to:

Commanding Officer
Naval Weapons Support Center, Code 603
Crane, IN 47522-5060

MIL-C-28754D

Packing slips should identify each product sent for qualification (include the specification sheet(s) specified and the contractor's part number) and include the name and telephone number of the contractor representative to contact relative to the qualification. On the outside of the shipping container write in large print the following, "QUAL SAMPLES - NO CHARGE".

6.5 Current-carrying capacity. The current rating given in the specification sheets are for single contacts. It is necessary to derate the total current carrying capacity of a connector.

6.6 Shipment of contacts. At the option of the contracting officer, contacts may be mounted on a carrier, or delivered loose in bulk.

6.7 Intermetallic contact. The finishing of metallic areas to be placed in intimate contact by assembly presents a special problem, since intermetallic contact of dissimilar metals results in electrolytic couples which promote corrosion through galvanic action. To provide the required corrosion protection, intermetallic couples are restricted to those permitted by table VII. Table VII shows metals and alloys (or plates) by groups which have common electromotive forces (EMF) within 0.05 volt when coupled with a saturated calomel electrode in sea water at room ambient temperatures. All members of a group are considered as completely compatible, one with the other. Compatible couples between groups have been specified in table VII based on a potential difference of 0.25 volt maximum. To simplify any arithmetic involved, table VII shows, in addition to EMF against a calomel electrode, a derived anodic index with group 1 (gold, and so forth) as 0 and group 18 (magnesium, and so forth) as 175. Subtraction of a lower group anodic index gives the EMF difference in hundredths of a volt.

6.7.1 Groups. Table VII lists 18 primary groups. It may be noted that neither the metallurgical similarity or dissimilarity of metals is the parameter for selection of compatible couples. All members within a group, regardless of metallurgical similarity, are considered inherently nonsusceptible to galvanic action, when coupled with any member within the group; for example, such dissimilar metals are platinum and gold. Similarly, such basically dissimilar alloys as austenitic stainless steels, silver-solder, and low brass (all members of group 5) are inherently nonsusceptible when coupled together

MIL-C-28754D

TABLE VII Compatible couples ^{1/}

Group no	Metallurgical category	EMF (V)	Anodic index (0, 01 V)	Compatible couples
1	Gold, solid and plated; gold-platinum alloys, wrought platinum (most cathodic)	+0.15	0	○
2	Rhodium plated on silver-plated copper	+0.05	10	● ○
3	Silver, solid or plated, high silver alloys	0	15	● ● ○
4	Nickel, solid or plated; monel metal, high nickel-copper alloys	-0.15	30	● ● ● ○
5	Copper, solid or plated; low brasses or bronzes, silver solder; German silver; high copper-nickel alloys, nickel-chromium alloys, austenitic corrosion-resistant steels	-0.20	35	● ● ● ● ○
6	Commercial yellow brasses and bronzes	-0.25	40	● ● ● ● ○
7	High brasses and bronzes, naval brass; Muntz metal	-0.30	45	● ● ● ● ○
8	18 percent chromium type corrosion-resistant steels	-0.35	50	● ● ● ● ○
9	Chromium, plated; tin, plated, 12 percent chromium type corrosion-resistant steels	-0.45	60	● ● ● ● ○
10	Tin-plate, terneplate, tin-lead solder	-0.50	65	● ● ● ● ○
11	Lead, solid or plated, high lead alloys	-0.55	70	● ● ● ● ○
12	Aluminum, wrought alloys of the duralumin type	-0.60	75	● ● ● ● ○
13	Iron, wrought, gray, or malleable, plain carbon and low alloy steels, armco iron	-0.70	85	● ● ● ● ○
14	Aluminum, wrought alloys other than duralumin type, aluminum, cast alloys of the silicon type	-0.75	90	● ● ● ● ○
15	Aluminum, cast alloys other than silicon type, cadmium, plated and chromated	-0.80	95	● ● ● ● ○
16	Hot-dip-zinc plate, galvanized steel	-1.05	120	● ● ● ● ○
17	Zinc, wrought, zinc-based die-casting alloys, zinc, plated	-1.10	125	● ● ● ● ○
18	Magnesium and magnesium-base alloys, cast or wrought (most anodic)	-1.60	175	●

^{1/} Compatible couples - potential difference of 0.25 volt maximum between groups

MIL-C-28754D

6.7.2 Compatibility graphs. Permissible couple series are shown in table VII by the graphs at the right. Members of groups connected by lines will form permissible couples. A "o" indicates the most cathode member of each series, a "•" an anodic member, and the arrow indicates the anodic direction.

6.7.3 Selection of compatible couples. Proper selection of metals in the design of equipment will result in fewer intermetallic contact problems. For example, for sheltered exposure, neither silver nor tin require protective finishes. However, since silver has an anodic index of 15 and tin 65, the EMF generated as a couple is 0.50 volt, which is not allowable by table VII. In this case, other metals or plates will be required. It should be noted that, in intermetallic couples, the member with the higher anodic index is anodic to the member with the lower anodic index and will be susceptible to corrosion in the presence of an electrolytic medium. If the surface area of the cathodic part is significantly greater than that of the anodic part, the corrosive attack on the contact area of the anodic part may be greatly intensified. Material selection for intermetallic contact parts, therefore, should establish the smaller part as the cathodic member of the couple, whenever practicable.

6.7.4 Plating. When base metals intended for intermetallic contact form couples not allowed by table VII, they are to be plated with those metals which will reduce the potential difference to that allowed by table VII.

6.8 Quality conformance inspection.

6.8.1 Inspection lot. An inspection lot should consist of all connectors having the same number and size of contacts, of the same type and contact spacing, or their component parts, whichever is being procured, produced under essentially the same conditions and offered for inspection at one time.

6.8.2 Group A inspection.

6.8.2.1 Sampling plan. Statistical sampling and inspection should be in accordance with MIL-STD-105 for general inspection level II. The acceptable quality level (AQL) should be 2.5.

MIL-C-28754D

6.8.2.2 Rejected lots. If an inspection lot is rejected, the contractor may rework it to correct the defects, or screen out the defective units, and resubmit for reinspection. Resubmitted lots shall be inspected using tightened inspection. Such lots should be separate from new lots, and should be clearly identified as reinspected lots.

6.8.3 Group B inspection.

6.8.3.1 Sampling plan. Statistical sampling and inspection should be in accordance with MIL-STD-105 for special inspection level S-4. The acceptable quality levels (AQL) should be 0.65. Major and minor defects should be as defined in MIL-STD-105.

6.8.3.2 Rejected lots. If an inspection lot is rejected, the contractor may rework it to correct the defects, or screen out the defective units, and resubmit for reinspection. Resubmitted lots should be inspected using tightened inspection. Such lots should be separate from new lots, and should clearly be identified as reinspected lots.

6.8.3.3 Disposition of sample units. Sample units which have been subjected to group B inspection may be delivered on the contract or purchase order, if the lot is accepted.

6.8.4 Group C inspection.

6.8.4.1 Sampling plan. The group C samples should be in accordance with the appendix.

6.8.4.2 Failures. If one or more sample units fail to pass group C inspection, the representative lot should be considered to have failed.

6.8.5 Disposition of sample units. Sample units which have been subjected to group C inspection should not be delivered on the contract or purchase order.

MIL-C-28754D

6.8.6 Noncompliance. If a sample fails to pass group C inspection, the qualifying activity should notify the contractor of such failure. The contractor should take corrective action on the materials or processes, or both, as warranted, and on all units of product which can be corrected and which were manufactured under essentially the same conditions with the same materials and processes, and which are considered subject to the same failure. Acceptance and shipment of the product should be discontinued until corrective action, acceptable to the qualifying activity has been taken. After the corrective action has been taken, group C inspection should be repeated on additional sample units (all inspections, or the inspection which the original sample failed, at the option of the qualifying activity). Groups A and B inspections may be reinstituted; however, final acceptance and shipment should be withheld until the group C inspection sample is accepted.

6.9 Subject term (key word) listing.

Backplane
Cable
Contacts
Module
Modules, standard electronic (SEM)

6.10 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MIL-C-28754D

Custodians:

Army - CR

Navy - SH

Air Force - 85

Preparing activity:

Navy - SH

(Project 5935-3628)

Review activities:

Navy - MC

Air Force - 11, 17, 99

DLA - ES

User activities:

Army - AR, MI

Navy - AS

Agent:

NWSC, Crane

MIL-C-28754D

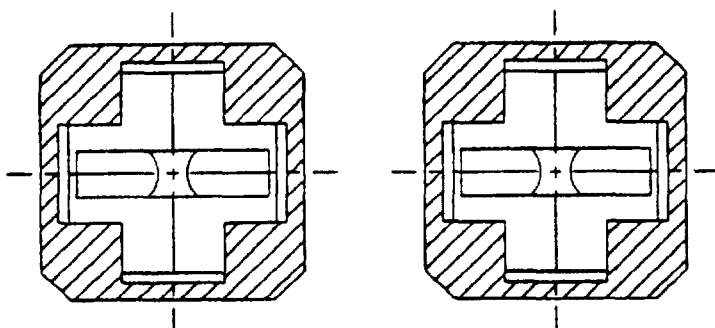


FIGURE 1A - Idealized condition




FIGURE 1B - Either tine broken




FIGURE 1C - Both contact tines twisted

FIGURE 1. Contact and bushing set workmanship standards.

MIL-C-28754D

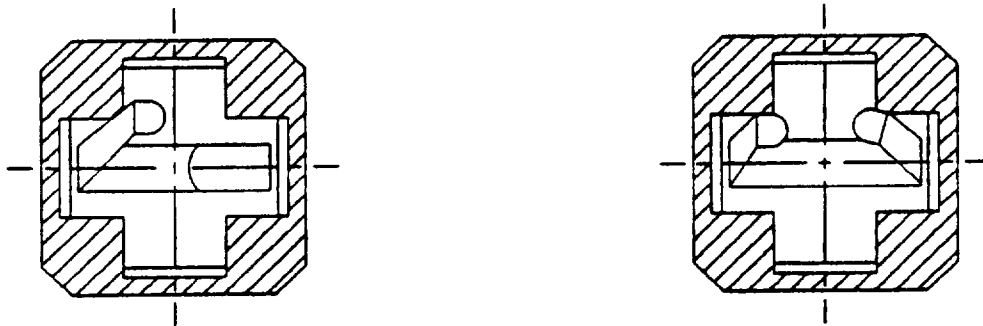


FIGURE 1D - Single contact tine twisted
FIGURE 1E - Contact lines against bushing




FIGURE 1F Bushing rotated and contact tines twisted




FIGURE 1G Contact orientation not central to cruciform and contact tines bridging bushing

FIGURE 1. Contact and bushing set workmanship standards - Continued.

MIL-C-28754D

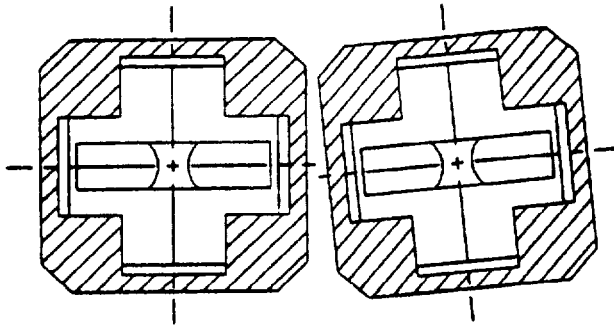


FIGURE 1H - Bushing and contacts with one set improperly oriented


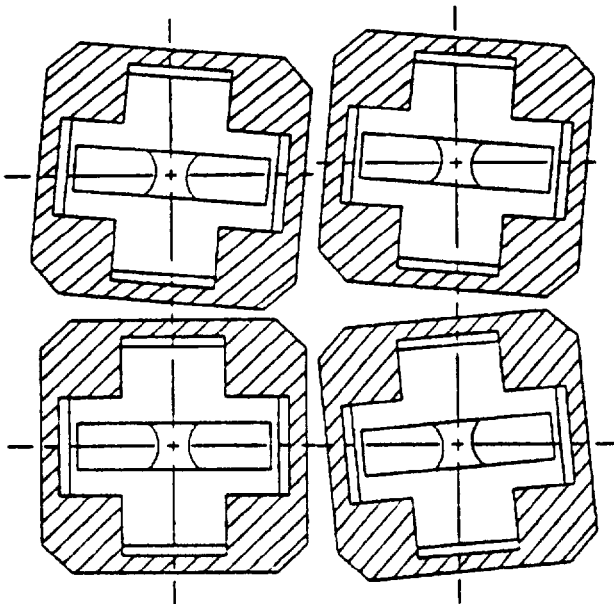


FIGURE 1I - Bushing and contacts randomly oriented in pattern

FIGURE 1. Contact and bushing set workmanship standards - Continued.

MIL-C-28754D

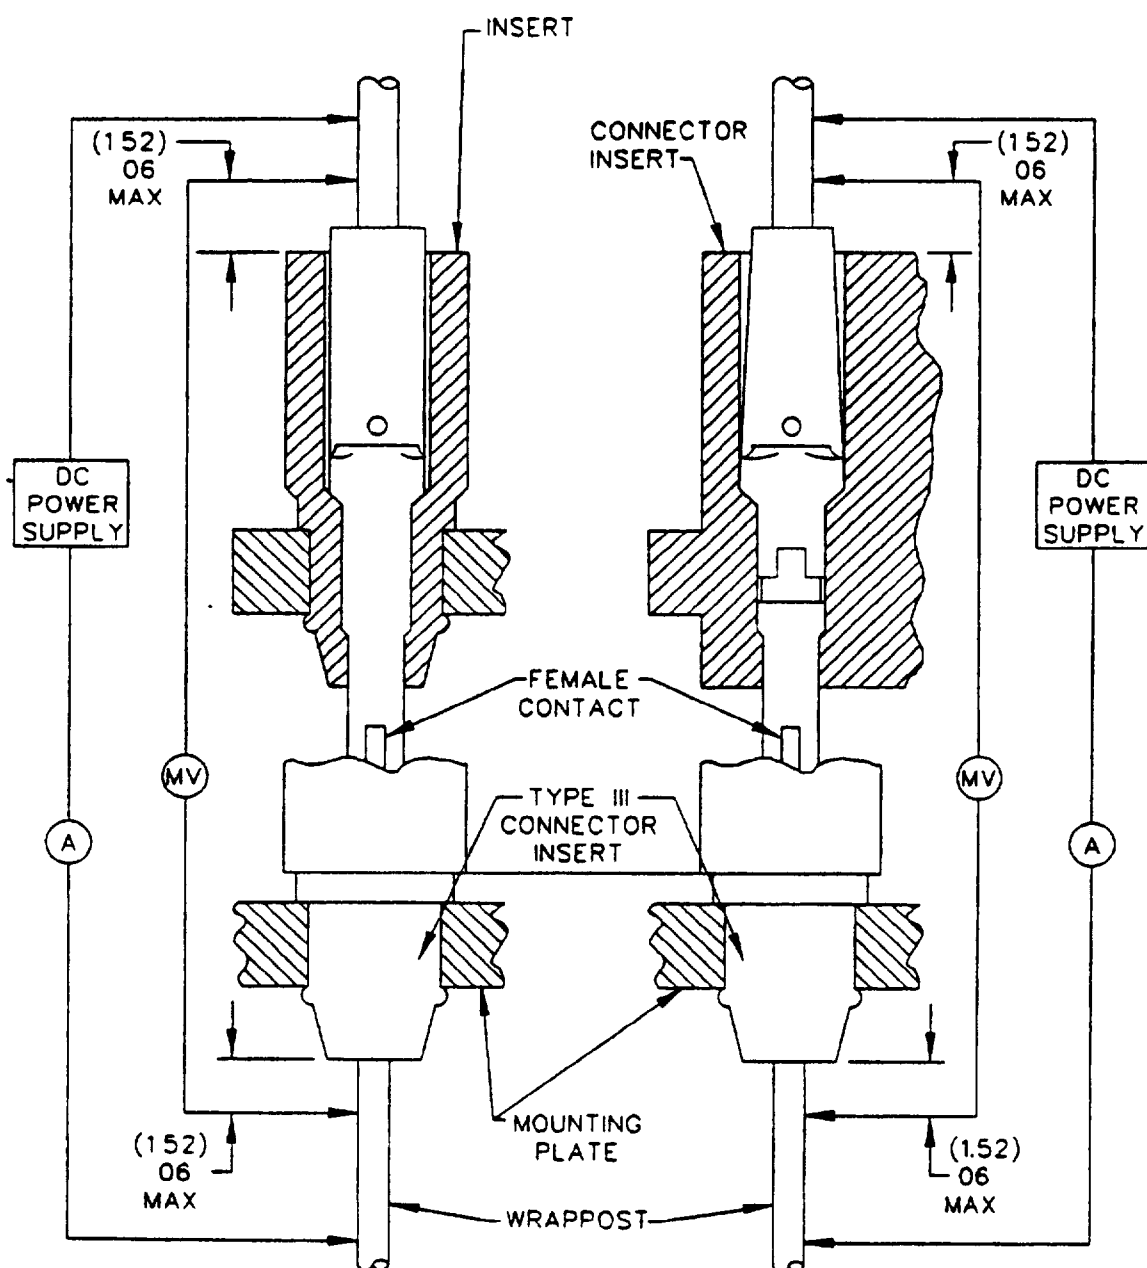


NOTES:

1. Dimensions are in inches.
2. Metric equivalents are in parentheses and are given for general information only.

FIGURE 2. Test setup for measuring mated contact resistance.

MIL-C-28754D

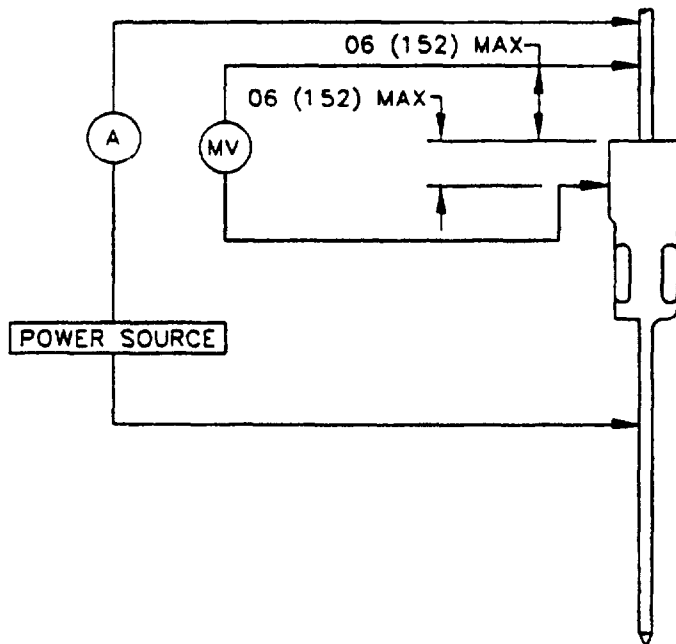


NOTES:

1. Dimensions are in inches.
2. Metric equivalents are in parentheses and are for general information only.

FIGURE 3. Test setup for measuring crimp or solder joint resistance.

MIL-C-28754D

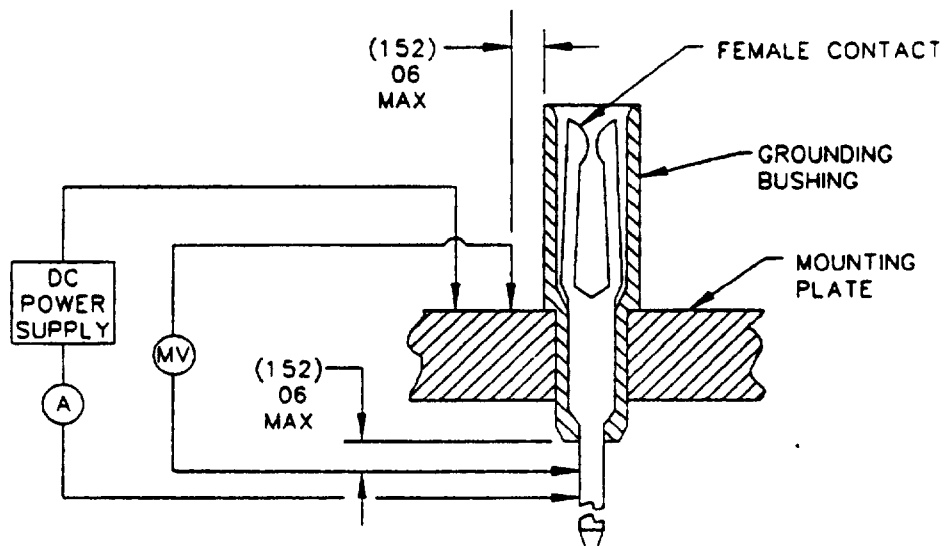


NOTES:

1. Dimensions are in inches.
2. Metric equivalents are in parentheses and are for general information only.

FIGURE 4. Test setup for measuring mounting plate to contact resistance.

MIL-C-28754D

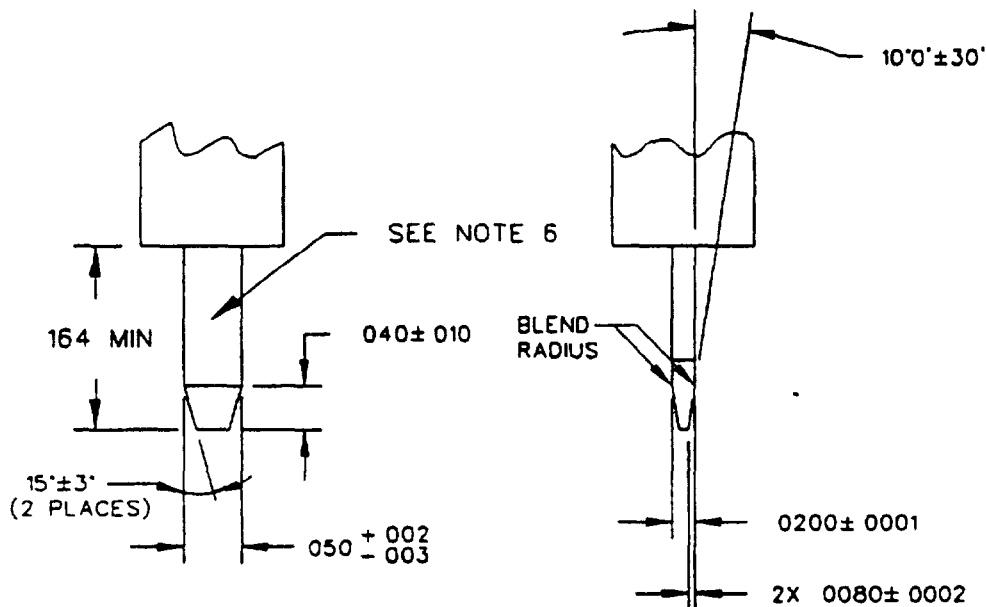


INCHES	MM	INCHES	MM
0.0001	0.0025	0.010	0.254
0.0002	0.0051	0.0200	0.5080
0.002	0.051	0.040	1.016
0.003	0.076	0.050	1.270
0.0080	0.2032	0.164	4.166

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Material: Hardened tool steel (hardness: Knoop 542-630).
4. Alternate material: Tungsten Carbide (hardness: Rockwell "A" 89.5-93.0).
5. Surface finish: 4-8, microinch Ra on working surfaces in accordance with ANSI B 46.1.
6. Grinding to be in the direction of blade movement during test.

FIGURE 5. Contact engaging and separating, test blade.

MIL-C-28754D

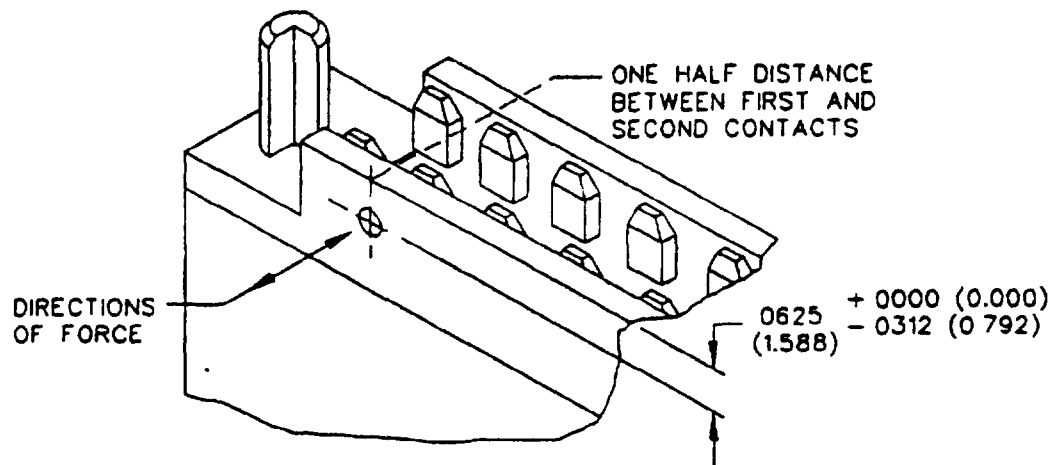




NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. On connectors having rows with 20 contacts, the force is applied at four different points for a total of eight measurements. On connectors with rows of 50 contacts, the force is applied at six different points for a total of 12 measurements.

FIGURE 6. Pin shield retention test.

MIL-C-28754D

INCHES	MM
0.150	3.810
0.200	5.080
0.215	5.461
0.300	7.62
0.400	10.160
0.500	12.700
1.890	48.006
2.320	58.928

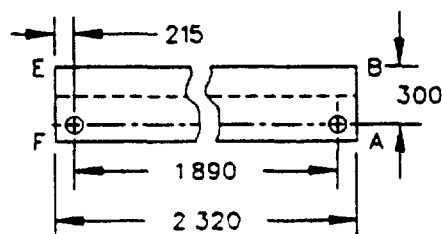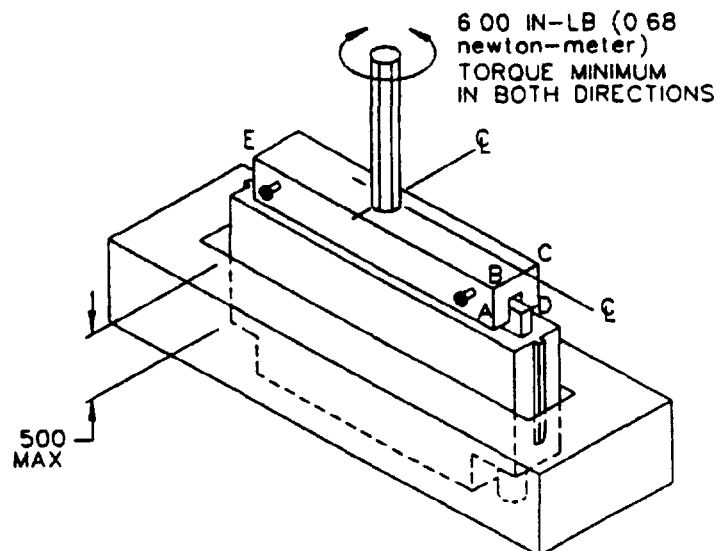


NOTES:

1. Dimensions are in inches.
2. Metric equivalents are in parentheses and are given for general information only.

FIGURE 7. Fin or header torque (formats A and B).

MIL-C-28754D

Format C,D,E 25.0 in - lb (2.8 newtons - meter)
Torque minimum in both directions

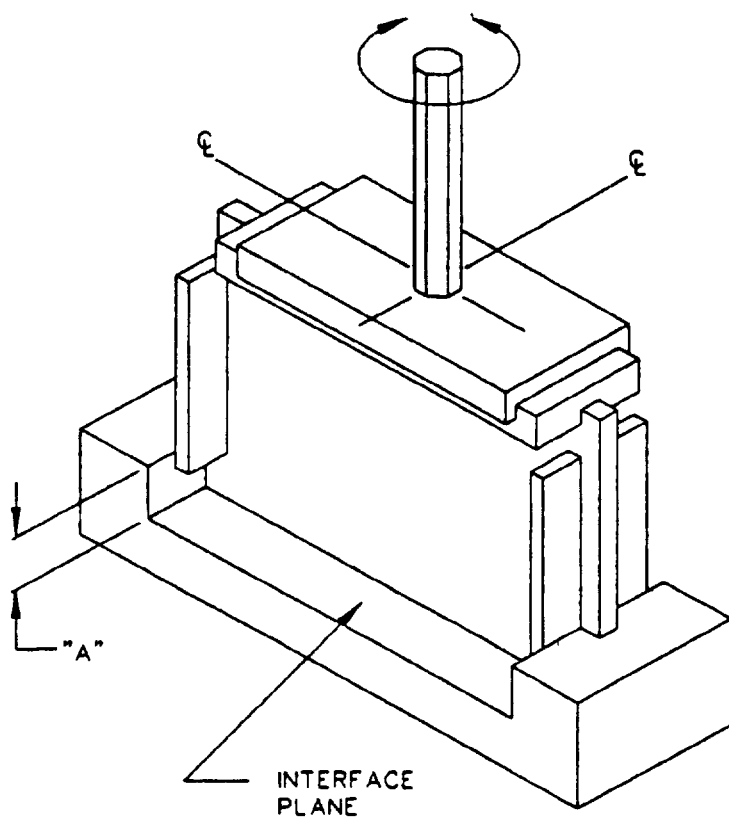


NOTES:

1. Metric equivalents are in parenthesis and given for general information only.
2. "A" is 1.0 inch (25.4 mm) for formats C, D and E.

FIGURE 8. Fin or header torque (formats C, D, and E).

MIL-C-28754D

Formats A,B 20 lb (90 newtons)
Formats C,D,E 50 lb (223 newtons)
Minimum in both directions


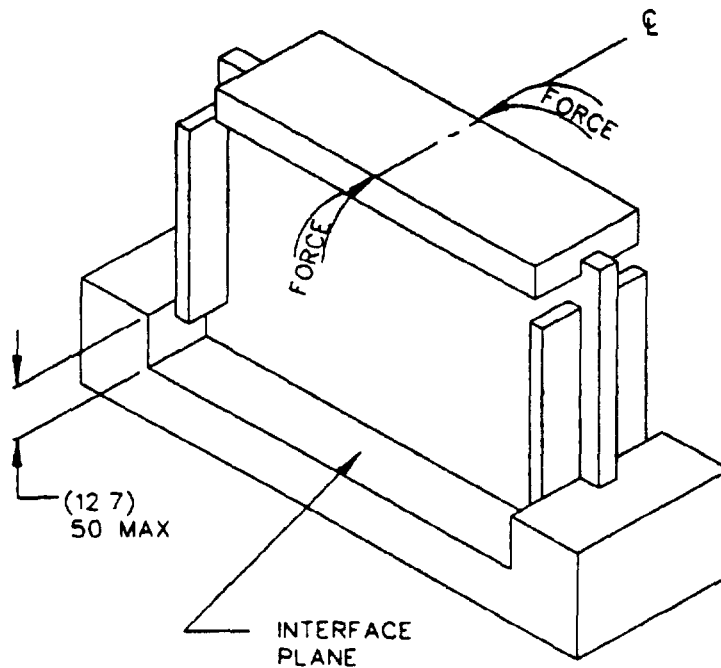


NOTES:


1. Dimensions are in inches.
2. Metric equivalents are in parentheses and given for general information only.

FIGURE 9. Fin or header cantilever load.

MIL-C-28754D

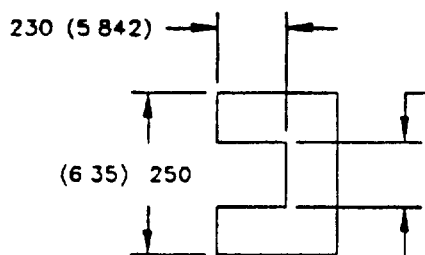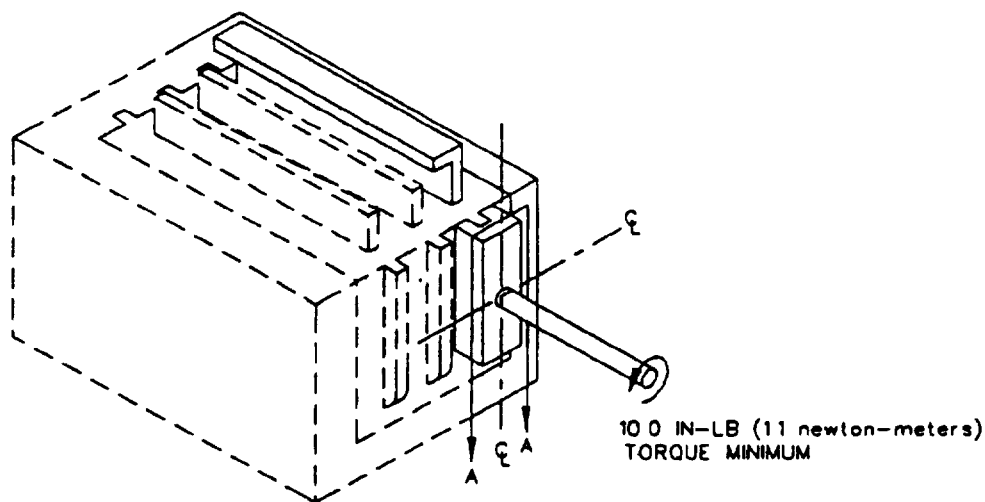

ENLARGED VIEW A-A
FOR FORMATS A,B,C,D,E
0.50 INCH THICK RIB

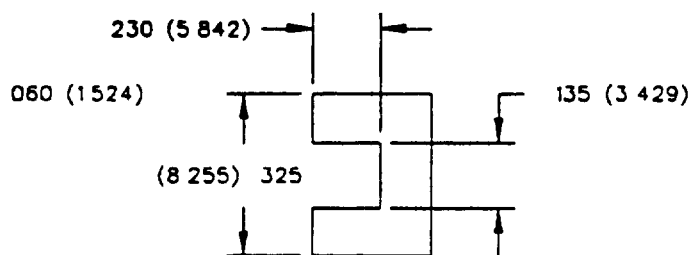

ENLARGED VIEW A-A
FOR FORMAT C,E
0.125 INCH THICK RIB

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are in parentheses and given for general information only.
3. Unless otherwise specified, tolerances are plus 0.005, minus 0.000 inch (plus 0.127, minus 0.000 mm).
4. Length of slot for enlarged view A-A must be equal or longer than the frame guide rib length.

FIGURE 10. Rib torque test.

MIL-C-28754D

APPENDIX

PROCEDURE FOR QUALIFICATION INSPECTION

10. SCOPE

10.1 Scope. This appendix details the procedure for submission of samples, with related data, for qualification inspection of connectors, contacts, and associated backplanes covered by this specification. This appendix is a mandatory part of the specification. The information contained herein is intended for compliance.

20. APPLICABLE DOCUMENTS.

20.1 Government documents.

20.1.1 Specifications. The following specifications form a part of this appendix to the extent specified herein. Unless otherwise specified the issues of these documents are those listed in the issue of the Department of Defense Index of Specification and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

- | | |
|----------------|--|
| MIL-W-16878 | - Wire, Electrical, Insulated, General Specification For. |
| MIL-C-28754/6 | - Connectors, Electrical, Modular, Type IV, 40 Pin, Straight Through. |
| MIL-C-28754/21 | - Connectors, Electrical, Modular, Frame, Casting, Type IV, Double Span. |
| MIL-C-28754/31 | - Connectors, Electrical, Modular, Connector Assembly, Type V, 40 Pin, Two Piece Insert, and 20 Pin, One-Half, One Piece Insert. |
| MIL-C-28754/34 | - Connectors, Electrical, Modular, Connector Type III, Female Contact and Insulator Bushing Set, Removable Wire Wrappost Terminal. |
| MIL-C-28754/35 | - Connector, Electrical, Modular, Connector Type III, Male Contact and Insulator Bushing Set, Removable Wire Wrappost Terminal. |

MIL-C-28754D

APPENDIX

- MIL-C-28754/36 - Connector, Electrical, Modular, Connector, Type III, Female Contact and Grounding Bushing Set, Removable Wire Wrappost Terminal.
- MIL-C-28754/37 - Connector, Electrical, Modular, Connector, Type III, Female Contact and Polarizing Bushing Set, Removable Wire Wrappost Terminal.
- MIL-C-28754/38 - Connector, Electrical, Modular, Connector, Type III, Wrappost Contact and Grounding Bushing Set, Removable Wire Wrappost Terminal.
- MIL-C-28754/39 - Connector, Electrical, Modular, Connector, Type III, Keing Pegs.
- MIL-C-28754/67 - Connectors, Electrical, Modular, Connector Frame Type IV, Single Span, Center.
- MIL-C-28754/79 - Connectors, Electrical, Modular, Type III, Female Contact and Insulator Bushing Set, Low Insertion Force (LIF), Removable Wire Wrappost Terminal.
- MIL-C-28754/80 - Connectors, Electrical, Modular, Type III, Female Contact and Grounding Bushing Set, Low Insertion Force (LIF), Removable Wire Wrappost Terminal.
- MIL-C-28754/81 - Connectors, Electrical, Modular, Type III, Female Contact and Polarizing Bushing Set, Low Insertion Force (LIF), Removable Wire Wrappost Terminal.
- MIL-C-49055 - Cable, Power, Electrical, (Flexible, Flat, Unshielded), (Round Conductor), General Specification For.
- MIL-C-49059 - Cable, Electrical (Flexible, Flat, Unshielded), (Flat Conductor), General Specification For.
- MIL-W-81044 - Wire, Electric, Crosslinked, Polyalkene, Crosslinked, Alkane-Imide Polymer, or Polyarylene Insulated, Copper or Copper Alloy.

(Unless otherwise indicated, copies of military specifications are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

MIL-C-28754D

APPENDIX

30. SUBMISSION

30.1 Samples. See 6.4.1 for submission addresses. If extended qualification is desired, the contractor shall submit the number of tested samples indicated in this document. Submission of untested samples qualified by extended qualification is not desired but may be required by the qualifying activity or their agent. All samples shall be selected from a production run produced with regular production equipment and procedures. The samples shall not be subjected to any screening test.

30.2 Type III sample submission. The backplane illustrated in figure 11 shall be used as the conveyance for testing the type III connector components, and the construction of the backplane, in accordance with figure 11, shall form a part of the qualification requirements. Connector components manufactured in accordance with this specification, for which qualification is desired, shall be installed into the figure 11 backplane in the locations described, and the wrappost length shall be 0.500 inch (12.700 mm). Ten of each other length connector contact wrappost to be qualified shall be submitted as loose parts (see 30.4.1). The loose parts shall be subjected to visual and mechanical examination but qualification is contingent upon the successful qualification of the same specification sheet parts installed in the figure 11 backplane. Backplanes shall be provided to the qualifying activity (see 6.4.1) at no charge to the Government, and these will be subjected to the qualification tests of table IV.

30.2.1 One-layer type III sample submission (6 ounce maximum insertion force tuning fork). The figure 11 backplane used to test sample submissions of 6.0 ounce (1.6 newtons) maximum insertion force tuning fork connector contacts shall be prepared as follows.

- (a) MIL-C-28754/34 - The MIL-C-28754/34 samples will always be accompanied by MIL-C-28754/37 samples (see table VIII and figure 11).
- (b) MIL-C-28754/35 - See table IX and figure 11.
- (c) MIL-C-28754/36 - See table X and figure 11.
- (d) MIL-C-28754/38 - See table XI and figure 11.

MIL-C-28754D

APPENDIX

TABLE VIII. MIL-C-28754/34 sample backplane population.

Specification sheet(s) to be qualified	Row or position	Contains
/34 and /37	Keying position of all rows remaining position	/37 style "s" /34
/34 and /37 /35 or /36 or /38	A, C, E, G B, D, F	/34, /37 /35 or /36 or /38
/34 and /37 /35 and /36	C, D, E, F, G A1, B1 A2, B2	/34, /37 /35 /36
/34 and /37 /35 and /38	remaining A1, B1 A2, B2	/34, /37 /35 /38
/34 and /37 /36 and /38	remaining A1, B1 A2, B2	/34, /37 /38 /36
/34, /35, /36, /37, /38	C, D, E, F, G and their keying positions A1 A2, B2 B1	/34 /37 "s" /35 /36 /38

MIL-C-28754D

APPENDIX

TABLE IX. MIL-C-28754/35 sample backplane population.

Specification sheet(s) to be qualified	Row or position	Contains
/35	all	/35
/35 and /38	A, C, E, G B, D, F	/35 /38
/35, /34, /36, /37, /38	See table VIII, last case	

30.2.2 One-layer type III sample submission (2.25 ounce maximum insertion force tuning fork). The figure 11 backplane shall be used to test sample submissions of 2.25 ounce (0.63 newton) insertion force tuning fork contacts. If both standard and LIF components are to be qualified, separate test coupons shall be used. Sample contact shall be prepared as follows:

- (a) MIL-C-28754/79 - The MIL-C-28754/79 samples will always be accompanied by MIL-C-28754/81 samples (see tables VIII and figure 11, replace /34 with /79 and /37 with /81).
- (b) MIL-C-28754/80 - See table X and figure 11, replacing /36 with /80.
- (c) MIL-C-28754/35 and /38. If these were not submitted with 6oz. contacts (see 30.2.1), they may be submitted on the LIF coupon. See tables IX and XI and figure 11.

MIL-C-28754D

APPENDIX

TABLE X. MIL-C-28754/36 sample backplane population.

Specification sheet(s) to be qualified	Row or position	Contains
/36	all	/36
/36 and /37	A, B, C, D, E, F, G keying positions of all rows	/36 /37 style "s"
/36 and /38	B, D, F A, C, E, G	/38 /36
/36, /34, /35, /37, /38	See table VIII, last case	

TABLE XI. MIL-C-28754/38 sample backplane population.

Specification sheet(s) to be qualified	Row or position	Contains
/38	all	/38
/38 and /35	See table IX, case 2	
/38 and /36	See table X, case 3	
/38, /34, /37	See table VIII, case 2	
/38, /34, /35, /36, /37	See table VIII, last case	

MIL-C-28754D

APPENDIX

30.3 Type IV and V sample submissions. Twelve connectors of types IV and V having the same number of contacts of the same size for which qualification is desired shall be subjected to qualification inspection. The twelve connectors submitted in the sample shall be divided equally between the various termination sizes for which qualification is desired. Fifty percent of each of the various termination sizes shall be wired to the smallest size wire and 50 percent of each of the various termination sizes shall be wired to the largest size conductor for which it is designed (see table XII).

30.3.1 Preparation of sample (type V). The sample, which must be wired to complete the test, shall be wired as follows:

- (a) Crimp-solder-type contacts shall have the appropriate stranded wire terminated to the contact sizes indicated.
 - (1) Sizes 16 through 32 - Stranded tinned copper wire, minimum of 7 strands, in accordance with MIL-W-16878.
- (b) Solder-type contacts shall have the appropriate stranded wire or flat cable terminated to the contact sizes indicated.
 - (1) Sizes 22 and 24 - Flat conductor cables, 20-conductor, 0.100 centers in accordance with MIL-C-49059.
 - (2) Sizes 24 through 30 - Flat cable assembly, 20-conductor, in accordance with MIL-C-49055.
 - (3) Sizes 20 through 30 - Stranded copper wire, in accordance with MIL-W-81044 and MIL-W-16878.

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission. 1/

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
6-01	Subgroup IV Connector fin torque, fin cantilever load, guide rib strength.	N/A	N/A	12	N/A
6-02		N/A	N/A	12	N/A
6-03		N/A	N/A	12	6-01, -02, -04
6-04		N/A	N/A	12	6-01, -02, -03
7-02	N/A	X	N/A	12	6-02
7-03	N/A	X	N/A	12	10-01
7-04	N/A	X	N/A	12	7-02; 6-01, -02, -03, -04
7-05	N/A	X	N/A	12	7-03; 10-01, -03
8-01	Subgroup II Pin shield retention. Subgroup IV Pin shield retention, connector fin torque, fin cantilever load, guide rib strength.	N/A	N/A	12	N/A

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
9-01	N/A	X	N/A	12	11-01
9-02	N/A	X	N/A	12	9-01, -03; 11-01, -02
9-03	N/A	X	N/A	12	11-01, -02
10-01	Subgroup IV Connector fin torque, fin cantilever load, guide rib strength.	N/A	N/A	12	N/A
10-02		N/A	N/A	12	N/A
10-03		N/A	N/A	12	10-04
10-04		N/A	N/A	12	N/A
11-01	Subgroup IV Connector fin torque, fin cantilever load, guide rib strength.	N/A	N/A	12	N/A
11-02		N/A	N/A	12	11-01
12-01	N/A	X	N/A	12	11-01; 12-02
12-02	N/A	X	N/A	12	11-01; 12-01
12-03	N/A	X	N/A	12	12-01, -02, -04, -05; 11-01, 11-02
12-04	N/A	X	N/A	12	11-01, -02; 12-01, -02, -03, -05
12-05	N/A	X	N/A	12	11-01, -02

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
13-01 13-02	Subgroup IV Guide rib strength.	N/A N/A	N/A N/A	12 12	6-02 6-04, -02; 13-01
14-01	Same as /8	N/A	N/A	12	N/A
15-01 15-02	N/A N/A	N/A N/A	Subgroup I Crimp or solder joint resistance. Subgroup V testing.	20 20	N/A N/A
16-01 16-02	N/A N/A	N/A N/A	Subgroup I Visual and mechanical examination.	12 12	N/A N/A
17-01 17-02 17-03 17-04	N/A N/A N/A N/A	X X X X	N/A N/A N/A N/A	12 12 12 12	15-01; 16-01; 49-01 15-01; 16-01; 17-01; 49-01, 49-02 15-01; 16-01; 17-01, -02; 49-01, -02, 03 15-02; 16-02; 49-01

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
18-01	N/A	N/A	Subgroup I Visual and mechanical examination.	12	N/A
18-02	N/A	N/A		12	N/A
18-03	N/A	N/A		12	N/A
19-01	N/A	N/A	Subgroup I Visual and mechanical examination.	12	N/A
19-02	N/A	N/A		12	N/A
19-03	N/A	N/A		12	N/A
20-01	N/A	N/A	Subgroup I Visual and mechanical examination.	12	N/A
20-02	N/A	N/A		12	N/A
20-03	N/A	N/A		12	N/A

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
21-01	N/A	N/A	Subgroup I Visual and mechanical examination.	12	21-02, -03
21-02	N/A	N/A		12	N/A
21-03	N/A	N/A		12	N/A
22-01	N/A	N/A	Subgroup II Vibration, pin shield retention, visual and mechanical examination.	12	22-02, -03
22-02	N/A	N/A		12	N/A
22-03	N/A	N/A		12	N/A
23-01	N/A	N/A	Subgroup III Salt spray, visual and mechanical examination. Subgroup IV Shock, pin shield retention. Connector fin torque, fin cantilever load, guide rib strength, and visual and mechanical examination.	12	23-02, -03
23-02	N/A	N/A		12	N/A
23-03	N/A	N/A		12	N/A

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
24-01	N/A	N/A	Subgroup I Visual and mechanical examination.	12	24-04
24-02	N/A	N/A		12	24-05
24-03	N/A	N/A		12	24-06
24-04	N/A	N/A		12	24-01
24-05	N/A	N/A		12	24-02
24-06	N/A	N/A		12	24-03
31-01	Subgroup II Vibration and these tests that follow vibration. Contact retention, contact resistance, pin shield retention.	N/A	N/A	6	2/ 31-02, -03, -04, -05, -07, -08, -09; 50-01, -02, -03, -04
31-02		N/A	N/A	N/A	
31-03		N/A	N/A	N/A	
31-04	Subgroup IV Shock, pin shield retention, connector fin torque, guide rib strength, contact retention.	N/A	N/A	N/A	51-01, -02, -03, -04
31-05		N/A	N/A	N/A	
31-06		N/A	N/A	6	
31-07		N/A	N/A	N/A	
31-08		N/A	N/A	N/A	
31-09		N/A	N/A	N/A	

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
32-01	N/A	X	N/A	N/A	31-05, -06, -08, -09; 32-01, -02, -11, -12, -14, -15, -20, -22, -23; 50-02; 52-01
32-02	N/A	X	N/A	N/A	
32-11	N/A	X	N/A	N/A	
32-12	N/A	X	N/A	N/A	
32-14	N/A	X	N/A	N/A	
32-15	N/A	X	N/A	N/A	
32-20	N/A	X	N/A	N/A	
32-21	N/A	X	N/A	12	
32-22	N/A	X	N/A	N/A	
32-23	N/A	X	N/A	N/A	
33-01	N/A	X	N/A	N/A	<u>3/</u> 31-01, -02, -03, -04, -05, -06, -07, -08, -09; 33-01, -08, -09, -10, -11, -13, -14, -15; 50-02, -03, -04 <u>3/</u> 50-02, -03, -04 51-02, -03, -04 53-01
33-07	N/A	X	N/A	6	
33-08	N/A	X	N/A	N/A	
33-09	N/A	X	N/A	N/A	
33-10	N/A	X	N/A	N/A	
33-11	N/A	X	N/A	N/A	
33-12	N/A	X	N/A	6	
33-13	N/A	X	N/A	N/A	
33-14	N/A	X	N/A	N/A	
33-15	N/A	X	N/A	N/A	

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
40-01	N/A	N/A	Subgroup I	12	N/A
40-02	N/A	N/A	Visual and	12	N/A
40-03	N/A	N/A	mechanical examination.	12	N/A
41-01	N/A	N/A	Subgroup I	12	N/A
41-02	N/A	N/A	Visual and	12	N/A
41-03	N/A	N/A	mechanical	12	N/A
41-04	N/A	N/A	examination.	12	N/A
42-01	See MIL-C-28754/6	N/A	N/A	12	N/A
43-01	N/A	X	N/A	12	42-01
44-01	See	N/A	N/A	12	44-02
44-02	MIL-C-28754/6	N/A	N/A	12	44-01
45-01	N/A	N/A	See MIL-C-28754/21	12	N/A
46-01	N/A	X	N/A	12	44-02; 45-01
47-01	See MIL-C-28754/6	N/A	N/A	12	N/A
48-01	N/A	X	N/A	12	10-02
48-02	N/A	X	N/A	12	48-01; 10,02-04

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
49-01 49-02 49-03	N/A N/A N/A	N/A N/A N/A	See MIL-C-28754/21	12 12 12	N/A 49-01 49-01, -02
50-01 50-02 50-03 50-04	See MIL-C-28754/31	N/A N/A N/A N/A	N/A N/A N/A N/A	12 12 12 12	N/A 50-03, -04 50-02, -04 50-02, -03
51-01 51-02 51-03 51-04	See MIL-C-28754/31	N/A N/A N/A N/A	N/A N/A N/A N/A	12 12 12 12	N/A 51-03, -04 51-02, -04 51-02, -03
52-01	N/A	N/A	See MIL-C-28754/21	12	N/A
53-01	N/A	N/A	See MIL-C-28754/21	12	N/A
54-01 54-02	N/A N/A	N/A N/A	Subgroup I Visual and mechanical examination and tests called out on specification sheet.	4 4	N/A N/A

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
55-01	N/A	X	N/A	6	15-01
55-02	N/A	X	N/A	6	15-02
56-01	See MIL-C-28754/6	N/A	N/A	12	N/A
56-02		N/A	N/A	12	N/A
56-03		N/A	N/A	12	N/A
56-04		N/A	N/A	12	N/A
57-01	See MIL-C-28754/6	N/A	N/A	12	N/A
57-02		N/A	N/A	12	N/A
57-03		N/A	N/A	12	N/A
57-04		N/A	N/A	12	N/A
58-01	See MIL-C-28754/6	N/A	N/A	12	N/A
58-02		N/A	N/A	12	N/A
59-01	See MIL-C-28754/6	N/A	N/A	12	N/A
59-02		N/A	N/A	12	N/A
59-03		N/A	N/A	12	N/A
59-04		N/A	N/A	12	N/A
59-05		N/A	N/A	12	N/A
59-06		N/A	N/A	12	N/A
59-07		N/A	N/A	12	N/A
59-08		N/A	N/A	12	N/A
59-09		N/A	N/A	12	N/A
59-10		N/A	N/A	12	N/A
59-11		N/A	N/A	12	N/A
59-12		N/A	N/A	12	N/A

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
60-01	See MIL-C-28754/6	N/A	N/A	12	N/A
60-02		N/A	N/A	12	N/A
60-03		N/A	N/A	12	N/A
60-04		N/A	N/A	12	N/A
60-05		N/A	N/A	12	N/A
60-06		N/A	N/A	12	N/A
61-01	See MIL-C-28754/6	N/A	N/A	12	N/A
61-02		N/A	N/A	12	N/A
61-03		N/A	N/A	12	N/A
61-04		N/A	N/A	12	N/A
61-05		N/A	N/A	12	N/A
61-06		N/A	N/A	12	N/A
61-07		N/A	N/A	12	N/A
61-08		N/A	N/A	12	N/A
61-09		N/A	N/A	12	N/A
61-10		N/A	N/A	12	N/A
61-11		N/A	N/A	12	N/A
61-12		N/A	N/A	12	N/A
62-01	See MIL-C-28754/6	N/A	N/A	12	N/A
62-02		N/A	N/A	12	N/A
62-03		N/A	N/A	12	N/A
63-01	See MIL-C-28754/6	N/A	N/A	12	N/A
63-02		N/A	N/A	12	N/A
63-03		N/A	N/A	12	N/A
63-04		N/A	N/A	12	N/A

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
64-01	See MIL-C-28754/6	N/A	N/A	12	N/A
64-02		N/A	N/A	12	N/A
64-03		N/A	N/A	12	N/A
64-04		N/A	N/A	12	N/A
65-01	See MIL-C-28754/6	N/A	N/A	12	N/A
65-02		N/A	N/A	12	N/A
65-03		N/A	N/A	12	N/A
65-04		N/A	N/A	12	N/A
65-05		N/A	N/A	12	N/A
65-06		N/A	N/A	12	N/A
65-07		N/A	N/A	12	N/A
65-08		N/A	N/A	12	N/A
65-09		N/A	N/A	12	N/A
65-10		N/A	N/A	12	N/A
65-11		N/A	N/A	12	N/A
65-12		N/A	N/A	12	N/A
66-01	See MIL-C-28754/6	N/A	N/A	12	N/A
66-02		N/A	N/A	12	N/A
66-03		N/A	N/A	12	N/A
66-04		N/A	N/A	12	N/A
66-05		N/A	N/A	12	N/A
66-06		N/A	N/A	12	N/A
66-07		N/A	N/A	12	N/A
66-08		N/A	N/A	12	N/A
66-09		N/A	N/A	12	N/A
66-10		N/A	N/A	12	N/A
66-11		N/A	N/A	12	N/A
66-12		N/A	N/A	12	N/A

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
67-01	N/A	N/A	Subgroup I	12	N/A
67-02	N/A	N/A	visual and	12	N/A
67-03	N/A	N/A	mechanical.	12	N/A
			Subgroup II		
			vibration and		
			tests that		
			follow.		
			Visual/mechan-		
			ical Subgroup		
			III saltspray		
			and following		
			tests. Visual/		
			mechanical		
			Subgroup IV		
			shock, follow-		
			ing tests, fin		
			torgue, fin		
			cantilever		
			load guide rib		
			strength.		
68-01	N/A	N/A	See	12	N/A
68-02	N/A	N/A	MIL-C-28754/67	12	68-01 and -03
68-03	N/A	N/A		12	N/A
68-04	N/A	N/A		12	N/A
68-05	N/A	N/A		12	68-04
68-06	N/A	N/A		12	N/A
68-07	N/A	N/A		12	68-06 and -08
68-08	N/A	N/A		12	N/A
68-09	N/A	N/A		12	N/A
68-10	N/A	N/A		12	68-09

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
69-01	N/A	N/A	See MIL-C-28754/67	12	N/A
69-02	N/A	N/A		12	N/A
69-03	N/A	N/A		12	N/A
69-04	N/A	N/A		12	N/A
69-05	N/A	N/A		12	N/A
69-06	N/A	N/A		12	N/A
70-01	N/A	N/A	See MIL-C-28754/67	12	N/A
70-02	N/A	N/A		12	N/A
70-03	N/A	N/A		12	N/A
71-01	N/A	N/A	See MIL-C-28754/67	12	N/A
71-02	N/A	N/A		12	N/A
71-03	N/A	N/A		12	N/A
71-04	N/A	N/A		12	N/A
71-05	N/A	N/A		12	N/A
71-06	N/A	N/A		12	N/A
72-01	N/A	N/A	See MIL-C-28754/67	12	N/A
72-02	N/A	N/A		12	72-01 and -03
72-03	N/A	N/A		12	N/A
72-04	N/A	N/A		12	N/A
72-05	N/A	N/A		12	72-04
72-06	N/A	N/A		12	N/A
72-07	N/A	N/A		12	72-06 and -08
72-08	N/A	N/A		12	N/A
72-09	N/A	N/A		12	N/A
72-10	N/A	N/A		12	72-09

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
73-01	N/A	X	N/A.	12	47-01, 68-01 47-02 thru -05
73-02	N/A	X	N/A	12	47-01, 68-02
73-03	N/A	X	N/A	12	47-01, 68-03
73-04	N/A	X	N/A	12	47-01, 68-04
73-05	N/A	X	N/A	12	47-01, 68-05
73-06	N/A	X	N/A	12	47-01, 68-06
73-07	N/A	X	N/A	12	47-01, 68-07, 47-06 thru -10
73-08	N/A	X	N/A	12	47-01, 68-08
73-09	N/A	X	N/A	12	47-01, 68-09
73-10	N/A	X	N/A	12	47-01, 68-10
73-11	N/A	X	N/A	12	47-02, 68-01 47-11 thru -15
73-12	N/A	X	N/A	12	47-02, 68-02
73-13	N/A	X	N/A	12	47-02, 68-03
73-14	N/A	X	N/A	12	47-02, 68-04
73-15	N/A	X	N/A	12	47-02, 68-05
73-16	N/A	X	N/A	12	47-02, 68-06 47-16 thru -20
73-17	N/A	X	N/A	12	47-02, 68-07
73-18	N/A	X	N/A	12	47-02, 68-08
73-19	N/A	X	N/A	12	47-02, 68-09
73-20	N/A	X	N/A	12	47-02, 68-10
73-21	N/A	X	N/A	12	47-03, 68-01 47-21 thru -25
73-22	N/A	X	N/A	12	47-03, 68-02
73-23	N/A	X	N/A	12	47-03, 68-03
73-24	N/A	X	N/A	12	47-03, 68-04
73-25	N/A	X	N/A	12	47-03, 68-05

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
73-26	N/A	X	N/A	12	47-03, 68-06 47-26 thru -30
73-27	N/A	X	N/A	12	47-03, 68-07,
73-28	N/A	X	N/A	12	47-03, 68-08
73-29	N/A	X	N/A	12	47-03, 68-09
73-30	N/A	X	N/A	12	47-03, 68-10
74-01	N/A	X	N/A	12	59-02, 67-01, 74-19, 67-02
74-02	N/A	X	N/A	12	59-08, 67-01, 74-20, 67-02
74-03	N/A	X	N/A	12	61-02, 67-01, 74-21, 67-02
74-04	N/A	X	N/A	12	61-08, 67-01, 74-22, 67-02
74-05	N/A	X	N/A	12	60-01, 67-01, 74-23, 67-02
74-06	N/A	X	N/A	12	62-01, 67-01, 74-24, 67-02
74-07	N/A	X	N/A	12	59-04, 67-01, 74-25, 67-02
74-08	N/A	X	N/A	12	59-10, 67-01, 74-26, 67-02
74-09	N/A	X	N/A	12	61-04, 67-01, 74-27, 67-02
74-10	N/A	X	N/A	12	61-10, 67-01, 74-28, 67-02
74-11	N/A	X	N/A	12	60-02, 67-01, 74-29, 67-02

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
74-12	N/A	X	N/A	12	62-02, 67-01, 74-30, 67-02
74-13	N/A	X	N/A	12	59-06, 67-01, 74-31, 67-02
74-14	N/A	X	N/A	12	59-12, 67-01, 74-32, 67-02
74-15	N/A	X	N/A	12	61-06, 67-01, 74-33, 67-02
74-16	N/A	X	N/A	12	61-12, 67-01, 74-34, 67-02
74-17	N/A	X	N/A	12	60-03, 67-01, 74-35, 67-02
74-18	N/A	X	N/A	12	62-03, 67-01, 74-36, 67-02
74-19	N/A	X	N/A	12	59-02, 67-02, 74-37, 67-03
74-20	N/A	X	N/A	12	59-08, 67-02, 74-38, 67-03
74-21	N/A	X	N/A	12	61-02, 67-02, 74-39, 67-03
74-22	N/A	X	N/A	12	61-08, 67-02, 74-40, 67-03
74-23	N/A	X	N/A	12	60-01, 67-02, 74-41, 67-03
74-24	N/A	X	N/A	12	62-01, 67-02, 74-42, 67-03
74-25	N/A	X	N/A	12	59-04, 67-02, 74-43, 67-03
74-26	N/A	X	N/A	12	59-10, 67-02, 74-44, 67-03

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
74-27	N/A	X	N/A	12	61-04, 67-02, 74-45, 67-03
74-28	N/A	X	N/A	12	61-10, 67-02, 74-46, 67-03
74-29	N/A	X	N/A	12	60-02, 67-02, 74-47, 67-03
74-30	N/A	X	N/A	12	62-02, 67-02, 74-48, 67-03
74-31	N/A	X	N/A	12	59-06, 67-02, 74-49, 67-03
74-32	N/A	X	N/A	12	59-12, 67-02, 74-50, 67-03
74-33	N/A	X	N/A	12	61-06, 67-02, 74-51, 67-03
74-34	N/A	X	N/A	12	61-12, 67-02, 74-52, 67-03
74-35	N/A	X	N/A	12	60-03, 67-03, 74-53, 67-03
74-36	N/A	X	N/A	12	62-03, 67-02, 74-54, 67-03
74-37	N/A	X	N/A	4	59-02, 67-03
74-38	N/A	X	N/A	4	59-08, 67-03
74-39	N/A	X	N/A	4	61-02, 67-03
74-40	N/A	X	N/A	4	61-08, 67-03
74-41	N/A	X	N/A	4	60-01, 67-03
74-42	N/A	X	N/A	4	62-01, 67-03
74-43	N/A	X	N/A	4	59-04, 67-03
74-44	N/A	X	N/A	4	59-10, 67-03
74-45	N/A	X	N/A	4	61-04, 67-03
74-46	N/A	X	N/A	4	61-10, 67-03

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
74-47	N/A	X	N/A	4	60-02, 67-03
74-48	N/A	X	N/A	4	62-02, 67-03
74-49	N/A	X	N/A	4	59-06, 67-03
74-50	N/A	X	N/A	4	59-12, 67-03
74-51	N/A	X	N/A	4	61-06, 67-03
74-52	N/A	X	N/A	4	61-12, 67-03
74-53	N/A	X	N/A	4	60-03, 67-03
74-54	N/A	X	N/A	4	62-03, 67-03
75-01	N/A	X	N/A	12	56-01, 69-01
75-02	N/A	X	N/A	12	56-03, 69-01
75-03	N/A	X	N/A	12	42-01, 69-01
75-04	N/A	X	N/A	12	57-01, 69-02
75-05	N/A	X	N/A	12	57-03, 69-02
75-06	N/A	X	N/A	12	58-01, 69-02
75-07	N/A	X	N/A	12	56-02, 69-01
75-08	N/A	X	N/A	12	56-04, 69-01
75-09	N/A	X	N/A	12	57-02, 69-02
75-10	N/A	X	N/A	12	57-04, 69-02
75-11	N/A	X	N/A	12	42-02, 69-01
75-12	N/A	X	N/A	12	58-02, 69-02
75-13	N/A	X	N/A	12	56-01, 69-03
75-14	N/A	X	N/A	12	56-03, 69-03
75-15	N/A	X	N/A	12	42-01, 69-03
75-16	N/A	X	N/A	12	N/A
75-17	N/A	X	N/A	12	57-03, 69-04
75-18	N/A	X	N/A	12	58-01, 69-04
75-19	N/A	X	N/A	12	56-02, 69-03
75-20	N/A	X	N/A	12	56-04, 69-03
75-21	N/A	X	N/A	12	57-02, 69-04

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
75-22	N/A	X	N/A	12	57-04, 69-04
75-23	N/A	X	N/A	12	42-02, 69-03
75-24	N/A	X	N/A	12	58-02, 69-04
75-25	N/A	X	N/A	12	56-01, 69-05
75-26	N/A	X	N/A	12	56-03, 69-05
75-27	N/A	X	N/A	12	42-01, 69-05
75-28	N/A	X	N/A	12	57-01, 69-06
75-29	N/A	X	N/A	12	57-03, 69-06
75-30	N/A	X	N/A	12	58-01, 69-06
75-31	N/A	X	N/A	12	56-02, 69-05
75-32	N/A	X	N/A	12	56-04, 69-05
75-33	N/A	X	N/A	12	57-02, 69-06
75-34	N/A	X	N/A	12	57-04, 69-06
75-35	N/A	X	N/A	12	42-02, 69-05
75-36	N/A	X	N/A	12	58-02, 69-06
76-01	N/A	X	N/A	12	6-04, 70-01, 70-02
76-02	N/A	X	N/A	12	65-02, 70-01, 70-02
76-03	N/A	X	N/A	12	65-08, 70-01, 70-02
76-04	N/A	X	N/A	12	66-02, 70-01, 70-02
76-05	N/A	X	N/A	12	66-08, 70-01, 70-02
76-06	N/A	X	N/A	12	65-04, 70-01, 70-02
76-07	N/A	X	N/A	12	
76-08	N/A	X	N/A	12	66-04, 70-01,

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
76-09	N/A	X	N/A	12	70-02 66-10, 70-01, 70-02
76-10	N/A	X	N/A	12	65-06, 70-01, 70-02
76-11	N/A	X	N/A	12	65-12, 70-01, 70-02
76-12	N/A	X	N/A	12	66-06, 70-01, 70-02
76-13	N/A	X	N/A	12	66-12, 70-01, 70-02
76-14	N/A	X	N/A	12	6-04, 70-02, 70-03
76-15	N/A	X	N/A	12	65-02, 70-02, 70-03
76-16	N/A	X	N/A	12	65-08, 70-02, 70-03
76-17	N/A	X	N/A	12	66-02, 70-02, 70-03
76-18	N/A	X	N/A	12	66-08, 70-02, 70-03
76-18	N/A	X	N/A	12	65-04, 70-02, 70-03
76-20	N/A	X	N/A	12	65-10, 70-02, 70-03
76-21	N/A	X	N/A	12	66-04, 70-02, 70-03
76-22	N/A	X	N/A	12	66-10, 70-02, 70-03
76-23	N/A	X	N/A	12	65-06, 70-02, 70-03

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
76-24	N/A	X	N/A	12	65-12, 70-02, 70-03
76-25	N/A	X	N/A	12	66-06, 70-02, 70-03
76-26	N/A	X	N/A	12	66-12, 70-02, 70-03
76-27	N/A	X	N/A	4	6-04, 70-03
76-28	N/A	X	N/A	4	65-02, 70-03
76-29	N/A	X	N/A	4	65-03, 70-03
76-30	N/A	X	N/A	4	66-08, 70-03
76-31	N/A	X	N/A	4	66-08, 70-03
76-32	N/A	X	N/A	4	65-04, 70-03
76-33	N/A	X	N/A	4	65-10, 70-03
76-34	N/A	X	N/A	4	
76-35	N/A	X	N/A	4	66-10, 70-03
76-36	N/A	X	N/A	4	65-06, 70-03
76-37	N/A	X	N/A	4	65-12, 70-03
76-38	N/A	X	N/A	4	66-06, 70-03
76-39	N/A	X	N/A	4	66-12, 70-03
77-01	N/A	X	N/A	12	10-04, 71-01
77-02	N/A	X	N/A	12	63-01, 71-01
77-03	N/A	X	N/A	12	63-03, 71-01
77-04	N/A	X	N/A	12	64-01, 71-02
77-05	N/A	X	N/A	12	64-03, 71-02
77-06	N/A	X	N/A	12	63-02, 71-01
77-07	N/A	X	N/A	12	63-04, 71-01
77-08	N/A	X	N/A	12	64-02, 71-02
77-09	N/A	X	N/A	12	64-04, 71-02
77-10	N/A	X	N/A	12	10-04, 71-03
77-11	N/A	X	N/A	12	63-01, 71-03

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

Military part number M28754/	Perform all tests except	Perform all tests	Delete all tests except	Sample quantity	Extends qualification to M28754/
77-12	N/A	X	N/A	12	63-03, 71-03
77-13	N/A	X	N/A	12	64-01, 71-04
77-14	N/A	X	N/A	12	64-03, 71-04
77-15	N/A	X	N/A	12	63-02, 71-03
77-16	N/A	X	N/A	12	63-04, 71-03
77-17	N/A	X	N/A	12	64-02, 71-04
77-18	N/A	X	N/A	12	64-04, 71-04
77-19	N/A	X	N/A	12	10-04, 71-05
77-20	N/A	X	N/A	12	63-01, 71-05
77-21	N/A	X	N/A	12	63-03, 71-05
77-22	N/A	X	N/A	12	
77-23	N/A	X	N/A	12	64-03, 71-06
77-24	N/A	X	N/A	12	63-02, 71-05
77-25	N/A	X	N/A	12	63-04, 71-05
77-26	N/A	X	N/A	12	64-02, 71-06
77-27	N/A	X	N/A	12	64-04, 71-06
78-01	N/A	X	N/A	12	11-02, 72-01
78-02	N/A	X	N/A	12	11-02, 72-02, 72-01, 72-03
78-03	N/A	X	N/A	12	11-02, 72-03
78-04	N/A	X	N/A	12	11-02, 72-04
78-05	N/A	X	N/A	12	11-02, 72-05, 72-04
78-06	N/A	X	N/A	12	11-02, 72-06
78-07	N/A	X	N/A	12	11-02, 72-07, 72-06, 72-08
78-08	N/A	X	N/A	12	11-02, 72-08
78-09	N/A	X	N/A	12	11-02, 72-09
78-10	N/A	X	N/A	12	11-02, 72-10, 72-09

MIL-C-28754D

APPENDIX

TABLE XII. Sample submission - Continued.

- 1/ N/A = Not applicable. X = Affirmative.
- 2/ To exercise the extended qualification option 6 samples of M28754/31-01 and 6 samples of M28754/31-06 shall be tested for a total of 12 samples.
- 3/ To exercise the extended qualification option 6 samples of M28754/33-07 and 6 samples of M28754/33-12 shall be tested, for a total of twelve samples.

30.4 Unassembled pieces. The unassembled pieces specified in 30.4.1 and 30.4.2 shall be submitted to the responsible qualifying activity (see 6.4.1).

30.4.1 Type III. Type III shall be as follows:

- (a) 20 of each wrappost lengths of each contact for which qualification is desired. These wrapposts are not assembled on test backplane.
- (b) 20 of each style of the polarized bushing for which qualification is desired. These bushings are not assembled on test backplane.
- (c) 20 keying pegs of each configuration (figures 1A, 1B and 1C of MIL-C-28754/39) of each material for which qualification is desired. These keying pegs are not assembled on test backplanes.

30.4.2 Types IV and V. Types IV and V shall be as follows:

- (a) Twenty contacts of each type IV and V connectors for which qualification is desired.

30.5 Types IV and V sample submission reduced testing and extended qualification. Sample submission shall be as specified in table XII.

MIL-C-28754D

APPENDIX

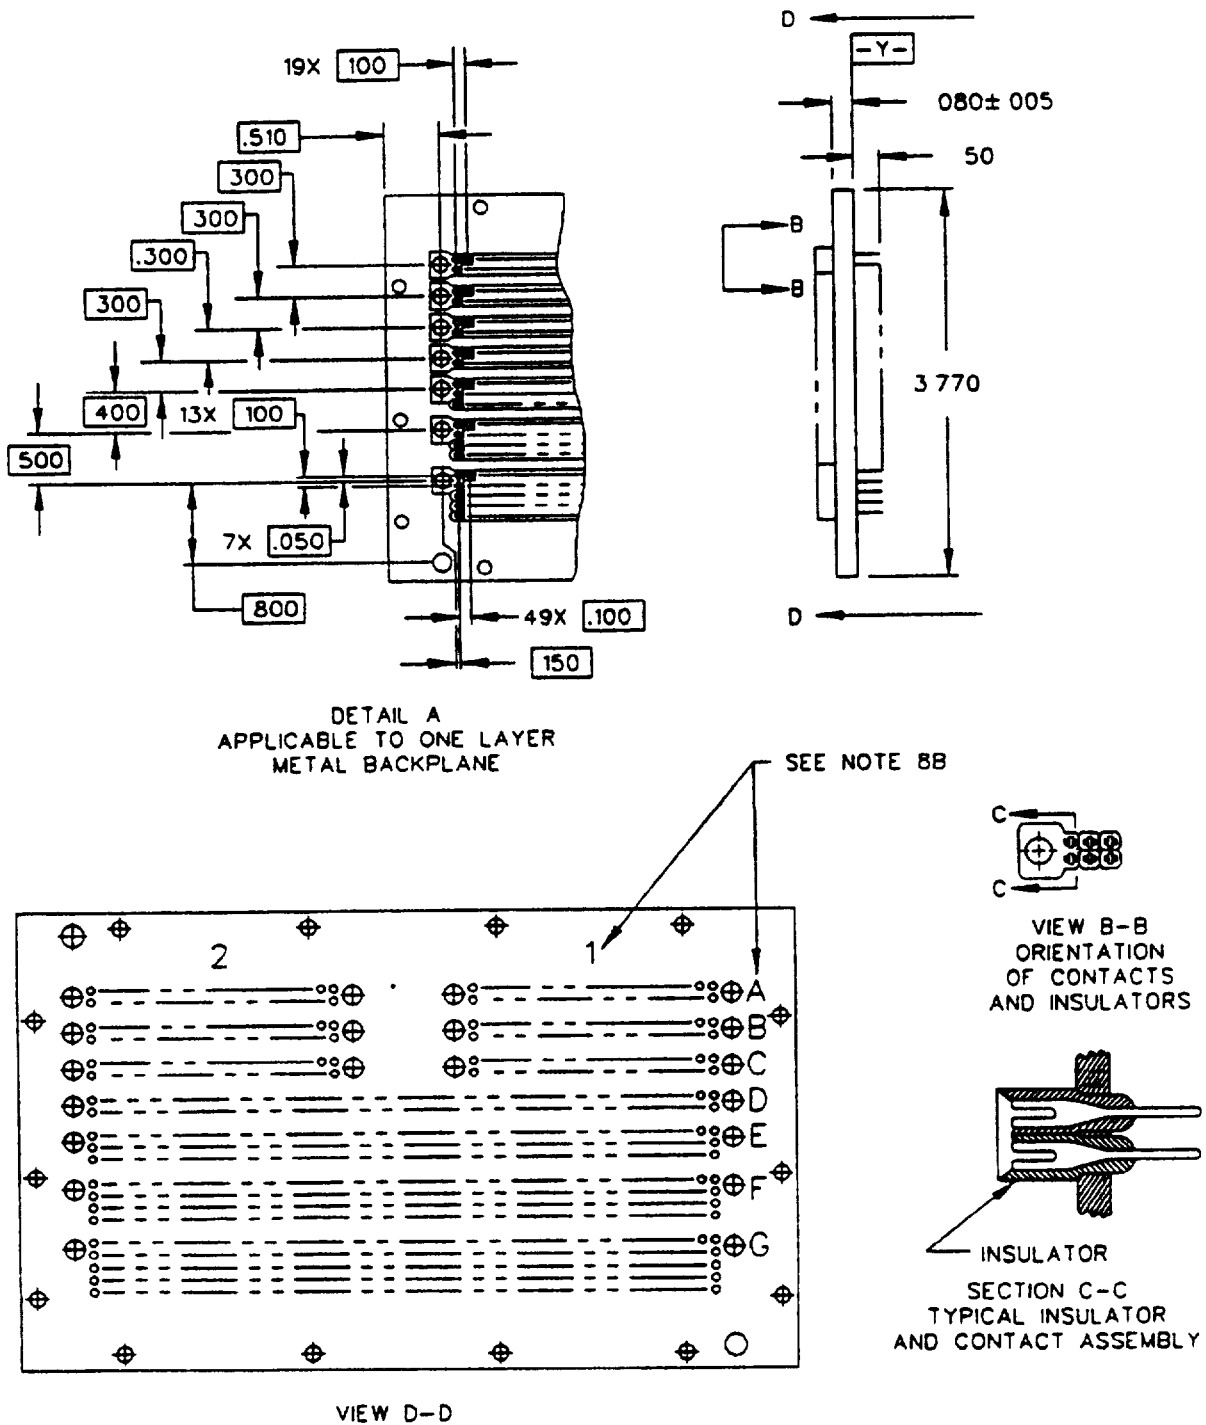


FIGURE 11. Component qualification backplane - Continued.

MIL-C-28754D

APPENDIX

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
0.001	0.025	0.0725	1.842	0.400	10.160	2.200	55.880
0.0015	0.0381	0.080	2.032	0.500	12.700	3.400	86.360
0.002	0.051	0.100	2.540	0.510	12.954	3.514	89.256
0.003	0.076	0.128	3.251	0.585	14.859	3.770	95.758
0.005	0.127	0.141	3.581	0.800	20.320	5.200	132.080
0.006	0.152	0.150	3.810	0.890	22.606	5.884	149.454
0.008	0.203	0.181	4.597	1.000	25.400	6.140	155.956
0.010	0.254	0.185	4.699	1.300	33.020		
0.050	1.270	0.300	7.620	1.480	37.592		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is plus or minus 0.005 inch (0.127 mm) for three place decimals, plus or minus 0.01 inch (0.25 mm) for two place decimals, and plus or minus 2 degrees for angles.
4. Unless otherwise specified, all corner radii shall be 0.02 inch (0.51 mm) radius maximum.
5. Finish: anodize, MIL-A-8625, type II, class 1, non-dyed or chemical film per MIL-C-5541, class 3.
6. All holes shall meet the dimensional requirements specified on the drawing for a minimum of 50 percent of the plate thickness.
Delineation and dimensions of remaining portion of holes optional as long as minimum opening is maintained.
7. Plate shall be flat within 0.003 per inch.
8. Plate shall be marked as per drawing using MIL-I-43553, contrasting color ink.
 - (a) The part number and the manufacturer's code identification is in an area outlined by phantom lines using 0.12 plus or minus 0.02 inch (3.0 plus or minus 0.5 mm) high Gothic or Futura characters.
 - (b) Mark letters and numbers in 0.09 plus or minus 0.02 inch (2.3 plus or minus 0.5 mm) high Gothic characters.
9. The 0.181 diameter holes are tooling holes and shall be used to locate the plate in the wire wrapping machine.
10. Assembly of contacts, insulators and bushings shall meet the requirements stated herein and in the specification sheet.

FIGURE 11. Component qualification backplane - Continued.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge (**DO NOT STAPLE**), and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 5523)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL SEA SYSTEMS COMMAND (SEA 5523)
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions - Reverse Side)

1 DOCUMENT NUMBER MIL-C-28754D		2 DOCUMENT TITLE Connectors, Electrical, Modular, and Component Parts, General Specification for	
3a. NAME OF SUBMITTING ORGANIZATION		4 TYPE OF ORGANIZATION (Mark one)	
		<input type="checkbox"/> VENDOR <input type="checkbox"/> USER <input type="checkbox"/> MANUFACTURER <input type="checkbox"/> OTHER (Specify) _____	
b ADDRESS (Street, City, State, ZIP Code)			
5 PROBLEM AREAS			
a. Paragraph Number and Wording			
b. Recommended Wording			
c. Reason/Rationale for Recommendation			
6 REMARKS			
7a. NAME OF SUBMITTER (Last, First, MI) - Optional		b WORK TELEPHONE NUMBER (Include Area Code) - Optional	
c. MAILING ADDRESS (Street, City, State, ZIP Code) - Optional		8 DATE OF SUBMISSION (YYMMDD)	

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)