

INCH-POUND

MIL-C-5040H
17 March 1994
SUPERSEDING
MIL-C-5040G
30 June 1987

MILITARY SPECIFICATION

CORD, FIBROUS, NYLON

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers braided nylon cord.

1.2 Classification. The braided cord shall be of the type specified (see table I and 6.2). A part or identifying number for the cord shall be as specified in 6.5 and be applicable to table I.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

UU-T-81 - Tags, Shipping and Stock

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick, Research, Development, and Engineering Center, Natick, MA 01760-5019, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 4020

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

MIL-C-5040H

- PPP-B-601 - Boxes, Wood, Cleated-Plywood
- PPP-B-636 - Boxes, Shipping, Fiberboard

MILITARY

- MIL-C-3131 - Cordage; Packaging of
- MIL-L-35078 - Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipment; General Specification for

FEDERAL

- FED-STD-191 - Textile Test Methods
- FED-STD-595 - Colors Used in Government Procurement

MILITARY

- MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
- MIL-STD-129 - Marking for Shipment and Storage
- MIL-STD-147 - Palletized Unit Loads
- MIL-STD-731 - Quality of Wood Members for Containers and Pallets
- MIL-STD-905 - Identification, Nylon Cord, Manufacturer's Color Code

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

- D 3951 - Standard Practice for Commercial Packaging

(Applications for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

MIL-C-5040H

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Government and supply purchases. The requirements specified in 3.12 and 3.13 apply only to cord purchased directly by the Government. All other requirements apply to cord purchased by a contractor as a component for an end item and to cord purchased directly by the Government.

3.2 Standard sample. The cord shall match the standard sample for shade and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 6.3). When Camouflage Green 483 is specified, the color shall match color chip 34094 of FED-STD-595 (see 3.1.1 and 6.3.2).

3.2.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3.1) in accordance with 4.1.3.

3.3 Materials. The nylon yarn in the manufacture of the cord shall be a bright, high-tenacity, light-resistant and heat-resistant polyamide prepared from hexamethylenediamine and adipic acid or its derivatives. It shall have a minimum melting point of 244°C when tested as specified in 4.2.1. The plied yarns shall be twisted only from the deniers specified in table I. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.4 Processing of yarns.

3.4.1 Core yarns. The core yarns shall be wet shrunk, for a minimum of 60 minutes, at a temperature of $93^{\circ}\text{C} + 3^{\circ}\text{C}$ after which they shall be dried at a temperature not exceeding 93°C before manufacture of the core (see 4.2.2). No oil shall be added to this yarn.

3.4.2 Sleeve yarns. Sleeve yarns shall be wet shrunk for a minimum of 30 minutes at a temperature of $71^{\circ}\text{C} + 3^{\circ}\text{C}$, after which they shall be dried at a temperature not exceeding 71°C before braiding (see 4.2.2). No oil shall be added to this yarn.

3.4.3 Stretching. The yarns used to manufacture the cord shall not be subjected to a stretching operation (see 4.2.2).

3.5 Bleaching. The yarn or the fabricated cord shall not be subjected to any type of bleaching process.

3.6 Construction and physical requirements. The fabricated cord shall conform to the applicable requirements specified in tables I and II and following paragraphs for the respective types when tested as specified in 4.2.1 and 4.2.4.

MIL-C-5040H

TABLE I. Construction

Dash no.	Type	Yarns denier/ply	Twist (turns/in) spin	Ply	Number of core ends	Picks per in	No. of carriers and ends per carrier
-1	I	Core 210/3 Sleeve 70/3	7.0 to 9.5 20 to 24.0	5 to 7 15 to 19	4 to 7 --	-- 26 to 28	-- 32/1 or 36/2
-2	IA	Core -- Sleeve 210/3	-- 7.0 to 9.5	-- 5 to 7	-- --	-- 26 to 28	-- 36/1
-3	II 1/	Core 210/1st 5 or 1050 (singles) Final - 3 Sleeve 210/3	1 7.0 to (approx) 9.5	1st 10 to 16 FINAL 6 to 8 5 to 7	4 to 7 --	-- 26 to 28	-- 32/1 or 36/1
-4	IIA	Core -- Sleeve 210/3	-- 7.0 to 9.5	-- 5 to 7	-- --	-- 26 to 28	-- 32/1 to 36/1
-5	III 1/	Core 210/1st 5 or 1050 (singles) Final - 3 Sleeve 210/3	1 7.0 to (approx) 9.5	1st 10 to 16 FINAL 6 to 8 5 to 7	7 to 9 --	-- 26 to 28	-- 32/1 or 36/1

MIL-C-5040H

TABLE I. Construction (cont'd)

Dash no.	Type	Yarns denier/ply	Twist (turns/in) spin	Ply	Number of core ends	Picks per in	No. of carriers and ends per carrier
-6	IV 1/	Core 210/1st 5 or 1050 (singles) Final - 3	--	1st 10 to 16 FINAL 6 to 8	11	--	--
		Sleeve 210/3	7.0 to 9.5	5 to 7	--	26 to 28	32/1, 36/1, or 44/1

1/ The core yarn shall be constructed by plying five yarns of 210 denier, resulting in a 1050 denier yarn, for the initial spin, or by using 1050 denier singles yarn, then plying three of the 1050 yarns (either 5 ply or singles) together, resulting in a final core size of 3150 denier.

MIL-C-5040H

TABLE II. Physical requirements

	Type I	Type IA	Type II	Type IIA	Type III	Type IV
Breaking strength (pounds), minimum	95	100	400	225	550	750
Elongation (percent), minimum	30	30	30	30	30	30
Length per pound of cord (feet), minimum	950	1050	265	495	225	165

3.6.1 Lapping of the core ends. Lapping of the core ends, or a sewn overlap where two core yarns are held together by the wrapping of thread around them is permissible providing the overlap is more than 5 inches but does not exceed 10 inches in length. Splicing or knotting of the core lines is not permissible (see 6.4). The minimum distance between a core end overlap or any adjacent core end overlap shall be 100 feet. The approximate center of each overlap shall be marked by inserting a bright red thread through the sleeve. The free ends of the marker shall extend approximately 3 inches on either side of the sleeve. The removal of the marker shall be accomplished by a light pull on either end. When Camouflage Green 483 colored cord is specified, the color of the marker shall be white.

3.6.1.1 Protruding core ends. When any core end projects through the sleeve as a result of overlapping (see 3.6.1 and 6.4), the end(s) shall be out flush with the surface of the sleeve with the cord in a relaxed condition. CAUTION: Do not hot knife the end(s) and be extremely careful not to damage the sleeve.

3.6.2 Extractable matter (chloroform-soluble material). No material shall be added for the purpose of weighing the cord. The chloroform-soluble material of the cord shall not exceed 2.0 percent when tested as specified in 4.2.4.

3.7 Resistance to light and heat. The nylon cord shall lose not more than 15 percent of its original breaking strength after exposure to light and heat when tested as specified in 4.2.4.

3.8 Color. Unless otherwise specified (see 6.2), the color of the cord shall be natural. When colored cord is specified, the color shall be obtained by yarn dyeing, and the cord shall match an approved standard shade of Camouflage Green 483 (see 6.3).

MIL-C-5040H

3.8.1 Color (shade) matching. The dyed cord shall match the standard sample when viewed under filtered tungsten lamps that approximate artificial daylight and that have a correlated color temperature of $7500\text{ K} \pm 200\text{ K}$, with illumination of 100 foot candles ± 20 foot candles, and shall be a good match to the standard sample under incandescent lamplight at $2300\text{ K} \pm 200\text{ K}$.

3.8.2 Colorfastness. The dyed cord shall show fastness to light, laundering, and dry cleaning equal to or better than the standard sample or shall show good fastness to light, laundering, and dry cleaning when tested as specified in 4.2.4.

3.9 Manufacturer's identification. Manufacturer's identification yarns (color-codes) shall be dyed yarns of the assigned colors designated in MIL-STD-905 and shall have the same colorfastness properties as described in 3.8.2.

3.9.1 Types I, II, III, and IV cord. Each manufacturer shall include in the cores of types I, II, III, and IV cord dyed yarns of the assigned colors that will identify his product. The color identification yarns shall be incorporated into a single core end. If a manufacturer's color code consists of three different colors, one core end shall contain all three of these colors, one color per ply.

3.9.2 Type IA and type IIA cord. Each manufacturer shall include, in the sleeve of type IA and type IIA cord, yarns of the assigned colors that will identify his product.

3.10 Type identification. Type II cord shall be identified by one black yarn braided into the sleeve (or cover). The colored marker yarns shall be 210 denier, 3 ply.

3.11 Age. The yarn used to fabricate the cord shall be no more than two years old on date of delivery of goods to the first receiving point. The cord shall be no more than one year of age from the date of manufacture to the date of delivery to the first receiving point.

3.12 Put-up and length. Unless otherwise specified (see 6.2), the cord shall be put-up on nonreturnable reels/spools in lengths specified in table III. Each reel/spool shall not contain any knots or splices and shall be so wound that each turn and layer is free from entanglement. A plus tolerance of 10 percent shall be allowed on the total length of any reel/spool. The ends of the cord shall be heat sealed to prevent fraying. When the cord is put-up in 1200 foot or 1500 foot lengths, 80 percent of the total number of reels/spools in the lot shall be in one continuous length. The remaining 20 percent in the lot may contain pieced lengths (lapped on ends). These reels/spools shall contain no more than two pieces, with no piece less than 300 feet in length. When the cord is put-up on 2100 foot reels/spools, 80 percent of these reels/spools shall contain no more than two pieces, with

MIL-C-5040H

no piece less than 300 feet in length. The remaining 20 percent in the lot shall contain no more than three pieces less than 300 feet. When pieced lengths are contained on a reel/spool, the number and lengths of the pieces shall be marked on the identification ticket or label as specified in 3.13.

TABLE III. Length

Type	Length on reels/spools (feet), minimum
I	1500
IA	1500
II	2100 or 1200
IIA	2100 or 1200
III	2100 or 1200
IV	1500

3.13 Identification. Each spool (reel) or cord shall have a ticket (identification tag) or label attached to it for identification purposes. The ticket shall conform to the requirements for type B, size 4 or 5 of UU-T-81. The ticket shall be made of not less than 15-point paper stock and shall have a minimum tearing resistance of both directions (total) or 850 grams when tested as specified in UU-T-81. When labels are used, the label shall be attached in such a manner as to remain in place and be legible until all cord has been removed. The ticket or label shall be legibly printed, stamped, or typed with water insoluble ink. The ticket or label shall contain the following information:

- Stock number
- Item description
- Specification number
- Length
- Number and length of pieces (when applicable)
- Color
- Contract number and date
- Date of manufacture (month and year)
- Length of pieces of cord per spool (when applicable)
- Contractor's name
- Bar code

3.14 Workmanship. The end item shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

MIL-C-5040H

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements; however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificates of compliance. When certificates of compliance are submitted (see table IV), the Government reserves the right to inspect such items to determine the validity of the certification.

4.1.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.2.3.1, 4.2.3.2, 4.2.3.3, 4.2.3.3.1, 4.2.3.3.2 and tested for the characteristics specified in 4.2.4. The presence of any defect shall be cause for rejection of the first article.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, inspection shall be performed for the requirements in table IV.

TABLE IV. Component tests

Characteristic	Requirement paragraph	Test method
Denier	3.3	1/
Tenacity	3.3	1/

MIL-C-5040H

TABLE IV. Component tests (cont'd)

Characteristic	Requirement paragraph	Test method
Melting point	3.3	1534 <u>1/</u> <u>2/</u>
Bleaching	3.5	<u>1/</u>
Age of yarn and cord	3.11	<u>1/</u>
Twist, single yarns	Table I	4052 <u>1/</u> <u>2/</u> <u>3/</u>
Twist, plied yarns	Table I	4054 <u>1/</u> <u>2/</u> <u>3/</u>
Plying of core yarns	Table I	<u>1/</u>

1/ Unless otherwise specified, a contractor's certificate of compliance shall be furnished and will be accepted for the requirements.

2/ Refers to test method of FED-STD-191.

3/ Twist of yarns: The number of specimens averaged for the result shall be five determinations on the core yarns and 10 determinations on the sleeve yarns, and the dead weight tension applied to the specimens shall be 60 grams \pm 2.0 grams. The 10 determinations of the sleeve yarn twist shall be made on specimens so selected that observations shall be made on five yarns braiding in one direction and five yarns braiding in the opposite direction. Turns per inch of the singles and first ply yarns shall be determined from the same specimen used for the determination of ply twist by cutting out all but one of the strands, leaving the plied ends still fastened in the clamps, and setting the counter to the zero mark.

4.2.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine that the requirements for processing of the core and sleeve yarns for shrinkage and stretching, lapping of the core yarn (see 3.4.1, 3.4.2, 3.4.3, and 3.6.1), and for percentages of allowable number of pieced lengths per spool or reel in the lot (see 3.12) have been adhered to in the manufacture of the cord. Unless otherwise specified, a contractor's certificate of compliance shall be furnished and will be accepted for these requirements. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

4.2.3 End item inspection.

4.2.3.1 Critical defect examination of the end item. Prior to performing the end item sampling required in 4.2.3.2, the cord spools (reels) shall be 100 percent examined for the critical defects in table V. This 100 percent

MIL-C-5040H

critical defect examination shall become a part of the contractor's inspection system or quality program. Any spool (reel) found to contain a critical defect shall be rejected.

4.2.3.2 End item visual examination. The defects specified in table V shall be counted, regardless of their proximity to each other, except where two or more defects represent a single local condition, in which case only the more serious defect shall be counted. The lot size shall be expressed in units of spools (reels), as applicable. The sample unit for the examination shall be one spool (reel). The inspection level shall be III and the finding of any defect shall be cause for rejection of the lot. Ten percent of the length contained on each sample unit, but not less than 100 feet, shall be subjected to the visual examination.

TABLE V. End item visual defects

Examine	Defect	Classification		
		<u>Critical</u>	<u>Major</u>	<u>Minor</u>
Appearance and workmanship	Any cut or hole	01		
	Abrasion, chafed area, or distortion in the orientation of yarn	02		
	Kink or unevenly braided, resulting open place, break in continuity of braid, or soft spot	03		
	Float, broken or missing end, or pick	04		
	Any projecting core end	05		
	Missing core end	06		
	Typed identification missing (when applicable)	07		
	Manufacturer's identification missing		101	
Type	Other than specified		102	
Color	Other than specified		103	
	Not within established tolerances			201
Put-up	Other than specified (i.e., spools (reels) not made of wood or metal)		104	
Cleanness	Spot or stain clearly visible $\frac{1}{2}$			202
	Objectionable odor			203

MIL-C-5040H

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification		
		<u>Critical</u>	<u>Major</u>	<u>Minor</u>
Identification	Omitted		105	
	Information incorrect, illegible			204
	Ticket or label not as specified			205
Coarse or heavy end (per 20 linear yards)	Over one end, 2 yards or more in length		106	
	Over two ends		107	
	Two ends, over 1 yard long		108	
	One end, up to 2 yards long			206
	Two ends, up to 1 yard long			207
Heavy, thick, or hard pieces or uneven picks	Picks per inch:			
	- 31 or more		109	
	- 29 or more for over 2 inches		110	
	- 29 or 30 for up to 2 inches			208
Knots in plied yarn (per 10 linear yards)	Over one knot in sleeve yarns		111	
	Any knot or splice in core	08		
	One knot in sleeve yarns			209
Light place, pull down, step marks, or uneven picks	Picks per inch:			
	- 23 or less		112	
	- 25 or less for over 2 inches		113	
	- 24 or 25 for up to 2 inches			210
Tight ends (per 10 linear yards)	Over one end, 2 yards or more in length		114	
	Two or more ends, less than 2 yards long			211

1/ At normal inspection distance (approximately 3 feet).

4.2.3.3 Examination for length and winding. The sample unit for this examination shall be one spool (reel). The inspection level shall be S-3 and the finding of any defect shall be cause for rejection of the lot. For lots consisting of 500 or fewer units, the sample size shall be 10 and the acceptance number 1. The lot size shall be the number of spools (reels) in the lot. Defects shall be as listed in 4.2.3.3.1 and 4.2.3.3.2. The length on the spool (reel) (see table III) shall be determined using the following formula:

$$W \times L = \text{Length per spool (reel) in feet,}$$

MIL-C-5040H

where W = the net weight of the spool (reel) in 0.1 pound
 L = the lot average of the weight/length relationship
 (length/pound) as determined in 4.2.4.

The length on the spool (reel) may also be determined by measuring yardage on the spool (reel).

4.2.3.3.1 Defects with regard to length. Defects shall be considered to exist if any of the following are determined during inspection:

- a. The length of cord on spool (reel) is less than specified or more than 10 percent in excess of the length specified.
- b. Length of cord on spool (reel) is more than 6 feet less than length marked on ticket or label.

4.2.3.3.2 Defects with regard to winding. Defects shall be considered to exist if any of the following conditions are determined during inspection:

- a. Improperly or not firmly wound, resulting in kinking, knotting, entangling, or slippage during unwinding or otherwise affecting free unhampered unwinding of cord.
- b. Put-up not as specified.
- c. Any end not heat sealed.
- d. Knot or otherwise joining of ends to make a continuous length.
- e. Any core end lap less than 100 feet apart (when applicable).
- f. Any spool (reel) of cord found to contain more pieced lengths than specified.
- g. Any piece of cord less than 300 feet in length.
- h. The lengths of the pieces not marked on the identification ticket or label.

4.2.4 End item testing. The methods of testing specified in FED-STD-191, wherever applicable and as listed in table VI, shall be followed. When the data in the "Number of determinations" and "Results reported as" columns are not specified in the table, they shall be as required by the referenced test method. The physical and chemical values specified in section 3 apply to the average of the determinations made on a sample unit for test purposes as specified in the applicable test methods. The lot size shall be expressed in units of spools (reels) of cord, as applicable. The sample unit shall be one spool (reel). The inspection level shall be S-3 and the finding of any defect shall be cause for rejection of the lot. All test reports shall contain the individual values utilized in expressing the final results. Tests to determine compliance with document requirements, may be made under prevailing atmospheric conditions. In cases of dispute, tests shall be made upon material that has reached equilibrium under standard conditions as defined in FED-STD-191.

MIL-C-5040H

TABLE VI. End item tests

Characteristics	Requirement reference	Test method	No. of determinations per individual sample unit	Results reported as
Construction:				
Number of core ends	Table I	Visual	3	Avg of 3 determinations to nearest whole no.
Picks per inch	Table I	4.3.1	1	To nearest whole no.
Number of carriers	Table I	Visual	3	Avg of 3 determinations to nearest whole no.
Number of ends per carrier	Table I	Visual	3	Avg of 3 determinations to nearest whole no.
Ply	Table I	Visual	3	Avg of 3 determinations to nearest whole no.
Length per pound	Table II	6004	-	-
Breaking strength	Table II	6016	-	-
Elongation	Table II	6016 <u>1</u> /	-	-
Extractable matter (chloroform-soluble material)	3.6.2	2611	-	-
Resistance to light	3.7	4.3.2	-	-
Resistance to heat	3.7	4.3.2	-	-

MIL-C-5040H

TABLE VI. End item tests (cont'd)

Characteristics	Requirement reference	Test method	No. of determinations per individual sample unit	Results reported as
Colorfastness:				
To light	3.8.2	5660 <u>2/</u>	1	Pass or fail
To laundering	3.8.2	5614 <u>3/ 4/</u>	1	Pass or fail
To dry cleaning	3.8.2	5620 <u>4/</u>	1	Pass or fail

- 1/ Except that elongation shall be determined at the breaking point.
- 2/ The exposure shall be 20 standard fading hours.
- 3/ This test shall be applied to the dyed identification yarns which are part of the core yarns of the cored types of this specification or are a part of the sleeve yarns in the coreless type of cord. On the cored types of cord, the sleeve shall be removed, and a 4 to 5 gram test specimen of the core yarns containing the dyed yarns, together with the marker yarns, shall be gathered together and tied into a bundle with a single overhand knot. For the coreless type, the specimen shall consist of the sleeve containing the marker threads.
- 4/ Test on dyed cord: The test specimen shall be 4 to 5 grams of cord.

4.2.5 Packaging inspection. Inspection shall be made in accordance with the quality assurance provisions of MIL-C-3131 except that the inspection level shall be S-2 and the finding of any defect shall be cause for rejection of the lot.

4.2.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the finding of any defect shall be cause for rejection of the lot.

<u>Examine</u>	<u>Defect</u>
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded with required straps as specified
Weight	Exceeds maximum load limits

MIL-C-5040H

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Levels A and B packing. Spools (reels) of cord shall be packed in accordance with the applicable requirements of MIL-C-3131 except that for level A the shipping container shall conform to style RSC, grade V2s of FFP-B-636 or to overseas type, style A or I, grade A or B, type 2 load of FFP-B-601, as specified (see 6.2). For level A packing, fiberboard shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Commercial packing. Spools (reels) or cord, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2, cord, packed in fiberboard shipping containers as specified in 5.2.1 and 5.2.2, shall be palletized on a four-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (four-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be in accordance with appendix of MIL-STD-147. Interlocking of loads shall be affected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, interior unit packs, exterior shipping containers, spools (reels), and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The cord is intended for use as personnel parachute suspension lines and is also used with various equiptage items.

6.2 Acquisition requirements. Acquisition documents must specify the following:

- a. Title, number, and date of this specification.
- b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
- c. Part number, type required (see table I).
- d. When shade Camouflage Green 483 is required (see 3.8).
- e. Put-up if other than specified (see 3.12).

MIL-C-5040H

- f. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
- g. Type of shipping container desired for level A packing (see 5.2.1).
- h. Type and class of unit load required for level A packing (see 5.2.1).
- i. When palletization is required (see 5.3).
- j. When a first article is required (see 3.2.1, 4.1.3, and 6.3.1).


6.3 Standard sample. For access to samples, address the contracting activity issuing the invitation for bids.

6.3.1 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209-4. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangement for selection, inspection, and approval of the first article.

6.3.2 Color. Olive Drab 7 has been replaced by Camouflage Green 483. Any end item which previously required Olive Drab 7 shall use Camouflage Green 483.

6.4 Splicing and lapping. Splicing as used in this specification is defined as the joining of two strands or core ends by process of interweaving or mechanical joint. Lapping of core ends as used in this specification is defined as the insertion of an incoming core line running parallel to a running-out core line without splicing (i.e., to lie upon and extend between two given points).

6.5 Part or identifying number (PIN). The PIN to be used for nylon cord acquired to this specification are created as follows:

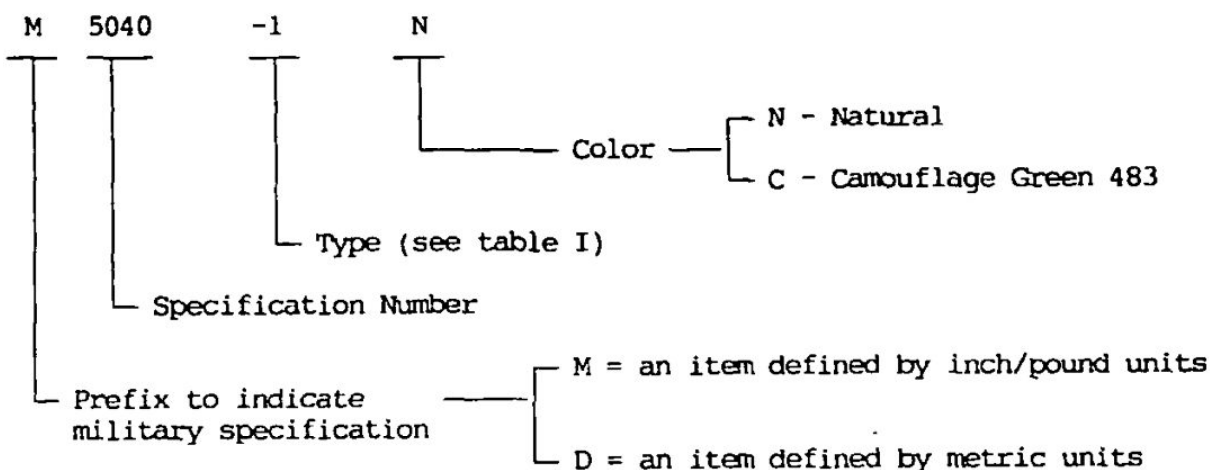

MIL-C-5040H

6.6 Subject term (key word) listing.

Cord, nylon
Equipage
Parachute lines

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Navy - AS
Air Force - 99

Preparing activity:

Army - GL
(Project 4020-0342)

Review Activities:

Navy - SH
Air Force - 82
DLA - IS
DNA - DS

User Activity:

Navy - MC

