

INCH-POUND

MIL-DTL-32249 (AR)

14 April 2008

SUPERSEDING

MIL-C-48396A (AR)

30 JUNE 1986

MIL-C-48397A (AR)

22 OCTOBER 1986

## DETAIL SPECIFICATION

### CARTRIDGE, IGNITION: M752A1 FOR ILLUMINATION AND SMOKE CARTRIDGES FOR THE 81MM MORTAR

This specification is approved for use by the U.S. Army Armament Research, Development and Engineering Center (ARDEC), and is available for use by all Departments and Agencies of the Department of Defense.

#### 1. SCOPE

1.1 Scope. This specification covers the requirements, examinations and tests for the parts and Loading, Assembling and Packing (LAP) of M752A1 Ignition Cartridges for the 81mm M853A1 Illumination (Visible), M816 Illumination (Infrared) and M819 Smoke Cartridges for the 81mm Mortar.

Comments, suggestions, or questions on this document should be addressed to the Commander, U.S. Army ARDEC, ATTN: AMSRD-AIS-SS, Picatinny, NJ 07806-5000 or emailed to [ardecstdzn@conus.army.mil](mailto:ardecstdzn@conus.army.mil). Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at <http://assist.daps.dla.mil>.

AMSC N/A

FSC 1315

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

## MIL-DTL-32249 (AR)

## 2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are needed to meet the requirements specified in sections 3 and 4 of this detail specification. This section does not include documents in other sections of this detail specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all requirements, documents cited in sections 3 and 4 of this detail specification, whether or not they are listed.

2.2 Government Documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

## DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-P-00223 – Powder, Black

MIL-P-60398 – Propellant M9, Flake for use in ignition cartridges

## DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-1916 DoD Preferred Methods for Acceptance of Product

MIL-STD-1168 Ammunition Lot Numbering and Ammunition Data Card

(Copies of these documents are available online at <http://assist.daps.dla.mil/quicksearch/> or <http://assist.daps.dla.mil> or from the Standardization Documents Order Desk, 700 Robbins Avenue, Bldg. 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

## U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC) DRAWINGS

|         |                             |
|---------|-----------------------------|
| 9293427 | Head                        |
| 9294752 | Cartridge, Ignition, M752A1 |
| 9294753 | Tube Assembly               |
| 9294754 | Tube                        |
| 9294755 | Body                        |
| 9294756 | Cap                         |
| 9294757 | Flash Tube Assembly         |
| 9294758 | Tube, Flash                 |
| 9297909 | Pin                         |

## MIL-DTL-32249 (AR)

|          |                         |
|----------|-------------------------|
| 9345250  | Tubing, Heat Shrinkable |
| 9345251  | Tubing, Heat Shrinkable |
| 12630551 | Assembly, Body          |
| 12977240 | Primer, Fed 150         |
| 13000746 | O-ring Plug, Firing     |
| 13000797 | Plug, Firing M752A1     |
| 13000847 | Pellet                  |
| 13012620 | Head Assembly           |
| 12977160 | Drop Test fixture       |

(Copies of these drawings maybe requested online at [pica.drawing.request@conus.army.mil](mailto:pica.drawing.request@conus.army.mil) or from US Army ARDEC, ATTN: AMSRD-AAR-AIS-TD, Picatinny Arsenal, NJ 07806-5000)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation.

ASTM International

ASTM B117 - Standard Test Method of Salt Spray (Fog) Apparatus

(Copies of ASTM standards are available online from <http://www.astm.org>)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

### 3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2.

3.2 Corrosion resistance (salt spray). Parts subjected to the salt spray test shall show no evidence of pitting or mottling.

#### 3.3 Components and assemblies.

3.3.1 Pellet. The pellet shall conform to drawing 13000847.

3.3.2 O-ring Plug, Firing. The O-ring shall conform to drawing 13000746.

3.3.3 Plug, Firing M752A1. The firing plug shall conform to drawing 13000797.

3.3.4 Head. The head shall conform to drawing 9293427.

MIL-DTL-32249 (AR)

- 3.3.5 Head Assembly. The head assembly shall conform to drawing 13012620.
- 3.3.6 Tube. The paper tube shall conform to drawing 9294754.
- 3.3.7 Body. The body shall conform to drawing 9294755.
- 3.3.8 Cap. The cap shall conform to drawing 9294756.
- 3.3.9 Tube, Flash. The flash tube shall conform to drawing 9294758.
- 3.3.10 Pin. The pin shall conform to drawing 9297909.
- 3.3.11 Flash Tube Assembly. The flash tube assembly shall conform to drawing 9294757.
- 3.3.12 Tube Assembly. The tube assembly shall conform to drawing 9294753.
- 3.3.13 Assembly, Body. The body assembly shall conform to drawing 12630551.
- 3.3.14 Cartridge, Ignition, M752A1. The M752A1 ignition cartridge shall conform to drawing 9294752.
- 3.3.15 Primer, Fed 150. The Fed 150 primer shall conform to drawing 12977240.
- 3.4 Moisture content of black powder. The moisture content of the black powder pellets used in loading the ignition cartridge shall not exceed 0.50 percent at the time of loading.
- 3.5 Primer testing.
- 3.5.1 Non-functioning sensitivity. The primer shall not function under an applied energy value of 8.85 inch ounces minimum (min.) using a 2.95 pound ball.
- 3.5.2 Functioning sensitivity. The primer shall be accepted if the following requirement is satisfied:
- H bar + 3 s times the nominal weight (7.8 lbs) is less than or equal to 70 inch-ounce  
H bar – 2 s times the nominal weight (7.8 lbs) is greater than or equal to 16 inch-ounce
- Where:  
H bar = the calculated average critical height  
s = dispersion of the of the critical height
- 3.5.3 Ignition Cartridge function with primer (safety drop test). The primer shall not function as a result of the 1.5 meter (m) cartridge drop.

## MIL-DTL-32249 (AR)

3.6 Incomplete Seal (Leak test). After the primer is loaded and the lacquer cured, each body assembly, as well as each loaded ignition cartridge, shall satisfactorily pass the leak test.

3.7 Velocity, functioning and security (proving ground test). The rounds shall be fired from a M252 81mm mortar, on a hard mount, at an elevation of 45 degrees (800 mils) to minimize ballistic differences in ammunition performance imposed by various soil conditions. at an elevation of 800 mils.

3.7.1 Misfires. The ignition cartridges shall function on the first attempt.

3.7.2 Velocity and functioning (proving ground). The cartridge assemblies shall function and shall impart a corrected mean muzzle velocity as specified in Table I. In addition, the velocity standard deviation of the lot shall be not greater than 0.9 mps.

Table I. Mean velocity Requirements

| Cartridge   | Cartridge Weight | Velocity (max)<br>(Para 3.7.2) | Velocity (min)<br>(Para 3.7.2) | Uniformity Velocity<br>(Para 3.8) |
|-------------|------------------|--------------------------------|--------------------------------|-----------------------------------|
| M819        | 10.35 ± 0.02 lbs | 59.0 mps                       | 57.0 mps                       | 58.0 mps                          |
| M853A1/M816 | 8.9 ± 0.02 lbs   | 65.0 mps                       | 63.0 mps                       | 64.0 mps                          |

3.7.3 Metal part security. There shall be no evidence of rupture or metal parts separation in the gun bore or in flight.

3.8 Propellant charge uniformity. The M9 propellant lots shall achieve a velocity as specified in Table I. This test shall be required for each M9 propellant lot and when a lapse of two years or more occurs between propellant acceptance and LAP initiation.

3.9 Propellant and assembly weights.

3.9.1 Propellant weight. The propellant weight shall comply with the weight specified in the loading authorization within plus or minus 1.0 grain.

3.9.2 Assembly weight. The weight of the ignition cartridge after assembly of the cap and immediately prior to pack-out will not differ by more than 10 grains from the total amount specified in the loading authorization plus actual weight of the ignition cartridge prior to filling with propellant plus the average weight of the RTV sealant around the cap plus the average or actual weight of the cap.

3.10 Excessive pressure on fin boom (static pressure). The average internal pressure of the ignition cartridges plus three standard deviations shall not exceed 23,000 psi.

3.11 Bursting strength. The tube shall not burst at a compression load of 57 pounds, minimum, but shall burst at a compression load of 192 pounds, maximum.

MIL-DTL-32249 (AR)

3.12 Check for deterioration of ignition cartridge. If the total elapsed time between original acceptance of the ignition cartridge lot and assembly of that lot into the complete round exceeds two years, or if the ignition cartridges were subjected to adverse conditions for any period of time since previous tests, the ignition cartridges shall be subjected to, and must satisfactorily comply with the test as specified in 4.5.10 before the ignition cartridges are assembled into complete rounds.

3.13 Workmanship. All parts and assemblies shall be fabricated and loaded in a thorough workmanlike manner. They shall be free of burrs, sharp edges, cracks, dirt, rust and other foreign matter. The cleaning method used shall not be injurious to any part nor shall parts be contaminated by the cleaning agent. All required markings should be neat and sharply defined.

## MIL-DTL-32249 (AR)

## 4. VERIFICATION

TABLE II. Requirements/verification cross reference matrix

| METHOD OF VERIFICATION                                   |  |                     |   | CLASSES OF VERIFICATION            |   |                    |   |                        |
|--|--|---------------------|---|------------------------------------|---|--------------------|---|------------------------|
| 1-Analysis<br>2-Demonstration<br>3-Examination<br>4-Test |  |                     |   | A- First Article<br>B- Conformance |   |                    |   |                        |
| Section Requirement                                      | Description  | Verification Method |   |                                    |   | Verification Class |   | Section 4 Verification |
|  |  | 1                   | 2 | 3                                  | 4 | A                  | B |                        |
| 3.1  | First Article  |                     |   | X                                  | X | X                  |   | 4.2                    |
| 3.2  | Corrosion resistance                                       |                     |   | X                                  |   | X                  | X | 4.5.9                  |
| 3.3.1  | Pellet   |                     |   | X                                  | X | X                  | X | 4.4.2.1                |
| 3.3.2  | O-ring Plug, Firing  |                     |   | X                                  |   | X                  | X | 4.4.2.2                |
| 3.3.3  | Plug, Firing M752A1  |                     |   | X                                  |   | X                  | X | 4.4.2.3                |
| 3.3.4  | Head   |                     |   | X                                  |   | X                  | X | 4.4.2.4                |
| 3.3.5  | Head Assembly  |                     |   | X                                  |   | X                  | X | 4.4.2.5                |
| 3.3.6  | Tube   |                     |   | X                                  |   | X                  | X | 4.4.2.6                |
| 3.3.7  | Body   |                     |   | X                                  |   | X                  | X | 4.4.2.7                |
| 3.3.8  | Cap  |                     |   | X                                  |   | X                  | X | 4.4.2.8                |
| 3.3.9  | Tube, Flash  |                     |   | X                                  |   | X                  | X | 4.4.2.9                |
| 3.3.10   | Pin  |                     |   | X                                  |   | X                  | X | 4.4.2.10               |
| 3.3.11   | Flash Tube Assembly  |                     |   | X                                  |   | X                  | X | 4.4.2.11               |
| 3.3.12   | Tube Assembly  |                     |   | X                                  |   | X                  | X | 4.4.2.12               |
| 3.3.13   | Assembly, Body   |                     |   | X                                  |   | X                  | X | 4.4.2.13               |
| 3.3.14   | Cartridge, Ignition<br>Prior to Filling with<br>Propellant |                     |   | X                                  |   | X                  | X | 4.4.2.14               |
| 3.3.14   | Cartridge, Ignition,<br>Prior to Assembly of<br>Cap        |                     |   | X                                  |   | X                  | X | 4.4.2.15               |
| 3.3.14   | Cartridge, Ignition,<br>After Assembly of<br>Cap           |                     |   | X                                  |   | X                  | X | 4.4.2.16               |
| 3.3.15   | Primer, Fed 150  |                     |   | X                                  |   | X                  | X | 4.4.2.17               |
| 3.4  | Moisture content of<br>black powder                        |                     |   | X                                  | X | X                  | X | 4.5.1                  |
| 3.5  | Primer testing   |                     |   | X                                  | X | X                  | X | 4.5.2                  |
| 3.5.1  | Non-functioning<br>Sensitivity                             |                     |   | X                                  | X | X                  | X | 4.5.2.1                |

## MIL-DTL-32249 (AR)

TABLE II. Requirements/verification cross reference matrix - Continued

| METHOD OF VERIFICATION                                   |  |                     |   | CLASSES OF VERIFICATION            |   |                    |   |                        |
|--|--|---------------------|---|------------------------------------|---|--------------------|---|------------------------|
| 1-Analysis<br>2-Demonstration<br>3-Examination<br>4-Test |  |                     |   | A- First Article<br>B- Conformance |   |                    |   |                        |
| Section Requirement                                      | Description  | Verification Method |   |                                    |   | Verification Class |   | Section 4 Verification |
|  |  | 1                   | 2 | 3                                  | 4 | A                  | B |                        |
| 3.5.2  | Functioning Sensitivity                                    |                     |   | X                                  | X | X                  | X | 4.5.2.2                |
| 3.5.3  | Ignition cartridge function with primer (safety drop test) |                     |   | X                                  | X | X                  | X | 4.5.2.3                |
| 3.6  | Incomplete Seal (Leak test)                                |                     |   | X                                  | X | X                  | X | 4.5.3                  |
| 3.7  | Velocity, functioning and security (proving ground test)   |                     |   | X                                  | X | X                  | X | 4.5.5                  |
| 3.7.1  | Misfire  |                     |   | X                                  | X | X                  | X | 4.5.5                  |
| 3.7.2  | Velocity and functioning (proving ground)                  |                     |   | X                                  | X | X                  | X | 4.5.5                  |
| 3.7.3  | Metal part security  |                     |   | X                                  | X | X                  | X | 4.5.5                  |
| 3.8  | Propellant charge uniformity                               |                     |   |                                    | X |                    |   | 4.5.6                  |
| 3.9.1  | Propellant Weight  |                     |   | X                                  | X | X                  | X | 4.5.4.1                |
| 3.9.2  | Assembly Weight  |                     |   | X                                  | X | X                  | X | 4.5.4.2-4.5.4.4        |
| 3.10   | Excessive pressure on fin boom (Static pressure)           |                     |   | X                                  | X | X                  | X | 4.5.7                  |
| 3.11   | Bursting strength  |                     |   | X                                  | X | X                  | X | 4.5.8                  |
| 3.12   | Check test for deterioration of ignition cartridge         |                     |   | X                                  | X |                    | X | 4.5.10                 |
| 3.13   | Workmanship  |                     |   | X                                  | X | X                  | X | 4.4.2.1-4.4.2.17       |



MIL-DTL-32249 (AR)

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

- a. First article inspection (see 4.2).
- b. Conformance inspection (see 4.4).

4.2 First article. When specified, a sample shall be subjected to first article verification in accordance with Table III.

4.2.1 First article quantity. First article inspection shall be performed on the quantities listed in Table III.

4.2.2 Verification to be performed. The first article inspection shall be performed in accordance with Table III.

## MIL-DTL-32249 (AR)

TABLE III. First Article inspection

| CLASSIFICATION | EXAMINATION OR TEST   | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|----------------|---|----------------------|-----------------------|-----------------------------|
|                | <u>Pellet (Dwg. 13000847)</u><br>Examination for defects              | 25                   | 3.3.1                 | 4.4.2.1                     |
|                | <u>O-ring Plug, Firing (Dwg. 13000746)</u><br>Examination for defects | 25                   | 3.3.2                 | 4.4.2.2                     |
|                | <u>Plug, Firing M752A1 (Dwg. 13000797)</u><br>Examination for defects | 25                   | 3.3.3                 | 4.4.2.3                     |
|                | <u>Head (Dwg. 9293427)</u><br>Examination for defects                 | 25                   | 3.3.4                 | 4.4.2.4                     |
|                | <u>Head Assembly (Dwg. 13012620)</u><br>Examination of defects        | 25                   | 3.3.5                 | 4.4.2.5                     |
|                | <u>Tube (Dwg. 9294754)</u><br>Examination for defects                 | 25 1/                | 3.3.6                 | 4.4.2.6                     |
|                | Bursting strength   | 25 1/                | 3.11                  | 4.5.8                       |
|                | <u>Body (Dwg. 9294755)</u><br>Examination for defects                 | 25                   | 3.3.7                 | 4.4.2.7                     |
|                | Salt spray test   | 25                   | 3.2                   | 4.5.9                       |
|                | <u>Cap (Dwg. 9294756)</u><br>Examination for defects                  | 25                   | 3.3.8                 | 4.4.2.8                     |
|                | Salt spray test   | 25                   | 3.2                   | 4.5.9                       |
|                | <u>Tube, Flash (Dwg. 9294758)</u><br>Examination for defects          | 25                   | 3.3.9                 | 4.4.2.9                     |
|                | Salt spray test   | 25                   | 3.2                   | 4.5.9                       |
|                | <u>Pin (Dwg. 9297909)</u><br>Examination for defects                  | 25                   | 3.3.10                | 4.4.2.10                    |
|                | <u>Flash Tube Assembly (Dwg. 9294757)</u><br>Examination for defects  | 25                   | 3.3.11                | 4.4.2.11                    |
|                | <u>Tube Assembly (Dwg. 9294753)</u><br>Examination for defects        | 25                   | 3.3.12                | 4.4.2.12                    |

Notes: 1/ The same samples submitted for examination shall be used for the burst test.

## MIL-DTL-32249 (AR)

TABLE III. First Article inspection – Continued

| CLASSIFICATION | EXAMINATION OR TEST   | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
|----------------|---|----------------------|-----------------------|-----------------------------|
|                | <u>Assembly, Body (Dwg. 12630551)</u><br>Examination for defects                                      | 25                   | 3.3.13                | 4.4.2.13                    |
|                | <u>Cartridge, Ignition Prior to Filling with Propellant (Dwg. 9294752)</u><br>Examination for defects | 25                   | 3.3.14                | 4.4.2.14                    |
|                | Moisture content  | 10                   | 3.4                   | 4.5.1                       |
|                | Non-functioning sensitivity   | 200                  | 3.5.1                 | 4.5.2.1                     |
|                | Functioning sensitivity   | 500                  | 3.5.2                 | 4.5.2.2                     |
|                | Ignition cartridge function with primer   | 25                   | 3.5.3                 | 4.5.2.3                     |
|                | <u>Cartridge, Ignition, Prior to Assembly of Cap (Dwg. 9294752)</u><br>Examination of defects         | 25                   | 3.3.14                | 4.4.2.15                    |
|                | <u>Cartridge, Ignition, After Assembly of Cap (Dwg. 9294752)</u><br>Examination for defects           | 25                   | 3.3.14                | 4.4.2.16                    |
|                | Incomplete seal (Leak Test)   | 50                   | 3.6                   | 4.5.3                       |
|                | Excessive pressure on fin boom  | 25 <u>2/</u>         | 3.10                  | 4.5.7                       |
|                | Proving ground test   | 50                   | 3.7                   | 4.5.5                       |
|                | <u>Primer, Fed 150 (Dwg. 12977240)</u><br>Examination for defects                                     | 25                   | 3.3.15                | 4.4.2.17                    |
| NOTES:         | <u>2/</u> Static pressure test is required for each propellant lot.                                   |                      |                       |                             |

## MIL-DTL-32249 (AR)

4.3 First article rejection. If any assembly, component or test specimen fails to comply with Table III requirements, the first article sample shall be rejected. The first article ballistic test shall be:

- a. Rejected if the mean velocity exceeds the uniformity velocity by  $\pm 3$  mps.
- b. Referred if the mean velocity exceeds the uniformity velocity by  $\pm 1$  mps to  $\pm 3$  mps
- c. Rejected if the velocity standard deviation exceeds the requirement.
- d. Rejected if one or more misfires attributable to the ignition cartridge occur.
- e. Rejected if one or more metal part separations attributable to the ignition cartridge occur.

4.4 Conformance inspection.

4.4.1 Inspection lot formation. Lot formation shall be in accordance with paragraph 4.2.2 of MIL-STD-1916. Lot numbering shall be in accordance with MIL-STD-1168. In addition, each inspection lot of ignition cartridges shall be produced with components complying with the following constraints:

- a. Metal parts from one lot interfix, from one manufacturer.
- b. Black powder pellets from one lot interfix, from one manufacturer.
- c. M9 propellant from not more than one lot number and from one manufacturer.
- d. Fed 150 primers from not more than one lot number and from one manufacturer.
- e. Heat shrinkable tubing from not more than one manufacturer.
- f. Adhesive sealant from not more than one manufacturer.

4.4.2 Classification of characteristics.

a. Sampling requirements. Inspection sampling requirements for critical, major and minor characteristics are defined in MIL-STD-1916. Unless specified otherwise, Inspection Level IV shall be used for all characteristics defined as Majors and Inspection Level II for all Minor characteristics; Critical characteristics shall be addressed in accordance with MIL-STD-1916 (see 6.9).

b. Conformance inspection. Conformance inspection shall be performed in accordance with paragraph 4.4.2.1 through 4.4.2.17. For all conformance inspections the same sample specimen may be used for all non-destructive examinations or tests.

## MIL-DTL-32249 (AR)

Conformance inspection by classification of characteristics

|                      |                              |                         |                          |                                    |
|----------------------|------------------------------|-------------------------|--------------------------|------------------------------------|
| PARAGRAPH<br>4.4.2.1 | TITLE<br>Pellet              | SHEET 1 OF 1            |                          | DRAWING NUMBER<br>13000847         |
|                      |                              |                         |                          | NEXT HIGHER<br>ASSEMBLY<br>9294752 |
| CLASSIFICATION       | EXAMINATION OR TEST          | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE     |
| <u>Critical</u>      | None defined                 |                         |                          |                                    |
| <u>Major</u>         |                              |                         |                          |                                    |
| 101                  | Weight of pellet             | VL-IV                   | 3.3.1                    | Balance                            |
| 102                  | Outside diameter             | VL-IV                   | 3.3.1                    | Gage                               |
| 103                  | Inside diameter              | VL-IV                   | 3.3.1                    | Gage                               |
| 104                  | Length                       | VL-IV                   | 3.3.1                    | Gage                               |
| 105                  | Pellet chipped or cracked    | VL-IV                   | 3.3.1                    | Visual                             |
| <u>Minor</u>         |                              |                         |                          |                                    |
| 201                  | Evidence of poor workmanship | VL-II                   | 3.13                     | Visual                             |
| Notes:               |                              |                         |                          |                                    |

|  |                              |                         |                          |                                     |
|--|------------------------------|-------------------------|--------------------------|-------------------------------------|
| PARAGRAPH<br>4.4.2.2   | TITLE<br>O-Ring Plug, Firing | SHEET 1 OF 1            |                          | DRAWING NUMBER<br>13000746          |
|  |                              |                         |                          | NEXT HIGHER<br>ASSEMBLY<br>13012620 |
| CLASSIFICATION   | EXAMINATION OR TEST          | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE      |
| <u>Critical</u>  | None defined                 |                         |                          |                                     |
| <u>Major</u>   |                              |                         |                          |                                     |
| 101  | Inner Diameter               | VL-IV                   | 3.3.2                    | Gage                                |
| 102  | Cross-sectional diameter     | VL-IV                   | 3.3.2                    | Gage                                |
| 103  | Composition                  | <u>1/</u>               | 3.3.2                    | Analysis                            |
| 104  | Presence of flash or cracks  | VL-IV                   | 3.3.2                    | Visual                              |
| <u>Minor</u>   |                              |                         |                          |                                     |
| 201  | Evidence of poor workmanship | VL-II                   | 3.13                     | Visual                              |
| Notes:<br><u>1/</u> The supplier (s) shall provide the material certification with each delivered lot. |                              |                         |                          |                                     |

## MIL-DTL-32249 (AR)

Conformance inspection by classification of characteristics

| PARAGRAPH<br>4.4.2.3 | TITLE<br>Plug, Firing M752A1  | SHEET 1 OF 1            |                          | DRAWING NUMBER<br>13000797          |
|----------------------|---|-------------------------|--------------------------|-------------------------------------|
|                      |   |                         |                          | NEXT HIGHER<br>ASSEMBLY<br>13012620 |
| CLASSIFICATION       | EXAMINATION OR TEST   | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE      |
| <u>Critical</u>      | None defined  |                         |                          |                                     |
| <u>Major</u>         |   |                         |                          |                                     |
| 101                  | Length of tip to second largest diameter                            | VL-IV                   | 3.3.3                    | Gage                                |
| 102                  | Total length including tip  | VL-IV                   | 3.3.3                    | Gage                                |
| 103                  | Length of tip   | VL-IV                   | 3.3.3                    | Gage                                |
| 104                  | Radius improper   | VL-IV                   | 3.3.3                    | Gage                                |
| 105                  | Large diameter  | VL-IV                   | 3.3.3                    | Gage                                |
| 106                  | Small diameter  | VL-IV                   | 3.3.3                    | Gage                                |
| 107                  | Protective finish missing   | VL-IV                   | 3.3.3                    | Visual                              |
| 108                  | Chamfer missing or incorrect  | VL-IV                   | 3.3.3                    | Visual                              |
| 109                  | True position of tip with large outside diameter                    | VL-IV                   | 3.3.3                    | Gage                                |
| 110                  | Shoulder length from the second largest diameter to o-ring diameter | VL-IV                   | 3.3.3                    | Gage                                |
| 111                  | Width of groove for o-ring  | VL-IV                   | 3.3.3                    | Gage                                |
| 112                  | Diameter of o-ring groove (smallest diameter)                       | VL-IV                   | 3.3.3                    | Gage                                |
| <u>Minor</u>         |   |                         |                          |                                     |
| 201                  | Surface finish improper   | VL-II                   | 3.3.3                    | Visual                              |
| 202                  | Evidence of poor workmanship  | VL-II                   | 3.13                     | Visual                              |
| Notes:               |   |                         |                          |                                     |

## MIL-DTL-32249 (AR)

Conformance inspection by classification of characteristics

| PARAGRAPH<br>4.4.2.4 | TITLE<br>Head  | SHEET 1 OF 1            |                          | DRAWING NUMBER<br>9293427           |
|----------------------|--|-------------------------|--------------------------|-------------------------------------|
|                      |  |                         |                          | NEXT HIGHER<br>ASSEMBLY<br>13012620 |
| CLASSIFICATION       | EXAMINATION OR TEST  | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE      |
| <u>Critical</u>      | None defined   |                         |                          |                                     |
| <u>Major</u>         |  |                         |                          |                                     |
| 101                  | Pitch diameter of internal threads                                     | VL-IV                   | 3.3.4                    | Gage                                |
| 102                  | Minor diameter of internal threads                                     | VL-IV                   | 3.3.4                    | Gage                                |
| 103                  | Pitch diameter of external threads                                     | VL-IV                   | 3.3.4                    | Gage                                |
| 104                  | Major diameter of external threads                                     | VL-IV                   | 3.3.4                    | Gage                                |
| 105                  | Length of internal thread, min.  | VL-IV                   | 3.3.4                    | Gage                                |
| 106                  | Overall length   | VL-IV                   | 3.3.4                    | Gage                                |
| 107                  | Length of large internal diameter                                      | VL-IV                   | 3.3.4                    | Gage                                |
| 108                  | Diameter of firing plug hole   | VL-IV                   | 3.3.4                    | Gage                                |
| 109                  | Large outside diameter   | VL-IV                   | 3.3.4                    | Gage                                |
| 110                  | Small outside diameter   | VL-IV                   | 3.3.4                    | Gage                                |
| 111                  | Large inside diameter  | VL-IV                   | 3.3.4                    | Gage                                |
| 112                  | True position of large inside diameter with<br>P.D. of external thread | VL-IV                   | 3.3.4                    | Gage                                |
| 113                  | True position of firing plug hole with P.D.<br>of external thread      | VL-IV                   | 3.3.4                    | Gage                                |
| 114                  | True position of internal threads with<br>external threads             | VL-IV                   | 3.3.4                    | Gage                                |
| 115                  | Length from shoulder to beginning of<br>external threads               | VL-IV                   | 3.3.4                    | Gage                                |
| 116                  | Protective finish missing  | VL-IV                   | 3.3.4                    | Visual                              |
| <u>Minor</u>         |  |                         |                          |                                     |
| 201                  | Surface finish improper  | VL-II                   | 3.3.4                    | Visual                              |
| 202                  | Diameter of spanner holes  | VL-II                   | 3.3.4                    | Gage                                |
| 203                  | Depth of spanner holes   | VL-II                   | 3.3.4                    | Gage                                |
| 204                  | Location of spanner holes  | VL-II                   | 3.3.4                    | Gage                                |
| 205                  | Distance from front face to shoulder                                   | VL-II                   | 3.3.4                    | Gage                                |
| 206                  | Length of thread undercut  | VL-II                   | 3.3.4                    | Gage                                |
| 207                  | Chamfer missing or incorrect   | VL-II                   | 3.3.4                    | Visual                              |
| 208                  | Evidence of poor workmanship   | VL-II                   | 3.13                     | Visual                              |
| Notes:               |  |                         |                          |                                     |

## MIL-DTL-32249 (AR)

Conformance inspection by classification of characteristics

| PARAGRAPH<br>4.4.2.5  | TITLE<br>Head Assembly             | SHEET 1 OF 1            |                          | DRAWING NUMBER<br>13012620         |
|---|------------------------------------|-------------------------|--------------------------|------------------------------------|
|   |                                    |                         |                          | NEXT HIGHER<br>ASSEMBLY<br>9294752 |
| CLASSIFICATION  | EXAMINATION OR TEST                | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE     |
| <u>Critical</u>   | None defined                       |                         |                          |                                    |
| <u>Major</u>  |                                    |                         |                          |                                    |
| 101   | O-ring missing or not fully seated | VL-IV <u>2/</u>         | 3.3.5                    | Visual                             |
| 102   | O-ring not lubricated              | VL-IV <u>2/</u>         | 3.3.5                    | Visual                             |
| 103   | Firing plug not fully seated       | 100% <u>1/</u>          | 3.3.5                    | Gage                               |
| <u>Minor</u>  |                                    |                         |                          |                                    |
| 201   | Evidence of Poor workmanship       | VL-II                   | 3.13                     | Visual                             |
| Notes:<br><u>1/</u> Firing plug with o-ring must be seated flush to the head with o-ring properly seated in the groove after assembly<br><u>2/</u> Inspections shall be performed prior to insertion into the head. |                                    |                         |                          |                                    |

| PARAGRAPH<br>4.4.2.6 | TITLE<br>Tube                | SHEET 1 OF 1            |                          | DRAWING NUMBER<br>9294754          |
|----------------------|------------------------------|-------------------------|--------------------------|------------------------------------|
|                      |                              |                         |                          | NEXT HIGHER<br>ASSEMBLY<br>9294753 |
| CLASSIFICATION       | EXAMINATION OR TEST          | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE     |
| <u>Critical</u>      | None defined                 |                         |                          |                                    |
| <u>Major</u>         |                              |                         |                          |                                    |
| 101                  | Thickness                    | VL-IV                   | 3.3.6                    | Gage                               |
| 102                  | Length                       | VL-IV                   | 3.3.6                    | Gage                               |
| 103                  | Inside diameter              | VL-IV                   | 3.3.6                    | Gage                               |
| 104                  | Tube not spiral wound        | 5                       | 3.3.6                    | Visual                             |
| 105                  | Burst strength               | 25                      | 3.11                     | 4.5.8                              |
| <u>Minor</u>         |                              |                         |                          |                                    |
| 201                  | Evidence of poor workmanship | VL-II                   | 3.13                     | Visual                             |
| Notes:               |                              |                         |                          |                                    |



## MIL-DTL-32249 (AR)

Conformance inspection by classification of characteristics

| PARAGRAPH<br>4.4.2.7 | TITLE<br>Body  | SHEET 1 OF 2            |                          | DRAWING NUMBER<br>9294755           |
|----------------------|--|-------------------------|--------------------------|-------------------------------------|
|                      |  |                         |                          | NEXT HIGHER<br>ASSEMBLY<br>12630551 |
| CLASSIFICATION       | EXAMINATION OR TEST  | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE      |
| <u>Critical</u><br>1 | Flash hole missing or obstructed                                 | 100%                    | 3.3.7                    | Gage                                |
| <u>Major</u><br>101  | Pitch diameter of threads, min.                                  | VL-IV                   | 3.3.7                    | Gage                                |
| 102                  | Major diameter of threads, min.                                  | VL-IV                   | 3.3.7                    | Gage                                |
| 103                  | Diameter of primer cavity  | VL-IV                   | 3.3.7                    | Gage                                |
| 104                  | Depth of primer cavity   | VL-IV                   | 3.3.7                    | Gage                                |
| 105                  | Depth of flash tube cavity                                       | VL-IV                   | 3.3.7                    | Gage                                |
| 106                  | Diameter of flash tube cavity                                    | VL-IV                   | 3.3.7                    | Gage                                |
| 107                  | Diameter of flash hole rear of pellet cavity                     | VL-IV                   | 3.3.7                    | Gage                                |
| 108                  | Large outside diameter   | VL-IV                   | 3.3.7                    | Gage                                |
| 109                  | Diameter of pellet cavity  | VL-IV                   | 3.3.7                    | Gage                                |
| 110                  | Depth to bottom of pellet cavity                                 | VL-IV                   | 3.3.7                    | Gage                                |
| 111                  | Length overall   | VL-IV                   | 3.3.7                    | Gage                                |
| 112                  | True position of primer cavity                                   | VL-IV                   | 3.3.7                    | Gage                                |
| 113                  | Width of groove  | VL-IV                   | 3.3.7                    | Gage                                |
| 114                  | Depth of groove  | VL-IV                   | 3.3.7                    | Gage                                |
| 115                  | Small outside diameter   | VL-IV                   | 3.3.7                    | Gage                                |
| 116                  | Diameter of countersink at base of primer<br>cavity, max.        | VL-IV                   | 3.3.7                    | Gage                                |
| 117                  | Length from rear face to large outside<br>diameter               | VL-IV                   | 3.3.7                    | Gage                                |
| 118                  | Outside diameter forward and rear of<br>groove                   | VL-IV                   | 3.3.7                    | Gage                                |
| 119                  | Length from large diameter to end of<br>external thread          | VL-IV                   | 3.3.7                    | Gage                                |
| 120                  | Length from large diameter to beginning<br>of thread             | VL-IV                   | 3.3.7                    | Gage                                |
| 121                  | Diameter of thread undercut                                      | VL-IV                   | 3.3.7                    | Gage                                |
| 122                  | Length of large diameter section                                 | VL-IV                   | 3.3.7                    | Gage                                |
| 123                  | Length from front face to groove                                 | VL-IV                   | 3.3.7                    | Gage                                |
| 124                  | Protective finish missing or inadequate                          | VL-IV                   | 3.3.7                    | Visual                              |
| 125                  | True position of forward outside diameter<br>with P.D. of thread | VL-IV                   | 3.3.7                    | Gage                                |
| 126                  | Salt spray test  | 25                      | 3.2                      | 4.5.9                               |
| 127                  | Inside chamfer at entrance of primer<br>cavity incorrect         | VL-IV                   | 3.3.7                    | Gage                                |
| Notes:               |  |                         |                          |                                     |

## MIL-DTL-32249 (AR)

Conformance inspection by classification of characteristics

|                                   |   |                         |                          |                                     |
|-----------------------------------|---|-------------------------|--------------------------|-------------------------------------|
| PARAGRAPH<br>4.4.2.7              | TITLE<br>Body (continued)   | SHEET 2 OF 2            |                          | DRAWING NUMBER<br>9294755           |
|                                   |   |                         |                          | NEXT HIGHER<br>ASSEMBLY<br>12630551 |
| CLASSIFICATION                    | EXAMINATION OR TEST   | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE      |
| <u>Minor</u><br>201<br>202<br>203 | Radii or chamfers missing or incorrect<br>Surface finish improper<br>Evidence of poor workmanship | VL-II<br>VL-II<br>VL-II | 3.3.7<br>3.3.7<br>3.13   | Visual<br>Visual<br>Visual          |
| Notes:                            |   |                         |                          |                                     |

|   |   |  |   |   |
|---|---|--|---|---|
| PARAGRAPH<br>4.4.2.8  | TITLE<br>Cap  | SHEET 1 OF 1   |   | DRAWING NUMBER<br>9294756   |
|   |   |  |   | NEXT HIGHER<br>ASSEMBLY<br>9294752  |
| CLASSIFICATION  | EXAMINATION OR TEST   | CONFORMANCE<br>CRITERIA  | REQUIREMENT<br>PARAGRAPH  | INSPECTION METHOD<br>REFERENCE  |
| <u>Critical</u>   | None defined  |  |   |   |
| <u>Major</u><br>101<br>102<br>103<br>104<br>105<br>106<br>107<br>108<br>109<br>110<br>111 | Forward outside diameter (OD)<br>Total length<br>Rear OD<br>Distance from rear face to shoulder<br>Diameter of cavity<br>Depth of cavity<br>True position of cavity with rear OD<br>Protective finish missing or inadequate<br>True position of forward OD with rear OD<br>Radius at bottom of cavity over maximum<br>Salt Spray Test | VL-IV<br>VL-IV<br>VL-IV<br>VL-IV<br>VL-IV<br>VL-IV<br>VL-IV<br>VL-IV<br>VL-IV<br>VL-IV<br>25 | 3.3.8<br>3.3.8<br>3.3.8<br>3.3.8<br>3.3.8<br>3.3.8<br>3.3.8<br>3.3.8<br>3.3.8<br>3.3.8<br>3.2 | Gage<br>Gage<br>Gage<br>Gage<br>Gage<br>Gage<br>Gage<br>Gage<br>Gage<br>Gage<br>4.5.9 |
| <u>Minor</u><br>201<br>202<br>203   | Radii or chamfers missing or improper<br>Surface finish improper<br>Evidence of poor workmanship  | VL-II<br>VL-II<br>VL-II  | 3.3.8<br>3.3.8<br>3.13  | Visual<br>Visual<br>Visual  |
| Notes:  |   |  |   |   |

## MIL-DTL-32249 (AR)

Conformance inspection by classification of characteristics

| PARAGRAPH<br>4.4.2.9 | TITLE<br>Tube, Flash   | SHEET 1 OF 1            |                          | DRAWING NUMBER<br>9294758          |
|----------------------|--|-------------------------|--------------------------|------------------------------------|
|                      |  |                         |                          | NEXT HIGHER<br>ASSEMBLY<br>9294757 |
| CLASSIFICATION       | EXAMINATION OR TEST  | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE     |
| <u>Critical</u>      |  |                         |                          |                                    |
| 1                    | Longitudinal flash hole missing or obstructed                          | 100%                    | 3.3.9                    | Gage                               |
| 2                    | Flash hole(s) missing or excessive in number or obstructed             | 100%                    | 3.3.9                    | Gage-Visual                        |
| <u>Major</u>         |  |                         |                          |                                    |
| 101                  | True position of flash holes to forward outside diameter and rear face | VL-IV                   | 3.3.9                    | Gage                               |
| 102                  | Diameter of flash holes  | VL-IV                   | 3.3.9                    | Gage                               |
| 103                  | Overall length   | VL-IV                   | 3.3.9                    | Gage                               |
| 104                  | Forward outside diameter   | VL-IV                   | 3.3.9                    | Gage                               |
| 105                  | Rear outside diameter  | VL-IV                   | 3.3.9                    | Gage                               |
| 106                  | Length of rear outside diameter  | VL-IV                   | 3.3.9                    | Gage                               |
| 107                  | Large inside diameter  | VL-IV                   | 3.3.9                    | Gage                               |
| 108                  | Length of large inside diameter  | VL-IV                   | 3.3.9                    | Gage                               |
| 109                  | Protective finish missing or inadequate                                | VL-IV                   | 3.3.9                    | Visual                             |
| 110                  | Small inside diameter  | VL-IV                   | 3.3.9                    | Gage                               |
| 111                  | Salt spray test  | 25                      | 3.2                      | 4.5.9                              |
| <u>Minor</u>         |  |                         |                          |                                    |
| 201                  | Surface finish improper  | VL-II                   | 3.3.9                    | Visual                             |
| 202                  | Evidence of poor workmanship   | VL-II                   | 3.13                     | Visual                             |
| Notes:               |  |                         |                          |                                    |

## MIL-DTL-32249 (AR)

Conformance inspection by classification of characteristics

|                       |                              |                         |                          |                                    |
|-----------------------|------------------------------|-------------------------|--------------------------|------------------------------------|
| PARAGRAPH<br>4.4.2.10 | TITLE<br>Pin                 | SHEET 1 OF 1            |                          | DRAWING NUMBER<br>9297909          |
|                       |                              |                         |                          | NEXT HIGHER<br>ASSEMBLY<br>9294757 |
| CLASSIFICATION        | EXAMINATION OR TEST          | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE     |
| Critical              | None defined                 |                         |                          |                                    |
| <u>Major</u><br>101   | Length                       | VL-IV                   | 3.3.10                   | Gage                               |
| 102                   | Outside Diameter             | VL-IV                   | 3.3.10                   | Gage                               |
| <u>Minor</u><br>201   | Evidence of poor workmanship | VL-II                   | 3.13                     | Visual                             |
| Notes:                |                              |                         |                          |                                    |

## MIL-DTL-32249 (AR)

Conformance inspection by classification of characteristics

| PARAGRAPH<br>4.4.2.11 | TITLE<br>Flash Tube Assembly  | SHEET 1 OF 1            |                          | DRAWING NUMBER<br>9294757          |
|-----------------------|---|-------------------------|--------------------------|------------------------------------|
|                       |   |                         |                          | NEXT HIGHER<br>ASSEMBLY<br>9294752 |
| CLASSIFICATION        | EXAMINATION OR TEST   | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE     |
| <u>Critical</u><br>1  | Heat shrinkable tubing missing, loose, or<br>does not completely cover all flash holes<br>Pin missing | 100%                    | 3.3.11                   | Visual<br>Gage                     |
| 2                     |   | 100%                    | 3.3.11                   |                                    |
| <u>Major</u><br>101   | Length, max.  | VL-IV                   | 3.3.11                   | Gage                               |
| <u>Minor</u><br>201   | Evidence of poor workmanship  | VL-II                   | 3.13                     | Visual                             |
| Notes:                |   |                         |                          |                                    |

| PARAGRAPH<br>4.4.2.12 | TITLE<br>Tube Assembly  | SHEET 1 OF 1            |                          | DRAWING NUMBER<br>9294753          |
|-----------------------|---|-------------------------|--------------------------|------------------------------------|
|                       |   |                         |                          | NEXT HIGHER<br>ASSEMBLY<br>9294752 |
| CLASSIFICATION        | EXAMINATION OR TEST   | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE     |
| <u>Critical</u>       | None defined  |                         |                          |                                    |
| <u>Major</u><br>101   | Outside diameter, max.<br>Length of tube fold-in<br>Tubing missing, loose, wrinkled,<br>separating or inadequately covering<br>external surface | VL-IV                   | 3.3.12                   | Gage<br>Gage                       |
| 102                   |   | VL-IV                   | 3.3.12                   |                                    |
| 103                   |   | VL-IV                   | 3.3.12                   | Visual-Manual                      |
| <u>Minor</u><br>201   | Evidence of poor workmanship  | VL-II                   | 3.13                     | Visual                             |
| Notes:                |   |                         |                          |                                    |

## MIL-DTL-32249 (AR)

Conformance inspection by classification of characteristics

| PARAGRAPH<br>4.4.2.13 | TITLE<br>Assembly, Body                                  | SHEET 1 OF 1            |                          | DRAWING NUMBER<br>12630551         |
|-----------------------|--|-------------------------|--------------------------|------------------------------------|
|                       |  |                         |                          | NEXT HIGHER<br>ASSEMBLY<br>9294752 |
| CLASSIFICATION        | EXAMINATION OR TEST                                      | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE     |
| <u>Critical</u>       | None defined   |                         |                          |                                    |
| <u>Major</u>          |  |                         |                          |                                    |
| 101                   | Primer missing or inverted                               | 100%                    | 3.3.13                   | Visual                             |
| 102                   | Primer above flush or more than .015 in.<br>below flush  | 100%                    | 3.3.13                   | Gage                               |
| 103                   | Lacquer seal missing or inadequate                       | 100%                    | 3.3.13                   | 4.5.3.1                            |
| 104                   | Presence of any adhesive or sealant on<br>face of primer | 100%                    | 3.3.13                   | Visual                             |
| 105                   | Staking process inadequate                               | 1/                      | 3.3.13                   | 4.4.3.1                            |
| 106                   | Primer bulged after staking                              | 100% 2/                 | 3.3.13                   | Visual                             |
| 107                   | One or more stakes missing or not full                   | 3/                      | 3.3.13                   | Visual                             |
| <u>Minor</u>          |  |                         |                          |                                    |
| 201                   | Evidence of poor workmanship                             | VL-II                   | 3.13                     | Visual                             |

Notes:  
1/ See 4.4.3.1 for conformance criteria.  
2/ Standards shall be established by the contractor during First Article Testing  
3/ Inspect the tool or one body at the start of each day's production and each hour thereafter. A missing or broken tooth shall be cause for rejection of all parts staked since the last successful inspection.

## MIL-DTL-32249 (AR)

Conformance inspection by classification of characteristics

| PARAGRAPH<br>4.4.2.14 | TITLE<br>Cartridge, Ignition Prior to Filling with Propellant                            | SHEET 1 OF 1         |                       | DRAWING NUMBER<br>9294752   |
|-----------------------|--|----------------------|-----------------------|-----------------------------|
|                       |  | NEXT HIGHER ASSEMBLY |                       |                             |
| CLASSIFICATION        | EXAMINATION OR TEST  | CONFORMANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD REFERENCE |
| <u>Critical</u>       |  |                      |                       |                             |
| 1                     | Nonfunctioning sensitivity   | 200/125 <u>1/</u>    | 3.5.1                 | 4.5.2.1                     |
| 2                     | Ignition cartridge function with primer  | 25 <u>2/</u>         | 3.5.3                 | 4.5.2.3                     |
| 3                     | Firing plug above flush with head surface  | 100%                 | 3.3.14                | Gage                        |
| <u>Major</u>          |  |                      |                       |                             |
| 101                   | Body not fully assembled to head   | VL-IV                | 3.3.14                | Visual                      |
| 102                   | Body and head improperly staked (2 places)   | VL-IV                | 3.3.14                | Visual                      |
| 103                   | Pellet missing, broken or chipped  | 100% <u>3/</u>       | 3.3.14                | Visual                      |
| 104                   | Presence of adhesive for 360 degrees in body groove prior to assembling to tube assembly | VL-IV                | 3.3.14                | Visual                      |
| 105                   | Tube assembly improperly seated on body  | VL-IV                | 3.3.14                | Visual                      |
| 106                   | Functioning sensitivity  | 500                  | 3.5.2                 | 4.5.2.2                     |
| 107                   | Flash tube assembly missing  | 100%                 | 3.3.14                | Visual                      |
| 108                   | Pellet moisture content  | 25/shift             | 3.4                   | 4.5.1                       |
| <u>Minor</u>          |  |                      |                       |                             |
| 201                   | Evidence of poor workmanship   | VL-II                | 3.13                  | Visual                      |

Notes:  
1/ 200 Samples for First 3 consecutive lots, and 125 samples each additional lot (See 4.5.2.1 for details)  
2/ Ignition Cartridge function with Primer will be conducted using a Safety drop test and will be performed per primer lot  
3/ Standards shall be established by the contractor during first article

## MIL-DTL-32249 (AR)

Conformance inspection by classification of characteristics

| PARAGRAPH<br>4.4.2.15 | TITLE<br>Cartridge, Ignition, Prior to Assembly<br>of Cap   | SHEET 1 OF 1            |                          | DRAWING NUMBER<br>9294752      |
|-----------------------|---|-------------------------|--------------------------|--------------------------------|
|                       |   | NEXT HIGHER<br>ASSEMBLY |                          |                                |
| CLASSIFICATION        | EXAMINATION OR TEST   | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE |
| <u>Critical</u><br>1  | Flash tube assembly missing   | 100%                    | 3.3.14                   | Gage                           |
| 2                     | Propellant weight greater than 10 grains<br>below lower limit or above upper limit<br>(after loading) | 100% <u>1/</u>          | 3.9.1                    | 4.5.4.1/4.5.4.2                |
| <u>Major</u><br>101   | Propellant weight 1 to 10 grains below<br>lower limit or above upper limit (after<br>loading)         | 100% <u>1/</u>          | 3.9.1                    | 4.5.4.1/4.5.4.2                |
| 102                   | Environmental conditions inadequate   | <u>2/</u>               | 3.3.14                   | Gage                           |
| <u>Minor</u><br>201   | Foreign matter in propellant  | VL-II                   | 3.3.14                   | Visual                         |
| 202                   | Evidence of poor workmanship  | VL-II                   | 3.13                     | Visual                         |

Notes:  
1/ Same sample used for both inspections.  
2/ Temperature and humidity shall be checked at the beginning and end of each shift. If conditions are not proper at either time, the quantity of product represented by the conditioning shall be rejected.



## MIL-DTL-32249 (AR)

Conformance inspection by classification of characteristics

| PARAGRAPH<br>4.4.2.16 | TITLE<br>Cartridge, Ignition, After Assembly of<br>Cap                | SHEET 1 OF 1            |                          | DRAWING NUMBER<br>9294752      |
|-----------------------|---|-------------------------|--------------------------|--------------------------------|
|                       |   | NEXT HIGHER<br>ASSEMBLY |                          |                                |
| CLASSIFICATION        | EXAMINATION OR TEST   | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE |
| <u>Critical</u>       |   |                         |                          |                                |
| 1                     | Propellant Weight   | 315                     | 3.9.1                    | 4.5.4.3                        |
| 2                     | Excessive pressure on fin boom  | 25 <u>2/</u>            | 3.10                     | 4.5.7                          |
| 3                     | Assembly improper or damaged to the extent that propellant can escape | 100%                    | 3.3                      | Visual-Manual                  |
| 4                     | Teardown inspection   | 4.4.3.2 <u>3/</u>       | 3.3                      | 4.5.11                         |
| 5                     | Gross Weight (Propellant missing)                                     | 100% <u>1/</u>          | 3.9.2                    | 4.5.4.4                        |
| <u>Major</u>          |   |                         |                          |                                |
| 101                   | Gross Weight (Propellant missing)                                     | 100% <u>1/</u>          | 3.9.2                    | 4.5.4.4                        |
| 102                   | Channel not completely filled with RTV sealant                        | VL-IV                   | 3.3.14                   | Visual                         |
| 103                   | Cap cocked or not completely seated                                   | VL-IV                   | 3.3.14                   | Visual                         |
| 104                   | Distance from shoulder to front of cap, max                           | VL-IV                   | 3.3.14                   | Gage                           |
| 105                   | True position of outside diameter with major diameter of head thread  | VL-IV                   | 3.3.14                   | Gage                           |
| 106                   | Incomplete seal (leak test)   | 100%                    | 3.6                      | 4.5.3.2                        |
| 107                   | Environmental conditions inadequate                                   | <u>4/</u>               | 3.3.14                   | Gage                           |
| 108                   | Presence of excessive sealant   | VL-IV                   | 3.3.14                   | Visual                         |
| 109                   | Pellet missing or broken  | 100%                    | 3.3                      | 4.5.12/4.5.13                  |
| 110                   | Firing plug missing   | 100%                    | 3.3                      | 4.5.12/4.5.13                  |
| 111                   | Primer missing  | 100%                    | 3.3                      | 4.5.12/4.5.13                  |
| 112                   | Pellet missing  | 100%                    | 3.3                      | 4.5.12/4.5.13                  |
| <u>Minor</u>          |   |                         |                          |                                |
| 201                   | Marking missing, misleading or unidentifiable                         | VL-II                   | 3.3.14                   | Visual                         |
| 202                   | Evidence of poor workmanship  | VL-II                   | 3.13                     | Visual                         |
|                       | <u>Proving ground test</u>  |                         |                          |                                |
|                       | Initial production  | 50                      | 3.7.2                    | 4.5.5                          |
|                       | Subsequent production   | 50/35                   | 3.7.2                    |                                |

## Notes:

1/ 1/ The rejected ignition cartridge shall be disassembled to verify the propellant weight. If the weight of the propellant is within critical tolerance, it will be classified as a Major, if not it will be classified as a Critical.

2/ Excessive Pressure on Fin Boom will be verified using a static pressure test fixture and should be conducted per propellant lot

3/ Category is Critical or Major dependent upon the inspection performed (see 4.5.11)

4/ Temperature and humidity shall be checked at the beginning and end of each shift. If conditions are not proper at either time, the quantity of product represented by the conditioning shall be rejected.

## MIL-DTL-32249 (AR)

Conformance inspection by classification of characteristics

|                       |                              |                         |                          |                                     |
|-----------------------|------------------------------|-------------------------|--------------------------|-------------------------------------|
| PARAGRAPH<br>4.4.2.17 | TITLE<br>Primer, FED 150     | SHEET 1 OF 1            |                          | DRAWING NUMBER<br>12977240          |
|                       |                              |                         |                          | NEXT HIGHER<br>ASSEMBLY<br>12630551 |
| CLASSIFICATION        | EXAMINATION OR TEST          | CONFORMANCE<br>CRITERIA | REQUIREMENT<br>PARAGRAPH | INSPECTION METHOD<br>REFERENCE      |
| <u>Critical</u>       | None defined                 |                         |                          |                                     |
| <u>Major</u><br>101   | Height                       | 100%                    | 3.3.15                   | Gage                                |
| <u>Minor</u><br>201   | Evidence of poor workmanship | VL-II                   | 3.13                     | Visual                              |
| Notes:                |                              |                         |                          |                                     |

## MIL-DTL-32249 (AR)

4.4.3 Testing and sampling.

4.4.3.1 Staking process (primer security). Each hour, and on the last units staked before a scheduled staking tool change, five (5) primed bodies shall be inspected before and after staking, using any method that can verify that the primer cups have been pushed down as a result of the staking operation. If none of the primer cups have been pushed down, all units loaded since the last successful inspection shall be rejected. If one or more primer cups have been pushed down by any amount, the process may continue unchanged at the discretion of the contractor.

4.4.3.2 Teardown Inspection. Three (3) complete assembled ignition cartridges shall be randomly selected from each day's production beginning with the first day of production and continuing until three consecutive days have complied with applicable requirements (see 4.5.11). After three consecutive days have met the requirements, one sample shall be randomly selected.

4.4.4 Inspection equipment. The inspection equipment required to perform the inspections specified herein is identified in the "Inspection Method Reference" column of the Classification of Characteristics listings from 4.4.2.1 to 4.4.2.17. Designs which provide variable measurements instead of attributes data are preferred in order to facilitate the use of statistical process control. Inspection equipment used for acceptance of product shall be capable of repeatable measurements, by various experienced inspection/test personnel, to an accuracy of 10% or better of the total tolerance of the characteristic being inspected. See 6.3 herein.

4.4.5 Automatic Inspection Equipment. Automatic test and inspection equipment, when utilized by the Contractor, shall be subjected to periodic verification and calibration check during production. Calibration and verification standards are required and shall initially be supplied by the equipment manufacturer as part of the equipment. Replacement standards will be fabricated and certified using designs and procedures provided by the equipment manufacturer and approved by the government. All standards or test samples required for such calibration/verification shall be furnished by the equipment manufacturer as part of the equipment. Procedures for verification shall include, as a minimum: frequency, method of verification and the method of retrieval of items produced between verification/calibration. These procedures shall be included in the operation/calibration procedures as required by the above paragraph. In addition, the equipment shall be subjected to periodic maintenance by the manufacturer or other qualified personnel in accordance with approved maintenance procedures.

4.5 Methods of inspection.

4.5.1 Moisture content of black powder. The procedures used for determining the moisture content of the black powder pellets shall be equivalent to that specified in MIL-P-00223. A sample of 5 each black powder pellets shall be selected prior to and after each production shift along with a sample of 15 black powder pellets selected randomly throughout each production shift. If any sample fails to comply with the requirement cited in paragraph 3.4, all pellets in the production shift represented by this sample shall be rejected. If loading with propellant has begun, ignition cartridges loaded with the non-conforming black powder pellets shall be rejected.

## MIL-DTL-32249 (AR)

4.5.2 Primer testing.4.5.2.1 Non-functioning sensitivity.

4.5.2.1.1 Initial production. Beginning with the first lot produced and continuing until three consecutive lots have complied with the acceptance criteria specified, 200 primed head assemblies (consisting of the firing plug Dwg. 13000797, head Dwg. 9293427 and body assembly Dwg. 12630551) shall be randomly selected from each lot for this test. If one or more assemblies fail to comply with the specified requirement, the lot shall be rejected.

4.5.2.1.2 Consecutive production. After three consecutive lots have met the criteria of 4.5.2.1.1, 125 samples shall be tested using the same acceptance criteria. If a lot is rejected, revert to sampling plan per 4.5.2.1.1. The test shall be performed as specified in 4.5.2.1.3.

4.5.2.1.3 Test. The primed head assemblies shall be assembled to a suitable fixture. The firing pin of the test fixture shall be adjusted so that impact will be on the center of the firing plug of the assembly. A 2.95 pound steel ball shall be dropped onto the firing pin from a height of 3/16 inch producing 8.85 inch ounces of energy (min.). The height of drop shall be measured as the height from the top of the firing pin to the bottom of the weight. Any primed head assemblies that functions shall be classified defective. Samples used in this test shall not be returned to the lot.

4.5.2.2 Functioning sensitivity.

4.5.2.2.1 Sampling plan. A random sample of five hundred (500) primed head assemblies (consisting of the firing plug Dwg. 13000797, head Dwg. 9293427 and body assembly Dwg. 12630551) shall be selected from each lot for this test. The test shall be performed as specified in 4.5.2.2.2 using the Government's design test equipment or an approved alternate (See 4.4.4).

4.5.2.2.2 Test. The primed head assemblies shall be divided into ten (10) groups of fifty (50) each. When assembled in the Drop Test Fixture (12977160). A 7.8 pound steel weight shall be dropped on to the firing pin starting from a height of 0.2 inches. The height of the drop shall be increased by 0.05 inches after each group of fifty primers is tested until the all fire height is reached. The "fire" and "no fire" events shall be recorded for each group (most lots do not require all ten (10) groups to reach all function height). An H bar and s shall be calculated (See 6.11). The lot shall be rejected if the H bar + 3s and H bar - 2s do not meet the requirements of 3.5.2, or if an all fire height is not reached after all 500 primed head assemblies have been tested.

4.5.2.3 Ignition Cartridge function with Primer (safety drop test).

4.5.2.3.1 Sampling plan. Twenty-five ignition cartridge assemblies (without flash tubes, black powder pellets or propellant) in accordance with Dwg. 9294752 shall be selected for first article testing. This test shall be performed only upon initial use of each primer lot. If one or more of the test samples function, the lot shall be rejected.

## MIL-DTL-32249 (AR)

4.5.2.3.2 Test. The test assemblies shall be assembled into inert-loaded, standard 81mm cartridges (Weighed to  $10.35 \pm 0.02$  lbs. for M819). Each cartridge shall be dropped twice from a height of 1.5m on a steel surface. For the first drop, the cartridge shall be in the base (fin) down orientation. For the second drop, the cartridge shall be in the nose (fuze) down orientation. The drop height shall be measured from the lowest point of the cartridge orientation to the top of the steel surface. Any test assembly which functions as a result of the drop shall be classed defective. All questionable test assemblies shall be downloaded to verify primer functioning or nonfunctioning. This test shall be performed only upon initial use of each primer lot. All components used for this test shall not be returned to their respective lots.

#### 4.5.3 Leak tests.

4.5.3.1 Body assembly. After the lacquer has cured, each primed body assembly shall be tested for leakage around the primer. The pressure differential and duration of the test shall be as specified for the leak test of the fully assembled ignition cartridge (see 4.5.3.2). Any body assembly which fails the test shall be classified defective and removed from the lot.

4.5.3.2 Ignition cartridge. The ignition cartridges shall be subjected to a pressure of  $3 \pm 1$  psi for duration of five (5) seconds minimum. Any ignition cartridge with a leak rate of 1.5 CC per minute or greater shall be rejected and removed from the lot. The test equipment shall be calibrated at the start of each day's operation and prior to production restarts. A restart results from any break in continuous production whether it is due to equipment stoppage/failure or operator breaks. Both accept and reject standards shall be used during each calibration. If the equipment is found to be out of calibration, the ignition cartridges tested since the last successful calibration shall be retested after adjustment of the equipment. Equipment design shall be submitted for approval (see 4.4.4).

#### 4.5.4 Weight of propellant.

4.5.4.1 Propellant Weight. Prior to filling the ignition cartridge, the propellant shall be weighted or volumetrically dispensed and then check-weighted on a different scale. If performed manually, the check-weigh will be performed by another operator. Any propellant sample propellant failing to meet the applicable requirements shall be classified defective and removed from the lot.

4.5.4.1.1 Automated method. An automated operation method can be performed using the 100 percent check-weighing operation with automated equipment and mandatory process controls. In such cases, process control plans in accordance with data item description DI-P1604 must be submitted to the technical agency for approval of the automated operations.

4.5.4.2 Ignition Cartridge Assembly Weight (prior to assembling the cap). The actual weight of the ignition cartridge assembly (without the cap) will be recorded (weight #1). The ignition cartridge assembly, immediately after the propellant is loaded and prior to the assembly of the cap, will be weighted and recorded (weight #2). The weight of the propellant shall be determined by subtracting the tare weight of the ignition cartridge assembly (weight #1) from the

## MIL-DTL-32249 (AR)

loaded ignition cartridge assembly weight (weight #2). Any propellant sample propellant failing to meet the applicable requirements shall be classified defective and removed from the lot.

4.5.4.3 Ignition Cartridge Assembly Weight (after assembly of cap). Critical defect: More than 10 grains above assessed maximum weight. Critical defect: More than 10 grains below assessed minimum weight. Major defect: 1 to 10 grains above assessed maximum weight. Major defect: 1 to 10 grains below assessed minimum weight. **315** sample ignition cartridge assemblies shall be randomly selected from each lot for this test. If any sample exceeds the assessed maximum weight by more than 10 grains or if two or more samples exceed the assessed maximum weight by 1 to 10 grains, the lot shall be rejected. If any sample is under the assessed minimum weight by more than 10 grains or if two or more samples are under the assessed minimum weight by 1 to 10 grains, the lot shall be rejected. The propellant shall be removed from each ignition cartridge sample, placed on the pan of a precision or analytic balance and weighed. Alternatively, the ignition cartridge assembly may be weighed and reweighed after removal of the propellant: The weight of the propellant charge shall be determined by subtracting the weight of the empty ignition cartridge from the loaded (gross) weight. The weight of the propellant in each sample shall be determined to the nearest 1 grain.

4.5.4.4 Gross Weight. The intent of this inspection is to verify presence of propellant in the ignition cartridge. The assembled ignition cartridge shall be weighed 100% prior to pack out. The mean gross weight shall be the average weight calculated by the contractor using a consecutive sample of 125 ignition cartridges, selected from a normal production run. The contractor shall submit the data used to calculate the mean gross weight to the responsible technical agency for approval prior to use. The gross weight of each ignition cartridge shall be within the mean  $\pm 1.5$  grams. Adjustment of the mean gross weight due to continuous SPC must be approved by the technical agency.

4.5.5 Velocity, functioning and security (proving ground test). The test shall be performed at a Government Proving Ground. The sample ignition cartridges shall be assembled into 81mm cartridges for which they were manufactured (live or inert loaded) with total cartridge weight as specified in Table I. The complete assembly, less propelling charges, shall be fired from an M252 81mm mortar, on a hard mount, at an elevation of 800 mils. Reference rounds shall be fired without propelling charges for the purpose of velocity correction (if deemed necessary by the testing agency). At least one reference round should be fired for every three test rounds. Individual velocities and individual chamber pressure shall be recorded for both reference and test rounds. Velocity and pressure standard deviations and arithmetic averages shall be calculated and recorded. Temperature of the day and time of firing shall also be recorded. In the event of a misfire, the suspect ignition cartridge shall not be disassembled by the proving ground but shall be forwarded to the responsible technical agency.

4.5.5.1 Ballistic defect classifications. The following defect classification apply to the ballistic testing:

- a. Misfires, Major defect (3.7.1)
- b. Metal part separation, Critical defect (3.7.3)

## MIL-DTL-32249 (AR)

- c. Mean velocity and standard deviation, Major defect (3.7.2).

4.5.5.2 Initial production. Beginning with the first lot produced and continuing until three consecutive lots have complied with the applicable requirements, a sample of 50 ignition cartridges shall be selected and tested as specified in 4.5.5. The lot shall be:

- a. Rejected if the mean velocity exceeds the uniformity velocity by  $\pm 3$  mps
- b. Referred if the mean velocity exceeds the uniformity velocity by  $\pm 1$ mps to  $\pm 3$  mps
- c. Rejected if the velocity standard deviation exceeds the requirement.
- d. Rejected if one or more misfires attributable to the ignition cartridge occur.
- e. Rejected if one or more metal part separations attributable to the ignition cartridge occur.

4.5.5.3 Subsequent production. After three consecutive lots have met the criteria of 4.5.5.2, a sample of 35 ignition cartridges shall be selected and tested. If a lot is rejected, the contractor shall revert to the sampling plan listed in 4.5.5.2. This test shall be performed as specified in 4.5.5. The lot shall be rejected if:

- a. Rejected if the mean velocity exceeds the uniformity velocity by  $\pm 3$  mps
- b. Referred if the mean velocity exceeds the uniformity velocity by  $\pm 1$ mps to  $\pm 3$  mps
- c. Rejected if the velocity standard deviation exceeds the requirement.
- d. Rejected if one or more misfires attributable to the ignition cartridge occur.
- e. Rejected if one or more metal part separations attributable to the ignition cartridge occur.

4.5.5.4 Refiring. If for any reason the proving ground concludes that conditions have detrimentally affected the test results, additional ignition cartridges shall be tested.

4.5.6 Propellant charge uniformity. (To be conducted at a U.S. Government Proving Ground). Ten ignition cartridges shall be loaded at charge weight established during the propellant assessment in accordance with MIL-P-60398 with a tolerance of plus or minus ( $\pm$ ) 0.5 grains. The sample ignition cartridges shall be assembled into 81mm cartridges for which they were manufactured (live or inert loaded) with total cartridge weight as specified in Table I. The rounds shall be conditioned at 70°F ( $\pm 2.5$ °F) for 24 hours prior to firing and shall be maintained at this temperature until fired. The rounds shall be fired from a M252 81mm mortar, on a hard mount, at an elevation of 800 mils. Reference rounds shall be fired alternately for velocity

## MIL-DTL-32249 (AR)

correction (if deemed necessary by the testing agency). The corrected velocities of the group shall be compared to the established charge velocity. If the corrected velocity of the test rounds exceeds 2% (two percent) of the expected muzzle velocity, use of the propellant lot shall be referred. Test results shall be forwarded to the technical agency for evaluation (see 6.5).

4.5.7 Excessive pressure on fin boom (Static pressure test).

4.5.7.1 Sampling plan. Twenty-five ignition cartridge assemblies in accordance with Dwg. 9294752 shall be selected for first article testing. This test shall be performed only upon initial use of each propellant lot. The lot shall be rejected if the test results fail to comply with the requirements.

4.5.7.2 Test. The static pressure test will be performed with equipment/fixtures in general conformance to the concept on Figure 1. The ignition cartridges shall be threaded into an M28/M29 Fin and firmly seated. A 1/8-inch hole shall be drilled in the ignition cartridge tube through one flash hole in the fifth row of flash holes in the fin boom, counting from the ignition cartridge end. A pressure transducer, mounted to a collar (see Figure 2), shall be attached to the fin boom and positioned so that the transducer will be directly over the flash hole drilled in the ignition cartridge tube. The collar shall be positioned carefully to prevent restriction of venting from other flash holes in the boom. The assembly shall be set up as shown in Figure 1 and the transducer connected to a recorder. The ignition cartridge shall then be functioned and maximum pressure and pressure/time trace shall be recorded. Equipment design shall be submitted for approval (see 4.4.4).



MIL-DTL-32249 (AR)

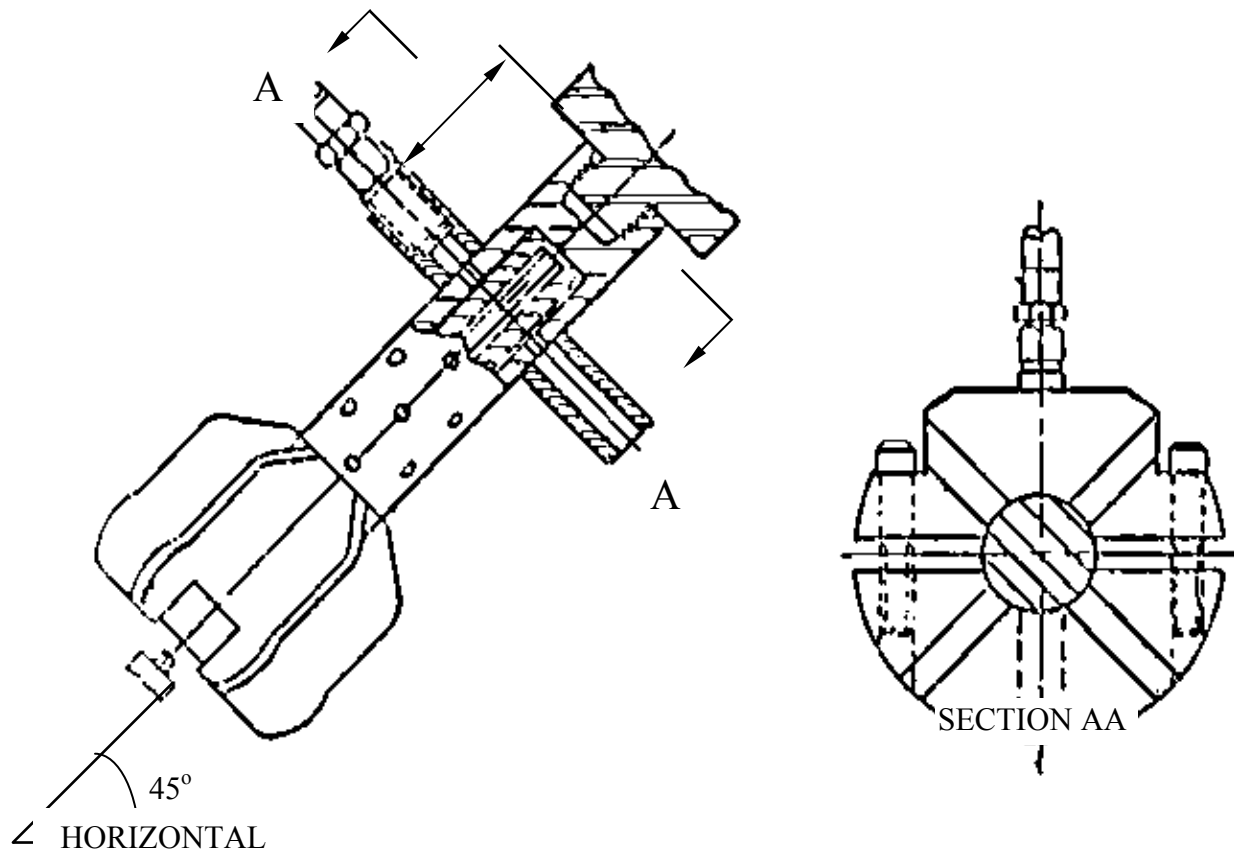


FIGURE 1. The collar used on fin (static pressure test setup)

MIL-DTL-32249 (AR)

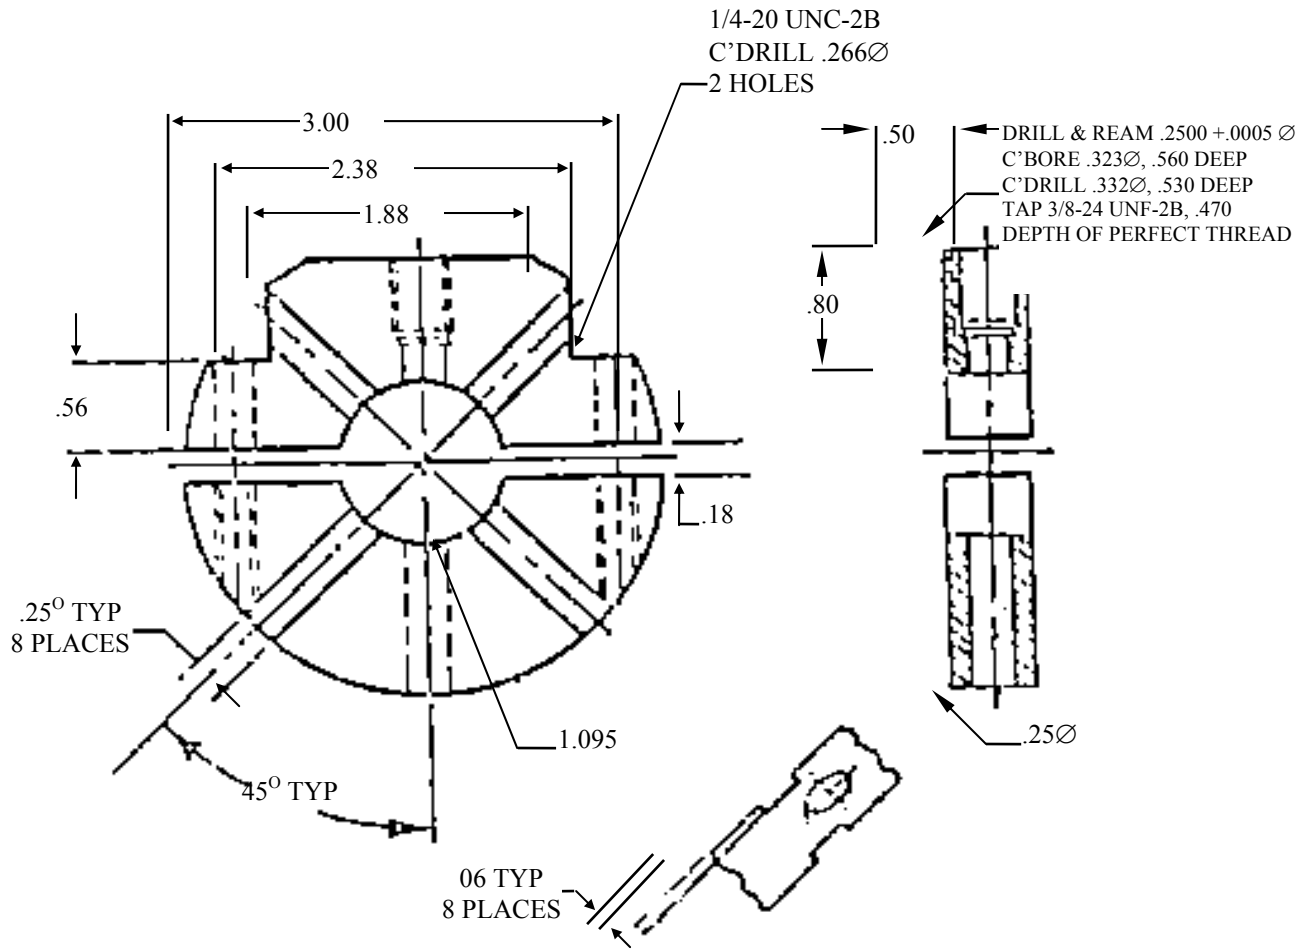


FIGURE 2. Sample dimensions of collar

MIL-DTL-32249 (AR)

4.5.8 Bursting strength. The tube shall be cut in half lengthwise and one of the halves placed in the fixture (see Figure 3-1, 3-2, 3-3). The stop (3) shall be completely removed or backed off so that it does not touch the punch (2). Place fixture in universal tester set for a travel speed of 0.125 inches per minute. Proceed with Test Number 1 and 2.


TEST NUMBER 1: NO BURST

Apply 57-pound compression load, remove tube. Item is rejected if evidence of bursting is observed. Tearing or puncturing of material shall be considered evidence of bursting.

TEST NUMBER 2: BURSTING

If item is not rejected, replace it in fixture, using opposite end of tube and apply 192 pounds compression load. If item shows no evidence of bursting (punch travels through material) it shall be rejected.

MIL-DTL-32249 (AR)

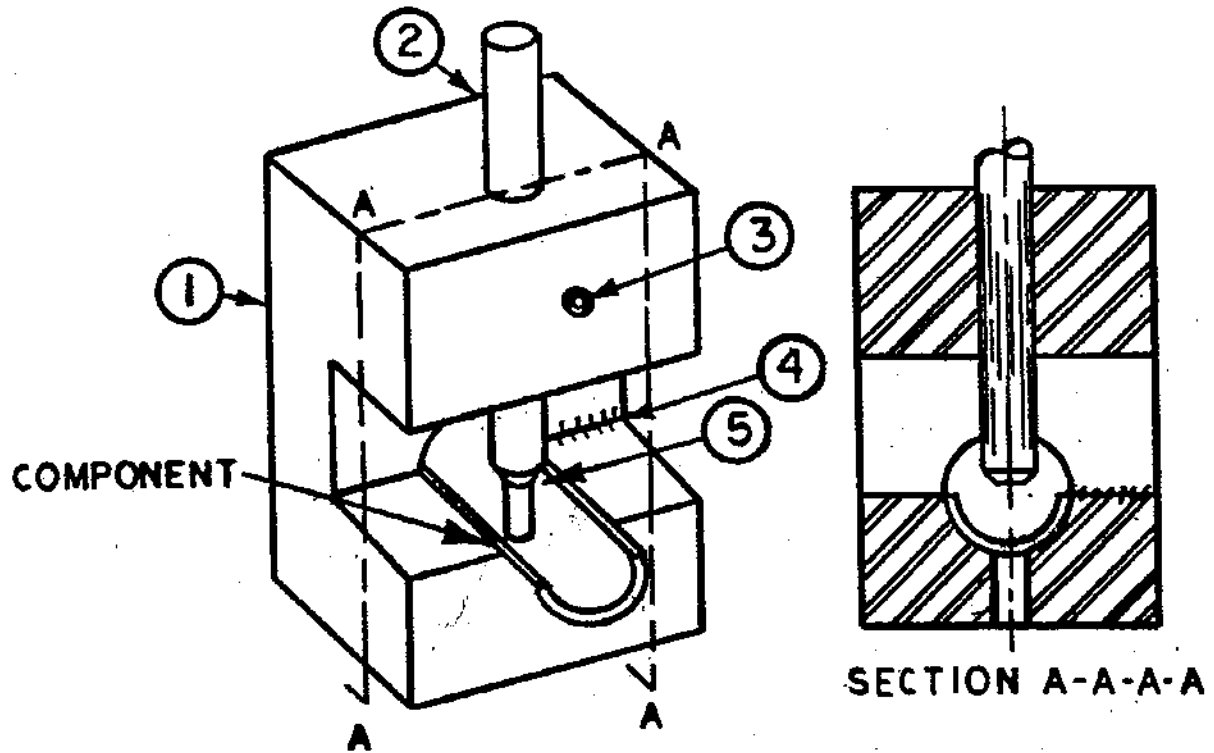

# ASSEMBLY BURSTING STRENGTH TEST FIXTURE

FIGURE 3-1. Burst strength fixture

MIL-DTL-32249 (AR)

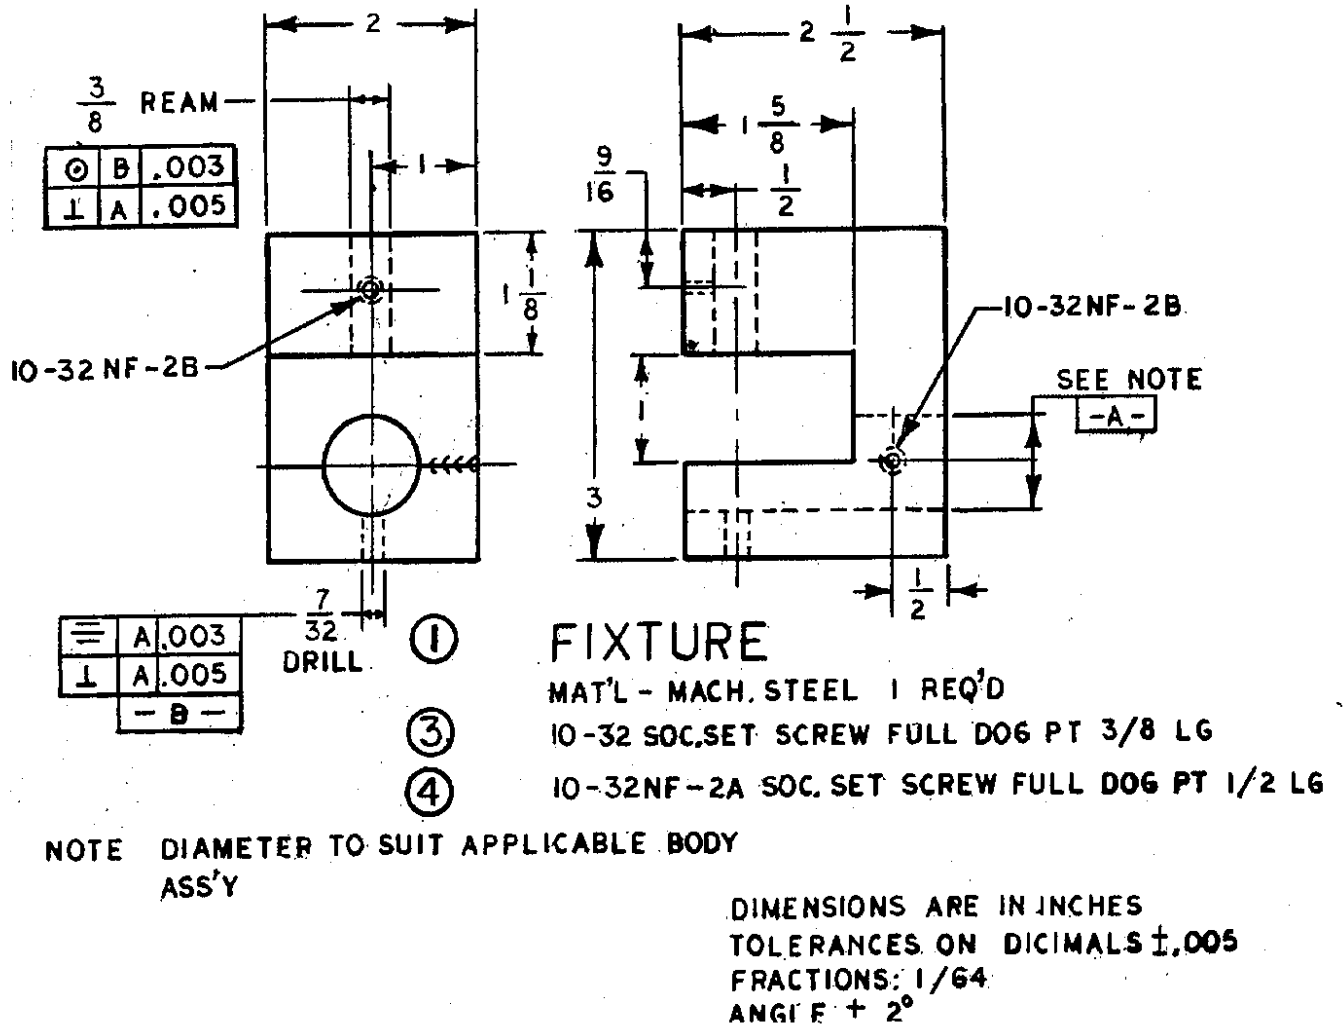


FIGURE 3-2. Sample dimension of test fixture

MIL-DTL-32249 (AR)

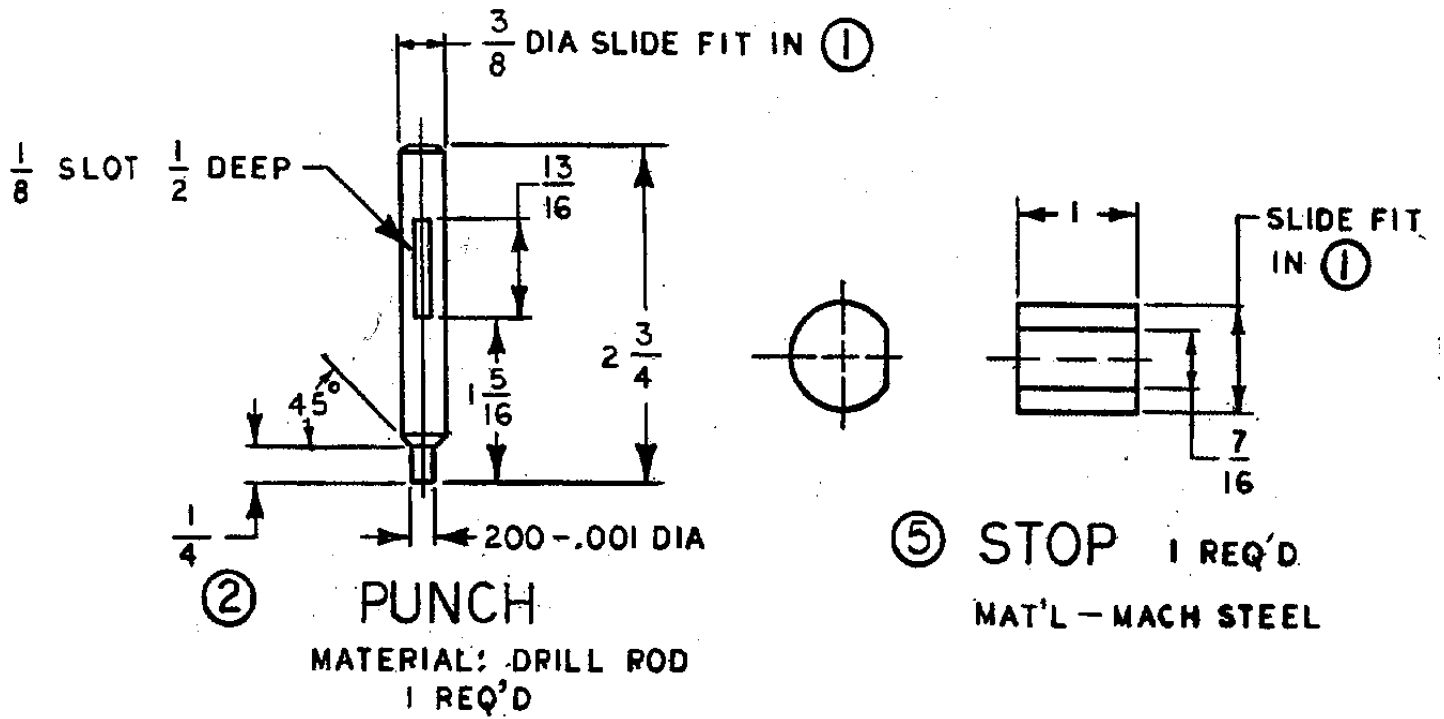


FIGURE 3-3. Sample dimension on punch for test fixture

## MIL-DTL-32249 (AR)

4.5.9 Salt spray testing. Samples shall be tested using equipment and procedures in accordance with ASTM B117. Test duration shall be specified on the drawing. Parts shall be rinsed, dried and examined for evidence of pitting or mottling of the finish. One or more pits or mottling shall be cause for rejection of all parts represented by the sample.

4.5.10 Check for deterioration of ignition cartridge. The following test is designed to prevent the loading of major ammunition items with ignition cartridges which have deteriorated. The test shall be performed on each lot of ignition cartridges which have been stored under normal conditions for more than two years or under adverse conditions for any period of time, as determined by the technical agency. A sample of 50 ignition cartridges shall be selected for this test. If the mean velocity or velocity standard deviation exceeds the requirements (Table I), the lot shall be rejected. If any round fails to function for reasons attributable to ignition cartridge failure, or if a metal parts separation occurs, the lot shall be referred. This test shall be performed as specified in 4.5.5.

4.5.11 Teardown inspection. Each ignition cartridge shall be subjected to an inspection of every critical defect and major defect as listed in the Table IV. Samples may be accumulated or inspected upon selection providing the selection remains random and represents the lot. The inspection shall be witnessed by the Government. The detection of any of the specified defects shall be the cause for rejection of that day's production.

Table IV. Teardown Inspection

| <b>Paragraph number</b> | <b>Examination or Test</b>  |
|-------------------------|---|
| 4.4.2.9                 | Critical – Flash hole(s) missing or excessive in number or obstructed   |
| 4.4.2.11                | Critical – Heat shrinkable tubing missing, loose or does not completely cover all flash holes<br>Critical – Pin missing |
| 4.4.2.14                | Critical – Firing plug above flush with head surface<br>Major – Flash tube assembly missing                             |
| 4.4.2.15                | Critical – Flash tube assembly missing<br>Critical – Propellant weight<br>Major – Propellant weight                     |
| 4.4.2.16                | Critical – Propellant weight<br>Critical – Assembly improper or damaged to the extent that propellant can escape        |

4.5.12 Automatic Inspection of Ignition Cartridge. Automatic inspection of the ignition cartridge shall be performed 100% in accordance with paragraph 4.5.13 using Government approved equipment to assure that the ignition cartridge does not contain the defects listed in Table V. This inspection must be performed after final assembly of the ignition cartridge. All ignition cartridges classified as defective shall be automatically segregated. (See 6.10)

## MIL-DTL-32249 (AR)

Table V. Automatic Inspection

| <b>Paragraph number</b> | <b>Examination or Test</b>  |
|-------------------------|---|
| 4.4.2.16                | Major - Pellet broken or chipped<br>Major - Firing Plug Missing<br>Major - Primer Missing<br>Major - Pellet Missing |

4.5.13 Automatic Inspection of Ignition Cartridge. The automatic inspection of the ignition cartridge shall be accomplished with an inspection system designed and maintained in accordance with paragraph 4.4.5. A non-destructive means shall be used to verify the defects listed in Table V. The equipment shall automatically accept or reject the ignition cartridge without requiring operator analysis or intervention and mark each accordingly. As a minimum the inspection equipment shall be checked at each inspection station with specially designed accept and reject standards, for each hour of production. If at any time the inspection system is found to be inoperative, the testing device shall be declared inoperative until repair and all assemblies tested since the last satisfactory verification shall be subjected to re-inspection. Designs of the proposed inspection equipment and associated procedures are required and shall be submitted in accordance with paragraph 6.3.

## 5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's system Command. Packaging data retrieval is available from the managing Military Departments or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.



## MIL-DTL-32249 (AR)

## 6. NOTES

(This section contains information of general or explanatory nature and may be helpful, but not mandatory.)

6.1 Intended use. The components covered by this product description are intended for assembly to M819, M853A1, and M816 cartridges for use with the 81mm Mortar system.

6.2 Acquisition requirements. Acquisition documents must specify the following:

- a. Title, number and date of this specification.
- b. Provisions for submission of first article sample.
- c. Test support hardware (see 6.10).
- d. Requirements for Ammunition Lot Number (see 4.4.1)
- f. Requirements for acceptance inspection equipment (AIE) designs (see 6.3).
- g. Certificate of Conformance requirement for each lot of material and each lot or shipment of product.
- h. Requirements for First Article (see 4.2)
- i. Provision for Quality Plan and Critical Nonconformance Control Plan.
- j. Critical Characteristic Clause.

6.3 Submission of contractor inspection equipment designs for approval. Submit copies of designs as required to:

Commander, US Army ARDEC  
ATTN: AMSRD-AAR-QEM-C  
Building 62, Picatinny Arsenal, NJ 07806-5000

This address will be specified on the Contract Data Requirements List, DD form 1423 in the contract.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament, Research Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as ARRADCOM, Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARDEC.

## MIL-DTL-32249 (AR)

6.5 Submission of test data. One copy of proving ground ballistic acceptance test data (i.e., firing record) should be forwarded to each of the following:

Commander, U.S. Army ARDEC  
ATTN: AMSRD-AAR-QEM-C and AMSRD-AAR-AEE-W  
Picatinny Arsenal, NJ 07806-5000

6.6 Submission of alternative conformance provisions. All contractor proposed alternative conformance provisions will be submitted to the Government for evaluation/approval as directed by the contracting activity.

6.7 Burst strength test fixture. Equipment designs for similar paper tubes are available for reference in MIL-C-48161, MIL-C-48155 and MIL-C-48396. For copies contact,

Commander, U.S. Army ARDEC  
ATTN: AMSRD-AAR-QEM-C  
Picatinny Arsenal, NJ 07806-5000

6.8 Definitions.

- a. Analysis - The use of analytical methods and mathematical formulas to determine if an item meets a requirement
- b. Demonstration - A functional test (for example, ballistic firing) that provides verification that a requirement is met
- c. Examination - Inspections utilizing gage(s) or visual means to assure conformance to requirement
- d. Test - The conduct of specific procedures and methods to provide data verifying a requirement is met

6.9 Critical Classification Rationale:

| <b>Paragraph</b> | <b>Critical Callout(s)</b>  | <b>Critical Rationale</b>   |
|------------------|---|---|
| 4.4.2.7          | Flash hole missing or obstructed  | Defect may prevent propulsion gases from evenly igniting surrounding propelling charges leading to a short round. |
| 4.4.2.9          | Longitudinal flash hole missing or obstructed                                       | Defect may prevent propulsion gases from evenly igniting surrounding propelling charges leading to a short round. |
| 4.4.2.9          | Flash hole(s) missing or excessive in number or obstructed                          | Defect may prevent propulsion gases from evenly igniting surrounding propelling charges leading to a short round. |
| 4.4.2.11         | Heat Shrinkable tubing missing, loose, or does not completely cover the flash holes | Defect may prevent propulsion gases from evenly igniting surrounding propelling charges leading to a short round. |
| 4.4.2.11         | Pin missing   | Defect may prevent propulsion gases from evenly   |

## MIL-DTL-32249 (AR)

|          |   |  |
|----------|---|--|
|          |   | igniting surrounding propelling charges leading to a short round.  |
| 4.4.2.14 | Non-functioning sensitivity   | A defect may lead to primer initiation during cartridge handling resulting in death or serious injury to the soldier.  |
| 4.4.2.14 | Ignition Cartridge function with Primer (Safety drop test)                                      | A defect may lead to primer initiation during cartridge handling resulting in death or serious injury to the soldier.  |
| 4.4.2.14 | Firing plug above flush with head surface   | A defect may lead to primer initiation during cartridge handling resulting in death or serious injury to the soldier.  |
| 4.4.2.15 | Flash tube assembly missing   | Defect may prevent propulsion gases from evenly igniting surrounding propelling charges leading to a short round.  |
| 4.4.2.15 | Propellant weight greater than 10 grains below lower limit or above upper limit (after loading) | A low amount of propellant could produce a critical short round. A high amount of propellant could produce high pressure build up in the tube resulting in death or serious injury to the soldier. |
| 4.4.2.16 | Propellant weight   | A low amount of propellant could produce a critical short round. A high amount of propellant could produce high pressure build up in the tube resulting in death or serious injury to the soldier. |
| 4.4.2.16 | Assembly improper or damaged to the extent that propellant can escape                           | A low amount of propellant could produce a critical short round.   |
| 4.4.2.16 | Excessive pressure on Fin Boom (Static Pressure test)   | High pressure could cause a rupture of the fin boom resulting in death or serious injury to the soldier.   |
| 4.4.2.16 | Teardown Inspection   | A low amount of propellant could produce a critical short round. A high amount of propellant could produce high pressure build up in the tube resulting in death or serious injury to the soldier. |
| 4.4.2.16 | Gross Weight (Propellant missing)   | A low amount of propellant could produce a critical short round.   |

Short Round: The cartridge that fails to has a horizontal range less than 80 percent of the average horizontal range (calculated without the short rounds).

6.10 Major Classification Rationale for automated inspection. The use of this inspection system will identify and remove ignition cartridge defects that are known causes of misfires in mortar ammunition. In the past, 100% visual inspections were relied on to detect these defects. Inspection escapes have been encountered in the past (three different suppliers) and costly re-inspection methods were used to remove the defects from the lots. This system will implement a

## MIL-DTL-32249 (AR)

more reliable inspection technique for missing firing plugs, missing primers, missing black powder pellet (s) and broken or chipped black powder pellets. The defects are classified as major but misfires can affect safety under certain conditions. Misfires have been identified as contributing factors in historical double load malfunction investigations. The purpose of implementing this system is to eliminate the obvious causes of misfires and isolate misfire causes to primer sensitivity failures.

6.11 Test support hardware. The following test hardware quantity is required to conduct the safety drop test and ballistic test for each of the First Article and Lot Acceptance Testing.

| <u>Hardware</u>                             | <u>Safety Drop</u> | <u>Static Pressure</u> | <u>Ballistic</u> |
|---|--------------------|------------------------|------------------|
| Inert M772 fuze                             | 25                 | -                      | 50               |
| Inert loaded M816/M819/M853A1 body assembly | 12                 | -                      | 50               |
| M28/M29 fin                                 | 25                 | 25                     | 50               |

6.12 Primer sensitivity calculations.

Example:

| <b>Drop weight = 7.8 lbs</b> |                    |                            |                      |                                    |               |
|------------------------------|--------------------|----------------------------|----------------------|------------------------------------|---------------|
| Height of Drop (inch)        | Number of Misfires | Dec. Fraction of Misfires  | Std Deviation Factor | Std Dev Factor x Dec. Failure Rate | in-oz         |
| 0.20                         | 50                 |                            |                      |                                    | 24            |
| 0.25                         | 47                 | 0.940                      | 1                    | 0.94                               | 30            |
| 0.30                         | 42                 | 0.840                      | 3                    | 2.52                               | 36            |
| 0.35                         | 26                 | 0.520                      | 5                    | 2.60                               | 42            |
| 0.40                         | 5                  | 0.100                      | 7                    | 0.70                               | 48            |
| 0.45                         | 0                  | 0.000                      | 9                    | 0.00                               | 54            |
|                              |                    |                            |                      |                                    |               |
|                              |                    |                            |                      |                                    |               |
| C                            | B                  | A                          | M                    | L                                  |               |
| 0.025                        | 0.2                | 0.12000                    | 5.7600               | 6.76                               |               |
|                              |                    | Sum * Increment Step (.05) |                      |                                    |               |
|                              |                    |                            | Inch                 | Wt of ball (oz)                    | (in-oz)       |
|                              |                    | H bar=                     | 0.3450               | 120                                | <b>41.400</b> |
| H bar =                      | 0.3450             | H bar + 3s=                | 0.5950               | 120                                | 71.400        |
| s =                          | 0.0500             | H bar - 2s=                | 0.2450               | 120                                | <u>29.400</u> |

Where  $H \text{ bar} = A + B + C$

$$s = 0.05 * ((L-M)^{0.5})$$

MIL-DTL-32249 (AR)

A = sum of the values under the column “Dec Fraction of Misfires” multiplied by .05

B = drop height at which all primers misfired

C = one-half of the drop height increment

L = the sum of the values under the column “Std Dev Factor x Dec Failure Rate”

M = the square of the sum of the values under the column “Dec Fraction of Misfires”

6.13 Changes from previous issues. Marginal notations are not used in this revision to identify changes with respect to previous issue due to the extent of the change.

6.14 Subject term (key word) listing.

Functioning test

Leak test

Sensitivity

Velocity

Custodian:  
Army – AR

Preparing Activity:  
Army – AR  
(Project 1315-2007-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.