

INCH-POUND

MIL-DTL-52618/9C
 26 January 2012
 SUPERSEDING
 MIL-DTL-52618/9B
 25 November 2002

DETAIL SPECIFICATION SHEET

FITTINGS, PIPE, ALUMINUM-ALLOY THREADED, 150-POUND,
 CROSSES (REDUCING SIZES)

This specification is approved for use by all Departments
 and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-52618.

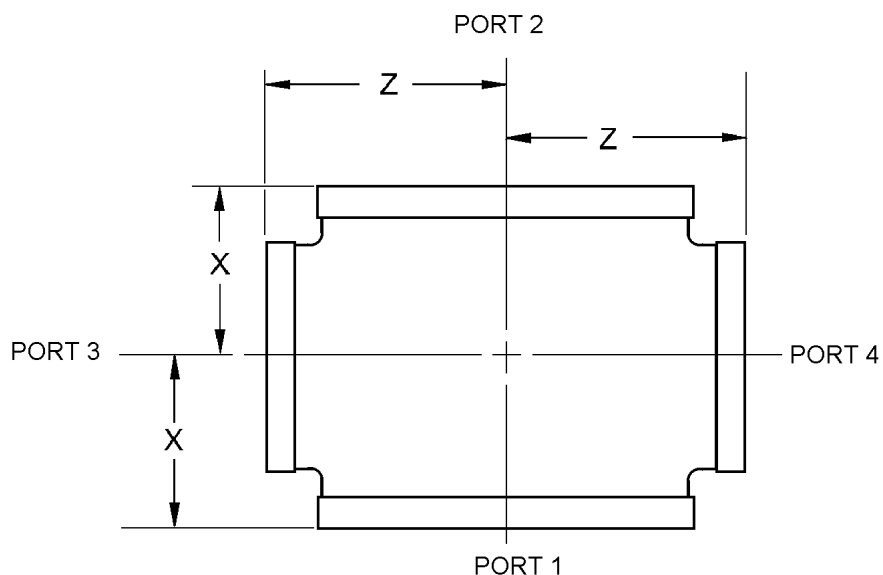


FIGURE 1. Cross, reducing.

REQUIREMENTS:

The fittings shall be as specified on figure 1.

The design, dimensions, and tolerances of cross reducer shall be in accordance with ASME B16.3.

Intended use is with water, oil, or air 150 psi (1.03 MPa) max at 72°F (22°C).

Aluminum shall be in accordance with MIL-DTL-52618.

MIL-DTL-52618/9C

Size code designators shall be in accordance with table I.

TABLE I. Size code numbers for reducing crosses.

Size code numbers	Nominal pipe size (inch)							
	Port 1		Port 2		Port 3		Port 4	
901	3/4	x	3/4	x	1/2	x	1/2	
902	1	x	1	x	3/4	x	3/4	
903	1-1/4	x	1-1/4	x	1	x	1	
904	1-1/4	x	1-1/4	x	3/4	x	3/4	
905	1-1/2	x	1-1/2	x	1-1/4	x	1-1/4	
906	1-1/2	x	1-1/2	x	1	x	1	
907	1-1/2	x	1-1/2	x	3/4	x	3/4	
908	2	x	2	x	1-1/2	x	1-1/2	
909	2	x	2	x	1-1/4	x	1-1/4	
910	2	x	2	x	1	x	1	
911	2	x	2	x	3/4	x	3/4	
912	2-1/2	x	2-1/2	x	2	x	2	
913	2-1/2	x	2-1/2	x	1-1/2	x	1-1/2	
914	2-1/2	x	2-1/2	x	1-1/4	x	1-1/4	
915	2-1/2	x	2-1/2	x	1	x	1	
916	3	x	3	x	2	x	2	
917	3	x	3	x	1-1/2	x	1-1/2	
918	3	x	3	x	1-1/4	x	1-1/4	
919	3	x	3	x	1	x	1	
920	3-1/2	x	3-1/2	x	2-1/2	x	2-1/2	
921	3-1/2	x	3-1/2	x	2	x	2	
922	3-1/2	x	3-1/2	x	1-1/2	x	1-1/2	
923	4	x	4	x	3	x	3	
924	4	x	4	x	2-1/2	x	2-1/2	
925	4	x	4	x	2	x	2	
926	4	x	4	x	1-1/2	x	1-1/2	
927	5	x	5	x	4	x	4	
928	5	x	5	x	3	x	3	
929	5	x	5	x	2	x	2	
930	6	x	6	x	4	x	4	
931	6	x	6	x	3	x	3	
932	6	x	6	x	2-1/2	x	2-1/2	
933	6	x	6	x	2	x	2	
934	8	x	8	x	6	x	6	
935	8	x	8	x	4	x	4	

Pipe threads shall be in accordance with MIL-DTL-52618.

MIL-DTL-52618/9C

Pipe thread direction code shall be in accordance with table II.

TABLE II. Thread direction code letter.

Thread direction code letter	Thread direction
X	Right-hand
Y	Left-hand
Z	Right- and left-hand


Finish shall be in accordance with MIL-DTL-52618.

Finish code letter shall be in accordance with table III.

TABLE III. Finish code letter.

Finish code letter	Finish
A	As cast
B	As extruded
C	Anodized

Part or Identifying Number (PIN). The PIN consists of the letter M, specification sheet number, a dash, configuration code letter, size code numbers, thread direction code letter and finish code letter are combined to form the part or identifying number. PIN's are assigned as follows:

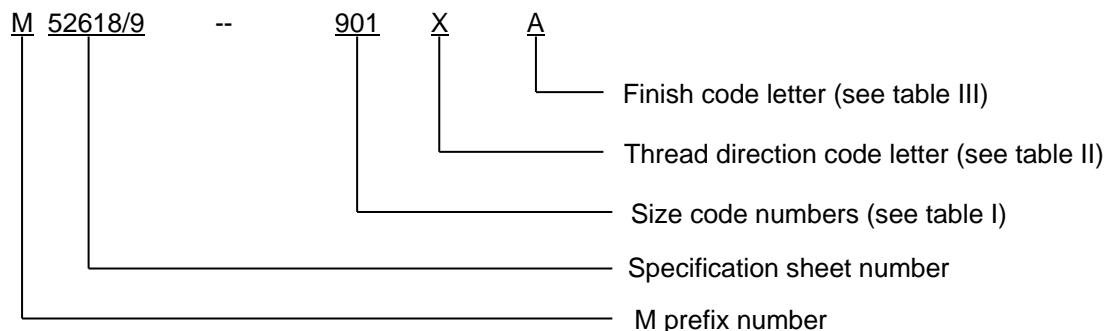

PIN example: M52618/9-901XA indicates a reducing cross 3/4 x 3/4 x 1/2 x 1/2 inch pipe, right hand threads, and finish is "as cast".

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

MIL-DTL-52618/9C

Referenced documents. In addition to MIL-DTL-52618, this document references ASME B16.3.

CONCLUDING MATERIAL

Custodians:

Army - AT
Navy - AS
DLA - CC

Preparing activity:
DLA - CC

Review activities:

Army - CE
Navy - MC, SA

(Project 4730-2012-018)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.daps.dla.mil>.