

INCH-POUND

MIL-DTL-5886/1

24 March 1995.

SUPERSEDING

MS21227A

12 November 1976


DETAIL SPECIFICATION SHEET

CYLINDER, AIRCRAFT OXYGEN, LOW PRESSURE,

NONSHATTERABLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-C-5886.

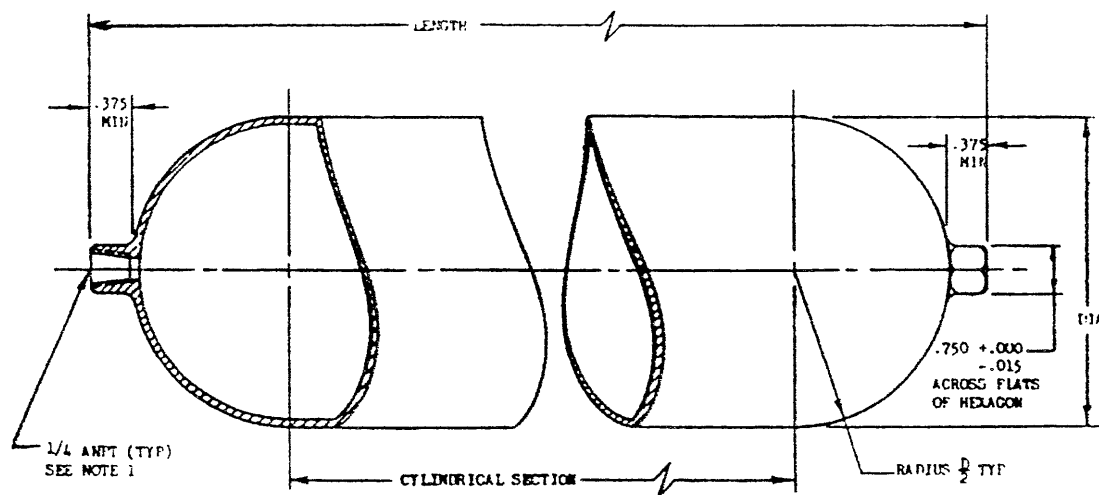

(Double outlet design shown)

MIL-DTL-5886/1

The Part or Identifying Number (PIN) shall be as follows: M5886/1-(applicable dash number from table 1).

TABLE I. Dash number and characteristics

DASH NUMBER	SUPERSEDED TYPES	INTERNAL VOLUME CU IN MIN	WEIGHT LBS MAX	LENGTH INCHES MAX	DIA INCHES MAX	NUMBER OF OPENINGS
1	A-6 MIL-C-5435	280	3.75	14.500	5.750	1
2	B-3 MIL-C-5436	280	3.75	15.000	5.750	2
3	D-2 MIL-C-5887	500	5.75	23.500	5.750	2
4	F-1 MIL-C-5888	1000	10.00	18.000	10.125	2
5	F-2 MIL-C-5889	1000	11.00	44.500	5.750	2
6	G-1 MIL-C-5890	2100	18.00	24.500	12.562	2
7	J-1 MIL-C-5891	18000	155.00	49.250	24.500	2

NOTES:

1. Threads shall be in accordance with MIL-P-7105.

Custodian:

Air Force - 99
Army - AV
Navy - AS

Preparing activity:

Air Force - 71

Agent:

Air Force - 99

Project 1660-0667