

MIL-R-7575C  
29 June 1966

SUPERSEDING

MIL-R-7575B

16 November 1959

(see 6.5)

## MILITARY SPECIFICATION

### RESIN, POLYESTER, LOW-PRESSURE LAMINATING

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

#### 1. SCOPE

1.1 Scope - This specification covers the requirements for low-pressure laminating polyester resins used in fabricating glass fabric-based plastic laminates for various applications (see 6.1).

1.2 Classification - The resin shall be furnished in the following grades, classes, and forms, as specified (6.2):

Grade A - Normal mechanical properties.

Grade B - Improved mechanical properties.

Class 0 - Nonelectrical.

Class 1 - Dielectric constant (laminate) of 3.6 up to 4.0.

Class 2 - Dielectric constant (laminate) of 4.0 up to 4.2.

Class 3 - Dielectric constant (laminate) of 4.2 up to 4.4.

Class 4 - Dielectric constant (laminate) of 4.4 up to 4.6.

Form A - Liquid or solid resin (3.3).

Form B - Pre-impregnated resin (3.3).

FSC 9330

MIL-R-7575C

## 2. APPLICABLE DOCUMENTS

- \* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

## SPECIFICATIONS

Federal

NN-P-515	Plywood, Container Grade
TT-I-735	Isopropyl Alcohol
TT-S-735	Standard Test Fluids; Hydrocarbon
PPP-B-576	Box, Wood, Cleated, Veneer, Paper Overlaid
PPP-B-585	Box, Wood, Wirebound
PPP-B-591	Box, Fiberboard, Wood-cleated
PPP-B-601	Box, Wood, Cleated-Plywood
PPP-B-621	Box, Wood, Nailed and Lock-Corner
PPP-B-636	Box, Fiberboard
PPP-C-96	Can, Metal, 28 Gage and Lighter
PPP-D-705	Drum, Metal Shipping, Steel (Over 12 and Under 55 Gallon)
PPP-D-729	Drums: Metal, 55-Gallon (For Shipment of Noncorrosive Material)
PPP-P-704	Pails, Shipping, Steel (1 through 12 Gallon)
PPP-T-60	Tape, Pressure-Sensitive Adhesive, Waterproof, for Packaging

Military

MIL-H-5606	Hydraulic Fluid, Petroleum Base, Aircraft, Missile, and Ordnance
------------	--

MIL-R-7575C

Military (continued)

MIL-C-9084	Cloth, Glass, Finished, for Polyester Resin Laminates
MIL-L-10547	Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible

## STANDARDS

Federal

Fed. Test Method Std. No. 406	Plastics; Methods of Testing
----------------------------------	------------------------------

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized Unit Loads (40 In. X 48 In. 4-Way Partial and 4-Way Pallets)

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications - The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

Uniform Classification Committee

## Uniform Freight Classification Rules

(Application for copies of the above publication should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

MIL-R-7575C

Interstate Commerce Commission

49 CFR 71 - 90

Interstate Commerce Commission Rules and  
Regulations for the Transportation of Explosives  
and Other Dangerous Articles

(The Interstate Commerce Commission Regulations are now a part of the Code of Federal Regulations (latest cumulative pocket supplement) available from the Superintendent of Documents, Government Printing Office, Washington, D. C., 20402. Orders for the above publication should cite "Code of Federal Regulations, 49 CFR 71 - 90 (Revised 1963)").

Manufacturing Chemists Association, Inc.

Manual I.-1

Guide to Precautionary Labeling of Hazardous  
Chemicals (Sixth Edition-1961)

(Application for copies should be addressed to the Manufacturing Chemists Association, Universal Building, 1825 Connecticut Avenue, Washington, D. C., 20009.)

## 3. REQUIREMENTS

- \* 3.1 Preproduction - The resin furnished under this specification shall be a product which has been subjected to and has passed the preproduction inspection specified herein.
- \* 3.1.1 One-year weathering data - As part of the preproduction requirement, the supplier shall submit certified data showing that a glass cloth base plastic laminate, fabricated as specified in 4.3.1.1 from the resin to be furnished under this specification, has been exposed to outdoor weathering in accordance with 4.5.5 for a period of one year and has subsequently met the applicable requirements of Table I. The data shall identify the geographical location in which the outdoor weathering was accomplished.
- 3.2 Materials - The materials used in the manufacture of the resin shall be of high quality and as specified herein. The resin shall be of the polyester, thermosetting, low pressure laminating type. The component materials of the resin shall be such that the cured resin shall not be corrosive to metals.
- 3.3 Form - The resin shall be in a form (liquid or solid) suitable for impregnating or may be furnished already impregnated on glass fabric (pre-impregnated). It shall be free from foreign materials.

## MIL-R-7575C

3.4 Chemical type - The supplier shall designate the polyester base and the cross-linking agents, such as "unsaturated alkyd-styrene." (See 3.9.1(d).)

3.5 Code number - The supplier shall designate each resin composition by a code number that shall be used to identify the resin. The code number may include trade name if desired. Any changes in the components or manufacturing procedures shall necessitate use of a different code number. For pre-impregnated materials, those materials using the same resin but having different properties due to different impregnating conditions shall have different designations. The designation shall consist of the resin code number with a suffix indicating impregnating conditions.

3.6 Physical and reactive properties - For liquid or solid resin, the supplier shall furnish limiting values for specific gravity, viscosity, and acid number of the liquid uncatalyzed resin; maximum gel time and peak exotherm of the catalyzed resin; and the Barcol hardness and specific gravity of the cured unfilled resin. For pre-impregnated material, limiting values shall be furnished for the volatile content, dry resin content, and flow. These values and the methods of determination, when not specified herein, shall be included by the supplier in the instruction sheet (3.9) and shall be considered requirements of this specification for resin of the code number or designation concerned. The supplier shall also furnish nominal values (adequate for design calculations) for the dielectric constant and loss tangent of the cured unfilled resin (Classes 1 through 4 only) at the frequency applicable to the electrical tests of Table II.

3.7 Mechanical and physical properties of the laminate - The mechanical and physical properties of a glass cloth base plastic laminate, fabricated as specified in 4.3.1.1 shall conform to the values listed in Table I.

3.8 Electrical properties of the laminate (Classes 1 through 4 only) - The electrical properties of a glass cloth base plastic laminate, fabricated as specified in 4.3.1.2, shall conform to the values listed in Table II. (See also 6.2 (c) and 6.3.)

3.9 Instruction sheet -

3.9.1 For liquid or solid resin - Unless otherwise specified, the supplier shall provide for each unit package of resin an approved instruction sheet containing the following information:

- (a) Grade and class of the resin and the number of this specification.
- (b) Resin code number (3.5).

MIL-R-7575C

TABLE I

**LENGTHWISE MECHANICAL AND PHYSICAL PROPERTIES  
OF GLASS CLOTH BASE PLASTIC LAMINATE 1/**

(Unless otherwise specified, all values are minimum for the average of five specimens)

Property	Test Method (FED-STD-406 Method No. except as noted)	Requirements 2/	
<b>TESTED UNDER STANDARD CONDITIONS (see 4.5.1)</b>		<b>Grade A</b>	<b>Grade B</b>
Flexural properties, flatwise - psi	1031		
Ultimate strength	(Specimen size 1 by 4 inches)	50,000 $2.7 \times 10^6$	65,000 $3.2 \times 10^6$
Initial modulus of elasticity			
Ultimate tensile strength, psi	1011 (Type 2 specimens)	40,000	50,000
Ultimate compressive strength, edgewise, psi	1021 (Specimen size 3 1/8 by 1/8 inches)	35,000	45,000
Flammability, inches per minute	2082	1.0 (max)	1.0 (max)
Water absorption, 24 hours immersion, percent change in weight	7031	+0.5 (max)	+0.5 (max)
Barcol hardness	(see 4.6.4)	55	55
Specific gravity	5011 or 5012	2/	2/
Resin content, percent	7061	2/	2/
<b>TESTED HOT (see 4.5.2)</b>			
Flexural properties, flatwise, psi	1031		
Ultimate strength	(Specimen size 1 by 4 inches)	45,000 $2.5 \times 10^6$	60,000 $3.1 \times 10^6$
Initial modulus of elasticity			
Ultimate tensile strength, psi	1011 (Type 2 specimens)	38,000	48,000
Ultimate compressive strength, edgewise, psi	1021 (Specimen size 3 1/8 by 1/8 inches)	30,000	40,000
<b>TESTED AT 70° C AFTER EXPOSURE TO 70° C FOR 1/2 HOUR (see 4.5.3)</b>			
Flexural properties, flatwise, psi	1031		
Ultimate strength	(Specimen size 1 by 4 inches)	40,000 $2.3 \times 10^6$	45,000 $2.6 \times 10^6$
Initial modulus of elasticity			
<b>TESTED AFTER IMMERSION IN CHEMICAL FLUIDS (see 4.5.4)</b>			
MIL-H-5606, Hydraulic Fluid, Petroleum Base, Aircraft, Missile and Ordnance	(Specimen size 1 by 4 inches)		
Percent change in weight (increase or decrease)	7011	0.2 (max)	0.2 (max)
Percent change in thickness (increase or decrease)	7011	0.2 (max)	0.2 (max)
Ultimate flexural strength, psi	1031	2/	2/
TT-I-735 Isopropyl Alcohol	(Specimen size 1 by 4 inches)		
Percent change in weight (increase or decrease)	7011	0.1 (max)	0.1 (max)
Percent change in thickness (increase or decrease)	7011	0.1 (max)	0.1 (max)
Ultimate flexural strength, psi	1031	2/	2/
TT-S-735 Standard Test Fluids, Hydrocarbon, Type III	(Specimen size 1 by 4 inches)		
Percent change in weight (increase or decrease)	7011	0.1 (max)	0.1 (max)
Percent change in thickness (increase or decrease)	7011	0.1 (max)	0.1 (max)
Ultimate flexural strength, psi	1031	2/	2/
<b>TESTED AFTER 1 YEAR OF OUTDOOR WEATHERING (see 4.5.5)</b>			
Flexural properties, flatwise, psi	1031		
Ultimate strength	(Specimen size 1 by 4 inches)	45,000 $2.5 \times 10^6$	50,000 $2.7 \times 10^6$
Initial modulus of elasticity			

NOTES: 1/ Lengthwise direction of test specimens is parallel to warp direction of glass fabric.

2/ The specimens shall show no cracking, creasing, softening, delamination, nor any other visible deterioration after conditioning exposures or immersions.

3/ There are no requirements for these properties. However, the values should be determined and reported. Calculations for ultimate flexural strength after immersion in chemical fluids shall be based on the dimensions of the specimens before immersion.

MIL-R-7575C

TABLE II

**ELECTRICAL REQUIREMENTS FOR GLASS CLOTH BASE PLASTIC  
(CLASSES 1-4 ONLY) LAMINATES AT 8,500 - 10,000 MEGACYCLES <sup>1/</sup>**  
(Values reported shall be the average of the determinations made  
on a minimum of 3 specimens.)

	Dielectric constant	Loss tangent
Standard conditions (4.5.1)	As specified for the applicable class (1.2)	0.020 (max)
Immersion conditions (4.5.6)	Not greater than 5 percent increase over the "as received" value	0.025 (max)

<sup>1/</sup> "X-band" frequency range. The recommended test frequency for this band is 9,375 mcs. (See also 6.3.)

- (c) The form of the resin (3.3).
- (d) Chemical type of the resin (3.4).
- (e) Limiting values required in 3.6 for the uncatalyzed resin, catalyzed resin, and cured unfilled resin; also the test procedures when not specified herein.
- (f) Dielectric constant (nominal) and loss tangent (nominal) of the cured unfilled resin, Classes 1 through 4 only (3.6).
- (g) Maximum usable storage life of the resin (uncatalyzed and catalyzed) and recommended storage conditions.
- (h) Recommended mixing and impregnating procedures, including recommended types, percentages and manner of utilization of catalysts and retardants.
- (i) Recommended finishes to be used on glass fabric.
- (j) Maximum allowable shelf life at various temperatures of impregnated fabric before curing.
- (k) Range of time, temperature and pressure cycles recommended to affect the cure for laminates.
- (l) Any other pertinent information, at the supplier's option, on storage and handling.

MIL-R-7575C

3.9.2 For pre-impregnated material - An instruction sheet for the pre-impregnated form shall be prepared as specified in 3.9.1 except that the following information, with description of the method of determining the properties shall be substituted for items (a) through (i) of 3.9.1.

- (a) Grade and class of the resin and the number of this specification.
- (b) Material designation (3.5).
- (c) Form of the resin (3.3).
- (d) Chemical type of the resin (3.4).
- (e) Dielectric constant (nominal) and loss tangent (nominal) of the cured unfilled resin component, Classes 1 through 4 only (3.6).
- (f) Volatile content (average and tolerance) (3.6).
- (g) Dry resin content (average and tolerance) (3.6).
- (h) Flow (average and tolerance) (3.6).

\*

3.10 Workmanship - The material specified herein shall be processed as required in accordance with the best practice for a high quality resin.

#### 4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections - The inspections performed under this specification shall be of the following classifications:

- (a) Preproduction inspection (4.3).
- (b) Quality conformance inspection (4.4)



MIL-R-7575C

\* 4.3 Preproduction inspection - Preproduction inspection shall include all the examinations and tests of this specification except the one year outdoor weathering test (4.5.5), for which certified test data shall be submitted by the supplier (3.1.1), and the examination of preparation for delivery (4.6.11). Unless otherwise specified (4.3.2), no material shall be offered for acceptance under any contract or order until the preproduction samples prescribed in 4.3.1 have been subjected to preproduction inspection and pronounced satisfactory by the procuring activity. However, approval of the preproduction samples or of acceptable test data (4.3.2) in lieu thereof shall not relieve the supplier of his obligation to meet the quality conformance inspection.

\* 4.3.1 Sampling for preproduction test - The following samples and materials shall be submitted by the supplier for preproduction test:

- (a) Two copies of the certified weather resistance data specified in 3.1.1.
- (b) Two copies of the instruction sheet specified in 3.9.
- (c) One gallon of liquid or dry resin; or eight square feet, full fabric width, of pre-impregnated resin fabric as applicable, dependent on the form of resin supplied.
- (d) A 2 foot by 2 foot glass cloth base laminate sheet 0.125  $\pm$  0.010 inch thick (see 4.3.1.1) or five sheets, each one foot square, of that thickness for determining mechanical and physical properties of the laminate. Unless otherwise specified in the contract or order, this sheet shall be processed by the supplier into the required number of test specimens for all mechanical and physical tests, machined to size and suitable for testing.
- (e) A 4 inch by 8 inch glass cloth base laminate sheet at least 0.75 inch thick (see 4.3.1.2) for tests of electrical properties (Classes 1 through 4 only)

\* 4.3.1.1 Laminate sheet for mechanical and physical properties - The laminate sample for mechanical and physical tests shall be fabricated in the form of a sheet or sheets 0.125  $\pm$  0.010 inch in thickness, using the resin

MIL-R-7575C

which is under test and 12 plies, laid up parallel, of 181 glass cloth conforming to MIL-C-9084 for finished cloth. The sample shall be laminated at a pressure not exceeding 30 pounds per square inch and shall be fully cured in accordance with the resin supplier's instruction sheet. The sample shall be essentially void free and representative of the best quality workmanship and shall have a resin content by weight that will produce a laminate with optimum properties. Specimens from this laminate shall be tested to determine conformance to the mechanical and physical requirements of 3.7.

- \* 4.3.1.1.1 Base fabric for pre-impregnated laminate samples - Unless otherwise specified, the laminate prepared for preproduction tests of pre-impregnated materials shall be fabricated with 181 glass cloth, regardless of the base cloth to be used in the actual delivery of pre-impregnated resin. This substitution shall apply to the laminate samples only, not to the pre-impregnated samples of 4.3.1 (c) or 4.4.1.2.
- \* 4.3.1.2 Laminate sheet for electrical property tests - The glass fabric base, resin content, specific gravity, finish, and other physical characteristics of the laminate sample for electrical test (4.3.1 (e)) shall be the same as those of the laminate fabricated in accordance with 4.3.1.1. The laminating procedure shall follow, as closely as practical, the procedure used in 4.3.1.1.
- \* 4.3.2 Preproduction inspection in repeat orders - In repeat orders or orders for different parts, the requirement for preproduction inspection in this specification may be met, at the discretion of the procuring activity, by submittal of applicable test data from previous preproduction testing, provided the materials and processes have not been changed and provided the supplier submits a certified statement to that effect. However, the procuring activity may, at any time, require the performance of any preproduction test deemed necessary to assure the conformance of the material to the specification requirements.
- \* 4.4 Quality conformance inspection - Quality conformance inspection shall include the material conformance inspection of Table III and the inspection of preparation for delivery specified in 4.6.11.

MIL-R-7575C

TABLE III

## MATERIAL CONFORMANCE INSPECTION

Test	Requirement Paragraph	Method Paragraph
Uncatalyzed resin		
Specific gravity	3.6	4.6.1
Viscosity	3.6	4.6.2
Acid number	3.6	4.6.3
Catalyzed resin		
Gel time	3.6	4.6.5 (b)
Peak exotherm	3.6	4.6.5 (c)
Cured unfilled resin		
Specific gravity	3.6	4.6.1
Barcol hardness	3.6	4.6.4
Pre-impregnated resin		
Volatile content	3.6	4.6.6
* Dry resin content	3.6	4.6.7
Flow	3.6	4.6.8

4.4.1 Sampling for quality conformance inspection -

- \* 4.4.1.1 Lot - For sampling purposes, a lot shall consist of all the resin of one code number or designation subjected to inspection at one time.
- \* 4.4.1.2 Sample for material conformance - One gallon of liquid or dry resin, or eight square feet, full fabric width, of pre-impregnated fabric, dependent on the form of resin supplied, shall be selected at random from each lot. Two copies of the instruction sheet specified in 3.9 shall be submitted with each sample.
- 4.4.1.3 Sample for conformance to preparation for delivery - A sample of filled exterior containers shall be selected from each lot in accordance with the provisions of MIL-STD-105 for Inspection Level I and an Acceptable Quality Level (AQL) of 2.5 percent defective.
- \* 4.4.2 Rejection criteria - If any sample of liquid or solid resin or of pre-impregnated fabric, fails to conform completely with the requirements of this specification, or if the preparation-for-delivery sample contains more defective units than permitted by AQL 2.5, the lot of resin represented

MIL-R-7575C

by the sample shall be rejected. Disposition of rejected lots shall be in accordance with MIL-STD-105.

#### 4.5 Test conditions -

4.5.1 Standard conditions - Specimens shall be conditioned and tested at an air temperature of  $23 \pm 1.1^{\circ} \text{C}$  ( $73.4 \pm 2^{\circ} \text{F}$ ) and relative humidity of  $50 \pm 4$  percent. The conditioning period prior to test shall be 96 hours.

\* 4.5.2 Wet conditions (for mechanical and physical tests) - Specimens shall be immersed for 2 hours in boiling distilled water by procedure E of method No. 7031, Fed. Test Method Std No. 406. Specimens shall then be cooled in water at  $23 \pm 1.1^{\circ} \text{C}$  ( $73.4 \pm 2^{\circ} \text{F}$ ) and tested wet at that temperature immediately after removal from the water. In case of any question as to validity of the test results, specimens shall be soaked for 30 days in distilled water at  $23 \pm 1.1^{\circ} \text{C}$  and tested wet at that temperature immediately after removal from the water. Results obtained under the latter conditioning shall be final.

4.5.3 Exposure to  $70^{\circ} \text{C}$  - Specimens shall be exposed for 1/2 hour to a temperature of  $70 \pm 1.1^{\circ} \text{C}$  ( $158 \pm 2^{\circ} \text{F}$ ) in a previously heated test chamber and shall then be tested immediately at the same temperature.

4.5.4 Immersion in chemical fluids - Specimens shall be immersed in the chemical fluids specified in Table I. A separate set of specimens shall be used for each fluid. The immersion procedure shall be in accordance with method 7011 of Fed. Test Method Std. No. 406, except that the immersion time shall be 24 hours at  $23 \pm 1.1^{\circ} \text{C}$  ( $73.4 \pm 2^{\circ} \text{F}$ ). The specimens shall be removed from the fluids at the close of the exposure period and tested immediately.

4.5.5 One year outdoor weathering (for supplier's certified test data (3.1.1)) - The laminate shall be exposed to outdoor weathering for one year on a land rack inclined 45 degrees to the horizontal, facing south. The laminate shall be turned over every 15 days. At the end of the weathering period, specimens shall be cut from the laminate, subjected to standard conditions (4.5.1) for 96 hours, and tested at standard conditions.

4.5.6 Water immersion (for tests of electrical properties) - Specimens shall be immersed for 24 hours in distilled water at  $23 \pm 1.1^{\circ} \text{C}$  ( $73.4 \pm 2^{\circ} \text{F}$ ). Specimens shall then be removed from the bath, wiped free of surface water, and tested immediately.

#### 4.6 Test methods -

4.6.1 Specific gravity - Specific gravity of the liquid uncatalyzed and of the cured unfilled resin shall be determined by weighing a specific volume of the resin in grams and dividing by the volume in cubic centimeters.

MIL-R-7575C

4.6.2 Viscosity - The viscosity of the liquid uncatalyzed resin shall be determined by a calibrated MacMichael viscosimeter or equivalent. The test procedure shall be submitted by the manufacturer in the instruction sheet (3.9).

4.6.3 Acid number - The acid number of the liquid uncatalyzed resin shall be determined in the following manner: The acid number of a polyester is defined as the milligrams of potassium hydroxide required to neutralize 1 gram of polyester. It is determined by titrating a suitable sample of the material as a solution in neutral acetone with 0.1 normal potassium hydroxide using phenolphthalein as an indicator. Other methods may be used but shall be described in the instruction sheet (3.9).

4.6.4 Barcol hardness - The Barcol hardness of the cured unfilled resin specimens and laminate specimens shall be obtained by direct reading on a Barcol Impressor. Barcol instrument, model GYZJ 934-1, shall be used (6.4). The laminate specimens shall be at least 1 inch square.

4.6.5 Gel time and peak exotherm - The gel time and peak exotherm shall be determined in the following manner:

(a) Apparatus:

Resin tubes: 19 by 150 mm.

Thermocouple: 1/8 inch maximum diameter (iron-constantan leads or stainless steel needle).

Potentiometer.

Constant-temperature circulating water baths.

(b) Method for gel time: A 200 gram sample of resin in a beaker surrounded by a water bath at  $25 \pm 0.5^\circ \text{C}$  ( $77 \pm 1^\circ \text{F}$ ) is catalyzed by adding exactly 1 percent of benzoyl peroxide and mixing at high speed for 5 minutes. Catalyzed resin is poured into the resin tube to a depth of 3 inches and the tube is suspended in a water bath controlled at  $82.2 \pm 0.3^\circ \text{C}$  ( $180 \pm 0.5^\circ \text{F}$ ), with the resin level below the water level of the bath. The thermocouple is positioned vertically in the tube, with the tip in the center of the resin. The gel time is determined as the time required for the temperature of the resin to rise from  $65.6^\circ \text{C}$  to  $87.8^\circ \text{C}$  ( $150^\circ \text{F}$  to  $190^\circ \text{F}$ ). The result shall be determined from an average of three tests.

(c) Method for peak exotherm: The peak exotherm is defined as the maximum temperature reached by the resin for the above-specified bath temperature. Peak exotherm is determined by the gel time method.

MIL-R-7575C

- \* 4.6.6 Volatile content (pre-impregnated form) - The specimen shall be a four inch square, the full thickness of the material, taken at least an inch from the edge of the fabric and bias cut to minimize raveling. The specimen shall be weighed at standard conditions (4.5.1), dried by suspending for  $15 \pm 1$  minutes in a circulating air oven at  $163 \pm 3^\circ \text{C}$  ( $325 \pm 5^\circ \text{F}$ ), cooled in a desiccator, and reweighed.

$$\text{Volatile content \%} = \frac{\text{Initial wt.} - \text{dry wt.}}{\text{Initial wt.}} \times 100$$

Result shall be the average of three specimens taken from representative areas of the material.

- \* 4.6.7 Dry resin content (pre-impregnated form) - The dry specimen from 4.6.6 shall be placed in a muffle dish in a muffle at  $565.5 \pm 14^\circ \text{C}$  ( $1050 \pm 25^\circ \text{F}$ ) for 30 minutes or until the specimen has the original color of the inorganic reinforcement. The ignition residue shall be cooled in a desiccator and weighed.

$$\text{Dry resin content (\%)} = \frac{\text{Dry wt.} - \text{Ignited wt.}}{\text{Dry wt.}} \times 100$$

Result shall be the average of three specimens.

4.6.8 Flow of pre-impregnated material - The flow of the pre-impregnated material shall be determined in the following manner: Four 4-inch squares shall be cut from the impregnated fabric material. These specimens shall be weighed. Specimens of 4 plies shall be wrapped in cellophane and placed between platens before being pressed into a laminate under conditions of  $325^\circ \text{F}$  temperature and 15 psi pressure for 5 minutes. After removing the specimen from the press, the cellophane, as well as all the flash resin that has flowed from the laminate, shall be removed from the 4 edges. The specimen shall then be reweighed.

$$\text{Flow (\%)} = \frac{\text{Initial wt.} - \text{final wt.}}{\text{Initial wt.}} \times 100$$

Result shall be the average of three tests.

4.6.9 Mechanical and physical properties of the laminate - The mechanical and physical properties of the laminate shall be determined in accordance with the methods of Table I, using specimens prepared from the 0.125 inch thick laminate sample (4.3.1.1).

- \* 4.6.10 Electrical properties of the laminate - The electrical tests shall be performed by the shunted line waveguide method or the resonant cavity technique using the laminate sample of 0.75 inch thickness (4.3.1.2). If calculations (6.3) establish that thinner specimens would be preferable, the testing activity is permitted to abrade or otherwise mill the 0.75 inch specimens to the optimum thickness.

MIL-R-7575C

4.6.11 Inspection of preparation for delivery - The sample selected in accordance with 4.4.1.3 shall be inspected before closing the exterior containers. Each interior container of the sample shall be weighed to determine the amount of contents and shall be examined for presence of the required instruction sheet. Interior and exterior containers shall be checked for nonconformities of materials, workmanship, and marking. Defects of closure of exterior containers shall be checked in containers ready for shipment. Any exterior container having one or more nonconformities in the exterior container itself or its contents shall be rejected.

## 5. PREPARATION FOR DELIVERY

5.1 Packaging - Packaging shall be Level A or C as specified (see 6.2).

5.1.1 Level A -

5.1.1.1 Liquid or solid form - The resin shall be packaged, as specified (see 6.2), in 1-gallon or smaller cans conforming to Type V, Class 2, round, of PPP-C-96, 5-gallon pails conforming to Type II, Class 3 of PPP-P-704, 16-gallon drums conforming to Type III of PPP-D-705, or 55-gallon drums conforming to Type III or Type IV of PPP-D-729.

5.1.1.2 Pre-impregnated form - Pre-impregnated glass fabric shall be furnished in approximately 60-pound rolls wound on cylindrical cores with polyethylene interleaf between the layers of impregnated fabric in the rolls. The rolls shall be paper-wrapped and individually packaged in export type PPP-B-636 fiberboard boxes in such fashion that the roll is suspended by the ends of the core.

5.1.2 Level C - Packaging shall be in accordance with the manufacturer's commercial practice.

5.2 Packing - Packing shall be Level A, B, or C as specified (see 6.2).

5.2.1 Level A -

5.2.1.1 Liquid or solid form - Resin packaged in containers conforming to PPP-C-96 shall be packed in accordance with the overseas requirements of the appendix thereto. Resin packaged in containers conforming to PPP-P-704, PPP-D-705 or PPP-D-729 require no overpacking. When specified (see 6.2), 5-gallon pails and 16-gallon drums shall be palletized in accordance with MIL-STD-147.

5.2.1.2 Pre-impregnated form - Pre-impregnated glass fabric, packaged as specified in 5.1.1.2 shall be packed in export type shipping containers conforming to PPP-B-576, PPP-B-585, PPP-B-591, PPP-B-601, PPP-B-621,



MIL-R-7575C

or PPP-B-636. Plywood, when used, shall conform to NN-P-515, Type I, Class 2. As far as practicable, exterior containers shall be of uniform shape and size, shall be of minimum cube and tare consistent with the protection required, and shall contain identical quantities. The gross weight of each pack shall be limited to approximately 200 pounds. Containers shall be closed and strapped in accordance with the applicable container specification or appendix thereto. Containers, except those meeting PPP-B-636, shall be provided with a case liner conforming to MIL-L-10547 and shall be sealed in accordance with the appendix thereto. As an alternate, PPP-B-636 containers may be sealed at all joints and seams with tape conforming to PPP-T-60.

#### 5.2.2 Level B -

5.2.2.1 Liquid or solid form - Resin packaged in containers conforming to PPP-C-96 shall be packed in accordance with the domestic requirements of the appendix thereto. Resins packaged in containers conforming to PPP-P-704, PPP-D-705, or PPP-D-729 require no overpacking. When specified (see 6.2), 5-gallon pails and 16-gallon drums shall be palletized in accordance with MIL-STD-147.

5.2.2.2 Pre-impregnated form - Pre-impregnated glass fabric, packaged as specified in 5.1.1.2 shall be packed in domestic type shipping containers conforming to PPP-B-576, PPP-B-585, PPP-B-591, PPP-B-601, PPP-B-621, or PPP-B-636. Exterior containers shall be of minimum cube and tare consistent with the protection required. As far as practicable, exterior containers shall be of uniform shape and size and shall contain identical quantities. The gross weight of each pack shall be limited to approximately 200 pounds. Containers shall be closed and strapped in accordance with the applicable container specification or appendix thereto.

5.2.3 Level C - Low pressure laminating resin and pre-impregnated glass fabric packaged as specified in 5.1.2 shall be packed to afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. Containers shall comply with Uniform Freight Classification Rules and Regulations or other common carrier regulations applicable to the mode of transportation.

- \* 5.3 Marking for shipment - In addition to any special marking required by the contract or order (6.2) or herein, interior packages, exterior shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129. The nomenclature shall include:

RESIN, POLYESTER, LOW-PRESSURE LAMINATING  
MIL-R-7575C  
Resin grade \_\_\_\_\_ and class \_\_\_\_\_  
Form (liquid, solid-granular, pre-impregnated)  
Code number (see 3.5)  
Date of manufacture



MIL-R-7575C

- \* 5.3.1 Hazardous chemicals - All packaged units of hazardous chemicals shall have affixed thereto such warning labels and markings as may be required by the Interstate Commerce Commission CFR, Title 49, Part 71-90, and the Manufacturing Chemists Association Manual L-1.

- \* 5.3.2 Warning markings - All packaged units shall be marked:

WARNING: USE WITH ADEQUATE VENTILATION -  
 FLAMMABLE - The solvents contained in this compound may have flash points well below prevailing room temperatures. Do not heat by, or use near, an open flame. Heat preferably by means of a steam coil or other nonflame-producing heat source.

WARNING: Catalysts, promoters, and solvents to be used with this compound should be stored in original tight containers isolated from one another in cool locations. Never permit a catalyst to come in contact with any component except the base compound.

- 5.4 Instruction sheet - Unless otherwise specified, a copy of the latest approved issue of the supplier's instruction sheet shall be included with each interior package (see 3.9).

## 6. NOTES

- 6.1 Intended use - Low pressure polyester resin covered by this specification is intended for use in fabricating laminates for general structural parts, aircraft radio and radar antenna housing, and other applications.

- \* 6.2 Ordering data - Procurement documents should specify:

- (a) Title, number, and date of this specification.
- (b) Grade, class, and form of resin (1.2 and 3.3).
- (c) Required sampling and testing for frequencies other than x-band (8,500 to 10,000 mcs), if applicable (6.3).
- (d) Quantity of resin:
  - 1. Liquid or solid: pounds or gallons (6.2.1)
  - 2. Pre-impregnated: weight, width of fabric, and length of rolls.
- (e) Where the preproduction samples should be sent and the agency designated to perform tests (4.3 and 4.3.1).

MIL-R-7575C

- (f) Levels of packaging and packing required (5. 1 and 5. 2).
- (g) Size and type of containers required (5. 1 and 5. 2).
- (h) Whether palletizing is required (5. 2. 1. 1 and 5. 2. 2. 1).
- (i) Special marking, if required (5. 3).

6. 2. 1 Purchase unit - The unit of purchase for both liquid and solid resin is the pound.

- \* 6. 3 Additional test frequencies - In addition to the specified test frequency range for electrical properties (Table II), other frequencies may be of importance in particular applications and may be specified in contract or order in addition to or in lieu of the 8, 500-10, 000 megacycle (x-band) range. Typical frequencies are as follows, including the x-band.

<u>Band</u>	<u>Test Frequency (mcs)</u>
S	2, 880
C	5, 400
X	9, 375
K <sub>u</sub>	16, 500
K	24, 500
K <sub>a</sub>	35, 000

For tests above the K<sub>a</sub> band, a possible test frequency is 58, 500 mcs, based on available oscillator tubes.

- \* 6. 3. 1 Specimen thickness - The thickness of specimens required for electrical tests at the frequencies of 6. 3 may be calculated by the following formula:

$$d = \frac{3\lambda_0}{4\sqrt{\epsilon - (\lambda_0/\lambda_c)^2}}$$

Where: d = specimen thickness  
 $\lambda_0$  = free space wavelength  
 $\lambda_c$  = cut-off wavelength of wave guide  
 $\epsilon$  = approximate dielectric constant of sample

Further information is available in ARTC report "ARTC-4 Electrical Test Procedures for Radomes and Radome Materials (Revised July 1960)," prepared by Aerospace Industries Association of America, Inc., 1725 De Sales Street, Washington, D. C. 20036.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge (*DO NOT STAPLE*), and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

**NOTE:** This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

---

(Fold along this line)

---

(Fold along this line)

---

DEPARTMENT OF THE NAVY



NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

---


OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300

**BUSINESS REPLY MAIL**

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer  
Naval Air Engineering Center  
Engineering Specifications & Standards  
Department (ESSD) Code 93  
Lakehurst, NJ 08733

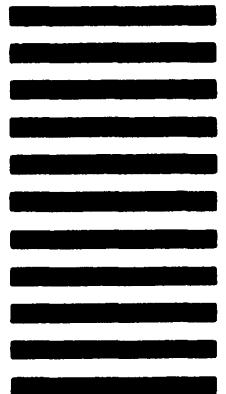

## STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions - Reverse Side)

1. DOCUMENT NUMBER

2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION

4. TYPE OF ORGANIZATION (Mark one)

☐ VENDOR☐ USER☐ MANUFACTURER☐ OTHER (Specify): \_\_\_\_\_

b. ADDRESS (Street, City, State, ZIP Code)

## 5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

## 6. REMARKS

7a. NAME OF SUBMITTER (Last, First, MI) - Optional

b. WORK TELEPHONE NUMBER (Include Area Code) - Optional

c. MAILING ADDRESS (Street, City, State, ZIP Code) - Optional

8. DATE OF SUBMISSION (YYMMDD)