

MIL-STD-112A

8 DECEMBER 1955

**SUPERSEDING
MIL-STD-112**

25 JANUARY 1951

MILITARY STANDARD

**GAGES, RING, PLAIN,
GO**



For sale by the Superintendent of Documents, U.S. Government Printing Office
Washington 25, D.C., Price \$2.00

MIL-STD-112A
8 December 1955

OFFICE OF THE ASSISTANT SECRETARY OF DEFENSE
WASHINGTON 25, D. C.

Supply and Logistics

8 December 1955

Gages, Ring, Plain, Go
MIL-STD-112A

1. This standard has been approved by the Department of Defense for use by the Departments of the Army, the Navy, and the Air Force.
2. In accordance with established procedure, the Standardization Division has designated the Ordnance Corps, the Bureau of Ordnance, and the Air Force, respectively, as Army-Navy-Air Force custodians of this standard.
3. This standard is mandatory for use effective 8 March 1956 by the Departments of the Army, the Navy, and the Air Force.
4. Recommended corrections, additions, or deletions should be addressed to the Standardization Division, Office of the Assistant Secretary of Defense (Supply and Logistics), Washington 25, D. C.

MIL-STD-112A
8 December 1955

CONTENTS

1. Scope
2. Referenced Documents
3. Definitions
4. General Requirements
 - 4.1 Table I - Tabulation of Design and Identification Data
5. Detail Requirements
 - 5.1 Manufacture and Inspection
 - 5.1.1 General
 - 5.1.2 Go Plain Ring Gage
 - 5.1.3 Plain Plug Acceptance Check Gage
 - 5.2 Procurement

FIGURES

Figure

- 1 Go Plain Ring Gage
- 2 Plain Plug Acceptance Check Gage (Wire Type)
- 3 Go Plain Ring Gage
- 4 Go Plain Ring Gage (Flange Type)

TABLES

Table I - Tabulation of Design and Identification Data

MIL-STD-112A
8 December 1955

1. SCOPE

1.1 This standard covers the pertinent design data and stock numbers for American Gage Design Standard, go plain ring gages for the inspection of the maximum limits of external diameters that range in size from 0.059 to 2.510 inches inclusive in increments of 0.001 and 0.03125 inches. The class of gage required is listed in accordance with the total component tolerance.

1.1.1 This standard also covers the pertinent design data and stock numbers for the applicable American Gage Design Standard plain plug acceptance check gages for go plain ring gages up to and including 0.250 inch in size, except that acceptance check stock numbers are not provided above 0.125 inch in size for total component tolerance of 0.008 and above.

1.2 The stock numbers listed in this standard have been approved by the Cataloging Division, Office of the Assistant Secretary of Defense as Federal Item Identification Numbers (FIIN).

2. REFERENCED DOCUMENTS

2.1 The following standards, specifications, and publications of latest issue form a part of this standard:

STANDARDS

MIL-STD-10, Surface Roughness, Waviness, and Lay

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington 25, D.C.)

SPECIFICATIONS

MIL-G-10944, Gages, Dimensional Control

(Copies of specifications should be obtained from the procuring activity or as directed by the contracting officer.)

OTHER PUBLICATIONS

U.S. Department of Commerce, Commercial Standard CS8, Gage Blanks

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington 25, D.C.)

3. DEFINITIONS

Not applicable.

MIL-STD-112A
8 December 1955

4. GENERAL REQUIREMENTS

4.1 Table I - Tabulation of Design and Identification Data

4.1.1 Stock numbers for each go plain ring gage and related acceptance check plug gage are listed in ascending numerical sequence in columns B and C respectively.

4.1.2 Column A lists the proper reference to the applicable figure for each stock number.

4.1.3 Column D lists the maximum component dimension and when applied to the total component tolerance in column E provides the data required for selecting the applicable stock number in column B or C.

4.1.3.1 When the total component tolerance is not listed, the stock number applicable to the next smaller listed total component tolerance for the maximum component dimension shall be used.

4.1.4 Columns F to H inclusive list the design data for each stock number and, when applied to the figure referenced in column A, provide the data required for manufacture and inspection.

4.1.5 Columns B to D inclusive list the identification data for each stock number and, when applied to the figure referenced in column A, provide the information for proper marking of the gages.

4.1.6 Design data, etc. not specifically covered in this standard shall conform to the latest issue of the documents referenced in paragraph 2 above.

4.1.7 Wear limit check plug stock numbers for go plain ring gages are provided in Standard Mil-Std-110, Gages, Plug, Plain Cylindrical (Go). (Apply the stock number in column B as listed for the master as shown in column E, corresponding to the applicable component dimension in column D.)

5. DETAIL REQUIREMENTS

5.1 Manufacture and Inspection

5.1.1 General

5.1.1.1 All gaging members shall be identified with the manufacturer's name or trade-mark.

5.1.1.2 All gages shall be clearly and permanently marked with the proper marking as listed in columns B or C and D of table I and as illustrated in figures 1 to 4 inclusive.

MIL-STD-112A
8 December 1955

5.1.1.3 The surface roughness value denoted on the gaging surface of figures 1 to 4 inclusive, and listed in Column H of table I is the maximum acceptable roughness of these surfaces. These values correspond to the meter indications of surface roughness measuring instruments, which from their method of operation show readings in accordance with the standard values prescribed in Standard Mil-Std-10.

5.1.1.4 Sharp edges shall not be permitted.

5.1.1.5 Gaging surfaces shall be lapped free of amorphous metal.

5.1.2 Go Plain Ring Gage

5.1.2.1 American Gage Design Standard (AGD) plain ring gages shall be of hardened tool steel or other wear resistant material suitable for the intended purpose, as defined in specification MIL-G-10944. (See figures 1, 3, and 4 for hardness requirements.)

5.1.2.2 Go plain ring gages shall be finished from AGD plain ring gage blanks.

5.1.3 Plain Plug Acceptance Check Gage

5.1.3.1 American Gage Design Standard (AGD) wire type gaging members shall be of hardened tool steel or other wear resistant material suitable for the intended purpose, as defined in specification MIL-G-10944. (See figure 2 for hardness requirement.)

5.1.3.2 Plain plug acceptance check gages shall be finished from AGD plain plug gage blanks of the wire type design.

5.1.3.3 Gage handles shall be as designated in Commercial Standard CS8. The handles shall be of steel or aluminum alloy.

5.2 Procurement

5.2.1 The tabulated design data, manufacturing, and inspection specifications in this standard are applicable for procurement purposes.


5.2.1.1 Procurement documents shall specify the following:

- a. Title, number, and date of this standard.
- b. Gages required (quantity and stock number).
- c. Place of delivery for acceptance inspection or place of delivery if acceptance inspection is to be at contractor's plant

5.2.1.2 When specified, the acceptance check plug gages may be procured without handles. The wire type gaging member shall be identified with a tag or label marked with the stock number and any other pertinent identification data as specified. The tag or label shall be such that it can be removed without damage to the member.


5.2.1.3 CAUTION - Although all items listed in this standard are included in the Federal Catalog system as items of supply, it is not intended that all items be procured and stock. Procurement and supply shall be confined to those items for which actual requirements exist.

MIL-STD-112A
8 December 1955

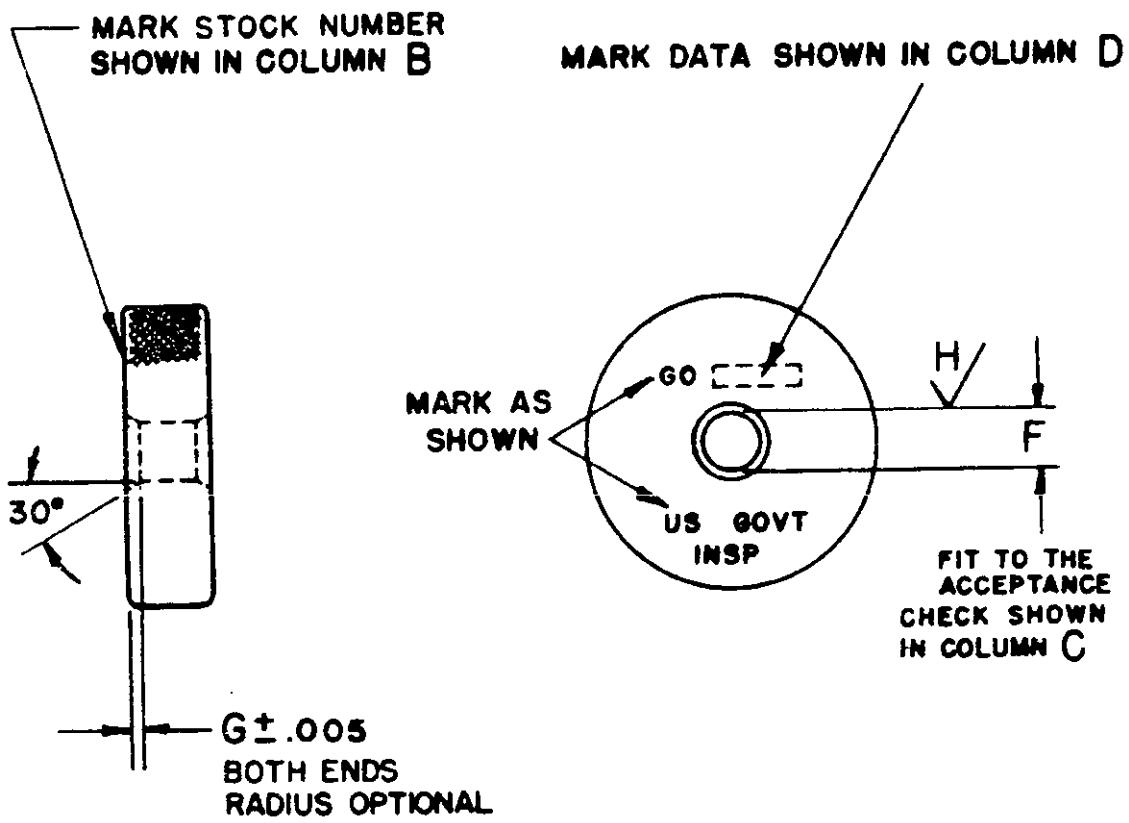

HARDNESS: ROCKWELL OR EQUIVALENT
C63 TO C68

Figure 1. Go Plain Ring Gage

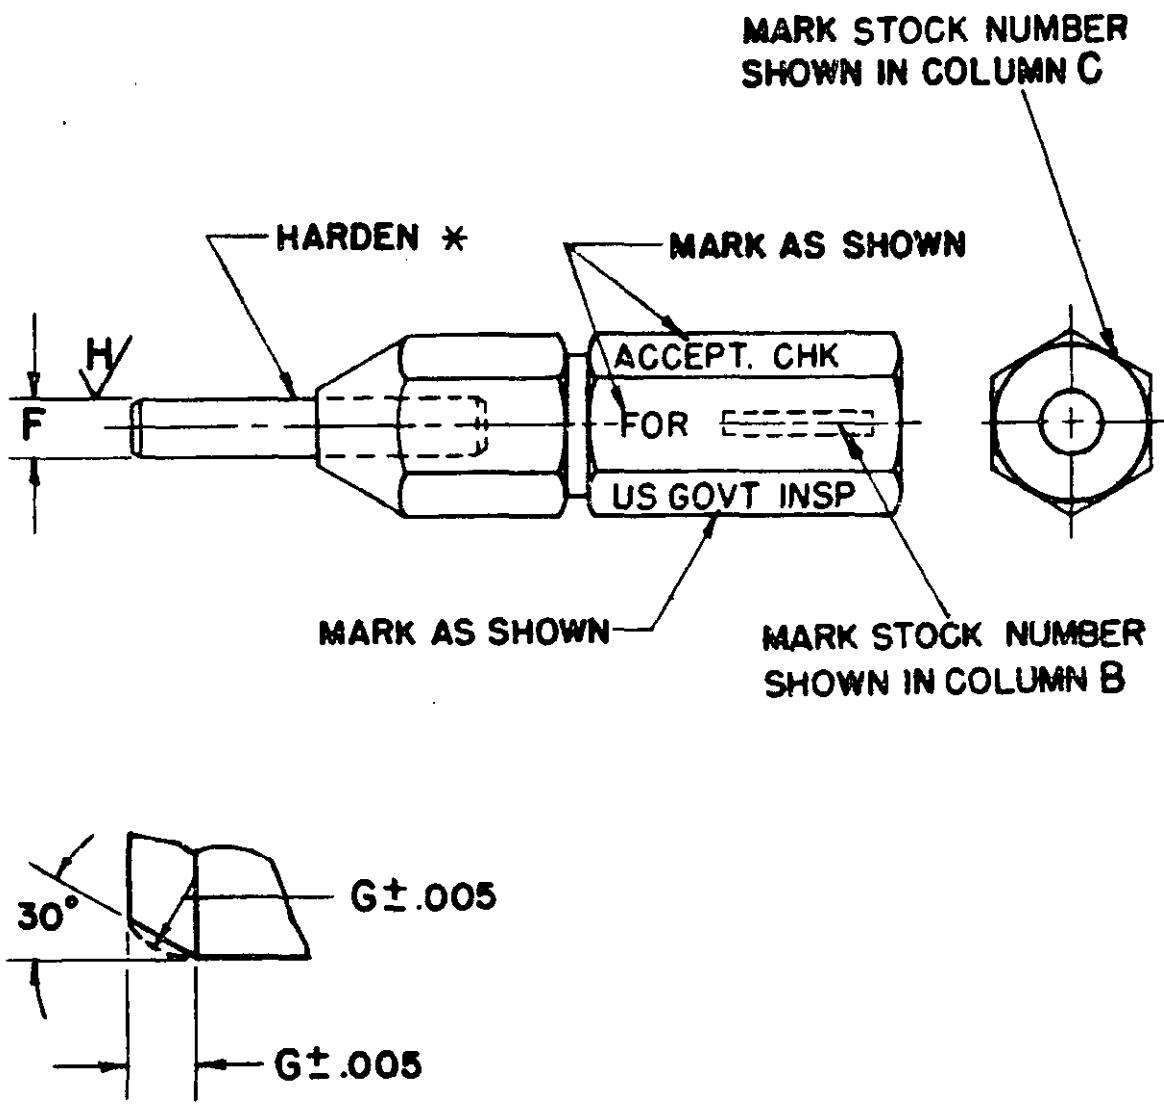MIL-STD-112A
8 December 1955


ENLARGED VIEW
CHAMFER OR RADIUS ON
BOTH ENDS OF WIRE

* HARDEN: ROCKWELL OR EQUIVALENT

C55 TO C60 FOR DIA UP TO AND INCL .10
 C60 TO C63 FOR DIA ABOVE .10 TO AND INCL .20
 C63 TO C66 FOR DIA ABOVE .20

Figure 2. Plain Plug Acceptance Check Gage (Wire Type)

MIL-STD-112A
8 December 1955

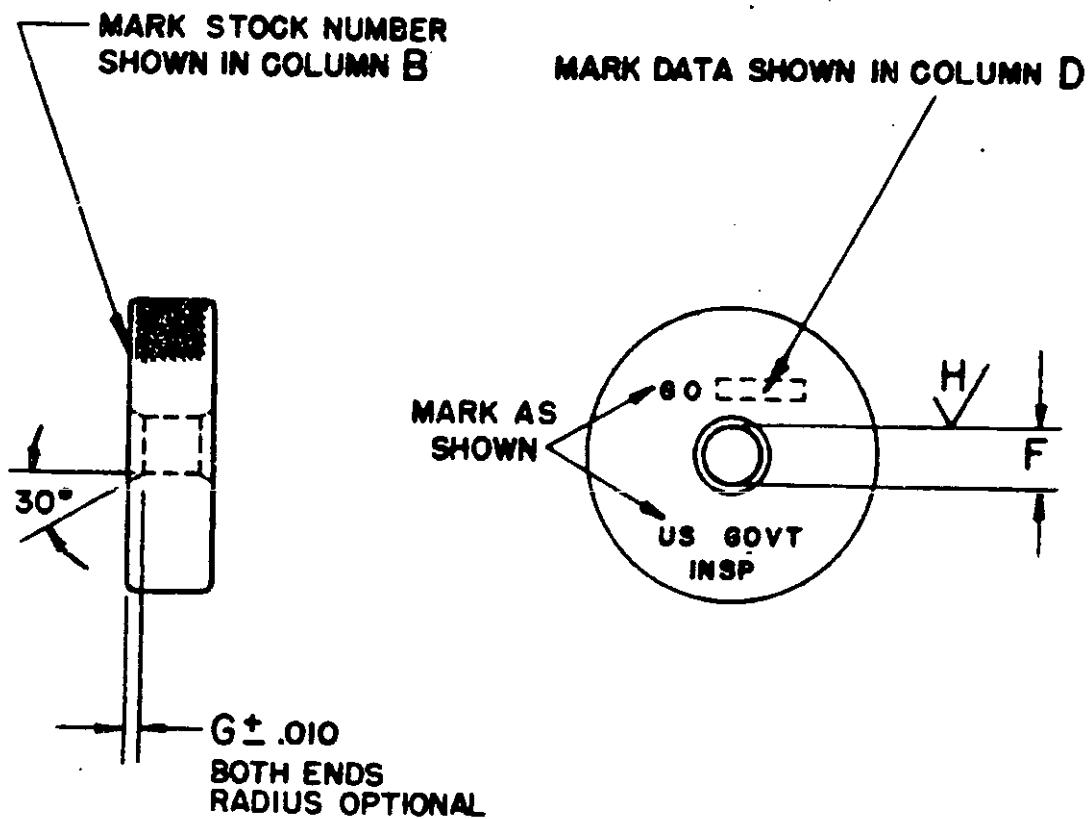


HARDNESS: ROCKWELL OR EQUIVALENT
C63 TO C66

Figure 3. Go Plain Ring Gage


MIL-STD-112A
8 December 1955

MARK STOCK NUMBER
SHOWN IN COLUMN B

MARK DATA SHOWN IN COLUMN D

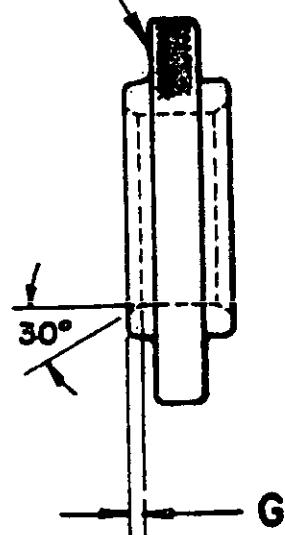

$G \pm .010$
BOTH ENDS
RADIUS OPTIONAL

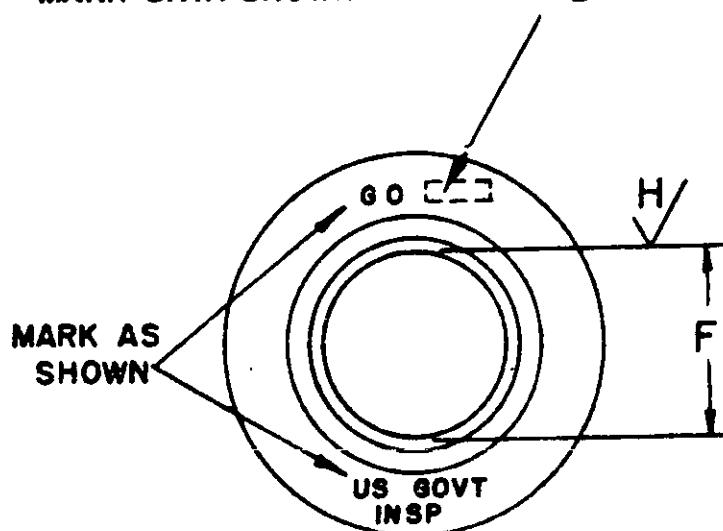

HARDNESS: ROCKWELL OR EQUIVALENT
C63 TO C66

Figure 4. Go Plain Ring Gage (Flange Type)

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data

ON CIR- CL	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS	
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	DIA. E	DIA. F	G	H
A	B	C	D	E	F	G	H
1	7480000	7480001	.059	.0005 CHECK	.05900 .05900 - .00004	.008	4
2	7480004	7480005	.059	.002 CHECK	.05890 .05890 - .00007	.008	4
1	7480006	7480007	.059	.004 AND UP CHECK	.05880 .05880 - .00010	.008	8
2							8
1	7480010	7480011	.060	.0005 CHECK	.06000 .06000 - .00004	.008	4
2	7480014	7480015	.060	.002 CHECK	.05990 .05990 - .00007	.008	4
1	7480016	7480017	.060	.004 AND UP CHECK	.05980 .05980 - .00010	.008	8
2							8
1	7480022	7480023	.061	.0005 CHECK	.06100 .06100 - .00004	.008	4
2	7480026	7480027	.061	.002 CHECK	.06090 .06090 - .00007	.008	4
1	7480028	7480029	.061	.004 AND UP CHECK	.06080 .06080 - .00010	.008	8
2							8
1	7480034	7480035	.062	.0005 CHECK	.06200 .06200 - .00004	.008	4
2	7480038	7480039	.062	.002 CHECK	.06190 .06190 - .00007	.008	4
1	7480040	7480041	.062	.004 AND UP CHECK	.06180 .06180 - .00010	.008	8
2							8
1	7480046	7480047	.0625	.0005 AND UP CHECK	.06250 .06250 - .00004	.008	4
2	7480048	7480049	.063	.0005 CHECK	.06300 .06300 - .00004	.008	4
1							8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ITEM NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH	
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	G	H
A	B	C	D	E	F	G	H	
1	7480052	7480053	.063	.002	.06290	.008	4	
2	7480054	7480055	.063	.004	.06290 - .00007	.008	4	
1	7480060	7480061	.064	.0005	.06280	.008	6	8
2	7480064	7480065	.064	.002	.06280 - .00010	.008	4	
1	7480066	7480067	.064	.004	.06400	.008	4	
2					.06400 - .00004	.008	4	
1	7480072	7480073	.065	.0005	.06400	.008	4	
2	7480076	7480077	.065	.002	.06390	.008	4	
1	7480078	7480079	.065	.004	.06390 - .00007	.008	4	
2					.06380	.008	4	
1	7480084	7480085	.066	.0005	.06380 - .00010	.008	6	8
2	7480088	7480089	.066	.002	.06500	.008	4	
1	7480090	7480091	.066	.004	.06500 - .00004	.008	4	
2					.06590	.008	4	
1	7480096	7480097	.067	.0005	.06590 - .00007	.008	4	
2	7480100	7480101	.067	.002	.06580	.008	6	8
1	7480102	7480103	.067	.004	.06600	.008	4	
2					.06600 - .00010	.008	4	
1	7480108	7480109	.068	.0005	.06680	.008	4	
2			.068		.06680 - .00004	.008	4	

Table I. Tabulation of Design and Identification Data (Continued)

ON CAR	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C	D	E	F	G	H		
1	7480112	7480113	.068	.002	.06790	.008	4		
2	7480114	7480115	.068	.004	.06790 - .00007	.008	4		
1	7480120	7480121	.069	.005	.06780	.008	8		
2	7480124	7480125	.069	.002	.06780 - .00010	.008	8		
1	7480126	7480127	.069	.004	.06900	.008	4		
2					.06900 - .00004	.008	4		
1	7480132	7480133	.070	.005	.06890	.008	4		
2	7480136	7480137	.070	.002	.06890 - .00007	.008	4		
1	7480138	7480139	.070	.004	.06880	.008	8		
2					.06880 - .00010	.008	8		
1	7480144	7480145	.071	.005	.07000	.008	4		
2					.07000 - .00004	.008	4		
1	7480148	7480149	.071	.002	.06990	.008	4		
2					.06990 - .00007	.008	4		
1	7480150	7480151	.071	.004	.06980	.008	8		
2					.06980 - .00010	.008	8		
1	7480156	7480157	.072	.005	.07100	.008	4		
2					.07100 - .00004	.008	4		
1	7480160	7480161	.072	.002	.07090	.008	4		
2					.07090 - .00007	.008	4		
1	7480162	7480163	.072	.004	.07080	.008	8		
2					.07080 - .00010	.008	8		
1	7480168	7480169	.073	.005	.07300	.008	4		
2					.07300 - .00004	.008	4		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

NO. FIG.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE RING GAGE	STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	G	
A	B	C	D	E	F	G	H
1	7480172	7480173	.073	.002	.07290	.008	4
2	7480174	7480175	.073	.004 AND UP CHECK	.07290 - .00007	.008	4
1	7480180	7480181	.074	.0005	.07280	.008	8
2	7480184	7480185	.074	.002	.07400 - .00004	.008	4
1	7480186	7480187	.074	.004 AND UP CHECK	.07390 - .00007	.008	4
2					.07380 - .00007	.008	8
1	7480192	7480193	.075	.0005	.07380 - .00010	.008	8
2	7480196	7480197	.075	.002	.07500 - .00004	.008	4
1	7480198	7480199	.075	.004 AND UP CHECK	.07490 - .00007	.008	4
2					.07480 - .00010	.008	8
1	7480204	7480205	.076	.0005	.07600 - .00004	.015	4
2	7480208	7480209	.076	.002	.07590 - .00007	.015	4
1	7480210	7480211	.076	.004 AND UP CHECK	.07580 - .00010	.015	8
2					.07580 - .00010	.015	8
1	7480216	7480217	.077	.0005	.07700 - .00004	.015	4
2	7480220	7480221	.077	.002	.07700 - .00004	.015	4
1	7480222	7480223	.077	.004 AND UP CHECK	.07690 - .00007	.015	4
2					.07680 - .00010	.015	8
1	7480228	7480229	.078	.0005	.07800 - .00004	.015	4
2			.078	CHECK	.07800 - .00004	.015	4

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

C ON GAGE	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	RING GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	G	
A	B	C	D	E	F	G	H
1	7480232	7480233	.078	.002	.07790	.015	4
2	7480234	7480235	.078	.004 AND UP CHECK	.07790 - .00007	.015	4
1	7480240	7480241	.079	.002 CHECK	.07780 - .00010	.015	8
2	7480244	7480245	.079	.004 AND UP CHECK	.07780 - .00010	.015	8
1	7480246	7480247	.079	.004 AND UP CHECK	.07780 - .00010	.015	8
2	7480252	7480253	.080	.0005 CHECK	.08000 - .00004	.015	4
1	7480256	7480257	.080	.002 CHECK	.07990 - .00007	.015	4
2	7480258	7480259	.080	.004 AND UP CHECK	.07980 - .00010	.015	8
1	7480264	7480265	.081	.0005 CHECK	.08100 - .00004	.015	4
2	7480268	7480269	.081	.002 CHECK	.08090 - .00007	.015	4
1	7480270	7480271	.081	.004 AND UP CHECK	.08080 - .00010	.015	8
2	7480276	7480277	.082	.0005 CHECK	.08200 - .00004	.015	4
1	7480280	7480281	.082	.002 CHECK	.08190 - .00007	.015	4
2	7480282	7480283	.082	.004 AND UP CHECK	.08180 - .00010	.015	8
1	7480288	7480289	.083	.0005 CHECK	.08300 - .00004	.015	4
2			.083			.015	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE				RING GAGE DIMENSIONS				FINISH CHARACTER	
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER		G	H		
					B	C	D	E		
1 2	7480292	7480293	.083	.002	.08290	-	.00007	.015	4	
1 2	7480294	7480295	.083	.004 AND UP CHECK	.08280	-	.00010	.015	8	
1 2	7480300	7480301	.084	.005	.08400	-	.00004	.015	4	
1 2	7480304	7480305	.084	.002	.08390	-	.00007	.015	4	
1 2	7480306	7480307	.084	.004 AND UP CHECK	.08380	-	.00007	.015	8	
1 2	7480312	7480313	.085	.0005	.08500	-	.00010	.015	4	
1 2	7480316	7480317	.085	.002	.08500	-	.00004	.015	4	
1 2	7480318	7480319	.085	.004 AND UP CHECK	.08490	-	.00007	.015	4	
1 2	7480324	7480325	.086	.0005	.08600	-	.00004	.015	4	
1 2	7480328	7480329	.086	.002	.08590	-	.00007	.015	4	
1 2	7480330	7480331	.086	.004 AND UP CHECK	.08580	-	.00010	.015	8	
1 2	7480336	7480337	.087	.0005	.08700	-	.00004	.015	4	
1 2	7480340	7480341	.087	.002	.08690	-	.00007	.015	4	
1 2	7480342	7480343	.087	.004 AND UP CHECK	.08680	-	.00010	.015	8	
1 2	7480348	7480349	.088	.0005 CHECK	.08800	-	.00004	.015	4	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON G. I F	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	G	
A	B	C	D	E	F	G	
1	7480352	7480353	.088	.002	.08790	.015	4
2	7480354	7480355	.088	.004 AND UP CHECK	.08790 - .00007	.015	4
1	7480360	7480361	.089	.0005, CHECK	.08780	.015	8
2	7480364	7480365	.089	.002 CHECK	.08780 - .00010	.015	8
1	7480366	7480367	.089	.004 AND UP CHECK	.08800	.015	4
2	7480372	7480373	.090	.0005 CHECK	.08800	.015	4
1	7480376	7480377	.090	.002 CHECK	.08880	.015	4
2	7480378	7480379	.090	.004 AND UP CHECK	.08900	.015	8
1	7480384	7480385	.091	.0005 CHECK	.08900	.015	4
2	7480388	7480389	.091	.002 CHECK	.08900 - .00004	.015	4
1	7480390	7480391	.091	.004 AND UP CHECK	.08900 - .00007	.015	8
2	7480396	7480397	.092	.0005 CHECK	.08900 - .00007	.015	8
1	7480400	7480401	.092	.002 CHECK	.09190 - .00007	.015	4
2	7480402	7480403	.092	.004 AND UP CHECK	.09180 - .00010	.015	8
1	7480408	7480409	.093	.0005 CHECK	.09300 - .00004	.015	4
2			.093			.015	4

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

F119. NO.	MARKING ON GO GAGE	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	RING GAGE DIMENSIONS		CHAMFER	H
				F	G		
1	7480412	7480413	.093	.002 CHECK	.09290 - .00007	.015	4 4 4 8
2	7480414	7480415	.093	.004 AND UP CHECK	.09280 - .00010	.015	4 4 4 8
1	7480420	7480421	.093	.005 AND UP CHECK	.09375 - .00004	.015	4 4 4 8
2	7480422	7480423	.094	.005 CHECK	.09400 - .00004	.015	4 4 4 8
1	7480426	7480427	.094	.002 CHECK	.09390 - .00007	.015	4 4 4 8
1	7480428	7480429	.094	.004 AND UP CHECK	.09380 - .00010	.015	4 4 4 8
2	7480434	7480435	.095	.0005 CHECK	.09500 - .00004	.015	4 4 4 8
1	7480438	7480439	.095	.002 CHECK	.09490 - .00007	.015	4 4 4 8
2	7480440	7480441	.095	.004 AND UP CHECK	.09480 - .00010	.015	4 4 4 8
1	7480446	7480447	.096	.0005 CHECK	.09600 - .00004	.015	4 4 4 8
2	7480450	7480451	.096	.002 CHECK	.09590 - .00007	.015	4 4 4 8
1	7480452	7480453	.096	.004 AND UP CHECK	.09580 - .00010	.015	4 4 4 8
2	7480458	7480459	.097	.0005 CHECK	.09700 - .00004	.015	4 4 4 8
1	7480462	7480463	.097	.002 CHECK	.09690 - .00007	.015	4 4 4 8
2	7480464	7480465	.097	.004 AND UP CHECK	.09680 - .00010	.015	4 4 4 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

C. N. O.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE RING-GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C	D	E	F	G	H		
1	7480470	7480471	.098	.0005	.09800 CHECK	.09800 -	.00004	.015	4 4 4 4
2	7480474	7480475	.098	.002	.09790 CHECK	.09790 -	.00007	.015	4 4 4 4
1	7480476	7480477	.098	.004	.09780 AND UP CHECK	.09780 -	.00010	.015	4 4 4 4
2									8 8 8 8
1	7480482	7480483	.099	.0005	.09900 CHECK	.09900 -	.00004	.015	4 4 4 4
2	7480486	7480487	.099	.002	.09890 CHECK	.09890 -	.00007	.015	4 4 4 4
1	7480488	7480489	.099	.004	.09880 AND UP CHECK	.09880 -	.00010	.015	4 4 4 4
2									8 8 8 8
1	7480494	7480495	.100	.0005	.10000 CHECK	.10000 -	.00004	.015	4 4 4 4
2	7480498	7480499	.100	.002	.09990 CHECK	.09990 -	.00007	.015	4 4 4 4
1	7480500	7480501	.100	.004	.09980 AND UP CHECK	.09980 -	.00010	.015	4 4 4 4
2									8 8 8 8
1	7480508	7480509	.101	.0005	.10100 CHECK	.10100 -	.00004	.015	4 4 4 4
2	7480512	7480513	.101	.002	.10090 CHECK	.10090 -	.00007	.015	4 4 4 4
1	7480514	7480515	.101	.004	.10080 AND UP CHECK	.10080 -	.00010	.015	4 4 4 4
2									8 8 8 8
1	7480522	7480523	.102	.0005	.10200 CHECK	.10200 -	.00004	.015	4 4 4 4
2	7480526	7480527	.102	.002	.10190 CHECK	.10190 -	.00007	.015	4 4 4 4
1	7480528	7480529	.102	.004	.10180 AND UP CHECK	.10180 -	.00010	.015	4 4 4 4
2									8 8 8 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

G. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		CHAMFER
	FINN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	
A	B	C					H		
1 2	7480536	7480537	.103	.0005		.10300	-	.015	4
1 2	7480540	7480541	.103	.002	CHECK	.10290	-	.015	4
1 2	7480542	7480543	.103	.004	CHECK AND UP	.10280	-	.015	4
1 2			.103		CHECK	.10280	-	.015	8
1 2	7480550	7480551	.104	.0005		.10400	-	.015	4
1 2	7480554	7480555	.104	.002	CHECK	.10390	-	.015	4
1 2	7480556	7480557	.104	.004	CHECK AND UP	.10380	-	.015	8
1 2			.104		CHECK	.10380	-	.015	8
1 2	7480564	7480565	.105	.0005		.10500	-	.015	4
1 2	7480568	7480569	.105	.002	CHECK	.10490	-	.015	4
1 2	7480570	7480571	.105	.004	CHECK AND UP	.10480	-	.015	8
1 2			.105		CHECK	.10480	-	.015	8
1 2	7480578	7480579	.106	.0005		.10600	-	.015	4
1 2	7480582	7480583	.106	.002	CHECK	.10590	-	.015	4
1 2	7480584	7480585	.106	.004	CHECK AND UP	.10580	-	.015	8
1 2			.106		CHECK	.10580	-	.015	8
1 2	7480592	7480593	.107	.0005		.10700	-	.015	4
1 2	7480596	7480597	.107	.002	CHECK	.10700	-	.015	4
1 2	7480598	7480599	.107	.004	CHECK AND UP	.10690	-	.015	4
1 2			.107		CHECK	.10680	-	.015	8

MIL-STD-112A
6 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

NO. ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	FINN—GAGE	STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	DIMETER	E	F	
A	B	C	D					H
1	7480606	7480607	.108	.0005	.10800	—	.00004	.015
1	2	7480610	.108	.002	.10790	—	.00007	.015
1	2	7480611	.108	.002	.10790	—	.00007	.015
1	2	7480612	.108	.004 AND UP	.10780	—	.00010	.015
1	2	7480613	.108	.004 CHECK	.10780	—	.00010	.015
1	2	7480620	.109	.0005	.10900	—	.00004	.015
1	2	7480621	.109	.002	.10900	—	.00004	.015
1	2	7480624	.109	.002	.10890	—	.00007	.015
1	2	7480625	.109	.004 AND UP	.10880	—	.00007	.015
1	2	7480626	.109	.004 CHECK	.10880	—	.00010	.015
1	2	7480627	.109	.0005	.10900	—	.00004	.015
1	2	7480634	.110	.002	.11000	—	.00004	.015
1	2	7480635	.110	.002	.11000	—	.00004	.015
1	2	7480638	.110	.002	.10990	—	.00007	.015
1	2	7480639	.110	.004 AND UP	.10980	—	.00007	.015
1	2	7480640	.110	.004 CHECK	.10980	—	.00010	.015
1	2	7480641	.110	.0005	.11100	—	.00004	.015
1	2	7480648	.111	.002	.11100	—	.00004	.015
1	2	7480649	.111	.002	.11090	—	.00007	.015
1	2	7480652	.111	.002	.11090	—	.00007	.015
1	2	7480653	.111	.004 AND UP	.11080	—	.00010	.015
1	2	7480654	.111	.004 CHECK	.11080	—	.00010	.015
1	2	7480662	.112	.0005	.11200	—	.00004	.015
1	2	7480663	.112	.002	.11200	—	.00004	.015
1	2	7480666	.112	.002	.11190	—	.00007	.015
1	2	7480667	.112	.004 AND UP	.11180	—	.00007	.015
1	2	7480668	.112	.004 CHECK	.11180	—	.00010	.015
1	2	7480669	.112	.0005	.11200	—	.00004	.015

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON NO. FIG.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER	
	FIN—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE				
				D	E	F		
A	B	C	D	E	F	G	H	
1	7480676	7480677	.113	.0005	.11300 CHECK	.11300 -.00004	.015	
1	7480680	7480681	.113	.002	.11290 CHECK	.11290 -.00007	.015	
1	7480682	7480683	.113	.004	.11280 AND UP CHECK	.11280 -.00010	.015	
1	7480690	7480691	.114	.0005	.11400 CHECK	.11400 -.00004	.015	
1	7480694	7480695	.114	.002	.11390 CHECK	.11390 -.00007	.015	
1	7480696	7480697	.114	.004	.11380 AND UP CHECK	.11380 -.00010	.015	
1	7480704	7480705	.115	.0005	.11500 CHECK	.11500 -.00004	.015	
1	7480708	7480709	.115	.002	.11490 CHECK	.11490 -.00007	.015	
1	7480710	7480711	.115	.004	.11480 AND UP CHECK	.11480 -.00010	.015	
1	7480718	7480719	.116	.0005	.11600 CHECK	.11600 -.00004	.015	
1	7480722	7480723	.116	.002	.11590 CHECK	.11590 -.00007	.015	
1	7480724	7480725	.116	.004	.11580 AND UP CHECK	.11580 -.00010	.015	
1	7480732	7480733	.117	.0005	.11700 CHECK	.11700 -.00004	.015	
1	7480736	7480737	.117	.002	.11690 CHECK	.11690 -.00007	.015	
1	7480738	7480739	.117	.004	.11680 AND UP CHECK	.11680 -.00010	.015	

MIL-STD-112A
December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	RING-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	ACCEPTANCE CHECK	E	F	G			
A	B	C	D				H		
12	7480746	.118	.0005				.015		
12	7480750	.118	.002	CHECK	.11800 - .00004	.015	4		
12	7480751	.118	.002	CHECK	.11790 - .00007	.015	4		
12	7480752	.118	.004	AND UP	.11780 - .00010	.015	8	8	
2	7480753	.118	.004	CHECK	.11780 - .00010	.015	8	8	
12	7480760	.119	.0005				.015		
12	7480761	.119	.002	CHECK	.11900 - .00004	.015	4		
12	7480764	.119	.002	CHECK	.11890 - .00007	.015	4		
12	7480765	.119	.004	AND UP	.11880 - .00010	.015	8		
12	7480766	.119	.004	AND UP	.11880 - .00010	.015	8		
12	7480767	.119	.004	CHECK	.11880 - .00010	.015	8		
12	7480774	.120	.0005				.015		
12	7480775	.120	.002	CHECK	.12000 - .00004	.015	4		
12	7480778	.120	.002	CHECK	.11990 - .00007	.015	4		
12	7480779	.120	.004	AND UP	.11980 - .00010	.015	8		
12	7480780	.120	.004	AND UP	.11980 - .00010	.015	8		
12	7480781	.120	.004	CHECK	.11980 - .00010	.015	8		
12	7480788	.121	.0005				.015		
12	7480789	.121	.002	CHECK	.12100 - .00004	.015	4		
12	7480792	.121	.002	CHECK	.12090 - .00007	.015	4		
12	7480793	.121	.004	AND UP	.12080 - .00010	.015	8		
12	7480794	.121	.004	AND UP	.12080 - .00010	.015	8		
12	7480795	.121	.004	CHECK	.12080 - .00010	.015	8		
1	7480802	.122	.0005				.015		
12	7480803	.122	.002	CHECK	.12200 - .00004	.015	4		
12	7480806	.122	.002	CHECK	.12190 - .00007	.015	4		
12	7480807	.122	.004	AND UP	.12180 - .00010	.015	8		
12	7480808	.122	.004	AND UP	.12180 - .00010	.015	8		
12	7480809	.122	.004	CHECK	.12180 - .00010	.015	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FIN—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
	RING GAGE	ACCEPTANCE CHECK							CHAMFER	
A	B	C	D	E	F	G	H			
1	7480816	7480817	.123	.0005	.12300	.00004	.015	4		
2	7480820		.123	.002	.12290	—	.015	4		
1	7480821		.123	CHECK	.12290	—	.015	4		
2	7480822		.123	.004 AND UP	.12280	—	.015	8		
1	7480823		.123	CHECK	.12280	—	.015	8		
1	7480830	7480831	.124	.0005	.12400	—	.015	4		
2	7480834		.124	.002	.12390	—	.015	4		
1	7480835		.124	CHECK	.12390	—	.015	4		
1	7480836		.124	.004 AND TIP	.12380	—	.015	8		
2	7480837		.124	CHECK	.12380	—	.015	8		
1	7480844		.125	.0005	.12500	—	.015	4		
2	7480845		.125	CHECK	.12500	—	.015	4		
1	7480848		.125	.002	.12490	—	.015	4		
2	7480849		.125	CHECK	.12490	—	.015	4		
1	7480850		.125	.004 AND UP	.12480	—	.015	8		
2	7480851		.125	CHECK	.12480	—	.015	8		
1	7480857		.126	.0005	.12600	—	.015	4		
2	7480858		.126	CHECK	.12600	—	.015	4		
1	7480861		.126	.002	.12590	—	.015	4		
2	7480862		.126	CHECK	.12590	—	.015	4		
1	7480863		.126	.004	.12580	—	.015	8		
2	7480864		.126	CHECK	.12580	—	.015	8		
3	7480866		.126	.008 AND UP	.12560	—	.015	8		
1	7480868		.127	.0005	.12700	—	.015	4		
2	7480869		.127	CHECK	.12700	—	.015	4		
1	7480872		.127	.002	.12690	—	.015	4		
2	7480873		.127	CHECK	.12690	—	.015	4		
1	7480874		.127	.004	.12680	—	.015	8		
2	7480875		.127	CHECK	.12680	—	.015	8		
3	7480877		.127	.008 AND TIP	.12660	—	.015	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FINN—GAGE	STOCK NO.	MAXIMUM COMPONENT TOLERANCE	DIA. DIAMETER	CHAMFER	G	
F1	RING GAGE	ACCEPTANCE CHECK	C	D	E	F	G
1	7480879	7480880	.128	.0005	.12800	—	.015
2	7480883	7480884	.128	.002	.12790	—	.015
1	7480885	7480886	.128	.004	.12780	—	.015
2	7480888	7480888	.128	.008 AND UP	.12760	—	.015
3	7480890	7480891	.129	.0005	.12900	—	.015
1	7480894	7480895	.129	.002	.12890	—	.015
2	7480896	7480897	.129	.004	.12880	—	.015
3	7480899	7480901	.129	.008 AND UP	.12860	—	.015
1	7480902	7480905	.130	.0005	.13000	—	.015
2	7480906	7480907	.130	.002	.12990	—	.015
1	7480908	7480910	.130	.004	.12980	—	.015
2	7480912	7480913	.131	.008 AND UP	.12960	—	.015
3	7480916	7480917	.131	.0005	.13100	—	.015
1	7480918	7480919	.131	.002	.13100	—	.015
2	7480921	7480921	.131	.004	.13090	—	.015
3				.008 AND UP	.13080	—	.015
					.13060	—	.015

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			TOTAL COMPONENT TOLERANCE	DIAMETER	FINISH
	FIN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	C	D	E			
RING GAGE	ACCEPTANCE CHECK		B	C	D				
12	7480923	7480924	.132	.0005	.13200	CHECK	.015	.13444	.015
12	7480927	7480928	.132	.002	.13190	-	.00004	.13444	.015
12	7480929	7480930	.132	.004	.13190	-	.00007	.13444	.015
12	7480932	7480930	.132	.008 AND UP	.13180	-	.00010	.13488	.015
12	7480934	7480935	.133	.0005	.13180	-	.00010	.13488	.015
12	7480938	7480939	.133	.002	.13160	-	.00030	.13488	.015
12	7480940	7480941	.133	.004	.13280	-	.00007	.13488	.015
12	7480943	7480941	.133	.008 AND UP	.13280	-	.00010	.13488	.015
12	7480945	7480946	.134	.0005	.13260	-	.00030	.13488	.015
12	7480949	7480950	.134	.002	.13300	-	.00004	.13444	.015
12	7480951	7480952	.134	.004	.13290	-	.00007	.13444	.015
12	7480954	7480954	.134	.008 AND UP	.13280	-	.00010	.13488	.015
12	7480956	7480957	.135	.0005	.13260	-	.00030	.13488	.015
12	7480960	7480961	.135	.002	.13300	-	.00004	.13444	.015
12	7480962	7480963	.135	.004	.13290	-	.00007	.13488	.015
12	7480965	7480965	.135	.008 AND UP	.13280	-	.00010	.13488	.015

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON Q. L.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH H
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA-METER	CHAMFER	G		
A	B	C	D	E	F	G		
1	7480967	7480968	.136	.0005	.13600	.015	4	
2	7480971	7480972	.136	.002	.13600	.015	4	
1	7480973	7480974	.136	.004	.13590	.015	4	
2	7480976		.136	.008 AND UP	.13580	.015	8	
3					.13580	.015	8	
					.13560	.015	8	
					.00030			
1	7480978	7480979	.137	.0005	.13700	.015	4	
2	7480982	7480983	.137	.002	.13700	.015	4	
1	7480984	7480985	.137	.004	.13690	.015	4	
2	7480987		.137	.008 AND UP	.13690	.015	8	
3					.13680	.015	8	
					.13680	.015	8	
					.00030			
1	7480989	7480990	.138	.0005	.13800	.015	4	
2	7480993	7480994	.138	.002	.13800	.015	4	
1	7480995	7480996	.138	.004	.13790	.015	4	
2	7480998		.138	.008 AND UP	.13790	.015	8	
3					.13780	.015	8	
					.13780	.015	8	
					.00030			
1	7481000		.139	.0005	.13900	.015	4	
2	7481004	7481005	.139	.002	.13900	.015	4	
1	7481006	7481007	.139	.004	.13890	.015	4	
2	7481009		.139	.008 AND UP	.13890	.015	8	
3					.13880	.015	8	
					.00030			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA.	E	F	G	H		
A	B	C	D							
1 2	7481011	7481012	.140	.0005	.14000	-	.015	.015		
1 2	7481015	7481016	.140	.002	CHECK	.14000 -	.00004	.015		
1 2	7481017	7481018	.140	.004	CHECK	.13990 -	.00007	.015		
1 2	7481020		.140	.008 AND UP	CHECK	.13980 -	.00010	.015		
3						.13960 -	.00030	.015		
1 2	7481022	7481023	.141	.0005	CHECK	.14100 -	.00010	.015		
1 2	7481026	7481027	.141	.002	CHECK	.14100 -	.00004	.015		
1 2	7481028	7481029	.141	.004	CHECK	.14090 -	.00007	.015		
1 2	7481031		.141	.008 AND UP	CHECK	.14080 -	.00010	.015		
3						.14060 -	.00030	.015		
1 2	7481033	7481034	.142	.0005	CHECK	.14200 -	.00004	.015		
1 2	7481037	7481038	.142	.002	CHECK	.14190 -	.00007	.015		
1 2	7481039	7481040	.142	.004	CHECK	.14180 -	.00010	.015		
3	7481042		.142	.008 AND UP	CHECK	.14160 -	.00030	.015		
1										
1 2	7481044	7481045	.143	.0005	CHECK	.14300 -	.00004	.015		
2	7481048	7481049	.143	.002	CHECK	.14290 -	.00007	.015		
1 2	7481050	7481051	.143	.004	CHECK	.14280 -	.00010	.015		
2	7481053		.143	.008 AND UP	CHECK	.14260 -	.00030	.015		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			RING GAGE DIMENSIONS			TOTAL COMPONENT TOLERANCE			CHAMFER			HSIN FIN	H
	RING GAGE	FIN - GAGE STOCK NO.		MAXIMUM ACCEPTANCE DIMENSION		DIAMETER		F		G				
		RING GAGE	ACCEPTANCE CHECK	C	D	E	F	G	H					
A	B													
1	7481055	7481056	.144	.0005	14400	.015	4							
2	7481059		.144	.002	CHECK	.14400	-.00004	.015	4					
1	7481060	7481060	.144	.004	CHECK	.14390	-.00007	.015	4					
2	7481061		.144	.008 AND UP		.14280	-.00010	.015	8					
1	7481062	7481062	.144	.004	CHECK	.14380	-.00010	.015	8					
2	7481064		.144	.008 AND UP		.14360	-.00030	.015	8					
1	7481066	7481067	.145	.0005	14500	.015	4							
2	7481070		.145	.002	CHECK	.14500	-.00004	.015	4					
1	7481071	7481071	.145	.004	CHECK	.14490	-.00007	.015	4					
2	7481072		.145	.008 AND UP		.14480	-.00010	.015	8					
1	7481073	7481073	.145	.004	CHECK	.14480	-.00010	.015	8					
2	7481075		.145	.008 AND UP		.14460	-.00030	.015	8					
1	7481077	7481078	.146	.0005	14600	.015	4							
2	7481081		.146	.002	CHECK	.14600	-.00004	.015	4					
1	7481082	7481082	.146	.004	CHECK	.14590	-.00007	.015	4					
2	7481083		.146	.008 AND UP		.14580	-.00010	.015	8					
1	7481084	7481084	.146	.004	CHECK	.14580	-.00010	.015	8					
2	7481086		.146	.008 AND UP		.14560	-.00030	.015	8					
1	7481088	7481089	.147	.0005	14700	.015	4							
2	7481092		.147	.002	CHECK	.14700	-.00004	.015	4					
1	7481093	7481093	.147	.004	CHECK	.14690	-.00007	.015	4					
2	7481094		.147	.008 AND UP		.14680	-.00010	.015	8					
1	7481095	7481095	.147	.008 AND UP		.14660	-.00030	.015	8					
2	7481097													

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISHED		
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	CHAMFER	G	F	E
A	B	C	D	E	F	G	H					
1	74811099	7481100	.148	.0005	.14800	-	.00004	.015	4			
2	7481103	7481104	.148	.002	.14790	-	.00007	.015	4			
1	7481105	7481106	.148	.004	.14780	-	.00010	.015	4			
2	7481108	7481106	.148	.008 AND UP	.14760	-	.00030	.015	8			
1	7481110	7481111	.149	.0005	.14900	-	.0004	.015	4			
2	7481114	7481115	.149	.002	.14890	-	.00007	.015	4			
1	7481116	7481117	.149	.004	.14880	-	.00010	.015	8			
2	7481119	7481117	.149	.008 AND UP	.14860	-	.00030	.015	8			
1	7481121	7481122	.150	.0005	.15000	-	.0004	.015	4			
2	7481125	7481126	.150	.002	.14990	-	.00007	.015	4			
1	7481127	7481128	.150	.004	.14980	-	.00010	.015	8			
2	7481130	7481128	.150	.008 AND UP	.14960	-	.00030	.015	8			
1	7481132	7481133	.151	.0005	.15100	-	.0004	.015	4			
2	7481136	7481137	.151	.002	.15090	-	.00007	.015	4			
1	7481138	7481139	.151	.004	.15080	-	.00010	.015	8			
2	7481141		.151	.008 AND UP	.15060	-	.00030	.015	8			

MIL-STD-112A
6 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON. NO.	MARKING ON GO GAGE			MAXIMUM COMPONENT DIMENSION			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH H
	RING GAGE ACCEPTANCE CHECK	RING GAGE STOCK NO.	CHECK	D	E	F	G	H	I	J	K		
A	B	C											
1	7481143	7481144		.152	.0005		.15200		.00004	.015	4	4	
2	7481147	7481148		.152	.002	CHECK	.15200	-	.00004	.015	4	4	
1	7481149	7481150		.152	.004	CHECK	.15190	-	.00007	.015	4	4	
2	7481152			.152	.008	CHECK AND UP	.15180	-	.00010	.015	6	6	
3							.15180	-	.00010	.015	6	6	
							.15160	-	.00030	.015	8	8	
1	7481154	7481155		.153	.0005		.15300		.00004	.015	4	4	
2	7481158	7481159		.153	.002	CHECK	.15290	-	.00004	.015	4	4	
1	7481160	7481161		.153	.004	CHECK	.15280	-	.00007	.015	6	6	
2	7481163			.153	.008	CHECK AND TIP	.15280	-	.00010	.015	6	6	
3							.15260	-	.00030	.015	8	8	
1	7481165	7481166		.154	.0005		.15400		.00004	.015	4	4	
2	7481169	7481170		.154	.002	CHECK	.15390	-	.00004	.015	4	4	
1	7481171	7481172		.154	.004	CHECK	.15390	-	.00007	.015	4	4	
2	7481174			.154	.008	CHECK AND TIP	.15380	-	.00010	.015	6	6	
3							.15360	-	.00030	.015	8	8	
1	7481176			.155	.0005		.15500		.00004	.015	4	4	
2	7481177			.155	.002	CHECK	.15500	-	.00004	.015	4	4	
1	7481180	7481181		.155	.004	CHECK	.15490	-	.00007	.015	4	4	
2	7481182	7481183		.155	.008	CHECK AND UP	.15480	-	.00010	.015	6	6	
3	7481185			.155			.15460	-	.00030	.015	8	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH		
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	G	H	
A	B	C	D	E	F	G	H		
1	7481187	7481188	.156	.0005	.15600	.015	.015	.015	
2	7481191	7481192	.156	.002	CHECK	.15600 - .00004	.015	.015	
1	7481193	7481194	.156	.004	CHECK	.15590 - .00007	.015	.015	
2	7481196	7481197	.156	.008	CHECK AND UP	.15580 - .00010	.015	.015	
3	7481198	7481199	.15625	.0005	AND UP	.15560 - .00030	.015	.015	
1	7481200	7481201	.157	.0005	CHECK	.15625 - .00004	.015	.015	
2	7481204	7481205	.157	.002	CHECK	.15700 - .00004	.015	.015	
1	7481206	7481207	.157	.004	CHECK	.15690 - .00007	.015	.015	
2	7481209	7481210	.157	.008	CHECK AND UP	.15680 - .00010	.015	.015	
3	7481211	7481212	.158	.0005	CHECK	.15660 - .00030	.015	.015	
1	7481215	7481216	.158	.002	CHECK	.15700 - .00004	.015	.015	
2	7481217	7481218	.158	.004	CHECK	.15790 - .00007	.015	.015	
3	7481220	7481221	.158	.008	CHECK AND UP	.15780 - .00010	.015	.015	
1	7481222	7481223	.159	.0005	CHECK	.15760 - .00030	.015	.015	
2	7481226	7481227	.159	.002	CHECK	.15800 - .00004	.015	.015	
1	7481228	7481229	.159	.004	CHECK	.15890 - .00007	.015	.015	
2	7481231	7481231	.159	.008	CHECK AND UP	.15880 - .00010	.015	.015	
						.15860 - .00030	.015	.015	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISHES		
	FIN-GAGE STOCK NO.	MAXIMUM RING GAGE ACCEPTANCE CHECK	COMPONENT DIMENSION	TOTAL DIAMETER	COMPONENT TOLERANCE	CHAMFER	G	F	H
A	B	C	D	E		G	F	H	
1	7481233		.160	.0005	.16000 CHECK	.015	.015	.015	
1	7481234	.160	.002	.15990	.00007	.015	.015	.015	
1	7481237	.160	.002	.15990	.00007	.015	.015	.015	
2	7481239	.160	.004	.15980	.00010	.015	.015	.015	
1	7481240	.160	.008 AND UP	.15980	.00010	.015	.015	.015	
3	7481242	.160	.008 AND UP	.15960	.00030	.015	.015	.015	
1	7481244	.161	.0005	.16100	.00010	.015	.015	.015	
1	7481245	.161	.002	.16100	.00004	.015	.015	.015	
1	7481248	.161	.002	.16090	.00007	.015	.015	.015	
2	7481249	.161	.004	.16080	.00010	.015	.015	.015	
1	7481250	.161	.004	.16080	.00010	.015	.015	.015	
2	7481251	.161	.008 AND UP	.16060	.00030	.015	.015	.015	
3	7481253	.161	.008 AND UP	.16060	.00030	.015	.015	.015	
1	7481255	.162	.0005	.16200	.00010	.015	.015	.015	
1	7481256	.162	.002	.16200	.00004	.015	.015	.015	
1	7481259	.162	.002	.16190	.00007	.015	.015	.015	
1	7481260	.162	.004	.16190	.00007	.015	.015	.015	
1	7481261	.162	.004	.16180	.00010	.015	.015	.015	
2	7481262	.162	.008 AND UP	.16180	.00010	.015	.015	.015	
3	7481264	.162	.008 AND UP	.16160	.00030	.015	.015	.015	
1	7481266	.163	.0005	.16300	.00004	.015	.015	.015	
1	7481267	.163	.002	.16290	.00007	.015	.015	.015	
1	7481270	.163	.004	.16290	.00007	.015	.015	.015	
1	7481272	.163	.008 AND UP	.16280	.00010	.015	.015	.015	
2	7481273	.163	.008 AND UP	.16260	.00030	.015	.015	.015	
3	7481275								

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS				FINISH CHAMFER
	FIN - GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	F	G	
A	B	C	D	E		H		
1	7481277	7481278	.164	.0005	.16400	-	.015	
2	7481281	7481282	.164	.002	CHECK	.16400	-	.00004
1	7481283	7481284	.164	.004	CHECK	.16390	-	.00007
2	7481286	7481286	.164	.008 AND UP	.16380	-	.00010	.015
3					.16360	-	.00030	.015
1	7481288	7481288	.165	.0005	.16500	-	.015	
2	7481292	7481293	.165	.002	CHECK	.16500	-	.00004
1	7481294	7481294	.165	.004	CHECK	.16490	-	.00007
2	7481295	7481295	.165	.008 AND UP	.16480	-	.00010	.015
3	7481297		.165		.16480	-	.00030	.015
1	7481299	7481300	.166	.0005	.16600	-	.015	
2	7481303	7481304	.166	.002	CHECK	.16600	-	.00004
1	7481305	7481306	.166	.004	CHECK	.16590	-	.00007
2	7481308		.166	.008 AND UP	.16580	-	.00010	.015
3					.16560	-	.00030	.015
1	7481310	7481311	.167	.0005	.16700	-	.015	
2	7481314	7481315	.167	.002	CHECK	.16690	-	.00004
1	7481316	7481317	.167	.004	CHECK	.16680	-	.00007
2	7481319		.167	.008 AND UP	.16660	-	.00030	.015
3								

MIL-STD-112A
6 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FIN—GAGE STOCK NO.	MAXIMUM ACCEPTANCE DIMENSION	CHECK	D	E	F	G	H		
1	7481321	.168	.0005	.168	CHECK	.16800	—	.00004	.015	4 4 4 4 4 4 4 4 4 4
2	7481325	.168	.002	.168	CHECK	.16790	—	.00007	.015	4 4 4 4 4 4 4 4 4 4
1	7481326	.168	.004	.168	CHECK	.16780	—	.00010	.015	4 4 4 4 4 4 4 4 4 4
2	7481327	.168	.008 AND UP	.168	CHECK	.16780	—	.00030	.015	4 4 4 4 4 4 4 4 4 4
2	7481328	.168	.008 AND UP	.168	CHECK	.16760	—	.00030	.015	4 4 4 4 4 4 4 4 4 4
3	7481330	.169	.0005	.169	CHECK	.16900	—	.00004	.015	4 4 4 4 4 4 4 4 4 4
1	7481332	.169	.002	.169	CHECK	.16890	—	.00007	.015	4 4 4 4 4 4 4 4 4 4
2	7481336	.169	.004	.169	CHECK	.16880	—	.00010	.015	4 4 4 4 4 4 4 4 4 4
1	7481337	.169	.008 AND UP	.169	CHECK	.16880	—	.00030	.015	4 4 4 4 4 4 4 4 4 4
2	7481338	.169	.008 AND UP	.169	CHECK	.16880	—	.00030	.015	4 4 4 4 4 4 4 4 4 4
2	7481339	.169	.008 AND UP	.169	CHECK	.16880	—	.00030	.015	4 4 4 4 4 4 4 4 4 4
3	7481341	.169	.008 AND UP	.169	CHECK	.16880	—	.00030	.015	4 4 4 4 4 4 4 4 4 4
1	7481343	.170	.0005	.170	CHECK	.17000	—	.00004	.015	4 4 4 4 4 4 4 4 4 4
2	7481347	.170	.002	.170	CHECK	.16990	—	.00007	.015	4 4 4 4 4 4 4 4 4 4
1	7481348	.170	.004	.170	CHECK	.16990	—	.00007	.015	4 4 4 4 4 4 4 4 4 4
2	7481349	.170	.008 AND UP	.170	CHECK	.16980	—	.00010	.015	4 4 4 4 4 4 4 4 4 4
3	7481352	.170	.008 AND UP	.170	CHECK	.16960	—	.00030	.015	4 4 4 4 4 4 4 4 4 4
1	7481354	.171	.0005	.171	CHECK	.17100	—	.00004	.015	4 4 4 4 4 4 4 4 4 4
2	7481355	.171	.002	.171	CHECK	.17090	—	.00007	.015	4 4 4 4 4 4 4 4 4 4
1	7481358	.171	.004	.171	CHECK	.17090	—	.00007	.015	4 4 4 4 4 4 4 4 4 4
2	7481360	.171	.008 AND UP	.171	CHECK	.17080	—	.00010	.015	4 4 4 4 4 4 4 4 4 4
2	7481361	.171	.008 AND UP	.171	CHECK	.17060	—	.00030	.015	4 4 4 4 4 4 4 4 4 4
3	7481363	.171	.008 AND UP	.171	CHECK	.17060	—	.00030	.015	4 4 4 4 4 4 4 4 4 4

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH HARDNESS
	FINN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	
A	B	C	D	E	F	G	H
1	7481365	7481366	.172	.0005	.17200	.015	4
2	7481369		.172	.002	.17200 - .00004	.015	4
1	7481370	7481370	.172	.004	.17190 - .00007	.015	4
2	7481371	7481372	.172	.004	.17180 - .00010	.015	8
2	7481374		.172	.008 AND UP	.17180 - .00010	.015	8
3					.17160 - .00030	.015	8
1	7481376	7481377	.173	.0005	.17300 - .00004	.015	4
2	7481380	7481381	.173	.002	.17300 - .00004	.015	4
2	7481382	7481383	.173	.004	.17290 - .00007	.015	4
2	7481385	7481385	.173	.008 AND UP	.17280 - .00010	.015	8
3					.17260 - .00030	.015	8
1	7481387	7481388	.174	.0005	.17400 - .00004	.015	4
2	7481391	7481392	.174	.002	.17390 - .00004	.015	4
2	7481393	7481394	.174	.004	.17390 - .00007	.015	4
2	7481396		.174	.008 AND UP	.17380 - .00010	.015	8
3					.17360 - .00030	.015	8
1	7481398	7481399	.175	.0005	.17500 - .00004	.015	4
2	7481402	7481403	.175	.002	.17490 - .00007	.015	4
1	7481404	7481405	.175	.004	.17480 - .00010	.015	8
2	7481407		.175	.008 AND UP	.17460 - .00030	.015	8
3							
1	7481409	7481410	.176	.0005	.17600 - .00004	.015	4
2							

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO. ON RING GAGE	MARKING ON GO GAGE			MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN--GAGE	STOCK NO.	ACCEPTANCE CHECK			DIA. E	F	
1	7481413	7481414	.176	.002	CHECK	.17590	-.00007	.015
2	7481415	7481416	.176	.004	CHECK	.17580	-.00010	.015
1	7481418		.176	.008 AND UP		.17560	-.00030	.015
2	7481420	7481421	.177	.0005	CHECK	.17700	-.00004	.015
1	7481424	7481425	.177	.002	CHECK	.17690	-.00007	.015
2	7481426	7481427	.177	.004	CHECK	.17680	-.00010	.015
1	7481429		.177	.008 AND UP		.17660	-.00030	.015
2	7481431	7481432	.178	.0005	CHECK	.17800	-.00004	.015
1	7481435	7481436	.178	.002	CHECK	.17790	-.00007	.015
2	7481437	7481438	.178	.004	CHECK	.17780	-.00010	.015
3	7481440		.178	.008 AND UP		.17760	-.00030	.015
1	7481442	7481443	.179	.0005	CHECK	.17900	-.00004	.015
2	7481446	7481447	.179	.002	CHECK	.17890	-.00007	.015
1	7481448	7481449	.179	.004	CHECK	.17880	-.00010	.015
2	7481451		.179	.008 AND UP		.17860	-.00030	.015
1	7481453	7481454	.180	.0005	CHECK	.18000	-.00004	.015
2	7481457	7481458	.180	.002	CHECK	.17990	-.00007	.015
1			.180					.015
2			.180					.015

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FINISH	MARKING ON GO GAGE				RING GAGE DIMENSIONS				FINISH
	FIN—GAGE	STOCK NO.	MAXIMUM	TOTAL	DIA METER	F	G		
	RING GAGE	ACCEPTANCE	COMPONENT	COMPONENT				CHAMFER	
A	B	C	D	E	F				H
1	7481459	7481460	.180	.004	.17980	.015	.015		8
2	7481462		.180	.008 AND UP	.17980	.015	.015		8
3			.180		.17960	.015	.015		8
1	7481464	7481465	.181	.0005 CHECK	.18100	.015	.015		4
2	7481468	7481469	.181	.002 CHECK	.18090	.015	.015		4
1	7481470	7481471	.181	.004 CHECK	.18080	.015	.015		4
2			.181	.008 AND UP	.18080	.015	.015		8
3	7481473		.181		.18060	.015	.015		8
1	7481475	7481476	.182	.0005 CHECK	.18200	.015	.015		4
2	7481479	7481480	.182	.002 CHECK	.18190	.015	.015		4
1	7481481	7481482	.182	.004 CHECK	.18180	.015	.015		8
2			.182	.008 AND UP	.18180	.015	.015		8
3	7481484		.182		.18160	.015	.015		8
1	7481486	7481487	.183	.0005 CHECK	.18300	.015	.015		4
2	7481490	7481491	.183	.002 CHECK	.18290	.015	.015		4
1	7481492	7481493	.183	.004 CHECK	.18280	.015	.015		8
2			.183	.008 AND UP	.18280	.015	.015		8
3	7481495		.183		.18260	.015	.015		8
1	7481497	7481498	.184	.0005 CHECK	.18400	.015	.015		4
2	7481501	7481502	.184	.002 CHECK	.18400	.015	.015		4
1	7481503	7481504	.184	.004 CHECK	.18390	.015	.015		4
2			.184	.008 AND UP	.18380	.015	.015		8
3	7481506		.184		.18360	.015	.015		8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		HORIZONTAL CHAMFER
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA.	E	F	G		
A	B	C	D					H	
1	7481508	7481509	.185	.0005	.18500	-.00004	.015	4	
2	7481512	7481513	.185	.002	CHECK	.18500	-.00004	.015	4
1	7481514	7481515	.185	.004	CHECK	.18490	-.00007	.015	4
2	7481517		.185	.008 AND UP	CHECK	.18480	-.00010	.015	8
3						.18460	-.00030	.015	8
1	7481519	7481520	.186	.0005	.18600	-.00004	.015	4	
2	7481523	7481524	.186	.002	CHECK	.18600	-.00004	.015	4
1	7481525	7481526	.186	.004	CHECK	.18590	-.00007	.015	4
2	7481528		.186	.008 AND UP	CHECK	.18580	-.00010	.015	8
3						.18560	-.00030	.015	8
1	7481530	7481531	.187	.0005	.18700	-.00004	.015	4	
2	7481534	7481535	.187	.002	CHECK	.18700	-.00004	.015	4
1	7481536	7481537	.187	.004	CHECK	.18690	-.00007	.015	4
2	7481539		.187	.008 AND UP	CHECK	.18680	-.00010	.015	8
3						.18660	-.00030	.015	8
1	7481541	7481542	.1875	.0005 AND UP	CHECK	.18750	-.00004	.015	4
2			.1875					.015	4
1	7481543	7481544	.188	.0005	CHECK	.18800	-.00004	.015	4
2	7481547	7481548	.188	.002	CHECK	.18790	-.00007	.015	4
1	7481549	7481550	.188	.004	CHECK	.18780	-.00010	.015	8
2			.188	.008 AND UP		.18760	-.00030	.015	8
3	7481552								

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL			RING GAGE		
	RING GAGE	STOCK NO.	MAXIMUM ACCEPTANCE DIMENSION	COMPONENT TOLERANCE	COMPONENT TOLERANCE	DIAMETER	CHAMFER	FINISH	GAGE
1	7481554	7481555	.189	.0005	.0005	.18900	-.00004	.015	4
2	7481558	7481559	.189	.002	.002	.18900	-.00007	.015	4
1	7481560	7481561	.189	.004	.004	.18880	-.00010	.015	4
2	7481563	7481564	.189	.008 AND UP	.008 AND UP	.18860	-.00010	.015	4
3	7481565	7481566	.190	.0005	.0005	.19000	-.00004	.015	4
1	7481569	7481570	.190	.002	.002	.18990	-.00007	.015	4
2	7481571	7481572	.190	.004	.004	.18980	-.00010	.015	4
1	7481574	7481575	.190	.008 AND UP	.008 AND UP	.18960	-.00010	.015	4
3	7481576	7481577	.191	.0005 AND UP	.0005 AND UP	.19100	-.00004	.015	4
1	7481580	7481581	.191	.002 CHECK	.002 CHECK	.19090	-.00007	.015	4
2	7481582	7481583	.191	.004 CHECK	.004 CHECK	.19080	-.00010	.015	4
1	7481585	7481586	.191	.008 AND UP	.008 AND UP	.19070	-.00007	.015	4
3	7481587	7481588	.192	.0005 CHECK	.0005 CHECK	.19060	-.00004	.015	4
2	7481591	7481592	.192	.002 CHECK	.002 CHECK	.19050	-.00007	.015	4
1	7481593	7481594	.192	.004 CHECK	.004 CHECK	.19040	-.00010	.015	4
2	7481596	7481597	.192	.008 AND UP	.008 AND UP	.19030	-.00004	.015	4
3	7481598	7481599	.193	.0005 CHECK	.0005 CHECK	.19020	-.00004	.015	4
1									

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C	D	E	F	G	H		
1	7481602	7481603	.193	.002	CHECK	.19290	.015	.015	4
2	7481604	7481605	.193	.004	CHECK	.19280	.00007	.015	4
1	7481607		.193	.008 AND UP	CHECK	.19280	.00010	.015	8
2					CHECK	.19260	.00030	.015	8
3									
1	7481609	7481610	.194	.0005	CHECK	.19400	.00004	.015	4
2	7481613	7481614	.194	.002	CHECK	.19390	.00007	.015	4
1	7481615	7481616	.194	.004	CHECK	.19380	.00010	.015	8
2					CHECK	.19380	.00010	.015	8
3	7481618		.194	.008 AND UP		.19360	.00030	.015	
1	7481620	7481621	.195	.0005	CHECK	.19500	.00004	.015	4
2	7481624	7481625	.195	.002	CHECK	.19490	.00007	.015	4
1	7481626	7481627	.195	.004	CHECK	.19490	.00007	.015	8
2					CHECK	.19480	.00010	.015	8
3	7481629		.195	.008 AND UP		.19460	.00030	.015	
1	7481631		.196	.0005	CHECK	.19600	.00004	.015	4
2	7481632		.196	.002	CHECK	.19600	.00004	.015	4
1	7481635	7481636	.196	.004	CHECK	.19590	.00007	.015	4
2	7481637	7481638	.196	.008 AND UP	CHECK	.19580	.00010	.015	8
1	7481640		.196			.19560	.00030	.015	8
2									
1	7481642		.197	.0005	CHECK	.19700	.00004	.015	4
2	7481643		.197	.002	CHECK	.19700	.00004	.015	4
1	7481646	7481647	.197		CHECK	.19690	.00007	.015	4
2									

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON CIR.	MARKING ON GO GAGE			MAXIMUM COMPONENT DIMENSION			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			HSIN FINISH	
	RING GAGE	STOCK NO.	ACCEPTANCE CHECK	A	B	C	D	E	F	G	H			
1	7481648	7481649		.197	.197	.197	.004	CHECK AND UP	.19680 .19660	.00010 .00030	.015 .015	8		
2	7481651			.197			.008	CHECK	.19800 .19790	.00004 .00007	.015 .015	8		
1	7481653	7481654		.198	.198	.198	.005	CHECK	.19800 .19790	.00004 .00007	.015 .015	4	4	
2	7481657	7481658		.198	.198	.198	.002	CHECK	.19790 .19780	.00007 .00010	.015 .015	4	8	
1	7481659	7481660		.198	.198	.198	.004	CHECK AND UP	.19780 .19760	.00010 .00030	.015 .015	8		
2	7481662			.198			.008	CHECK AND UP	.19760 .19760	.00030				
1	7481664	7481665		.199	.199	.199	.005	CHECK	.19900 .19890	.00004 .00007	.015 .015	4	4	
2	7481668	7481669		.199	.199	.199	.002	CHECK	.19890 .19880	.00007 .00010	.015 .015	4	8	
1	7481670	7481671		.199	.199	.199	.004	CHECK AND UP	.19880 .19860	.00010 .00030	.015 .015	8		
2	7481673			.199			.008	CHECK AND UP	.19860 .19860	.00010 .00030	.015 .015	8		
1	7481675			.200			.0005	CHECK	.20000 .19990	.00004 .00007	.015 .015	4	4	
2	7481679	7481680		.200	.200	.200	.002	CHECK	.19990 .19980	.00007 .00010	.015 .015	4	8	
1	7481681	7481682		.200	.200	.200	.004	CHECK AND UP	.19980 .19960	.00010 .00030	.015 .015	8		
2	7481684			.200			.008	CHECK AND UP	.19960 .19960	.00010 .00030	.015 .015	8		
1	7481686			.201			.0005	CHECK	.20100 .20090	.00004 .00007	.015 .015	4	4	
2	7481687			.201			.002	CHECK	.20090 .20080	.00004 .00010	.015 .015	4	8	
1	7481690	7481691		.201	.201	.201	.004	CHECK AND UP	.20080 .20060	.00007 .00030	.015 .015	8		
2	7481692	7481693		.201	.201	.201	.008	CHECK AND UP	.20080 .20060	.00010 .00030	.015 .015	8		
3	7481695													

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

GAGE NO.	MARKING ON GO GAGE			MAXIMUM COMPONENT DIMENSION		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	RING GAGE	STOCK NO.	ACCEPTANCE CHECK	D	E	F	G	H		
A	B	C								
1	7481697	7481698	.202	.0005	.20200	-	.015	4		
2	7481701		.202	.002	.20200	-	.015	4		
1	7481702	7481702	.202	.004	.20190	-	.015	4		
1	7481703		.202	.004	.20190	-	.015	4		
2	7481704	7481704	.202	.008 AND UP	.20180	-	.015	8		
3	7481706		.202	.008 AND UP	.20180	-	.015	8		
					.20160	-	.015	8		
					.00030					
1	7481708		.203	.0005	.20300	-	.015	4		
2	7481709	7481709	.203	.002	.20300	-	.015	4		
1	7481712		.203	.002	.20290	-	.015	4		
2	7481713	7481713	.203	.004	.20290	-	.015	4		
1	7481714		.203	.004	.20280	-	.015	8		
2	7481715	7481715	.203	.008 AND UP	.20280	-	.015	8		
3	7481717		.203	.008 AND UP	.20260	-	.015	8		
					.00030					
1	7481719		.204	.0005	.20400	-	.015	4		
2	7481720	7481720	.204	.002	.20400	-	.015	4		
1	7481723		.204	.002	.20390	-	.015	4		
2	7481724	7481724	.204	.004	.20390	-	.015	4		
1	7481725		.204	.004	.20380	-	.015	8		
2	7481726	7481726	.204	.008 AND UP	.20380	-	.015	8		
3	7481728		.204	.008 AND UP	.20360	-	.015	8		
					.00030					
1	7481730		.205	.0005	.20500	-	.015	4		
2	7481731	7481731	.205	.002	.20500	-	.015	4		
1	7481734		.205	.002	.20490	-	.015	4		
2	7481735	7481735	.205	.004	.20490	-	.015	4		
1	7481736		.205	.004	.20480	-	.015	8		
2	7481737	7481737	.205	.008 AND UP	.20480	-	.015	8		
3	7481739		.205	.008 AND UP	.20460	-	.015	8		
1	7481741	7481741	.206	.0005	.20600	-	.015	4		
2	7481742		.206	.0004	.20600	-	.015	4		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	FIN-GAGE	RING GAGE	MARKING ON GO GAGE		TOTAL MAXIMUM COMPONENT COMPONENT DIMENSION	COMPONENT TOLERANCE	RING GAGE DIMENSIONS		DIAMETER	CHAMFER	FINISH
			B	C			D	E			
1	7481745	7481746	.206	.002	.206	.002	.002	.20590	.015	.015	.4
2	7481747	7481748	.206	.004	.206	.004	.004	.20580	.015	.015	.4
1	7481750		.206	.008 AND UP		.008 AND UP		.20580	.00010	.015	.4
3	7481752	7481753	.207	.0005	.207	.0005	.0005	.20560	.00030	.015	.4
1	7481756	7481757	.207	.002	.207	.002	.002	.20690	.00007	.015	.4
2	7481758	7481759	.207	.004	.207	.004	.004	.20680	.00007	.015	.4
1	7481761		.207	.008 AND UP		.008 AND UP		.20680	.00010	.015	.4
3	7481763	7481764	.208	.0005	.208	.0005	.0005	.20660	.00030	.015	.4
1	7481767	7481768	.208	.002	.208	.002	.002	.20800	.00004	.015	.4
2	7481769	7481770	.208	.004	.208	.004	.004	.20790	.00007	.015	.4
1	7481772	7481773	.208	.008 AND UP	.208	.008 AND UP	.008 AND UP	.20780	.00010	.015	.4
2	7481774	7481775	.209	.0005	.209	.0005	.0005	.20760	.00030	.015	.4
1	7481778	7481779	.209	.002	.209	.002	.002	.20750	.00007	.015	.4
2	7481780	7481781	.209	.004	.209	.004	.004	.20740	.00010	.015	.4
3	7481783	7481784	.209	.008 AND UP	.209	.008 AND UP	.008 AND UP	.20730	.00030	.015	.4
1	7481785	7481786	.210	.0005	.210	.0005	.0005	.20720	.00007	.015	.4
2	7481789	7481790	.210	.002	.210	.002	.002	.20710	.00004	.015	.4
2								.20990	.00007	.015	.4

MIL-STD-112A
0 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FILE NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION				DIA. METER	CHAMFER	G	
A	B	C	D	E	F	G	H			
1	7481791	7481792	.210	.004	.20980	.015	8			
2			.210	.008 CHECK AND UP	.20980 - .00010	.015	8			
3	7481794		.210	.008	.20960 - .00030	.015	8			
1	7481796	7481797	.211	.005	.21100	.015	4			
2	7481800	7481801	.211	.002	.21100 - .00004	.015	4			
2	7481802	7481803	.211	.004	.21090 - .00007	.015	4			
1			.211	.008 CHECK AND UP	.21080 - .00010	.015	8			
2			.211	.008	.21060 - .00030	.015	8			
3	7481805									
1	7481807	7481808	.212	.005	.21200	.015	4			
2			.212	.002 CHECK	.21200 - .00004	.015	4			
1	7481811	7481812	.212	.004	.21190	.015	4			
2			.212	.008 CHECK AND UP	.21190 - .00007	.015	4			
1	7481813	7481814	.212	.004	.21180	.015	8			
2			.212	.008	.21180 - .00010	.015	8			
3	7481816									
1	7481818	7481819	.213	.005	.21160	.015	8			
2			.213	.008 AND UP	.21160 - .00030	.015	8			
1	7481822	7481823	.213	.002	.21300	.015	4			
2			.213	.004 CHECK	.21300 - .00004	.015	4			
1	7481824	7481825	.213	.004	.21290	.015	4			
2			.213	.008 CHECK AND UP	.21290 - .00007	.015	8			
3	7481827									
1	7481829	7481830	.214	.005	.21280	.015	8			
2			.214	.008 CHECK AND UP	.21280 - .00010	.015	8			
1	7481833	7481834	.214	.002	.21260	.015	8			
2			.214	.004 CHECK	.21260 - .00030	.015	8			
1	7481835	7481836	.214	.004	.21400	.015	4			
2			.214	.008 AND UP	.21400 - .00004	.015	4			
3	7481838									

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			MAXIMUM COMPONENT DIMENSION		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH	
	RING GAGE	STOCK NO.	ACCEPTANCE CHECK	B	C	D	E	F	G	H	
1	7481840	7481841	.215	.215	.215	.0005	CHECK	.21500	-.00004	.015	4
2	7481844	7481845	.215	.215	.215	.002	CHECK	.21490	-.00007	.015	4
1	7481846	7481847	.215	.215	.215	.004	CHECK	.21490	-.00007	.015	4
2	7481849		.215	.215	.008 AND UP	.008 AND UP	CHECK	.21480	-.00010	.015	8
3								.21460	-.00030	.015	8
1	7481851	7481852	.216	.216	.216	.0005	CHECK	.21600	-.00004	.015	4
2	7481855	7481856	.216	.216	.216	.002	CHECK	.21590	-.00007	.015	4
1	7481857	7481858	.216	.216	.216	.004	CHECK	.21590	-.00007	.015	4
2	7481860		.216	.216	.008 AND UP	.008 AND UP	CHECK	.21580	-.00010	.015	8
3								.21560	-.00030	.015	8
1	7481862	7481863	.217	.217	.217	.0005	CHECK	.21700	-.00004	.015	4
2	7481866	7481867	.217	.217	.217	.002	CHECK	.21690	-.00007	.015	4
1	7481868	7481869	.217	.217	.217	.004	CHECK	.21690	-.00007	.015	4
2	7481871		.217	.217	.008 AND UP	.008 AND UP	CHECK	.21680	-.00010	.015	8
3								.21660	-.00030	.015	8
1	7481873	7481874	.218	.218	.218	.0005	CHECK	.21800	-.00004	.015	4
2	7481877	7481878	.218	.218	.218	.002	CHECK	.21790	-.00007	.015	4
1	7481879	7481880	.218	.218	.218	.004	CHECK	.21790	-.00007	.015	4
2	7481882		.218	.218	.008 AND UP	.008 AND UP	CHECK	.21780	-.00010	.015	8
3								.21760	-.00030	.015	8
1	7481884	7481885	.21875	.21875	.21875	.0005 AND UP	CHECK	.21875	-.00004	.015	4
2										.015	4

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON S/L	MARKING ON TO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA. C	E	F	G	
A	B	C	D	E	F	G	H	
1	7481886		.219	.0005	.21900	.015	4	
2	7481890	7481887	.219	CHECK	.21900	.015	4	
1	7481891		.219	.002	.21890	.015	4	
2	7481892	7481891	.219	CHECK	.21890	.015	4	
1	7481893		.219	.004	.21880	.015	8	
2	7481895	7481893	.219	CHECK	.21880	.015	8	
3	7481895		.219	.008 AND UP	.21860	.015	8	
1	7481897		.220	.0005	.22000	.015	4	
2	7481901	7481898	.220	CHECK	.22000	.015	4	
1	7481902		.220	.002	.21990	.015	4	
2	7481903	7481902	.220	CHECK	.21990	.015	4	
1	7481904		.220	.004	.21980	.015	8	
2	7481906	7481904	.220	CHECK	.21980	.015	8	
3	7481906		.220	.008 AND UP	.21960	.015	8	
1	7481908		.221	.0005	.22100	.015	4	
2	7481909	7481908	.221	CHECK	.22100	.015	4	
1	7481912		.221	.002	.22090	.015	4	
2	7481913	7481912	.221	CHECK	.22090	.015	4	
1	7481914		.221	.004	.22080	.015	8	
2	7481915	7481914	.221	CHECK	.22080	.015	8	
3	7481917		.221	.008 AND UP	.22060	.015	8	
1	7481919		.222	.0005	.22200	.015	4	
2	7481920	7481919	.222	CHECK	.22200	.015	4	
1	7481923		.222	.002	.22190	.015	4	
2	7481924	7481923	.222	CHECK	.22190	.015	4	
1	7481925		.222	.004	.22180	.015	8	
2	7481926	7481925	.222	CHECK	.22180	.015	8	
3	7481928		.222	.008 AND UP	.22160	.015	8	
1	7481930		.223	.0005	.22300	.015	4	
2	7481931	7481930	.223	CHECK	.22300	.015	4	

MIL-STD-1124
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	FINN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	COMPONENT CHECK	DIA	E	F	G	
A	B	C	D					H
1	7481934	7481935	.223	.002	CHECK	.22290 - .00007	.015	4 4 4 4 4 4 4 4
2	7481936		.223	.004	CHECK	.22280 - .00010	.015	4 4 4 4 4 4 4 4
1	7481937	7481937	.223	.008 AND UP		.22260 - .00030	.015	4 4 4 4 4 4 4 4
3	7481939		.223	.0005	CHECK	.222400 - .00004	.015	4 4 4 4 4 4 4 4
1	7481941		.224	.002	CHECK	.222390 - .00007	.015	4 4 4 4 4 4 4 4
2	7481942	7481942	.224	.004	CHECK	.222390 - .00007	.015	4 4 4 4 4 4 4 4
1	7481945	7481946	.224	.004	CHECK	.222380 - .00010	.015	4 4 4 4 4 4 4 4
2	7481947	7481947	.224	.008 AND UP		.222380 - .00030	.015	4 4 4 4 4 4 4 4
2	7481948		.224	.0005	CHECK	.222360 - .00004	.015	4 4 4 4 4 4 4 4
3	7481950		.224	.008 AND UP		.222360 - .00030	.015	4 4 4 4 4 4 4 4
1	7481952		.225	.0005	CHECK	.222500 - .00004	.015	4 4 4 4 4 4 4 4
2	7481953	7481953	.225	.002	CHECK	.222490 - .00007	.015	4 4 4 4 4 4 4 4
1	7481956	7481957	.225	.004	CHECK	.222490 - .00007	.015	4 4 4 4 4 4 4 4
2	7481958	7481958	.225	.008 AND UP		.222480 - .00010	.015	4 4 4 4 4 4 4 4
1	7481961		.225	.0005	CHECK	.222460 - .00030	.015	4 4 4 4 4 4 4 4
2	7481963	7481963	.226	.002	CHECK	.222600 - .00004	.015	4 4 4 4 4 4 4 4
1	7481964		.226	.004	CHECK	.222590 - .00007	.015	4 4 4 4 4 4 4 4
2	7481967	7481968	.226	.008 AND UP		.222590 - .00030	.015	4 4 4 4 4 4 4 4
1	7481969		.226	.004	CHECK	.222580 - .00010	.015	4 4 4 4 4 4 4 4
2	7481970	7481970	.226	.0005	CHECK	.222580 - .00030	.015	4 4 4 4 4 4 4 4
3	7481972		.226	.002	CHECK	.222700 - .00004	.015	4 4 4 4 4 4 4 4
1	7481974	7481975	.227	.002	CHECK	.222690 - .00007	.015	4 4 4 4 4 4 4 4
2	7481978		.227	.002	CHECK	.222690 - .00007	.015	4 4 4 4 4 4 4 4
1	7481979		.227					

Table I. Tabulation of Design and Identification Data (Continued)

ON	MARKING ON GO GAGE				RING GAGE DIMENSIONS				FINISH
	FINN-GAGE	STOCK NO.	MAXIMUM	TOTAL	DIAMETER	CHAMFER	G	H	
9	RING GAGE	ACCEPTANCE	COMPONENT	COMPONENT					
IL	A	B	C	D	E	F	G	H	
1	1	7481980	7481981	.227	.004	.22680	.015	.015	8
1	2	7481982		.227	.008 AND UP	.22680 - .00030	.015	.015	8
1	3	7481983		.227	.005	.22800	.015	.015	8
1	2	7481985	7481986	.228	.002	.22800 - .00004	.015	.015	4
1	2	7481989	7481990	.228	.004	.22790 - .00007	.015	.015	4
1	1	7481991		.228	.004	.22780 - .00010	.015	.015	8
1	2	7481992		.228	.008 AND UP	.22760 - .00030	.015	.015	8
1	3	7481994		.228	.005	.22900	.015	.015	4
1	2	7481996		.229	.002	.22900 - .00004	.015	.015	4
1	2	7482000	7482001	.229	.004	.22890 - .00007	.015	.015	4
1	2	7482002		.229	.008 AND UP	.22880 - .00010	.015	.015	8
1	2	7482003	7482003	.229	.004	.22880 - .00007	.015	.015	8
1	3	7482005		.229	.008 AND UP	.22860 - .00030	.015	.015	8
1	2	7482007		.230	.005	.23000	.015	.015	4
1	2	7482008	7482008	.230	.002	.23000 - .00004	.015	.015	4
1	1	7482011		.230	.004	.22990 - .00007	.015	.015	4
1	2	7482012		.230	.008 AND UP	.22980 - .00010	.015	.015	8
1	1	7482013	7482013	.230	.004	.22980 - .00007	.015	.015	8
1	2	7482014		.230	.005	.22960 - .00030	.015	.015	8
1	3	7482016		.230	.005	.23100	.015	.015	4
1	2	7482018		.231	.002	.23100 - .00004	.015	.015	4
1	2	7482022	7482023	.231	.004	.23090 - .00007	.015	.015	4
1	2	7482024	7482025	.231	.008 AND UP	.23080 - .00010	.015	.015	8
1	3	7482027		.231	.006	.23060 - .00030	.015	.015	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH		
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	G	H	
A	B	C	D	E	F	G	H		
1	7482029	7482030	.232	.0005	.23200		.015	4	
2	7482033	7482034	.232	.002	.23190	-.00004	.015	4	
1	7482035	7482036	.232	.004	.23190	-.00007	.015	4	
2	7482038	7482039	.232	.008 AND UP	.23180	-.00010	.015	8	
3					.23160	-.00030	.015	8	
1	7482040	7482041	.233	.0005	.23300		.015	4	
2	7482044	7482045	.233	.002	.23300	-.00004	.015	4	
1	7482046	7482047	.233	.004	.23290	-.00007	.015	4	
2	7482049	7482051	.233	.008 AND UP	.23280	-.00010	.015	8	
3					.23260	-.00030	.015	8	
1	7482052	7482052	.234	.0005	.23400		.015	4	
2	7482055	7482056	.234	.002	.23400	-.00004	.015	4	
1	7482057	7482058	.234	.004	.23390	-.00007	.015	4	
2	7482060	7482060	.234	.008 AND UP	.23380	-.00010	.015	8	
3					.23360	-.00030	.015	8	
1	7482062	7482063	.235	.0005	.23500		.015	4	
2	7482066	7482067	.235	.002	.23500	-.00004	.015	4	
1	7482068	7482069	.235	.004	.23490	-.00007	.015	4	
2	7482071	7482073	.235	.008 AND UP	.23480	-.00010	.015	8	
3					.23460	-.00030	.015	8	
1	7482074	7482074	.236	.0005	.23600		.015	4	
2					.23600	-.00004	.015	4	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHARACTER
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G		
A	B	C						H	
1	7482077	7482078	.236	.002	.23290	-.00007	.015	4	
1	7482079	7482080	.236	.004	.23590	-.00007	.015	4	
2	7482082		.236	.008 AND UP	.23580	-.00010	.015	8	
3	7482084	7482085	.237	.0005	.23560	-.00030	.015	8	
1	7482088	7482089	.237	.002	.23700	-.00004	.015	4	
2	7482090	7482091	.237	.004	.23690	-.00007	.015	4	
3	7482093		.237	.008 AND UP	.23680	-.00010	.015	8	
1	7482095	7482096	.238	.0005	.23660	-.00030	.015	8	
2	7482099	7482100	.238	.002	.23800	-.00004	.015	4	
2	7482101	7482102	.238	.004	.23800	-.00007	.015	4	
3	7482104		.238	.008 AND UP	.23790	-.00007	.015	8	
1	7482106	7482107	.239	.0005	.23780	-.00007	.015	4	
2	7482110	7482111	.239	.002	.23760	-.00030	.015	8	
2	7482112	7482113	.239	.004	.23750	-.00010	.015	8	
3	7482115		.239	.008 AND UP	.23740	-.00030	.015	8	
1	7482117	7482118	.240	.0005	.23900	-.00004	.015	4	
2	7482121	7482122	.240	.002	.23890	-.00007	.015	4	
2			.240	.0005	.24000	-.00004	.015	4	
1			.240	.002	.23990	-.00007	.015	4	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON CIR. NO.	RING GAGE	STOCK NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER	H
			RING GAGE	ACCEPTANCE CHECK		D	E		
A	B	C							
1	7482123	7482124	.240	.004	.23980	.23980	-.00010	.015	8
2	7482126		.240	.008 AND UP	.23960	-.00030	.015	8	
3			.240					.015	8
1	7482128	7482129	.241	.0005	.24100	.24100	-.00004	.015	4
2	7482132	7482133	.241	.002	.24090	.24090	-.00007	.015	4
1	7482134	7482135	.241	.004	.24080	.24080	-.00010	.015	8
2	7482137		.241	.008 AND UP	.24060	-.00030	.015	8	
3								.015	8
1	7482139	7482140	.242	.0005	.24200	.24200	-.00004	.015	4
2	7482143	7482144	.242	.002	.24190	.24190	-.00007	.015	4
1	7482145	7482146	.242	.004	.24180	.24180	-.00010	.015	8
2	7482148		.242	.008 AND UP	.24160	-.00030	.015	8	
3								.015	8
1	7482150	7482151	.243	.0005	.24300	.24300	-.00004	.015	4
2	7482154	7482155	.243	.002	.24290	.24290	-.00007	.015	4
1	7482156	7482157	.243	.004	.24280	.24280	-.00010	.015	8
2	7482159		.243	.008 AND UP	.24260	-.00030	.015	8	
3								.015	8
1	7482161	7482162	.244	.0005	.24400	.24400	-.00004	.015	4
2	7482165	7482166	.244	.002	.24390	.24390	-.00007	.015	4
1	7482167	7482168	.244	.004	.24380	.24380	-.00010	.015	8
2	7482170		.244	.008 AND UP	.24360	-.00030	.015	8	
3								.015	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

NO. ON FIN. GAGE	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE RING GAGE	STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	
A	B	C	D	E	F	G	H
1 2	7482172	7482173	.245	.0005	.24500	.015	4
1 2	7482176	7482177	.245	.002	.24500 -	.00004	4
1 2	7482178	7482179	.245	.004	.24490	.015	4
1 2	7482181	7482182	.245	.008 AND UP	.24490 -	.00007	4
1 2	7482183	7482184	.246	.0005	.24480	.015	4
1 2	7482187	7482188	.246	.002	.24480 -	.00010	4
1 2	7482189	7482190	.246	.004	.24480 -	.00010	4
1 2	7482192	7482193	.246	.008 AND UP	.24460	.00030	4
1 2	7482194	7482195	.247	.0005	.244600	.015	4
1 2	7482198	7482199	.247	.002	.244600 -	.00004	4
1 2	7482200	7482201	.247	.004	.244590	.015	4
1 2	7482203	7482204	.247	.008 AND UP	.244590 -	.00007	4
1 2	7482205	7482206	.248	.0005	.244580	.015	4
1 2	7482209	7482210	.248	.002	.244580 -	.00004	4
1 2	7482211	7482212	.248	.004	.244580 -	.00007	4
1 2	7482214	7482215	.248	.008 AND UP	.244580 -	.00010	4
1 2	7482216	7482217	.249	.0005	.244570	.015	4
				CHECK	.244570 -	.00030	4

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
1	7482220	7482221	.249	.002	.24890 - .00007	.015	.4
2	7482222	7482223	.249	.004	.24880 - .00010	.015	.8
2	7482225	7482233	.249	.008 AND UP	.24860 - .00030	.015	.8
3	7482227	7482228	.250	.0005	.25000 - .00004	.015	.4
2	7482231	7482232	.250	.002	.24990 - .00007	.015	.4
2	7482233	7482234	.250	.004	.24980 - .00010	.015	.8
2	7482236	7482238	.250	.008 AND UP	.24960 - .00030	.015	.8
3	7482240	7482241	.251	.0005	.25100 - .00004	.015	.4
3	7482240	7482243	.251	.002	.25090 - .00007	.015	.8
3	7482241	7482243	.251	.004	.25080 - .00010	.015	.8
3	7482243	7482245	.251	.008 AND UP	.25060 - .00030	.015	.8
3	7482245	7482247	.252	.0005	.25200 - .00004	.015	.4
3	7482247	7482248	.252	.002	.25190 - .00007	.015	.8
3	7482248	7482250	.252	.004	.25180 - .00010	.015	.8
3	7482250	7482252	.252	.008 AND UP	.25160 - .00030	.015	.8
3	7482252	7482254	.253	.0005	.25200 - .00004	.015	.4
3	7482254	7482255	.253	.002	.25190 - .00007	.015	.8
3	7482255	7482257	.253	.004	.25180 - .00010	.015	.8
3	7482257	7482259	.253	.008 AND UP	.25160 - .00030	.015	.8
3	7482259	7482261	.254	.0005	.25400 - .00004	.015	.4
3	7482261	7482262	.254	.002	.25390 - .00007	.015	.8
3	7482262	7482264	.254	.004	.25380 - .00010	.015	.8
3	7482264	7482265	.254	.008 AND UP	.25360 - .00030	.015	.8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	RING GAGE STOCK NO.	MARKING ON GO GAGE			TOTAL			RING GAGE DIMENSIONS			FINISH
		RING GAGE	ACCEPTANCE CHECK	C	D	E	F	G	H	CHAMFER	
								UP	DOWN		
A	B										
7482266	7482268			.255	.0005		.25500		.00004	.015	
	7482269			.255	.002		.25490		.00007	.015	4
	7482271			.255	.004		.25480		.00010	.015	8
					.008 AND UP		.25460		.00030	.015	8
	7482273			.256	.0005		.25600		.00004	.015	
	7482275			.256	.002		.25590		.00007	.015	
	7482276			.256	.004		.25580		.00010	.015	
	7482278			.256	.008 AND UP		.25560		.00030	.015	
	7482280			.257	.0005		.25700		.00004	.015	
	7482282			.257	.002		.25690		.00007	.015	
	7482283			.257	.004		.25680		.00010	.015	
	7482285			.257	.008 AND UP		.25660		.00030	.015	
	7482287			.258	.0005		.25800		.00004	.015	
	7482289			.258	.002		.25790		.00007	.015	
	7482290			.258	.004		.25780		.00010	.015	
	7482292			.258	.008 AND UP		.25760		.00030	.015	
	7482294			.259	.0005		.25900		.00004	.015	
	7482296			.259	.002		.25890		.00007	.015	
	7482297			.259	.004		.25880		.00010	.015	
	7482299			.259	.008 AND UP		.25860		.00030	.015	
	7482301			.260	.0005		.26000		.00004	.015	
	7482303			.260	.002		.25990		.00007	.015	
	7482304			.260	.004		.25980		.00010	.015	
	7482306			.260	.008 AND UP		.25960		.00030	.015	
	7482308			.261	.0005		.26100		.00004	.015	
	7482310			.261	.002		.26090		.00007	.015	
	7482311			.261	.004		.26080		.00010	.015	
	7482313			.261	.008 AND UP		.26060		.00030	.015	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	FIN—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	CHECK	DIMENSION	DIAMETER	SHANK DIAMETER	GAGE	
A	B	C	D	E	F	G	H		
7482315	.262	.0005	.26200	—	.00004	.015	4		
7482317	.262	.002	.26190	—	.00007	.015	4		
7482318	.262	.004	.26180	—	.00010	.015	4		
7482320	.262	.003 AND UP	.26160	—	.00030	.015	4		
7482322	.263	.0005	.26300	—	.00004	.015	4		
7482324	.263	.002	.26290	—	.00007	.015	4		
7482325	.263	.004	.26280	—	.00010	.015	4		
7482327	.263	.003 AND UP	.26260	—	.00030	.015	4		
7482329	.264	.0005	.26400	—	.00004	.015	4		
7482331	.264	.002	.26390	—	.00007	.015	4		
7482332	.264	.004	.26380	—	.00010	.015	4		
7482334	.264	.003 AND UP	.26360	—	.00030	.015	4		
7482336	.265	.0005	.26500	—	.00004	.015	4		
7482338	.265	.002	.26490	—	.00007	.015	4		
7482339	.265	.004	.26480	—	.00010	.015	4		
7482341	.265	.003 AND UP	.26460	—	.00030	.015	4		
7482343	.266	.0005	.26600	—	.00004	.015	4		
7482345	.266	.002	.26590	—	.00007	.015	4		
7482346	.266	.004	.26580	—	.00010	.015	4		
7482348	.266	.003 AND UP	.26560	—	.00030	.015	4		
7482350	.267	.0005	.26700	—	.00004	.015	4		
7482352	.267	.002	.26690	—	.00007	.015	4		
7482353	.267	.004	.26680	—	.00010	.015	4		
7482355	.267	.003 AND UP	.26660	—	.00030	.015	4		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER		
	FIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	F	G	H	I	
A	B	C	D	E	F	G	H	I	
3	7482357	.268	.0005	.26800 - .00004	.015	4			
3	7482359	.268	.002	.26790 - .00007	.015	4	8		
3	7482360	.268	.004	.26780 - .00010	.015	4	8		
3	7482362	.268	.008 AND UP	.26760 - .00030	.015	8			
3	7482364	.269	.0005	.26900 - .00004	.015	4	4	8	
3	7482365	.269	.002	.26890 - .00007	.015	4	4	8	
3	7482367	.269	.004	.26880 - .00010	.015	4	4	8	
3	7482369	.269	.008 AND UP	.26860 - .00030	.015	8			
3	7482371	.270	.0005	.27000 - .00004	.015	4	4	8	
3	7482373	.270	.002	.26990 - .00007	.015	4	4	8	
3	7482374	.270	.004	.26980 - .00010	.015	4	4	8	
3	7482376	.270	.008 AND UP	.26960 - .00030	.015	8			
3	7482378	.271	.0005	.27100 - .00004	.015	4	4	8	
3	7482380	.271	.002	.27090 - .00007	.015	4	4	8	
3	7482381	.271	.004	.27080 - .00010	.015	4	4	8	
3	7482383	.271	.008 AND UP	.27060 - .00030	.015	8			
3	7482385	.272	.0005	.27200 - .00004	.015	4	4	8	
3	7482387	.272	.002	.27190 - .00007	.015	4	4	8	
3	7482388	.272	.004	.27180 - .00010	.015	4	4	8	
3	7482390	.272	.008 AND UP	.27160 - .00030	.015	8			
3	7482392	.273	.0005	.27300 - .00004	.015	4	4	8	
3	7482394	.273	.002	.27290 - .00007	.015	4	4	8	
3	7482395	.273	.004	.27280 - .00010	.015	4	4	8	
3	7482397	.273	.008 AND UP	.27260 - .00030	.015	8			
3	7482399	.274	.0005	.27400 - .00004	.015	4			
3	7482401	.274	.002	.27390 - .00007	.015	4			
3	7482402	.274	.004	.27380 - .00010	.015	4			
3	7482404	.274	.008 AND UP	.27360 - .00030	.015	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE				RING GAGE DIMENSIONS				FINISH
	FIN—GAGE STOCK NO.	MAXIMUM RING GAGE ACCEPTANCE CHECK	COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA	F	G	H	
A	B	C	D	E					CHAMFER
7482406	.275	.0005	.275	.0004	.27500	—	.00004	.015	4
7482408	.275	.002	.275	.0007	.27490	—	.00007	.015	4
7482409	.275	.004	.275	.0010	.27480	—	.00010	.015	4
7482411	.275	.008 AND UP	.275	.0030	.27460	—	.00030	.015	8
7482413	.276	.0005	.276	.0004	.27600	—	.00004	.015	4
7482415	.276	.002	.276	.0007	.27590	—	.00007	.015	4
7482416	.276	.004	.276	.0010	.27580	—	.00010	.015	4
7482418	.276	.008 AND UP	.276	.0030	.27560	—	.00030	.015	8
7482420	.277	.0005	.277	.0004	.27700	—	.00004	.015	4
7482422	.277	.002	.277	.0007	.27690	—	.00007	.015	4
7482423	.277	.004	.277	.0010	.27680	—	.00010	.015	8
7482425	.277	.008 AND UP	.277	.0030	.27660	—	.00030	.015	8
7482427	.278	.0005	.278	.0004	.27800	—	.00004	.015	4
7482429	.278	.002	.278	.0007	.27790	—	.00007	.015	4
7482430	.278	.004	.278	.0010	.27780	—	.00010	.015	8
7482432	.278	.008 AND UP	.278	.0030	.27760	—	.00030	.015	8
7482434	.279	.0005	.279	.0004	.27900	—	.00004	.015	4
7482436	.279	.002	.279	.0007	.27890	—	.00007	.015	4
7482437	.279	.004	.279	.0010	.27880	—	.00010	.015	8
7482439	.279	.008 AND UP	.279	.0030	.27860	—	.00030	.015	8
7482441	.280	.0005	.280	.0004	.28000	—	.00004	.015	4
7482443	.280	.002	.280	.0007	.27990	—	.00007	.015	4
7482444	.280	.004	.280	.0010	.27980	—	.00010	.015	8
7482446	.280	.008 AND UP	.280	.0030	.27960	—	.00030	.015	8
7482448	.281	.0005	.281	.0004	.28100	—	.00004	.015	4
7482450	.281	.002	.281	.0007	.28090	—	.00007	.015	4
7482451	.281	.004	.281	.0010	.28080	—	.00010	.015	8
7482453	.281	.008 AND UP	.281	.0030	.28060	—	.00030	.015	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON. CIR.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
A	B	C	D	E	F	G	H			
3	7482455		.28125	.0005 AND UP	.28125 - .00004	.015	4			
	7482456		.282	.0005	.28200 - .00004	.030	4			
	7482458		.282	.002	.28190 - .00007	.030	4			
	7482459		.282	.004	.28180 - .00010	.030	8			
	7482461		.282	.008 AND UP	.28160 - .00030	.030	8			
	7482463		.283	.0005	.28300 - .00004	.030	4			
	7482465		.283	.002	.28290 - .00007	.030	4			
	7482466		.283	.004	.28280 - .00010	.030	8			
	7482468		.283	.008 AND UP	.28260 - .00030	.030	8			
	7482470		.284	.0005	.28400 - .00004	.030	4			
	7482472		.284	.002	.28390 - .00007	.030	4			
	7482473		.284	.004	.28380 - .00010	.030	8			
	7482475		.284	.008 AND UP	.28360 - .00030	.030	8			
	7482477		.285	.0005	.28500 - .00004	.030	4			
	7482479		.285	.002	.28490 - .00007	.030	4			
	7482480		.285	.004	.28480 - .00010	.030	8			
	7482482		.285	.008 AND UP	.28460 - .00030	.030	8			
	7482484		.286	.0005	.28600 - .00004	.030	4			
	7482486		.286	.002	.28590 - .00007	.030	4			
	7482487		.286	.004	.28580 - .00010	.030	8			
	7482489		.286	.008 AND UP	.28560 - .00030	.030	8			
	7482491		.287	.0005	.28700 - .00004	.030	4			
	7482493		.287	.002	.28690 - .00007	.030	4			
	7482494		.287	.004	.28680 - .00010	.030	8			
	7482496		.287	.008 AND UP	.28660 - .00030	.030	8			
	7482498		.288	.0005	.28800 - .00004	.030	4			
	7482500		.288	.002	.28790 - .00007	.030	4			
	7482501		.288	.004	.28780 - .00010	.030	8			
	7482503		.288	.008 AND UP	.28760 - .00030	.030	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FINN—GAGE	STOCK NO.	MAXIMUM ACCEPTANCE DIMENSION	C	D	E	F	G	H	
RING GAGE	ACCEPTANCE CHECK	COMPONENT DIMENSION	A	B	C					
3 3 3 3 3	7482505	.289	.0005	.28900	—	.00004	.030	4		
	7482507	.289	.002	.28890	—	.00007	.030	4		
	7482508	.289	.004	.28880	—	.00010	.030	8		
	7482510	.289	.008 AND UP	.28860	—	.00030	.030	8		
3 3 3 3 3	7482512	.290	.0005	.29000	—	.00004	.030	4		
	7482514	.290	.002	.28990	—	.00007	.030	4		
	7482515	.290	.004	.28980	—	.00010	.030	8		
	7482517	.290	.008 AND UP	.28960	—	.00030	.030	8		
3 3 3 3 3	7482519	.291	.0005	.29100	—	.00004	.030	4		
	7482521	.291	.002	.29090	—	.00007	.030	4		
	7482522	.291	.004	.29080	—	.00010	.030	8		
	7482524	.291	.008 AND UP	.29060	—	.00030	.030	8		
3 3 3 3 3	7482526	.292	.0005	.29200	—	.00004	.030	4		
	7482528	.292	.002	.29190	—	.00007	.030	4		
	7482529	.292	.004	.29180	—	.00010	.030	8		
	7482531	.292	.008 AND UP	.29160	—	.00030	.030	8		
3 3 3 3 3	7482533	.293	.0005	.29300	—	.00004	.030	4		
	7482535	.293	.002	.29290	—	.00007	.030	4		
	7482536	.293	.004	.29280	—	.00010	.030	8		
	7482538	.293	.008 AND UP	.29260	—	.00030	.030	8		
3 3 3 3 3	7482540	.294	.0005	.29400	—	.00004	.030	4		
	7482542	.294	.002	.29390	—	.00007	.030	4		
	7482543	.294	.004	.29380	—	.00010	.030	8		
	7482545	.294	.008 AND UP	.29360	—	.00030	.030	8		
3 3 3 3 3	7482547	.295	.0005	.29500	—	.00004	.030	4		
	7482549	.295	.002	.29490	—	.00007	.030	4		
	7482550	.295	.004	.29480	—	.00010	.030	8		
	7482552	.295	.008 AND UP	.29460	—	.00030	.030	8		

MIL-STD-112A
6 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN.—GAGE RING GAGE	STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	DIA. D	E	F	G	
A	B	C	D						
3	7482554			.296	.0005		.29600	—	.00004
3	7482556			.296	.002		.29590	—	.00007
3	7482557			.296	.004	AFD UP	.29580	—	.00010
3	7482559			.296	.008	AFD UP	.29560	—	.00030
3	7482561			.297	.0005		.29700	—	.00004
3	7482563			.297	.002		.29690	—	.00007
3	7482564			.297	.004		.29680	—	.00010
3	7482566			.297	.008	AND UP	.29660	—	.00030
3	7482568			.298	.0005		.29800	—	.00004
3	7482570			.298	.002		.29790	—	.00007
3	7482571			.298	.004		.29780	—	.00010
3	7482573			.298	.008	AND UP	.29760	—	.00030
3	7482575			.299	.0005		.29900	—	.00004
3	7482577			.299	.002		.29890	—	.00007
3	7482578			.299	.004		.29880	—	.00010
3	7482580			.299	.008	AND UP	.29860	—	.00030
3	7482582			.300	.0005		.30000	—	.00004
3	7482584			.300	.002		.29990	—	.00007
3	7482585			.300	.004		.29980	—	.00010
3	7482587			.300	.008	AND UP	.29960	—	.00030
3	7482589			.301	.0005		.30100	—	.00004
3	7482591			.301	.002		.30090	—	.00007
3	7482592			.301	.004		.30080	—	.00010
3	7482594			.301	.008	AND UP	.30060	—	.00030
3	7482596			.302	.0005		.30200	—	.00004
3	7482598			.302	.002		.30190	—	.00007
3	7482599			.302	.004		.30180	—	.00010
3	7482601			.302	.008 AND UP		.30160	—	.00030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Cont'dued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER	H
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		E	DIA. DIAMETER	F	G			
A	B	C	D								
33333	7482603		.303	.0005		.30300 - .00004	.030	4			
33333	7482605		.303	.002		.30290 - .00007	.030	4			
33333	7482606		.303	.004 AND UP		.30280 - .00010	.030	8			
33333	7482608		.303	.008 AND UP		.30260 - .00030	.030	8			
33333	7482610		.304	.0005		.30400 - .00004	.030	4			
33333	7482612		.304	.002		.30390 - .00007	.030	4			
33333	7482613		.304	.004 AND UP		.30380 - .00010	.030	8			
33333	7482615		.304	.008 AND UP		.30360 - .00030	.030	8			
33333	7482617		.305	.0005		.30500 - .00004	.030	4			
33333	7482619		.305	.002		.30490 - .00007	.030	4			
33333	7482620		.305	.004 AND UP		.30480 - .00010	.030	8			
33333	7482622		.305	.008 AND UP		.30460 - .00030	.030	8			
33333	7482624		.306	.0005		.30600 - .00004	.030	4			
33333	7482626		.306	.002		.30590 - .00007	.030	4			
33333	7482627		.306	.004 AND UP		.30580 - .00010	.030	8			
33333	7482629		.306	.008 AND UP		.30560 - .00030	.030	8			
33333	7482631		.307	.0005		.30700 - .00004	.030	4			
33333	7482633		.307	.002		.30690 - .00007	.030	4			
33333	7482634		.307	.004 AND UP		.30680 - .00010	.030	8			
33333	7482636		.307	.008 AND UP		.30660 - .00030	.030	8			
33333	7482638		.308	.0005		.30800 - .00004	.030	4			
33333	7482640		.308	.002		.30790 - .00007	.030	4			
33333	7482641		.308	.004 AND UP		.30780 - .00010	.030	8			
33333	7482643		.308	.008 AND UP		.30760 - .00030	.030	8			
33333	7482645		.309	.0005		.30900 - .00004	.030	4			
33333	7482647		.309	.002		.30890 - .00007	.030	4			
33333	7482648		.309	.004 AND UP		.30880 - .00010	.030	8			
33333	7482650		.309	.008 AND UP		.30860 - .00030	.030	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIA. METER	CHAMFER	
A	B	C	D	E	F	G	H
3	7482652		.310	.0005	.31000	-.00004	.030
3	7482654		.310	.002	.30990	-.00007	.030
3	7482655		.310	.004	.30980	-.00010	.030
3	7482657		.310	.008 AND UP	.30960	-.00030	.030
3	7482659		.311	.0005	.31100	-.00004	.030
3	7482661		.311	.002	.31090	-.00007	.030
3	7482662		.311	.004	.31080	-.00010	.030
3	7482664		.311	.008 AND UP	.31060	-.00030	.030
3	7482666		.312	.0005	.31200	-.00004	.030
3	7482668		.312	.002	.31190	-.00007	.030
3	7482669		.312	.004	.31180	-.00010	.030
3	7482671		.312	.008 AND UP	.31160	-.00030	.030
3	7482673		.3125	.0005 AND UP	.31250	-.00004	.030
3	7482674		.313	.0005	.31300	-.00004	.030
3	7482676		.313	.002	.31290	-.00007	.030
3	7482677		.313	.004	.31280	-.00010	.030
3	7482679		.313	.008 AND UP	.31260	-.00030	.030
3	7482681		.314	.0005	.31400	-.00004	.030
3	7482683		.314	.002	.31390	-.00007	.030
3	7482684		.314	.004	.31380	-.00010	.030
3	7482686		.314	.008 AND UP	.31360	-.00030	.030
3	7482688		.315	.0005	.31500	-.00004	.030
3	7482690		.315	.002	.31490	-.00007	.030
3	7482691		.315	.004	.31480	-.00010	.030
3	7482693		.315	.008 AND UP	.31460	-.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	E	F	G	H		
A	B	C	D						
7482695	.316	.0005	.31600 - .00004	.030	4				
7482697	.316	.002	.31590 - .00007	.030	4				
7482698	.316	.004 AND UP	.31580 - .00010	.030	4				
7482700	.316	.008 AND UP	.31560 - .00030	.030	8				
7482702	.317	.0005	.31700 - .00004	.030	4				
7482704	.317	.002	.31690 - .00007	.030	4				
7482705	.317	.004 AND UP	.31680 - .00010	.030	8				
7482707	.317	.008 AND UP	.31660 - .00030	.030	8				
7482709	.318	.0005	.31800 - .00004	.030	4				
7482711	.318	.002	.31790 - .00007	.030	4				
7482712	.318	.004 AND UP	.31780 - .00010	.030	8				
7482714	.318	.008 AND UP	.31760 - .00030	.030	8				
7482716	.319	.0005	.31900 - .00004	.030	4				
7482718	.319	.002	.31890 - .00007	.030	4				
7482719	.319	.004 AND UP	.31880 - .00010	.030	8				
7482721	.319	.008 AND UP	.31860 - .00030	.030	8				
7482723	.320	.0005	.32000 - .00004	.030	4				
7482725	.320	.002	.31990 - .00007	.030	4				
7482726	.320	.004 AND UP	.31980 - .00010	.030	8				
7482728	.320	.008 AND UP	.31960 - .00030	.030	8				
7482730	.321	.0005	.32100 - .00004	.030	4				
7482732	.321	.002	.32090 - .00007	.030	4				
7482733	.321	.004 AND UP	.32080 - .00010	.030	8				
7482735	.321	.008 AND UP	.32060 - .00030	.030	8				
7482737	.322	.0005	.32200 - .00004	.030	4				
7482739	.322	.002	.32190 - .00007	.030	4				
7482740	.322	.004 AND UP	.32180 - .00010	.030	8				
7482742	.322	.008 AND UP	.32160 - .00030	.030	8				

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	FIN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA. METER	CHAMFER	G	H	H	
RING GAGE	ACCEPTANCE CHECK		E	F	G	H			
A	B	C	D						
3	7482744		.323	.0005	.32300 - .0004	.030	4		
3	7482746		.323	.002	.32290 - .0007	.030	4		
3	7482747		.323	.004	.32280 - .0010	.030	8		
3	7482749		.323	.008 AND UP	.32260 - .00030	.030	8		
3	7482751		.324	.0005	.32400 - .0004	.030	4		
3	7482753		.324	.002	.32390 - .0007	.030	4		
3	7482754		.324	.004	.32380 - .0010	.030	8		
3	7482756		.324	.008 AND UP	.32360 - .00030	.030	8		
3	7482758		.325	.0005	.32500 - .0004	.030	4		
3	7482760		.325	.002	.32490 - .0007	.030	4		
3	7482761		.325	.004	.32480 - .0010	.030	8		
3	7482763		.325	.008 AND UP	.32460 - .00030	.030	8		
3	7482765		.326	.0005	.32600 - .0004	.030	4		
3	7482767		.326	.002	.32590 - .0007	.030	4		
3	7482768		.326	.004	.32580 - .0010	.030	8		
3	7482770		.326	.008 AND UP	.32560 - .00030	.030	8		
3	7482772		.327	.0005	.32700 - .0004	.030	4		
3	7482774		.327	.002	.32690 - .0007	.030	4		
3	7482775		.327	.004	.32680 - .0010	.030	8		
3	7482777		.327	.008 AND UP	.32660 - .00030	.030	8		
3	7482779		.328	.0005	.32700 - .0004	.030	4		
3	7482781		.328	.002	.32690 - .0007	.030	4		
3	7482782		.328	.004	.32680 - .0010	.030	8		
3	7482784		.328	.008 AND UP	.32660 - .00030	.030	8		
3	7482786		.329	.0005	.32700 - .0004	.030	4		
3	7482788		.329	.002	.32690 - .0007	.030	4		
3	7482789		.329	.004	.32680 - .0010	.030	8		
3	7482791		.329	.008 AND UP	.32660 - .00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH		
	FIN - GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	G	H	
FIG. NO.	RING GAGE	ACCEPTANCE CHECK	D	E	F	G	H		
A	B	C	D	E	F	G	H		
5	7482793		.330	.005	.33000 - .0004	.030	4 4 8	8	
5	7482795		.330	.002	.32990 - .0007	.030	4 4 8	8	
5	7482796		.330	.004	.32980 - .0010	.030	4 4 8	8	
5	7482798		.330	.008 AND UP	.32960 - .00030	.030	4 4 8	8	
5	7482800		.331	.005	.33100 - .0004	.030	4 4 8	8	
5	7482802		.331	.002	.33090 - .0007	.030	4 4 8	8	
5	7482803		.331	.004	.33080 - .0010	.030	4 4 8	8	
5	7482805		.331	.008 AND UP	.33060 - .00030	.030	4 4 8	8	
5	7482807		.332	.005	.33200 - .0004	.030	4 4 8	8	
5	7482809		.332	.002	.33190 - .0007	.030	4 4 8	8	
5	7482810		.332	.004	.33180 - .0010	.030	4 4 8	8	
5	7482812		.332	.008 AND UP	.33160 - .00030	.030	4 4 8	8	
5	7482814		.333	.005	.33300 - .0004	.030	4 4 8	8	
5	7482816		.333	.002	.33290 - .0007	.030	4 4 8	8	
5	7482817		.333	.004	.33280 - .0010	.030	4 4 8	8	
5	7482819		.333	.008 AND UP	.33260 - .00030	.030	4 4 8	8	
5	7482821		.334	.005	.33400 - .0004	.030	4 4 8	8	
5	7482823		.334	.002	.33390 - .0007	.030	4 4 8	8	
5	7482824		.334	.004	.33380 - .0010	.030	4 4 8	8	
5	7482826		.334	.008 AND UP	.33360 - .00030	.030	4 4 8	8	
5	7482828		.335	.005	.33500 - .0004	.030	4 4 8	8	
5	7482830		.335	.002	.33490 - .0007	.030	4 4 8	8	
5	7482831		.335	.024	.33480 - .0010	.030	4 4 8	8	
5	7482833		.335	.008 AND UP	.33460 - .00030	.030	4 4 8	8	
5	7482835		.336	.005	.33600 - .0004	.030	4 4 8	8	
5	7482837		.336	.002	.33590 - .0007	.030	4 4 8	8	
5	7482838		.336	.004	.33580 - .0010	.030	4 4 8	8	
5	7482840		.336	.008 AND UP	.33560 - .00030	.030	4 4 8	8	

MIL-STD-112A
0 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER	H
	FINN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		E	F		
A	B	C	D					
3	7482842		.337	.0005	.33700	-.0004	.030	4
3	7482844		.337	.002	.33690	-.0007	.030	4
3	7482845		.337	.004 AND UP	.33680	-.0010	.030	8
3	7482847		.337	.008 AND UP	.33660	-.00030	.030	8
3	7482849		.338	.0005	.33800	-.0004	.030	4
3	7482851		.338	.002	.33790	-.0007	.030	4
3	7482852		.338	.004 AND UP	.33780	-.0010	.030	8
3	7482854		.338	.008 AND UP	.33760	-.00030	.030	8
3	7482856		.339	.0005	.33900	-.0004	.030	4
3	7482858		.339	.002	.33890	-.0007	.030	4
3	7482859		.339	.004 AND UP	.33880	-.0010	.030	8
3	7482861		.339	.008 AND UP	.33860	-.00030	.030	8
3	7482863		.340	.0005	.34000	-.0004	.030	4
3	7482865		.340	.002	.33990	-.0007	.030	4
3	7482866		.340	.004	.33980	-.0010	.030	8
3	7482868		.340	.008 AND UP	.33960	-.00030	.030	8
3	7482870		.341	.0005	.34100	-.0004	.030	4
3	7482872		.341	.002	.34090	-.0007	.030	4
3	7482873		.341	.004	.34080	-.0010	.030	8
3	7482875		.341	.008 AND UP	.34060	-.00030	.030	8
3	7482877		.342	.0005	.34200	-.0004	.030	4
3	7482879		.342	.002	.34190	-.0007	.030	4
3	7482880		.342	.004 AND UP	.34180	-.0010	.030	8
3	7482882		.342	.008 AND UP	.34160	-.00030	.030	8
3	7482884		.343	.0005	.34300	-.0004	.030	4
3	7482886		.343	.002	.34290	-.0007	.030	4
3	7482887		.343	.004	.34280	-.0010	.030	8
3	7482889		.343	.008 AND UP	.34260	-.00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	FLIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	COMPONENT TOLERANCE	DIA METER	G	
A	B	C	D	E	F	G	H
3	7482891		.34.375	.0005 AND UP	.34.375 - .00004	.030	4
3	7482892		.34.4	.0005	.34.400 - .00004	.030	4
3	7482894		.34.4	.002	.34.390 - .00007	.030	4
3	7482895		.34.4	.004	.34.380 - .00010	.030	8
3	7482897		.34.4	.008 AND UP	.34.360 - .00030	.030	8
3	7482899		.34.5	.0005	.34.500 - .00004	.030	4
3	7482901		.34.5	.002	.34.490 - .00007	.030	4
3	7482902		.34.5	.004	.34.480 - .00010	.030	8
3	7482904		.34.5	.008 AND UP	.34.460 - .00030	.030	8
3	7482906		.34.6	.0005	.34.600 - .00004	.030	4
3	7482908		.34.6	.002	.34.590 - .00007	.030	4
3	7482909		.34.6	.004	.34.580 - .00010	.030	8
2	7482911		.34.6	.008 AND UP	.34.560 - .00030	.030	8
3	7482913		.34.7	.0005	.34.700 - .00004	.030	4
3	7482915		.34.7	.002	.34.690 - .00007	.030	4
3	7482916		.34.7	.004	.34.680 - .00010	.030	8
3	7482918		.34.7	.008 AND UP	.34.660 - .00030	.030	8
3	7482920		.34.8	.0005	.34.800 - .00004	.030	4
3	7482922		.34.8	.002	.34.790 - .00007	.030	4
3	7482923		.34.8	.004	.34.780 - .00010	.030	8
3	7482925		.34.8	.008 AND UP	.34.760 - .00030	.030	8
3	7482927		.34.9	.0005	.34.900 - .00004	.030	4
3	7482929		.34.9	.002	.34.890 - .00007	.030	4
3	7482930		.34.9	.004	.34.880 - .00010	.030	8
3	7482932		.34.9	.008 AND UP	.34.860 - .00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	RING GAGE	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
		FIN - GAGE STOCK NO.	MAXIMUM ACCEPTANCE COMPONENT CHECK	COMPONENT DIMENSION	DIA METER	CHAMFER	G	
A	B	C	D	E	F	G	H	
7482934	7482936	.350	.0005	.35000 - .00004	.030	4		
7482935	7482937	.350	.002	.34990 - .00007	.030	4		
7482939	7482941	.350	.004	.34980 - .00010	.030	8		
7482943	7482944	.350	.008 AND UP	.34960 - .00030	.030	8		
7482945	7482946	.351	.0005	.35100 - .00004	.030	4		
7482947	7482948	.351	.002	.35090 - .00007	.030	4		
7482950	7482951	.351	.004	.35080 - .00010	.030	8		
7482952	7482953	.351	.008 AND UP	.35060 - .00030	.030	8		
7482955	7482957	.352	.0005	.35200 - .00004	.030	4		
7482958	7482959	.352	.002	.35190 - .00007	.030	4		
7482960	7482962	.353	.004	.35180 - .00010	.030	8		
7482963	7482964	.353	.008 AND UP	.35160 - .00030	.030	8		
7482965	7482967	.354	.0005	.35300 - .00004	.030	4		
7482966	7482969	.354	.002	.35290 - .00007	.030	4		
7482968	7482971	.354	.004	.35280 - .00010	.030	8		
7482972	7482974	.354	.008 AND UP	.35260 - .00030	.030	8		
7482975	7482976	.355	.0005	.35400 - .00004	.030	4		
7482977	7482978	.355	.002	.35390 - .00007	.030	4		
7482979	7482981	.355	.004	.35380 - .00010	.030	8		
7482980		.355	.008 AND UP	.35360 - .00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON G. N. T.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM ACCEPTANCE COMPONENT DIMENSION		DIA. E	F	
A	B	C	D	E	F	G	H
74832983			.357	.0005	.35700 - .00004	.030	4
7482985			.357	.002	.35690 - .00007	.030	4
7482986			.357	.004	.35680 - .00010	.030	8
7482988			.357	.008 AND UP	.35660 - .00030	.030	8
7482990			.358	.0005	.35800 - .00004	.030	4
7482992			.358	.002	.35790 - .00007	.030	4
7482993			.358	.004	.35780 - .00010	.030	8
7482995			.358	.008 AND UP	.35760 - .00030	.030	8
7482997			.359	.0005	.35900 - .00004	.030	4
7482999			.359	.002	.35890 - .00007	.030	4
7483000			.359	.004	.35880 - .00010	.030	8
7483002			.359	.008 AND UP	.35860 - .00030	.030	8
7483004			.360	.0005	.36000 - .00004	.030	4
7483006			.360	.002	.35990 - .00007	.030	4
7483007			.360	.004	.35980 - .00010	.030	8
7483009			.360	.008 AND UP	.35960 - .00030	.030	8
7483011			.361	.0005	.36100 - .00004	.030	4
7483013			.361	.002	.36090 - .00007	.030	4
7483014			.361	.004	.36080 - .00010	.030	8
7483016			.361	.008 AND UP	.36060 - .00030	.030	8
7483018			.362	.0005	.36200 - .00004	.030	4
7483020			.362	.002	.36190 - .00007	.030	4
7483021			.362	.004	.36180 - .00010	.030	8
7483023			.362	.008 AND UP	.36160 - .00030	.030	8
7483025			.363	.0005	.36300 - .00004	.030	4
7483027			.363	.002	.36290 - .00007	.030	4
7483028			.363	.004	.36280 - .00010	.030	8
7483030			.363	.008 AND UP	.36260 - .00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION		RING GAGE DIMENSIONS		FINISH
	RING GAGE	STOCK NO. ACCEPTANCE CHECK	D	E	F	G	
A	B	C	D	E	F	G	H
7483032	.364	.0005	.36400	-.00004	.030	4	
7483034	.364	.002	.36390	-.00007	.030	4	
7483035	.364	.004	.36380	-.00010	.030	8	
7483037	.364	.008 AND UP	.36360	-.00013	.030	8	
7483039	.365	.0005	.36500	-.00004	.030	4	
7483041	.365	.002	.36490	-.00007	.030	4	
7483042	.365	.004	.36480	-.00010	.030	8	
7483044	.365	.008 AND UP	.36460	-.00013	.030	8	
7483046	.366	.0005	.36600	-.00004	.030	4	
7483048	.366	.002	.36590	-.00007	.030	4	
7483049	.366	.004	.36580	-.00010	.030	8	
7483051	.366	.008 AND UP	.36560	-.00013	.030	8	
7483053	.367	.0005	.36700	-.00004	.030	4	
7483055	.367	.002	.36690	-.00007	.030	4	
7483056	.367	.004	.36680	-.00010	.030	8	
7483058	.367	.008 AND UP	.36660	-.00013	.030	8	
7483060	.368	.0005	.36800	-.00004	.030	4	
7483062	.368	.002	.36790	-.00007	.030	4	
7483063	.368	.004	.36780	-.00010	.030	8	
7483065	.368	.008 AND UP	.36760	-.00013	.030	8	
7483067	.369	.0005	.36900	-.00004	.030	4	
7483069	.369	.002	.36890	-.00007	.030	4	
7483070	.369	.004	.36880	-.00010	.030	8	
7483072	.369	.008 AND UP	.36860	-.00013	.030	8	
7483074	.370	.0005	.37000	-.00004	.030	4	
7483076	.370	.002	.36990	-.00007	.030	4	
7483077	.370	.004	.36980	-.00010	.030	8	
7483079	.370	.008 AND UP	.36960	-.00013	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data. (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIA. IN.	E	
RING GAGE	ACCEPTANCE CHECK	CHECK DIMENSION	D				H
A	B	C	D				
7483081			.371	.0005	.37100	-.0004	.030
7483083			.371	.002	.37090	-.0007	.030
7483084			.371	.004	.37080	-.0010	.030
7483086			.371	.008 AND IN.	.37060	-.00030	.030
7483088			.372	.0005	.37200	-.00004	.030
7483090			.372	.002	.37190	-.00007	.030
7483091			.372	.004	.37180	-.00010	.030
7483093			.372	.007 AND IN.	.37160	-.00030	.030
7483095			.373	.0005	.37300	-.00004	.030
7483097			.373	.002	.37290	-.00007	.030
7483098			.373	.004	.37250	-.00010	.030
7483100			.373	.008 AND IN.	.37260	-.00030	.030
7483102			.374	.0005	.37400	-.00004	.030
7483104			.374	.002	.37390	-.00007	.030
7483105			.374	.004	.37380	-.00010	.030
7483107			.374	.008 AND IN.	.37360	-.00030	.030
7483109			.375	.0005	.37500	-.00004	.030
7483111			.375	.002	.37490	-.00007	.030
7483112			.375	.004	.37480	-.00010	.030
7483114			.375	.008 AND IN.	.37460	-.00030	.030
7483116			.376	.0005	.37600	-.00004	.030
7483118			.376	.002	.37590	-.00007	.030
7483119			.376	.004	.37580	-.00010	.030
7483121			.376	.008 AND IN.	.37560	-.00030	.030
7483123			.377	.0005	.37700	-.00004	.030
7483125			.377	.002	.37690	-.00007	.030
7483126			.377	.004	.37670	-.00010	.030
7483128			.377	.008	.37660	-.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ITEM NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN—GAGE STOCK NO.	MAXIMUM ACCEPTANCE DIMENSION	CHECK	DIMENSION	E	F	G		
ITEM NO.	RING GAGE	ACCEPTANCE CHECK	D						
A	B	C	D	E	F	G	H		
7483130			.378	.0005					
7483132			.373	.002					
7483133			.378	.004					
7483135			.378	.008 AND UP					
7483137			.379	.0005					
7483139			.379	.002					
7483140			.379	.004					
7483142			.379	.008 AND UP					
7483144			.380	.0005					
7483146			.380	.002					
7483147			.380	.004					
7483149			.380	.008 AND UP					
7483151			.381	.0005					
7483153			.381	.002					
7483154			.381	.004					
7483156			.381	.008 AND UP					
7483158			.382	.0005					
7483160			.382	.002					
7483161			.382	.004					
7483163			.382	.008 AND UP					
7483165			.383	.0005					
7483167			.383	.002					
7483168			.383	.004					
7483170			.383	.008 AND UP					
7483172			.384	.0005					
7483174			.384	.002					
7483175			.384	.004					
7483177			.384	.008 AND UP					

8 MIL-STD-112A
December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON. C. G. T.	MARKING ON GO GAGE			RING GAGE DIMENSIONS		RING GAGE DIMENSIONS		FINISH H
	FIN— GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	G	
A	B	C	D	E	F	G		
3	7483179		.385	.0005	.38500	-.00004	.030	4
3	7483181		.385	.002	.38490	-.00007	.030	4
3	7483182		.385	.004 AND UP	.38480	-.00010	.030	8
3	7483184		.385	.005	.38600	-.00004	.030	4
3	7483186		.386	.002	.38590	-.00007	.030	4
3	7483188		.386	.004	.38580	-.00010	.030	8
3	7483189		.386	.004 AND UP	.38560	-.00010	.030	8
3	7483191		.386	.008 AND UP	.38530	-.00030	.030	8
3	7483193		.387	.0005	.38700	-.00004	.030	4
3	7483195		.387	.002	.38690	-.00007	.030	4
3	7483196		.387	.004	.38680	-.00010	.030	8
3	7483198		.387	.008 AND UP	.38660	-.00030	.030	8
3	7483200		.388	.0005	.38800	-.00004	.030	4
3	7483202		.388	.002	.38790	-.00007	.030	4
3	7483203		.388	.004	.38780	-.00010	.030	8
3	7483205		.388	.008 AND UP	.38760	-.00030	.030	8
3	7483207		.389	.0005	.38900	-.00004	.030	4
3	7483209		.389	.002	.38890	-.00007	.030	4
3	7483210		.389	.004	.38880	-.00010	.030	8
3	7483212		.389	.008 AND UP	.38860	-.00030	.030	8
3	7483214		.390	.0005	.39000	-.00004	.030	4
3	7483216		.390	.002	.38990	-.00007	.030	4
3	7483217		.390	.004	.38980	-.00010	.030	8
3	7483219		.390	.008 AND UP	.38960	-.00030	.030	8
3	7483221		.391	.0005	.39100	-.00004	.030	4
3	7483223		.391	.002	.39090	-.00007	.030	4
3	7483224		.391	.004	.39080	-.00010	.030	8
3	7483226		.391	.008 AND UP	.39060	-.00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
A	B	C	D							
3 7483228			.392	.0005	.39200	-.00004	.030	4		
3 7483230			.392	.002	.39190	-.00007	.030	4		
3 7483231			.392	.004	.39190	-.00010	.030	8		
3 7483233			.392	.008 AND UP	.39160	-.00030	.030	8		
3 7483235			.393	.005	.39300	-.00004	.030	4		
3 7483237			.393	.002	.39290	-.00007	.030	4		
3 7483238			.393	.004	.39280	-.00010	.030	8		
3 7483240			.393	.008 AND UP	.39260	-.00030	.030	8		
3 7483242			.394	.005	.39400	-.00004	.030	4		
3 7483244			.394	.002	.39390	-.00007	.030	4		
3 7483245			.394	.004	.39380	-.00010	.030	8		
3 7483247			.394	.008 AND UP	.39360	-.00030	.030	8		
3 7483249			.395	.005	.39500	-.00004	.030	4		
3 7483251			.395	.002	.39490	-.00007	.030	4		
3 7483252			.395	.004	.39480	-.00010	.030	8		
3 7483254			.395	.008 AND UP	.39460	-.00030	.030	8		
3 7483256			.396	.005	.39600	-.00004	.030	4		
3 7483258			.396	.002	.39590	-.00007	.030	4		
3 7483259			.396	.004	.39580	-.00010	.030	8		
3 7483261			.396	.008 AND UP	.39560	-.00030	.030	8		
3 7483263			.397	.005	.39700	-.00004	.030	4		
3 7483265			.397	.002	.39690	-.00007	.030	4		
3 7483266			.397	.004	.39680	-.00010	.030	8		
3 7483268			.397	.008 AND UP	.39660	-.00030	.030	8		
3 7483270			.398	.005	.39800	-.00004	.030	4		
3 7483272			.398	.002	.39790	-.00007	.030	4		
3 7483273			.398	.004	.39780	-.00010	.030	8		
3 7483275			.398	.008 AND UP	.39760	-.00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	RING GAGE STOCK NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER
		FIN.—GAGE RING GAGE	ACCEPTANCE CHECK		D	E	
A	B	C	D	E	F	G	H
3	7483277		.399	.0005	.39900	-.00004	.030
3	7483279		.399	.002	.39890	-.00007	.030
3	7483280		.399	.004	.39880	-.00010	.030
3	7483282		.399	.008 AND UP	.39860	-.00030	.030
3	7483284		.400	.0005	.40000	-.00004	.030
3	7483286		.400	.002	.39990	-.00007	.030
3	7483287		.400	.004	.39980	-.00010	.030
3	7483289		.400	.008 AND UP	.39960	-.00030	.030
3	7483291		.401	.0005	.40100	-.00004	.030
3	7483293		.401	.002	.40090	-.00007	.030
3	7483294		.401	.004	.40080	-.00010	.030
3	7483296		.401	.008 AND UP	.40060	-.00030	.030
3	7483298		.402	.0005	.40200	-.00004	.030
3	7483300		.402	.002	.40190	-.00007	.030
3	7483301		.402	.004	.40180	-.00010	.030
3	7483303		.402	.008 AND UP	.40160	-.00030	.030
3	7483305		.403	.0005	.40300	-.00004	.030
3	7483307		.403	.002	.40290	-.00007	.030
3	7483308		.403	.004	.40280	-.00010	.030
3	7483309		.403	.008 AND UP	.40260	-.00030	.030
3	7483310						
3	7483312						
3	7483314						
3	7483315						
3	7483317						
3	7483319						
3	7483321						
3	7483322						
3	7483324						

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

LINE NO.	MARKING ON GO GAGE				TOTAL COMPONENT TOLERANCE				RING GAGE DIMENSIONS		FINISH
	FIN-GAGE RINGS	STOCK NO.	MAXIMUM ACCEPTANCE CHECK	COMPONENT DIMENSION	DIA	E	F	G	H		
3	7483326		.406	.0005		.40600	-.00004	.030	4	4	
3	7483328		.406	.002		.40590	-.00007	.030	4	4	
3	7483329		.406	.004		.40580	-.00010	.030	8	8	
3	7483331		.406	.008 AND UP		.40560	-.00030	.030	8	8	
7	7483333		.40625	.0005 AND UP		.40625	-.00004	.030	4	4	
7	7483334		.407	.0005		.40700	-.00004	.030	4	4	
7	7483336		.407	.002		.40690	-.00007	.030	4	4	
7	7483337		.407	.004		.40680	-.00010	.030	8	8	
7	7483339		.407	.008 AND UP		.40660	-.00030	.030	8	8	
7	7483341		.408	.0005		.40800	-.00004	.030	4	4	
7	7483343		.408	.002		.40790	-.00007	.030	4	4	
7	7483344		.408	.004		.40780	-.00010	.030	8	8	
7	7483346		.408	.008 AND UP		.40760	-.00030	.030	8	8	
7	7483348		.409	.0005		.40900	-.00004	.030	4	4	
7	7483350		.409	.002		.40890	-.00007	.030	4	4	
7	7483351		.409	.004		.40880	-.00010	.030	8	8	
7	7483353		.409	.008 AND UP		.40860	-.00030	.030	8	8	
7	7483355		.410	.0005		.41000	-.00004	.030	4	4	
7	7483357		.410	.002		.40990	-.00007	.030	4	4	
7	7483358		.410	.004		.40980	-.00010	.030	8	8	
7	7483360		.410	.008 AND UP		.40960	-.00030	.030	8	8	
7	7483362		.411	.0005		.41100	-.00004	.030	4	4	
7	7483364		.411	.002		.41090	-.00007	.030	4	4	
7	7483365		.411	.004		.41080	-.00010	.030	8	8	
7	7483367		.411	.008 AND UP		.41060	-.00030	.030	8	8	
7	7483369		.412	.0005		.41200	-.00004	.030	4	4	
7	7483371		.412	.002		.41190	-.00007	.030	4	4	
7	7483372		.412	.004		.41180	-.00010	.030	8	8	
7	7483374		.412	.008 AND UP		.41160	-.00030	.030	8	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON SHEET	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	FLIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA. METER	CHAMFER	
A	B	C	D	E	F	G	H
3	7483376		.413	.005	.41300 - .00004	.030	4
	7483378		.413	.002	.41290 - .00007	.030	4
	7483379		.413	.004	.41260 - .00010	.030	8
	7483381		.413	.008 AND UP	.41260 - .00030	.030	8
	7483383		.414	.0005	.41400 - .00004	.030	4
	7483385		.414	.002	.41390 - .00007	.030	4
	7483386		.414	.004	.41380 - .00010	.030	8
	7483388		.414	.008 AND UP	.41360 - .00030	.030	8
	7483390		.415	.0005	.41500 - .00004	.030	4
	7483392		.415	.002	.41490 - .00007	.030	4
	7483393		.415	.004	.41480 - .00010	.030	8
	7483395		.415	.008 AND UP	.41460 - .00030	.030	8
	7483397		.416	.0005	.41600 - .00004	.030	4
	7483399		.416	.002	.41590 - .00007	.030	4
	7483400		.416	.004	.41580 - .00010	.030	8
	7483402		.416	.008 AND UP	.41560 - .00030	.030	8
	7483404		.417	.0005	.41700 - .00004	.030	4
	7483406		.417	.002	.41690 - .00007	.030	4
	7483407		.417	.004	.41680 - .00010	.030	8
	7483409		.417	.008 AND UP	.41660 - .00030	.030	8
	7483411		.418	.0005	.41800 - .00004	.030	4
	7483413		.418	.002	.41790 - .00007	.030	4
	7483414		.418	.004	.41780 - .00010	.030	8
	7483416		.418	.008 AND UP	.41760 - .00030	.030	8
	7483418		.419	.0005	.41900 - .00004	.030	4
	7483420		.419	.002	.41890 - .00007	.030	4
	7483421		.419	.004	.41880 - .00010	.030	8
	7483423		.419	.008 AND UP	.41860 - .00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING OF 30 GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH	
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIAMETER		CHAMFER					
		RING GAGE	ACCEP'TANCE CHECK	B	C	D	E	F	G		
A										H	
3	7483425			.420	.0005		.42000	—	.00004	.030	
	7483427			.420	.002		.41990	—	.00007	.030	
	7483428			.420	.004	AND IT	.41980	—	.00010	.030	
	7483430			.420	.008		.41960	—	.00030	.030	
3	7483432			.421	.0005		.42100	—	.00004	.030	
	7483434			.421	.002		.42090	—	.00007	.030	
	7483435			.421	.004		.42080	—	.00010	.030	
	7483437			.421	.008 AND UP		.42060	—	.00030	.030	
3	7483439			.422	.0005		.42200	—	.00004	.030	
	7483441			.422	.002		.42190	—	.00007	.030	
	7483442			.422	.004		.42180	—	.00010	.030	
	7483444			.422	.008 AND UP		.42160	—	.00030	.030	
3	7483446			.423	.0005		.42300	—	.00004	.030	
	7483448			.423	.002		.42290	—	.00007	.030	
	7483449			.423	.004		.42280	—	.00010	.030	
	7483451			.423	.008 AND UP		.42260	—	.00030	.030	
3	7483453			.424	.0005		.42400	—	.00004	.030	
	7483455			.424	.002		.42390	—	.00007	.030	
	7483456			.424	.004		.42380	—	.00010	.030	
	7483458			.424	.008 AND UP		.42360	—	.00030	.030	
3	7483460			.425	.0005		.42500	—	.00004	.030	
	7483462			.425	.002		.42490	—	.00007	.030	
	7483463			.425	.004		.42480	—	.00010	.030	
	7483465			.425	.008 AND UP		.42460	—	.00030	.030	
3	7483467			.426	.0005		.42600	—	.00004	.030	
	7483469			.426	.002		.42590	—	.00007	.030	
	7483470			.426	.004		.42580	—	.00010	.030	
	7483472			.426	.008 AND UP		.42560	—	.00030	.030	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C	D						
7483476	7483476		.427	.005	.42700	-.00004	.030	4	
7483476	7483476		.427	.002	.42690	-.00007	.030	4	
7483477	7483477		.427	.004	.42680	-.00010	.030	8	
7483479	7483479		.427	.008 AND UP	.42660	-.00030	.030	8	
7483481	7483481		.428	.0005	.42800	-.00004	.030	4	
7483483	7483483		.428	.002	.42790	-.00007	.030	4	
7483484	7483484		.428	.004	.42780	-.00010	.030	8	
7483486	7483486		.428	.008 AND UP	.42760	-.00030	.030	8	
7483488	7483488		.429	.0005	.42900	-.00004	.030	4	
7483490	7483490		.429	.002	.42890	-.00007	.030	4	
7483491	7483491		.429	.004	.42880	-.00010	.030	8	
7483493	7483493		.429	.008 AND UP	.42860	-.00030	.030	8	
7483495	7483495		.430	.0005	.43000	-.00004	.030	4	
7483497	7483497		.430	.002	.42990	-.00007	.030	4	
7483498	7483498		.430	.004	.42980	-.00010	.030	8	
7483500	7483500		.430	.008 AND UP	.42960	-.00030	.030	8	
7483502	7483502		.431	.0005	.43100	-.00004	.030	4	
7483504	7483504		.431	.002	.43090	-.00007	.030	4	
7483505	7483505		.431	.004	.43080	-.00010	.030	8	
7483507	7483507		.431	.008 AND UP	.43060	-.00030	.030	8	
7483509	7483509		.432	.0005	.43200	-.00004	.030	4	
7483511	7483511		.432	.002	.43190	-.00007	.030	4	
7483512	7483512		.432	.004	.43180	-.00010	.030	8	
7483514	7483514		.432	.008 AND UP	.43160	-.00030	.030	8	
7483516	7483516		.433	.0005	.43300	-.00004	.030	4	
7483518	7483518		.433	.002	.43290	-.00007	.030	4	
7483519	7483519		.433	.004	.43280	-.00010	.030	8	
7483521	7483521		.433	.008 AND UP	.43260	-.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		CHAMFER	FINISH
	FIN - GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G		
A	B	C							
3	7483523		.434	.0005	.43400	-.00004	.030	4	
	7483525		.434	.002	.43390	-.00007	.030	4	
	7483526		.434	.004	.43380	-.00010	.030	8	
	7483528		.434	.008 AND UP	.43360	-.00030	.030	8	
	7483530		.435	.0005	.43500	-.00004	.030	4	
	7483532		.435	.002	.43490	-.00007	.030	4	
	7483533		.435	.004	.43480	-.00010	.030	8	
	7483535		.435	.008 AND UP	.43460	-.00030	.030	8	
	7483537		.436	.0005	.43600	-.00004	.030	4	
	7483539		.436	.002	.43590	-.00007	.030	4	
	7483540		.436	.004	.43580	-.00010	.030	8	
	7483542		.436	.008 AND UP	.43560	-.00030	.030	8	
	7483544		.437	.0005	.43700	-.00004	.030	4	
	7483546		.437	.002	.43690	-.00007	.030	4	
	7483547		.437	.004	.43680	-.00010	.030	8	
	7483549		.437	.008 AND UP	.43660	-.00030	.030	8	
3	7463551		.4375	.0005 AND UP	.43750	-.00004	.030	4	
	7483552		.438	.0005	.43800	-.00004	.030	4	
	7483554		.438	.002	.43790	-.00007	.030	4	
	7483555		.438	.004	.43780	-.00010	.030	8	
	7483557		.438	.008 AND UP	.43760	-.00030	.030	8	
	7483559		.439	.0005	.43900	-.00004	.030	4	
	7483561		.439	.002	.43890	-.00007	.030	4	
	7483562		.439	.004	.43880	-.00010	.030	8	
	7483564		.439	.008 AND UP	.43860	-.00030	.030	8	

MIL-STD-1124
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON CIR- CUL	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	
A	B	C							
3	7483566			.440	.0005	.44000	-.00004	.030	4
3	7483568			.440	.002	.43990	-.00007	.030	4
3	7483569			.440	.004 AND UP	.43980	-.00010	.030	4
3	7483571			.440		.43960	-.00013	.030	4
3	7483573			.441	.0005	.44100	-.00004	.030	4
3	7483575			.441	.002	.44090	-.00007	.030	4
3	7483576			.441	.004	.44080	-.00010	.030	4
3	7483578			.441	.008 AND UP	.44060	-.00013	.030	4
3	7483580			.442	.0005	.44200	-.00004	.030	4
3	7483582			.442	.002	.44190	-.00007	.030	4
3	7483583			.442	.004	.44180	-.00010	.030	4
3	7483585			.442	.008 AND UP	.44160	-.00013	.030	4
3	7483587			.443	.0005	.44300	-.00004	.030	4
3	7483589			.443	.002	.44290	-.00007	.030	4
3	7483590			.443	.004	.44280	-.00010	.030	4
3	7483592			.443	.008 AND UP	.44260	-.00013	.030	4
3	7483594			.444	.0005	.44400	-.00004	.030	4
3	7483596			.444	.002	.44390	-.00007	.030	4
3	7483598			.444	.004	.44380	-.00010	.030	4
3	7483599			.444	.008 AND UP	.44360	-.00013	.030	4
3	7483601			.445	.0005	.44500	-.00004	.030	4
3	7483603			.445	.002	.44490	-.00007	.030	4
3	7483604			.445	.004	.44480	-.00010	.030	4
3	7483606			.445	.008 AND UP	.44460	-.00013	.030	4
3	7483608			.446	.0005	.44600	-.00004	.030	4
3	7483610			.446	.002	.44590	-.00007	.030	4
3	7483611			.446	.004	.44580	-.00010	.030	4
3	7483613			.446	.008 AND UP	.44560	-.00013	.030	4

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	G	
A	B	C	D	E	F	G	H
3	7483615		.447	.0005	.44700 - .00004	.030	4
3	7483617		.447	.002	.44690 - .00007	.030	4
3	7483618		.447	.004	.44680 - .00010	.030	8
3	7483620		.447	.008 AND UP	.44660 - .00030	.030	8
3	7483622		.448	.0005	.44800 - .00004	.030	4
3	7483624		.448	.002	.44790 - .00007	.030	4
3	7483625		.448	.004	.44780 - .00010	.030	8
3	7483627		.448	.008 AND UP	.44760 - .00030	.030	8
3	7483629		.449	.0005	.44900 - .00004	.030	4
3	7483631		.449	.002	.44890 - .00007	.030	4
3	7483632		.449	.004	.44880 - .00010	.030	8
3	7483634		.449	.008 AND UP	.44860 - .00030	.030	8
3	7483636		.450	.0005	.45000 - .00004	.030	4
3	7483638		.450	.002	.44990 - .00007	.030	4
3	7483639		.450	.004	.44980 - .00010	.030	8
3	7483641		.450	.008 AND UP	.44960 - .00030	.030	8
3	7483643		.451	.0005	.45100 - .00004	.030	4
3	7483645		.451	.002	.45090 - .00007	.030	4
3	7483646		.451	.004	.45080 - .00010	.030	8
3	7483648		.451	.008 AND UP	.45060 - .00030	.030	8
3	7483650		.452	.0005	.45200 - .00004	.030	4
3	7483652		.452	.002	.45190 - .00007	.030	4
3	7483653		.452	.004	.45180 - .00010	.030	8
3	7483655		.452	.008 AND UP	.45160 - .00030	.030	8
3	7483657		.453	.0005	.45300 - .00004	.030	4
3	7483659		.453	.002	.45290 - .00007	.030	4
3	7483660		.453	.004	.45280 - .00010	.030	8
3	7483662		.453	.008 AND UP	.45260 - .00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER
	FLIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION		DIA. DIAMETER	F E	
A	B	C	D	E		H	
3	7483664		.454	.0005	.45400	-.00004	.030
	7483666		.454	.002	.45390	-.00007	.030
	7483667		.454	.004	.45380	-.00010	.030
	7483669		.454	.008 AND UP	.45360	-.00030	.030
3	7483671		.455	.0005	.45500	-.00004	.030
	7483673		.455	.002	.45490	-.00007	.030
	7483674		.455	.004	.45480	-.00010	.030
	7483676		.455	.008 AND UP	.45460	-.00030	.030
3	7483678		.456	.0005	.45600	-.00004	.030
	7483680		.456	.002	.45590	-.00007	.030
	7483681		.456	.004	.45580	-.00010	.030
	7483683		.456	.008 AND UP	.45560	-.00030	.030
3	7483685		.457	.0005	.45700	-.00004	.030
	7483687		.457	.002	.45690	-.00007	.030
	7483688		.457	.004	.45680	-.00010	.030
	7483690		.457	.008 AND UP	.45660	-.00030	.030
3	7483692		.458	.0005	.45800	-.00004	.030
	7483694		.458	.002	.45790	-.00007	.030
	7483695		.458	.004	.45780	-.00010	.030
	7483697		.458	.008 AND UP	.45760	-.00030	.030
3	7483699		.459	.0005	.45900	-.00004	.030
	7483701		.459	.002	.45890	-.00007	.030
	7483702		.459	.004	.45880	-.00010	.030
	7483704		.459	.008 AND UP	.45860	-.00030	.030
3	7483706		.460	.0005	.46000	-.00004	.030
	7483708		.460	.002	.45990	-.00007	.030
	7483709		.460	.004	.45980	-.00010	.030
3	7483711		.460	.008 AND UP	.45960	-.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISHER
	FLN—GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C							
7483713			.461	.0005	.46100	—	.00004	.030	4
7483715			.461	.002	.46090	—	.00007	.030	4
7483716			.461	.004	.46080	—	.00010	.030	8
7483718			.461	.008 AND UP	.46060	—	.00030	.030	8
7483720			.462	.0005	.46200	—	.00004	.030	4
7483722			.462	.002	.46190	—	.00007	.030	4
7483723			.462	.004	.46180	—	.00010	.030	8
7483725			.462	.008 AND UP	.46160	—	.00030	.030	8
7483727			.463	.0005	.46300	—	.00004	.030	4
7483729			.463	.002	.46290	—	.00007	.030	4
7483730			.463	.004	.46280	—	.00010	.030	8
7483732			.463	.008 AND UP	.46260	—	.00030	.030	8
7483734			.464	.0005	.46400	—	.00004	.030	4
7483736			.464	.002	.46390	—	.00007	.030	4
7483737			.464	.004	.46380	—	.00010	.030	8
7483739			.464	.008 AND UP	.46360	—	.00030	.030	8
7483741			.465	.0005	.46500	—	.00004	.030	4
7483743			.465	.002	.46490	—	.00007	.030	4
7483744			.465	.004	.46480	—	.00010	.030	8
7483746			.465	.008 AND UP	.46460	—	.00030	.030	8
7483748			.466	.0005	.46600	—	.00004	.030	4
7483750			.466	.002	.46590	—	.00007	.030	4
7483751			.466	.004	.46580	—	.00010	.030	8
7483753			.466	.008 AND UP	.46560	—	.00030	.030	8
7483755			.467	.0005	.46700	—	.00004	.030	4
7483757			.467	.002	.46690	—	.00007	.030	4
7483758			.467	.004	.46680	—	.00010	.030	8
7483760			.467	.008 AND UP	.46660	—	.00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON 913	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G			
A	B	C							H
MMMM	7483762	.468	.0005	.46800	-.00004	.030	4		
MMMM	7483764	.468	.002	.46790	-.00007	.030	4		
MMMM	7483765	.468	.004	.46780	-.00010	.030	6		
MMMM	7483767	.468	.006 AND UP	.46760	-.00030	.030	6		
3	7483769	.46875	.0005 AND UP	.46875	-.00004	.030	4		
3	7483770	.469	.0005	.46900	-.00004	.030	4		
3	7483772	.469	.002	.46890	-.00007	.030	4		
3	7483773	.469	.004	.46880	-.00010	.030	6		
3	7483775	.469	.008 AND UP	.46860	-.00030	.030	6		
MMMM	7483777	.470	.0005	.47000	-.00004	.030	4		
MMMM	7483779	.470	.002	.46990	-.00007	.030	4		
MMMM	7483780	.470	.004	.46980	-.00010	.030	6		
MMMM	7483782	.470	.008 AND UP	.46960	-.00030	.030	6		
MMMM	7483784	.471	.0005	.47100	-.00004	.030	4		
MMMM	7483786	.471	.002	.47090	-.00007	.030	4		
MMMM	7483787	.471	.004	.47080	-.00010	.030	6		
MMMM	7483789	.471	.008 AND UP	.47060	-.00030	.030	6		
MMMM	7483791	.472	.0005	.47200	-.00004	.030	4		
MMMM	7483793	.472	.002	.47190	-.00007	.030	4		
MMMM	7483794	.472	.004	.47180	-.00010	.030	6		
MMMM	7483796	.472	.008 AND UP	.47160	-.00030	.030	6		
MMMM	7483798	.473	.0005	.47300	-.00004	.030	4		
MMMM	7483800	.473	.002	.47290	-.00007	.030	4		
MMMM	7483801	.473	.004	.47280	-.00010	.030	6		
MMMM	7483803	.473	.008 AND UP	.47260	-.00030	.030	6		
MMMM	7483805	.474	.0005	.47400	-.00004	.030	4		
MMMM	7483807	.474	.002	.47390	-.00007	.030	4		
MMMM	7483808	.474	.004	.47380	-.00010	.030	6		
MMMM	7483810	.474	.008 AND UP	.47360	-.00030	.030	6		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHARACTER	H
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION		DIA. DIM.	E		
7483812	.475		.475	.0005	.47500	-.00004	.030	.44888
7483814	.475		.475	.002	.47490	-.00007	.030	.44888
7483815	.475		.475	.004	.47480	-.00010	.030	.44888
7483817	.475		.476 AND UP	.008	.47460	-.00030	.030	.44888
7483819			.476	.0005	.47600	-.00004	.030	.44888
7483821			.476	.002	.47590	-.00007	.030	.44888
7483822			.476	.004	.47580	-.00010	.030	.44888
7483824			.476	.008 AND UP	.47560	-.00030	.030	.44888
7483826			.477	.0005	.47700	-.00004	.030	.44888
7483828			.477	.002	.47690	-.00007	.030	.44888
7483829			.477	.004	.47680	-.00010	.030	.44888
7483831			.477	.008 AND UP	.47660	-.00030	.030	.44888
7483833			.478	.0005	.47800	-.00004	.030	.44888
7483835			.478	.002	.47790	-.00007	.030	.44888
7483836			.478	.004	.47780	-.00010	.030	.44888
7483838			.478	.008 AND UP	.47760	-.00030	.030	.44888
7483840			.479	.0005	.47900	-.00004	.030	.44888
7483842			.479	.002	.47890	-.00007	.030	.44888
7483843			.479	.004	.47880	-.00010	.030	.44888
7483845			.479	.008 AND UP	.47860	-.00030	.030	.44888
7483847			.480	.0005	.48000	-.00004	.030	.44888
7483849			.480	.002	.47990	-.00007	.030	.44888
7483850			.480	.004	.47980	-.00010	.030	.44888
7483852			.480	.008 AND UP	.47960	-.00030	.030	.44888
7483854			.481	.0005	.48100	-.00004	.030	.44888
7483856			.481	.002	.48090	-.00007	.030	.44888
7483857			.481	.004	.48080	-.00010	.030	.44888
7483859			.481	.008 AND UP	.48060	-.00030	.030	.44888

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON 915	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH HISIN	H
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G				
A	B	C									
3	7483861		.482	.0005	.48200	-.00004	.030	4	4		
3	7483863		.482	.002	.48190	-.00007	.030	4	4		
3	7483864		.482	.004	.48180	-.00010	.030	4	4		
3	7483866		.482	.008 AND UP	.48160	-.00030	.030	4	4		
3	7483868		.483	.0005	.48300	-.00004	.030	4	4		
3	7483870		.483	.002	.48290	-.00007	.030	4	4		
3	7483871		.483	.004	.48280	-.00010	.030	4	4		
3	7483873		.483	.008 AND UP	.48260	-.00030	.030	4	4		
3	7483875		.484	.0005	.48400	-.00004	.030	4	4		
3	7483877		.484	.002	.48390	-.00007	.030	4	4		
3	7483878		.484	.004	.48380	-.00010	.030	4	4		
3	7483880		.484	.008 AND UP	.48360	-.00030	.030	4	4		
3	7483882		.485	.0005	.48500	-.00004	.030	4	4		
3	7483884		.485	.002	.48490	-.00007	.030	4	4		
3	7483885		.485	.004	.48480	-.00010	.030	4	4		
3	7483887		.485	.008 AND UP	.48460	-.00030	.030	4	4		
3	7483889		.486	.0005	.48600	-.00004	.030	4	4		
3	7483891		.486	.002	.48590	-.00007	.030	4	4		
3	7483892		.486	.004	.48580	-.00010	.030	4	4		
3	7483894		.486	.008 AND UP	.48560	-.00030	.030	4	4		
MNNNN	7483896		.487	.0005	.48700	-.00004	.030	4	4		
MNNNN	7483898		.487	.002	.48690	-.00007	.030	4	4		
MNNNN	7483899		.487	.004	.48680	-.00010	.030	4	4		
MNNNN	7483901		.487	.008 AND UP	.48660	-.00030	.030	4	4		
MNNNN	7483903		.488	.0005	.48800	-.00004	.030	4	4		
MNNNN	7483905		.488	.002	.48790	-.00007	.030	4	4		
MNNNN	7483906		.488	.004	.48780	-.00010	.030	4	4		
MNNNN	7483908		.488	.008 AND UP	.48760	-.00030	.030	4	4		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

RING NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FUN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	DIA METER	CHAMFER	G	F	E	
A	B	C	D							H
3	7483910		.489	.0005	.48900	-	.00004	.030	4	
3	7483912		.489	.002	.48890	-	.00007	.030	4	
3	7483913		.489	.004	.48880	-	.00010	.030	6	
3	7483915		.489	.008 AND UP	.48860	-	.00030	.030	6	
3	7483917		.490	.0005	.49000	-	.00004	.030	4	
3	7483919		.490	.002	.48990	-	.00007	.030	4	
3	7483920		.490	.004	.48980	-	.00010	.030	6	
3	7483922		.490	.008 AND UP	.48960	-	.00030	.030	6	
3	7483924		.491	.0005	.49100	-	.00004	.030	4	
3	7483926		.491	.002	.49090	-	.00007	.030	4	
3	7483927		.491	.004	.49080	-	.00010	.030	6	
3	7483929		.491	.008 AND UP	.49060	-	.00030	.030	6	
3	7483931		.492	.0005	.49200	-	.00004	.030	4	
3	7483933		.492	.002	.49190	-	.00007	.030	4	
3	7483934		.492	.004	.49180	-	.00010	.030	6	
3	7483936		.492	.008 AND UP	.49160	-	.00030	.030	6	
3	7483938		.493	.0005	.49300	-	.00004	.030	4	
3	7483940		.493	.002	.49290	-	.00007	.030	4	
3	7483941		.493	.004	.49280	-	.00010	.030	6	
3	7483943		.493	.008 AND UP	.49260	-	.00030	.030	6	
3	7483945		.494	.0005	.49400	-	.00004	.030	4	
3	7483947		.494	.002	.49390	-	.00007	.030	4	
3	7483948		.494	.004	.49380	-	.00010	.030	6	
3	7483950		.494	.008 AND UP	.49360	-	.00030	.030	6	
3	7483952		.495	.0005	.49500	-	.00004	.030	4	
3	7483954		.495	.002	.49490	-	.00007	.030	4	
3	7483955		.495	.004	.49480	-	.00010	.030	6	
3	7483957		.495	.008 AND UP	.49460	-	.00030	.030	6	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON. NO. FIG.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA. ACCEPTANCE CHECK	E	F	G	H		
A	B	C	D							
3	7483959		.496	.0005	.49600	-.00004	.030	4		
3	7483961		.496	.002	.49590	-.00007	.030	4		
3	7483962		.496	.004	.49580	-.00010	.030	8		
3	7483964		.496	.008 AND UP	.49560	-.00030	.030	8		
3	7483966		.497	.0005	.49700	-.00004	.030	4		
3	7483968		.497	.002	.49690	-.00007	.030	4		
3	7483969		.497	.004	.49680	-.00010	.030	8		
3	7483971		.497	.008 AND UP	.49660	-.00030	.030	8		
3	7483973		.498	.0005	.49800	-.00004	.030	4		
3	7483975		.498	.002	.49790	-.00007	.030	4		
3	7483976		.498	.004	.49780	-.00010	.030	8		
3	7483978		.498	.008 AND UP	.49760	-.00030	.030	8		
3	7483980		.499	.0005	.49900	-.00004	.030	4		
3	7483982		.499	.002	.49890	-.00007	.030	4		
3	7483983		.499	.004	.49880	-.00010	.030	8		
3	7483985		.499	.008 AND UP	.49860	-.00030	.030	8		
3	7483987		.500	.0005	.50000	-.00004	.030	4		
3	7483989		.500	.002	.49990	-.00007	.030	4		
3	7483990		.500	.004	.49980	-.00010	.030	8		
3	7483992		.500	.008 AND UP	.49960	-.00030	.030	8		
3	7483994		.501	.0005	.50100	-.00004	.030	4		
3	7483996		.501	.002	.50090	-.00007	.030	4		
3	7483997		.501	.004	.50080	-.00010	.030	8		
3	7483999		.501	.008 AND UP	.50060	-.00030	.030	8		
3	7484001		.502	.0005	.50200	-.00004	.030	4		
3	7484003		.502	.002	.50190	-.00007	.030	4		
3	7484004		.502	.004	.50180	-.00010	.030	8		
3	7484006		.502	.008 AND UP	.50160	-.00030	.030	8		

MIL-STD-112A
December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	D	E	F	G	H	CHAMFER	
A	B	C	D	E	F	G	H			
7484008	.503	.0005	.50300 - .00004	.030	4					
7484010	.503	.002	.50290 - .00007	.030	4					
7484011	.503	.004	.50280 - .00010	.030	8					
7484013	.503	.008 AND UP	.50260 - .00030	.030	8					
7484015	.504	.0005	.50400 - .00004	.030	4					
7484017	.504	.002	.50390 - .00007	.030	4					
7484018	.504	.004	.50380 - .00010	.030	8					
7484020	.504	.008 AND UP	.50360 - .00030	.030	8					
7484022	.505	.0005	.50500 - .00004	.030	4					
7484024	.505	.002	.50490 - .00007	.030	4					
7484025	.505	.004	.50480 - .00010	.030	8					
7484027	.505	.008 AND UP	.50460 - .00030	.030	8					
7484029	.506	.0005	.50600 - .00004	.030	4					
7484031	.506	.002	.50590 - .00007	.030	4					
7484032	.506	.004	.50580 - .00010	.030	8					
7484034	.506	.008 AND UP	.50560 - .00030	.030	8					
7484036	.507	.0005	.50700 - .00004	.030	4					
7484038	.507	.002	.50690 - .00007	.030	4					
7484039	.507	.004	.50680 - .00010	.030	8					
7484041	.507	.008 AND UP	.50660 - .00030	.030	8					
7484043	.508	.0005	.50800 - .00004	.030	4					
7484045	.508	.002	.50790 - .00007	.030	4					
7484046	.508	.004	.50780 - .00010	.030	8					
7484048	.508	.008 AND UP	.50760 - .00030	.030	8					
7484050	.509	.0005	.50900 - .00004	.030	4					
7484052	.509	.002	.50890 - .00007	.030	4					
7484053	.509	.004	.50880 - .00010	.030	8					
7484055	.509	.008 AND UP	.50860 - .00030	.030	8					

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON C. I. T.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER	
	FIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION		E	F	G	H	I		
		RING GAGE	ACCEPTANCE CHECK							
A	B	C	D	E	F	G	H	I	J	
333333	7484057		.510	.0005	.51000	.00004	.030	4		
	7484059		.510	.002	.50990	-.00007	.030	4		
	7484060		.510	.004	.50980	-.00010	.030	4		
	7484062		.510	.008 AND UP	.50960	-.00030	.030	4		
333333	7484064		.511	.0005	.51100	-.00004	.030	4		
	7484066		.511	.002	.51090	-.00007	.030	4		
	7484067		.511	.004	.51080	-.00010	.030	4		
	7484069		.511	.008 AND UP	.51060	-.00030	.030	4		
333333	7484071		.512	.0005	.51200	-.00004	.030	4		
	7484073		.512	.002	.51190	-.00007	.030	4		
	7484074		.512	.004	.51180	-.00010	.030	4		
	7484076		.512	.008 AND UP	.51160	-.00030	.030	4		
333333	7484078		.513	.0005	.51300	-.00004	.030	4		
	7484080		.513	.002	.51290	-.00007	.030	4		
	7484081		.513	.004	.51280	-.00010	.030	4		
	7484083		.513	.008 AND UP	.51260	-.00030	.030	4		
333333	7484085		.514	.0005	.51400	-.00004	.030	4		
	7484087		.514	.002	.51390	-.00007	.030	4		
	7484088		.514	.004	.51380	-.00010	.030	4		
	7484090		.514	.008 AND UP	.51360	-.00030	.030	4		
333333	7484092		.515	.0005	.51500	-.00004	.030	4		
	7484094		.515	.002	.51490	-.00007	.030	4		
	7484095		.515	.004	.51480	-.00010	.030	4		
	7484097		.515	.008 AND UP	.51460	-.00030	.030	4		
333333	7484099		.516	.0005	.51600	-.00004	.030	4		
	7484101		.516	.002	.51590	-.00007	.030	4		
	7484102		.516	.004	.51580	-.00010	.030	4		
	7484104		.516	.008 AND UP	.51560	-.00030	.030	4		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			H
	FIN-GAGE STOCK NO.	MAXIMUM RING GAGE	COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
3	7484106	.517	.0005	.51700 - .00004	.030	4	
	7484108	.517	.002	.51690 - .00007	.030	4	8
	7484109	.517	.004 AND UP	.51680 - .00010	.030	8	
	7484111	.517		.51660 - .00030	.030		
	7484113	.518	.0005	.51800 - .00004	.030	4	
	7484115	.518	.002	.51790 - .00007	.030	4	8
	7484116	.518	.004	.51780 - .00010	.030	8	
	7484118	.518	.008 AND UP	.51760 - .00030	.030		
	7484120	.519	.0005	.51900 - .00004	.030	4	
	7484122	.519	.002	.51890 - .00007	.030	4	8
	7484123	.519	.004	.51880 - .00010	.030	8	
	7484125	.519	.008 AND UP	.51860 - .00030	.030		
	7484127	.520	.0005	.52000 - .00004	.030	4	
	7484129	.520	.002	.51990 - .00007	.030	4	8
	7484130	.520	.004	.51980 - .00010	.030	8	
	7484132	.520	.008 AND UP	.51960 - .00030	.030		
	7484134	.521	.0005	.52100 - .00004	.030	4	
	7484136	.521	.002	.52090 - .00007	.030	4	8
	7484137	.521	.004	.52080 - .00010	.030	8	
	7484139	.521	.008 AND UP	.52060 - .00030	.030		
	7484141	.522	.0005	.52200 - .00004	.030	4	
	7484143	.522	.002	.52190 - .00007	.030	4	8
	7484144	.522	.004	.52180 - .00010	.030	8	
	7484146	.522	.008 AND UP	.52160 - .00030	.030		
	7484148	.523	.0005	.52300 - .00004	.030	4	
	7484150	.523	.002	.52290 - .00007	.030	4	8
	7484151	.523	.004	.52280 - .00010	.030	8	
	7484153	.523	.008 AND UP	.52260 - .00030	.030		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

TIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION		DIA/M	CHAMFER	G	H	
A	B	C	D	E	F	G	H		
3 3 3 3 3 3 3 3 3 3	7484155		.524	.0005	.52400	-.00004	.030	4	
	7484157		.524	.002	.52390	-.00007	.030	4	
	7484158		.524	.004	.52380	-.00010	.030	4	
	7484160		.524	.008 AND UP	.52360	-.00030	.030	8	
	7484162		.525	.0005	.52500	-.00004	.030	4	
	7484164		.525	.002	.52490	-.00007	.030	4	
	7484165		.525	.004	.52480	-.00010	.030	6	
	7484167		.525	.008 AND UP	.52460	-.00030	.030	8	
	7484169		.526	.0005	.52600	-.00004	.030	4	
	7484171		.526	.002	.52590	-.00007	.030	4	
	7484172		.526	.004	.52580	-.00010	.030	6	
	7484174		.526	.008 AND UP	.52560	-.00030	.030	8	
	7484176		.527	.0005	.52700	-.00004	.030	4	
	7484178		.527	.002	.52690	-.00007	.030	4	
	7484179		.527	.004	.52680	-.00010	.030	6	
	7484181		.527	.008 AND UP	.52660	-.00030	.030	8	
	7484183		.528	.0005	.52800	-.00004	.030	4	
	7484185		.528	.002	.52790	-.00007	.030	4	
	7484186		.528	.004	.52780	-.00010	.030	6	
	7484188		.528	.008 AND UP	.52760	-.00030	.030	8	
	7484190		.529	.0005	.52900	-.00004	.030	4	
	7484192		.529	.002	.52890	-.00007	.030	4	
	7484193		.529	.004	.52880	-.00010	.030	6	
	7484195		.529	.008 AND UP	.52860	-.00030	.030	8	
	7484197		.530	.0005	.53000	-.00004	.030	4	
	7484199		.530	.002	.52990	-.00007	.030	4	
	7484200		.530	.004	.52980	-.00010	.030	6	
	7484202		.530	.008 AND UP	.52960	-.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN—GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA	F	G	
FIG. RING GAGE	CHECK	D	E	F	H		
A	B	C	D	E			
3	7484204		.531	.0005	.53100 - .00004	.030	
	7484205		.531	.002	.53090 - .00007	.030	
	7484207		.531	.004	.53080 - .00010	.030	
	7484209		.531	.008 AND UP	.53060 - .00030	.030	
3	7484211		.53125	.0005 AND JP	.53125 - .00004	.030	
	7484212		.532	.0005	.53200 - .00004	.030	
	7484214		.532	.002	.53190 - .00007	.030	
	7484215		.532	.004	.53180 - .00010	.030	
	7484217		.532	.008 AND UP	.53160 - .00030	.030	
	7484219		.533	.0005	.53300 - .00004	.030	
	7484221		.533	.002	.53290 - .00007	.030	
	7484222		.533	.004	.53280 - .00010	.030	
	7484224		.533	.008 AND UP	.53260 - .00030	.030	
	7484226		.534	.0005	.53400 - .00004	.030	
	7484228		.534	.002	.53390 - .00007	.030	
	7484229		.534	.004	.53380 - .00010	.030	
	7484231		.534	.008 AND UP	.53360 - .00030	.030	
	7484233		.535	.0005	.53500 - .00004	.030	
	7484235		.535	.002	.53490 - .00007	.030	
	7484236		.535	.004	.53480 - .00010	.030	
	7484238		.535	.008 AND UP	.53460 - .00030	.030	
	7484240		.536	.0005	.53600 - .00004	.030	
	7484242		.536	.002	.53590 - .00007	.030	
	7484243		.536	.004	.53580 - .00010	.030	
	7484245		.536	.008 AND UP	.53560 - .00030	.030	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER	H
	FIN - GAGE RING GAGE	STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F		
7484247	.537	.0005		.53700	-.00004	.030	4	
7484249	.537	.002		.53690	-.00007	.030	4	
7484250	.537	.004		.53680	-.00010	.030	8	
7484252	.537	.008 AND UP		.53660	-.00030	.030	8	
7484254	.538	.0005		.53800	-.00004	.030	4	
7484256	.538	.002		.53790	-.00007	.030	4	
7484257	.538	.004		.53780	-.00010	.030	8	
7484259	.538	.008 AND UP		.53760	-.00030	.030	8	
7484261	.539	.0005		.53900	-.00004	.030	4	
7484263	.539	.002		.53890	-.00007	.030	4	
7484264	.539	.004		.53880	-.00010	.030	8	
7484266	.539	.008 AND UP		.53860	-.00030	.030	8	
7484268	.540	.0005		.54000	-.00004	.030	4	
7484270	.540	.002		.53990	-.00007	.030	4	
7484271	.540	.004		.53980	-.00010	.030	8	
7484273	.540	.008 AND UP		.53960	-.00030	.030	8	
7484275	.541	.0005		.54100	-.00004	.030	4	
7484277	.541	.002		.54090	-.00007	.030	4	
7484278	.541	.004		.54080	-.00010	.030	8	
7484280	.541	.008 AND UP		.54060	-.00030	.030	8	
7484282	.542	.0005		.54200	-.00004	.030	4	
7484284	.542	.002		.54190	-.00007	.030	4	
7484285	.542	.004		.54180	-.00010	.030	8	
7484287	.542	.008 AND UP		.54160	-.00030	.030	8	
7484289	.543	.0005		.54300	-.00004	.030	4	
7484291	.543	.002		.54290	-.00007	.030	4	
7484292	.543	.004		.54280	-.00010	.030	8	
7484294	.543	.008 AND UP		.54260	-.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		TOTAL		RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN - GAGE RING GAGE	STOCK NO. ACCEP-	MAXIMUM	COMPONENT	DIA METER	G	
A	B	C	D	E	F	G	H
7484296	.544	.0005	.54400	-.00004	.030	4	4-8 8
7484298	.544	.002	.54390	-.00007	.030	4	4-8 8
7484299	.544	.004	.54380	-.00010	.030	4	4-8 8
7484301	.544	.008 AND UP	.54360	-.00030	.030	4	4-8 8
7484303	.545	.0005	.54500	-.00004	.030	4	4-8 8
7484305	.545	.002	.54490	-.00007	.030	4	4-8 8
7484306	.545	.004	.54480	-.00010	.030	4	4-8 8
7484308	.545	.008 AND UP	.54460	-.00030	.030	4	4-8 8
7484310	.546	.0005	.54600	-.00004	.030	4	4-8 8
7484312	.546	.002	.54590	-.00007	.030	4	4-8 8
7484313	.546	.004	.54580	-.00010	.030	4	4-8 8
7484315	.546	.008 AND UP	.54560	-.00030	.030	4	4-8 8
7484317	.547	.0005	.54700	-.00004	.030	4	4-8 8
7484319	.547	.002	.54690	-.00007	.030	4	4-8 8
7484320	.547	.004	.54680	-.00010	.030	4	4-8 8
7484322	.547	.008 AND UP	.54660	-.00030	.030	4	4-8 8
7484324	.548	.0005	.54800	-.00004	.030	4	4-8 8
7484326	.548	.002	.54790	-.00007	.030	4	4-8 8
7484327	.548	.004	.54780	-.00010	.030	4	4-8 8
7484329	.548	.008 AND UP	.54760	-.00030	.030	4	4-8 8
7484331	.549	.0005	.54900	-.00004	.030	4	4-8 8
7484333	.549	.002	.54890	-.00007	.030	4	4-8 8
7484334	.549	.004	.54880	-.00010	.030	4	4-8 8
7484336	.549	.008 AND UP	.54860	-.00030	.030	4	4-8 8
7484338	.550	.0005	.55000	-.00004	.030	4	4-8 8
7484340	.550	.002	.54990	-.00007	.030	4	4-8 8
7484341	.550	.004	.54980	-.00010	.030	4	4-8 8
7484343	.550	.008 AND UP	.54960	-.00030	.030	4	4-8 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

NO. 915	MARKING ON GO GAGE	FIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	RING GAGE DIMENSIONS		HSHIN	H				
				A	B	C	D	E	F	G	H
7484345		.551	.0005					.55100	-.00004	.030	4
7484347		.551	.002					.55090	-.00007	.030	4
7484348		.551	.004					.55080	-.00010	.030	6
7484350		.551	.008 AND UP					.55060	-.00030	.030	8
7484352		.552	.0005					.55200	-.00004	.030	4
7484354		.552	.002					.55190	-.00007	.030	4
7484355		.552	.004					.55180	-.00010	.030	6
7484357		.552	.008 AND UP					.55160	-.00030	.030	8
7484359		.553	.0005					.55300	-.00004	.030	4
7484361		.553	.002					.55290	-.00007	.030	4
7484362		.553	.004					.55280	-.00010	.030	6
7484364		.553	.008 AND UP					.55260	-.00030	.030	8
7484366		.554	.0005					.55400	-.00004	.030	4
7484368		.554	.002					.55390	-.00007	.030	4
7484369		.554	.004					.55380	-.00010	.030	6
7484371		.554	.008 AND UP					.55360	-.00030	.030	8
7484373		.555	.0005					.55500	-.00004	.030	4
7484375		.555	.002					.55490	-.00007	.030	4
7484376		.555	.004					.55480	-.00010	.030	6
7484378		.555	.008 AND UP					.55460	-.00030	.030	8
7484380		.556	.0005					.55600	-.00004	.030	4
7484382		.556	.002					.55590	-.00007	.030	4
7484383		.556	.004					.55580	-.00010	.030	6
7484385		.556	.008 AND UP					.55560	-.00030	.030	8
7484387		.557	.0005					.55700	-.00004	.030	4
7484389		.557	.002					.55690	-.00007	.030	4
7484390		.557	.004					.55680	-.00010	.030	6
7484392		.557	.008 AND UP					.55660	-.00030	.030	8

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE	FIN - GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS				FINISH	
					RING GAGE	ACCEPTANCE CHECK	DIAMETER			
							E	F		
74844394	B	C	D	E	.558	.0005	.55800	-.00004	.030	
74844396					.558	.002	.55790	-.00007	.030	
74844397					.558	.004	.55780	-.00010	.030	
74844399					.558	.006 AND UP	.55760	-.00030	.030	
74844401					.559	.0005	.55900	-.00004	.030	
74844403					.559	.002	.55890	-.00007	.030	
74844404					.559	.004	.55880	-.00010	.030	
74844406					.559	.008 AND UP	.55860	-.00030	.030	
74844408					.560	.0005	.56000	-.00004	.030	
74844410					.560	.002	.55990	-.00007	.030	
74844411					.560	.004	.55980	-.00010	.030	
74844413					.560	.008 AND UP	.55960	-.00030	.030	
74844415					.561	.0005	.56100	-.00004	.030	
74844417					.561	.002	.56090	-.00007	.030	
74844418					.561	.004	.56080	-.00010	.030	
74844420					.561	.008 AND UP	.56060	-.00030	.030	
74844422					.562	.0005	.56200	-.00004	.030	
74844424					.562	.002	.56190	-.00007	.030	
74844425					.562	.004	.56180	-.00010	.030	
74844427					.562	.008 AND UP	.56160	-.00030	.030	
74844429					.5625	.0005 AND UP	.56250	-.00004	.030	
74844430					.563	.0005	.56300	-.00004	.030	
74844432					.563	.002	.56290	-.00007	.030	
74844433					.563	.004	.56280	-.00010	.030	
74844435					.563	.008 AND UP	.56260	-.00030	.030	
74844437					.564	.0005	.56400	-.00004	.030	
74844439					.564	.002	.56390	-.00007	.030	
74844440					.564	.004	.56380	-.00010	.030	
74844442					.564	.008 AND UP	.56360	-.00030	.030	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FINN. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FINN—GAGE RING GAGE	STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
A	B	C	D							
333333	74844444		.565	.0005	.56500	-.00004	.030			
	74844446		.565	.002	.56490	-.00007	.030			
	74844447		.565	.004	.56480	-.00010	.030			
	74844449		.565	.008 AND UP	.56460	-.00030	.030			
333333	74844451		.566	.0005	.56600	-.00004	.030			
	74844453		.566	.002	.56590	-.00007	.030			
	74844454		.566	.004	.56580	-.00010	.030			
	74844456		.566	.008 AND UP	.56560	-.00030	.030			
333333	74844458		.567	.0005	.56700	-.00004	.030			
	74844460		.567	.002	.56690	-.00007	.030			
	74844461		.567	.004	.56680	-.00010	.030			
	74844463		.567	.008 AND UP	.56660	-.00030	.030			
333333	74844465		.568	.0005	.56800	-.00004	.030			
	74844467		.568	.002	.56790	-.00007	.030			
	74844468		.568	.004	.56780	-.00010	.030			
	74844470		.568	.008 AND UP	.56760	-.00030	.030			
333333	74844472		.569	.0005	.56900	-.00004	.030			
	74844474		.569	.002	.56890	-.00007	.030			
	74844475		.569	.004	.56880	-.00010	.030			
	74844477		.569	.008 AND UP	.56860	-.00030	.030			
333333	74844479		.570	.0005	.57000	-.00004	.030			
	74844481		.570	.002	.56990	-.00007	.030			
	74844482		.570	.004	.56980	-.00010	.030			
	74844484		.570	.008 AND UP	.56960	-.00030	.030			
333333	74844486		.571	.0005	.57100	-.00004	.030			
	74844488		.571	.002	.57090	-.00007	.030			
	74844489		.571	.004	.57080	-.00010	.030			
	74844491		.571	.008 AND UP	.57060	-.00030	.030			

MIL-STD-112A
6 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN—GAGE STOCK NO.	MAXIMUM ACCEPTANCE RING GAGE	COMPONENT DIMENSION	CHECK	D	E	F	G	H	
A	B	C								
322223	7484493				.572	.0005	.57200	.00004	.030	4-4-8 8
	7484495				.572	.002	.57190	.00007	.030	
	7484496				.572	.004	.57180	.00010	.030	
	7484498				.572	.008 AND UP	.57160	.00030	.030	
322223	7484500				.573	.0005	.57300	.00004	.030	4-4-8 8
	7484502				.573	.002	.57290	.00007	.030	
	7484503				.573	.004	.57280	.00010	.030	
	7484505				.573	.008 AND UP	.57260	.00030	.030	
322223	7484507				.574	.0005	.57400	.00004	.030	4-4-8 8
	7484509				.574	.002	.57390	.00007	.030	
	7484510				.574	.004	.57380	.00010	.030	
	7484512				.574	.008 AND UP	.57360	.00030	.030	
322223	7484514				.575	.0005	.57500	.00004	.030	4-4-8 8
	7484516				.575	.002	.57490	.00007	.030	
	7484517				.575	.004	.57480	.00010	.030	
	7484519				.575	.008 AND UP	.57460	.00030	.030	
322223	7484521				.576	.0005	.57600	.00004	.030	4-4-8 8
	7484523				.576	.002	.57590	.00007	.030	
	7484524				.576	.004	.57580	.00010	.030	
	7484526				.576	.008 AND UP	.57560	.00030	.030	
322223	7484528				.577	.0005	.57700	.00004	.030	4-4-8 8
	7484530				.577	.002	.57690	.00007	.030	
	7484531				.577	.004	.57680	.00010	.030	
	7484533				.577	.008 AND UP	.57660	.00030	.030	
322223	7484535				.578	.0005	.57800	.00004	.030	4-4-8 8
	7484537				.578	.002	.57790	.00007	.030	
	7484538				.578	.004	.57780	.00010	.030	
	7484540				.578	.008 AND UP	.57760	.00030	.030	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FIN - GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	CHAMFER	
RING GAGE	ACCEPTANCE CHECK		C	D						
A	B									
7484542			.579	.0005	.57900	-.00004	.030	4	4	
7484544			.579	.002	.57890	-.00007	.030	4	4	
7484545			.579	.004	.57880	-.00010	.030	4	4	
7484547			.579	.008 AND UP	.57860	-.00030	.030	4	4	
7484549			.580	.0005	.58000	-.00004	.030	4	4	
7484551			.580	.002	.57990	-.00007	.030	4	4	
7484552			.580	.004	.57980	-.00010	.030	4	4	
7484554			.580	.008 AND UP	.57960	-.00030	.030	4	4	
7484556			.581	.0005	.58100	-.00004	.030	4	4	
7484558			.581	.002	.58090	-.00007	.030	4	4	
7484559			.581	.004	.58080	-.00010	.030	4	4	
7484561			.581	.008 AND UP	.58060	-.00030	.030	4	4	
7484563			.582	.0005	.58200	-.00004	.030	4	4	
7484565			.582	.002	.58190	-.00007	.030	4	4	
7484566			.582	.004	.58180	-.00010	.030	4	4	
7484568			.582	.008 AND UP	.58160	-.00030	.030	4	4	
7484570			.583	.0005	.58300	-.00004	.030	4	4	
7484572			.583	.002	.58290	-.00007	.030	4	4	
7484573			.583	.004	.58280	-.00010	.030	4	4	
7484575			.583	.008 AND UP	.58260	-.00030	.030	4	4	
7484577			.584	.0005	.58400	-.00004	.030	4	4	
7484579			.584	.002	.58390	-.00007	.030	4	4	
7484580			.584	.004	.58380	-.00010	.030	4	4	
7484582			.584	.008 AND UP	.58360	-.00030	.030	4	4	
7484584			.585	.0005	.58500	-.00004	.030	4	4	
7484586			.585	.002	.58490	-.00007	.030	4	4	
7484587			.585	.004	.58480	-.00010	.030	4	4	
7484589			.585	.008 AND UP	.58460	-.00030	.030	4	4	

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH	
	FIN-GAGE STOCK NO.	MAXIMUM RING GAGE ACCEPTANCE DIMENSION	COMPONENT CHECK	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	G	H
A	B	C	D	E	F	G	H	
7484591		.586	.0005	.58600 - .00004	.030	4		
7484593		.586	.002	.58590 - .00007	.030	4		
7484594		.586	.004	.58580 - .00010	.030	8		
7484596		.586	.006 AND UP	.58560 - .00030	.030	8		
7484598		.587	.0005	.58700 - .00004	.030	4		
7484600		.587	.002	.58690 - .00007	.030	4		
7484601		.587	.004	.58680 - .00010	.030	8		
7484603		.587	.008 AND UP	.58660 - .00030	.030	8		
7484605		.588	.0005	.58800 - .00004	.030	4		
7484607		.588	.002	.58790 - .00007	.030	4		
7484608		.588	.004	.58780 - .00010	.030	8		
7484610		.588	.006 AND UP	.58760 - .00030	.030	8		
7484612		.589	.0005	.58900 - .00004	.030	4		
7484614		.589	.002	.58890 - .00007	.030	4		
7484615		.589	.004	.58880 - .00010	.030	8		
7484617		.589	.006 AND UP	.58860 - .00030	.030	8		
7484619		.590	.0005	.59000 - .00004	.030	4		
7484621		.590	.002	.58990 - .00007	.030	4		
7484622		.590	.004	.58980 - .00010	.030	8		
7484624		.590	.008 AND UP	.58960 - .00030	.030	8		
7484626		.591	.0005	.59100 - .00004	.030	4		
7484628		.591	.002	.59090 - .00007	.030	4		
7484629		.591	.004	.59080 - .00010	.030	8		
7484631		.591	.008 AND UP	.59060 - .00030	.030	8		
7484633		.592	.0005	.59200 - .00004	.030	4		
7484635		.592	.002	.59190 - .00007	.030	4		
7484636		.592	.004	.59180 - .00010	.030	8		
7484638		.592	.008 AND UP	.59160 - .00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISHES	
	FIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	ACCEPTANCE CHECK	D	E	F	G	H	CHAMFER	G	H
A	B	C									
3	7484640	.593	.0005	.59300	-.00004	.030	4				
	7484642	.593	.002	.59290	-.00007	.030	4				
	7484643	.593	.004	.59280	-.00010	.030	8				
	7484645	.593	.008 AND UP	.59260	-.00030	.030	8				
3	7484647	.59375	.0005 AND UP	.59375	-.00004	.030	4				
	7484648	.594	.0005	.59400	-.00004	.030	4				
	7484650	.594	.002	.59390	-.00007	.030	4				
	7484651	.594	.004	.59380	-.00010	.030	8				
	7484653	.594	.008 AND UP	.59360	-.00030	.030	8				
3	7484655	.595	.0005	.59500	-.00004	.030	4				
	7484657	.595	.002	.59490	-.00007	.030	4				
	7484658	.595	.004	.59480	-.00010	.030	8				
	7484660	.595	.008 AND UP	.59460	-.00030	.030	8				
3	7484662	.596	.0005	.59600	-.00004	.030	4				
	7484664	.596	.002	.59590	-.00007	.030	4				
	7484665	.596	.004	.59580	-.00010	.030	8				
	7484667	.596	.008 AND UP	.59560	-.00030	.030	8				
3	7484669	.597	.0005	.59700	-.00004	.030	4				
	7484671	.597	.002	.59690	-.00007	.030	4				
	7484672	.597	.004	.59680	-.00010	.030	8				
	7484674	.597	.008 AND UP	.59660	-.00030	.030	8				
3	7484676	.598	.0005	.59800	-.00004	.030	4				
	7484678	.598	.002	.59790	-.00007	.030	4				
	7484679	.598	.004	.59780	-.00010	.030	8				
	7484681	.598	.008 AND UP	.59760	-.00030	.030	8				
3	7484683	.599	.0005	.59900	-.00004	.030	4				
	7484685	.599	.002	.59890	-.00007	.030	4				
	7484686	.599	.004	.59880	-.00010	.030	8				
	7484688	.599	.008 AND UP	.59860	-.00030	.030	8				

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH		
	FIN. - GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	G	H	I
A	B	C	D	E	F	G	H	I	
33333	7484690		.600	.0005	.60000	-.00004	.030	4 4 8 8	
33333	7484692		.600	.002	.59990	-.00007	.030	4 4 8 8	
33333	7484693		.600	.004	.59980	-.00010	.030	4 4 8 8	
33333	7484695		.600	.008 AND UP	.59960	-.00030	.030	4 4 8 8	
33333	7484697		.601	.0005	.60100	-.00004	.030	4 4 8 8	
33333	7484699		.601	.002	.60090	-.00007	.030	4 4 8 8	
33333	7484700		.601	.004	.60080	-.00010	.030	4 4 8 8	
33333	7484702		.601	.008 AND UP	.60060	-.00030	.030	4 4 8 8	
33333	7484704		.602	.0005	.60200	-.00004	.030	4 4 8 8	
33333	7484706		.602	.002	.60190	-.00007	.030	4 4 8 8	
33333	7484707		.602	.004	.60180	-.00010	.030	4 4 8 8	
33333	7484709		.602	.008 AND UP	.60160	-.00030	.030	4 4 8 8	
33333	7484711		.603	.0005	.60300	-.00004	.030	4 4 8 8	
33333	7484713		.603	.002	.60290	-.00007	.030	4 4 8 8	
33333	7484714		.603	.004	.60280	-.00010	.030	4 4 8 8	
33333	7484716		.603	.008 AND UP	.60260	-.00030	.030	4 4 8 8	
33333	7484718		.604	.0005	.60400	-.00004	.030	4 4 8 8	
33333	7484720		.604	.002	.60390	-.00007	.030	4 4 8 8	
33333	7484721		.604	.004	.60380	-.00010	.030	4 4 8 8	
33333	7484723		.604	.008 AND UP	.60360	-.00030	.030	4 4 8 8	
33333	7484725		.605	.0005	.60500	-.00004	.030	4 4 8 8	
33333	7484727		.605	.002	.60490	-.00007	.030	4 4 8 8	
33333	7484728		.605	.004	.60480	-.00010	.030	4 4 8 8	
33333	7484730		.605	.008 AND UP	.60460	-.00030	.030	4 4 8 8	
33333	7484732		.606	.0005	.60600	-.00004	.030	4 4 8 8	
33333	7484734		.606	.002	.60590	-.00007	.030	4 4 8 8	
33333	7484735		.606	.004	.60580	-.00010	.030	4 4 8 8	
33333	7484737		.606	.008 AND UP	.60560	-.00030	.030	4 4 8 8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

NO. ITEM	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS			FINISH CHAMFER		
	FIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION			DIAMETER	RING GAGE DIMENSIONS				
		RING GAGE ACCEPTANCE CHECK	CHECK DIMENSION			E	F			
A	B	C	D							
3444444444	7484739		.607	.0005	.60700	-.00004	.030			
	7484741		.607	.002	.60690	-.00007	.030			
	7484742		.607	.004	.60680	-.00010	.030			
	7484744		.607	.008 AND UP	.60660	-.00030	.030			
3444444444	7484746		.608	.0005	.60800	-.00004	.030			
	7484748		.608	.002	.60790	-.00007	.030			
	7484749		.608	.004	.60780	-.00010	.030			
	7484751		.608	.008 AND UP	.60760	-.00030	.030			
3444444444	7484753		.609	.0005	.60900	-.00004	.030			
	7484755		.609	.002	.60890	-.00007	.030			
	7484756		.609	.004	.60880	-.00010	.030			
	7484758		.609	.008 AND UP	.60860	-.00030	.030			
3444444444	7484760		.610	.0005	.61000	-.00004	.030			
	7484762		.610	.002	.60990	-.00007	.030			
	7484763		.610	.004	.60980	-.00010	.030			
	7484765		.610	.008 AND UP	.60960	-.00030	.030			
3444444444	7484767		.611	.0005	.61100	-.00004	.030			
	7484769		.611	.002	.61090	-.00007	.030			
	7484770		.611	.004	.61080	-.00010	.030			
	7484772		.611	.008 AND UP	.61060	-.00030	.030			
3444444444	7484774		.612	.0005	.61200	-.00004	.030			
	7484776		.612	.002	.61190	-.00007	.030			
	7484777		.612	.004	.61180	-.00010	.030			
	7484779		.612	.008 AND UP	.61160	-.00030	.030			
3444444444	7484781		.613	.0005	.61300	-.00004	.030			
	7484783		.613	.002	.61290	-.00007	.030			
	7484784		.613	.004	.61280	-.00010	.030			
	7484786		.613	.008 AND UP	.61260	-.00030	.030			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		CHAMFER	FINISH
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION		D	E		
A	B	C						
7484788	.614	.0005	.61400	-.00004	.030	4		
7484790	.614	.002	.61390	-.00007	.030	4		
7484791	.614	.004	.61380	-.00010	.030	8		
7484793	.614	.008 AND UP	.61360	-.00030	.030	8		
7484795	.615	.0005	.61500	-.00004	.030	4		
7484797	.615	.002	.61490	-.00007	.030	4		
7484798	.615	.004	.61480	-.00010	.030	8		
7484800	.615	.008 AND UP	.61460	-.00030	.030	8		
7484802	.616	.0005	.61600	-.00004	.030	4		
7484804	.616	.002	.61590	-.00007	.030	4		
7484805	.616	.004	.61580	-.00010	.030	8		
7484807	.616	.008 AND UP	.61560	-.00030	.030	8		
7484809	.617	.0005	.61700	-.00004	.030	4		
7484811	.617	.002	.61690	-.00007	.030	4		
7484812	.617	.004	.61680	-.00010	.030	8		
7484814	.617	.008 AND UP	.61660	-.00030	.030	8		
7484816	.618	.0005	.61800	-.00004	.030	4		
7484818	.618	.002	.61790	-.00007	.030	4		
7484819	.618	.004	.61780	-.00010	.030	8		
7484821	.618	.008 AND UP	.61760	-.00030	.030	8		
7484823	.619	.0005	.61900	-.00004	.030	4		
7484825	.619	.002	.61890	-.00007	.030	4		
7484826	.619	.004	.61880	-.00010	.030	8		
7484828	.619	.008 AND UP	.61860	-.00030	.030	8		
7484830	.620	.0005	.62000	-.00004	.030	4		
7484832	.620	.002	.61990	-.00007	.030	4		
7484833	.620	.004	.61980	-.00010	.030	8		
7484835	.620	.008 AND UP	.61960	-.00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
7484837		.621	.0005	.62100 - .00004	.030	4	
7484839		.621	.002	.62090 - .00007	.030	4	
7484840		.621	.004	.62080 - .00010	.030	8	
7484842		.621	.008 AND UP	.62060 - .00030	.030	8	
7484844		.622	.0005	.62200 - .00004	.030	4	
7484846		.622	.002	.62190 - .00007	.030	4	
7484847		.622	.004	.62180 - .00010	.030	8	
7484849		.622	.008 AND UP	.62160 - .00030	.030	8	
7484851		.623	.0005	.62300 - .00004	.030	4	
7484853		.623	.002	.62290 - .00007	.030	4	
7484854		.623	.004	.62280 - .00010	.030	8	
7484856		.623	.008 AND UP	.62260 - .00030	.030	8	
7484858		.624	.0005	.62400 - .00004	.030	4	
7484860		.624	.002	.62390 - .00007	.030	4	
7484861		.624	.004	.62380 - .00010	.030	8	
7484863		.624	.008 AND UP	.62360 - .00030	.030	8	
7484865		.625	.0005	.62500 - .00004	.030	4	
7484867		.625	.002	.62490 - .00007	.030	4	
7484868		.625	.004	.62480 - .00010	.030	8	
7484870		.625	.008 AND UP	.62460 - .00030	.030	8	
7484872		.626	.0005	.62600 - .00004	.030	4	
7484874		.626	.002	.62590 - .00007	.030	4	
7484875		.626	.004	.62580 - .00010	.030	8	
7484877		.626	.008 AND UP	.62560 - .00030	.030	8	
7484879		.627	.0005	.62700 - .00004	.030	4	
7484881		.627	.002	.62690 - .00007	.030	4	
7484882		.627	.004	.62680 - .00010	.030	8	
7484884		.627	.008 AND UP	.62660 - .00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FILE NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN - GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA	E	F	G	
RING GAGE	ACCEPTANCE CHECK	C	D				H
A	B						
7484886	.628	.0005	.62800	-.00004	.030	4	
7484888	.628	.002	.62790	-.00007	.030	4	
7484889	.628	.004	.62780	-.00010	.030	8	
7484891	.628	.008 AND UP	.62760	-.00030	.030	8	
7484893	.629	.0005	.62900	-.00004	.030	4	
7484895	.629	.002	.62890	-.00007	.030	4	
7484896	.629	.004	.62880	-.00010	.030	8	
7484898	.629	.008 AND UP	.62860	-.00030	.030	8	
7484900	.630	.0005	.63000	-.00004	.030	4	
7484902	.630	.002	.62990	-.00007	.030	4	
7484903	.630	.004	.62980	-.00010	.030	8	
7484905	.630	.008 AND UP	.62960	-.00030	.030	8	
7484907	.631	.0005	.63100	-.00004	.030	4	
7484909	.631	.002	.63090	-.00007	.030	4	
7484910	.631	.004	.63080	-.00010	.030	8	
7484912	.631	.008 AND UP	.63060	-.00030	.030	8	
7484914	.632	.0005	.63200	-.00004	.030	4	
7484916	.632	.002	.63190	-.00007	.030	4	
7484917	.632	.004	.63180	-.00010	.030	8	
7484919	.632	.008 AND UP	.63160	-.00030	.030	8	
7484921	.633	.0005	.63300	-.00004	.030	4	
7484923	.633	.002	.63290	-.00007	.030	4	
7484924	.633	.004	.63280	-.00010	.030	8	
7484926	.633	.008 AND UP	.63260	-.00030	.030	8	
7484928	.634	.0005	.63400	-.00004	.030	4	
7484930	.634	.002	.63390	-.00007	.030	4	
7484931	.634	.004	.63380	-.00010	.030	8	
7484933	.634	.008 AND UP	.63360	-.00030	.030	8	

MIL-STD-1124
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

F11. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	F11-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	F	G	
A	B	C	D	E	F	G	H
7484935		.635	.0005	.63500	-.00004	.030	4 4 8 8
7484937		.635	.002	.63490	-.00007	.030	4 4 8 8
7484938		.635	.004 AND UP	.63480	-.00010	.030	4 4 8 8
7484940		.635	.008 AND UP	.63460	-.00030	.030	4 4 8 8
7484942		.636	.0005	.63600	-.00004	.030	4 4 8 8
7484944		.636	.002	.63590	-.00007	.030	4 4 8 8
7484945		.636	.004	.63580	-.00010	.030	4 4 8 8
7484947		.636	.008 AND UP	.63560	-.00030	.030	4 4 8 8
7484949		.637	.0005	.63700	-.00004	.030	4 4 8 8
7484951		.637	.002	.63690	-.00007	.030	4 4 8 8
7484952		.637	.004	.63680	-.00010	.030	4 4 8 8
7484954		.637	.008 AND UP	.63660	-.00030	.030	4 4 8 8
7484956		.638	.0005	.63800	-.00004	.030	4 4 8 8
7484958		.638	.002	.63790	-.00007	.030	4 4 8 8
7484959		.638	.004	.63780	-.00010	.030	4 4 8 8
7484961		.638	.008 AND UP	.63760	-.00030	.030	4 4 8 8
7484963		.639	.0005	.63900	-.00004	.030	4 4 8 8
7484965		.639	.002	.63890	-.00007	.030	4 4 8 8
7484966		.639	.004	.63880	-.00010	.030	4 4 8 8
7484968		.639	.008 AND UP	.63860	-.00030	.030	4 4 8 8
7484970		.640	.0005	.64000	-.00004	.030	4 4 8 8
7484972		.640	.002	.63990	-.00007	.030	4 4 8 8
7484973		.640	.004	.63980	-.00010	.030	4 4 8 8
7484975		.640	.008 AND UP	.63960	-.00030	.030	4 4 8 8
7484977		.641	.0005	.64100	-.00004	.030	4 4 8 8
7484979		.641	.002	.64090	-.00007	.030	4 4 8 8
7484980		.641	.004	.64080	-.00010	.030	4 4 8 8
7484982		.641	.008 AND UP	.64060	-.00030	.030	4 4 8 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

NO.	ITEM	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		H
		RING GAGE	STOCK NO.	MAXIMUM ACCEPTANCE CHECK	COMPONENT DIMENSION	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H	
3	HSINIL	7484984		.642	.0005	.64200	-.00004	4
3	7484986		.642	.002	.64190	-.00007	.4	
3	7484987		.642	.004	.64180	-.00010	8	
3	7484989		.642	.008 AND UP	.64160	-.00030	8	
3	7484991		.643	.0005	.64200	-.00004	4	
3	7484993		.643	.002	.64290	-.00007	4	
3	7484994		.643	.004	.64280	-.00010	8	
3	7484996		.643	.008 AND UP	.64260	-.00030	8	
3	7484998		.644	.0005	.64400	-.00004	4	
3	7485000		.644	.002	.64390	-.00007	4	
3	7485001		.644	.004	.64380	-.00010	8	
3	7485003		.644	.008 AND UP	.64360	-.00030	8	
3	7485005		.645	.0005	.64500	-.00004	4	
3	7485007		.645	.002	.64490	-.00007	4	
3	7485008		.645	.004	.64480	-.00010	8	
3	7485010		.645	.008 AND UP	.64460	-.00030	8	
3	7485012		.646	.0005	.64600	-.00004	4	
3	7485014		.646	.002	.64590	-.00007	4	
3	7485015		.646	.004	.64580	-.00010	8	
3	7485017		.646	.008 AND UP	.64560	-.00030	8	
3	7485019		.647	.0005	.64700	-.00004	4	
3	7485021		.647	.002	.64690	-.00007	4	
3	7485022		.647	.004	.64680	-.00010	8	
3	7485024		.647	.008 AND UP	.64660	-.00030	8	
3	7485026		.648	.0005	.64800	-.00004	4	
3	7485028		.648	.002	.64790	-.00007	4	
3	7485029		.648	.004	.64780	-.00010	8	
3	7485031		.648	.008 AND UP	.64760	-.00030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	RING GAGE	MARKING ON GO GAGE		RING GAGE DIMENSIONS		HSIN-F H	
		FIN-BASE STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA. E	DIA. F	G	H
7485033	7485035	.649	.0005	.64900	-.00004	.030	.030
7485036	7485038	.649	.002	.64890	-.00007	.030	.030
7485040	7485042	.649	.004	.64880	-.00010	.030	.030
7485043	7485045	.649	.008 AND UP	.64860	-.00030	.030	.030
7485047	7485049	.650	.0005	.65000	-.00004	.030	.030
7485050	7485052	.650	.002	.64990	-.00007	.030	.030
7485054	7485056	.650	.004	.64980	-.00010	.030	.030
7485057	7485059	.650	.008 AND UP	.64960	-.00030	.030	.030
7485061	7485063	.651	.0005	.65100	-.00004	.030	.030
7485064	7485066	.651	.002	.65090	-.00007	.030	.030
7485068	7485070	.651	.004	.65080	-.00010	.030	.030
7485071	7485073	.651	.008 AND UP	.65060	-.00030	.030	.030
7485075	7485077	.652	.0005	.65200	-.00004	.030	.030
7485078	7485080	.652	.002	.65190	-.00007	.030	.030
7485081	7485083	.652	.004	.65180	-.00010	.030	.030
7485084	7485086	.652	.008 AND UP	.65160	-.00030	.030	.030
7485088	7485090	.653	.0005	.65300	-.00004	.030	.030
7485091	7485093	.653	.002	.65290	-.00007	.030	.030
7485094	7485096	.653	.004	.65280	-.00010	.030	.030
7485098	7485100	.653	.008 AND UP	.65260	-.00030	.030	.030
7485101	7485103	.654	.0005	.65400	-.00004	.030	.030
7485104	7485106	.654	.002	.65390	-.00007	.030	.030
7485107	7485109	.654	.004	.65380	-.00010	.030	.030
7485110	7485112	.654	.008 AND UP	.65360	-.00030	.030	.030
7485114	7485116	.655	.0005	.65500	-.00004	.030	.030
7485117	7485119	.655	.002	.65490	-.00007	.030	.030
7485120	7485122	.655	.004	.65480	-.00010	.030	.030
7485124	7485126	.655	.008 AND UP	.65460	-.00030	.030	.030

Table I. Tabulation of Design and Identification Data (Continued)

ON-GAGE NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH		
	FIN-GAGE STOCK NO.	MAXIMUM ACCEPTANCE CHECK	COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	G	H	I
A	B	C	D	E	F	G	H	I	
7485082	.656	.0005	.65600 - .00004	.65600 - .00004	.65600 - .00004	.030	4	4	
7485084	.656	.002	.65590 - .00007	.65590 - .00007	.65590 - .00007	.030	4	4	
7485085	.656	.004	.65580 - .00010	.65580 - .00010	.65580 - .00010	.030	8	8	
7485087	.656	.008 AND UP	.65560 - .00030	.65560 - .00030	.65560 - .00030	.030	8	8	
7485089	.65625	.0005 AND UP	.65625 - .00004	.65625 - .00004	.65625 - .00004	.030	4	4	
7485090	.657	.0005	.65700 - .00004	.65700 - .00004	.65700 - .00004	.030	4	4	
7485092	.657	.002	.65690 - .00007	.65690 - .00007	.65690 - .00007	.030	8	8	
7485093	.657	.004	.65680 - .00010	.65680 - .00010	.65680 - .00010	.030	8	8	
7485095	.657	.008 AND UP	.65660 - .00030	.65660 - .00030	.65660 - .00030	.030	8	8	
7485097	.658	.0005	.65800 - .00004	.65800 - .00004	.65800 - .00004	.030	4	4	
7485099	.658	.002	.65790 - .00007	.65790 - .00007	.65790 - .00007	.030	4	4	
7485100	.658	.004	.65780 - .00010	.65780 - .00010	.65780 - .00010	.030	8	8	
7485102	.658	.008 AND UP	.65760 - .00030	.65760 - .00030	.65760 - .00030	.030	8	8	
7485104	.659	.0005	.65900 - .00004	.65900 - .00004	.65900 - .00004	.030	4	4	
7485106	.659	.002	.65890 - .00007	.65890 - .00007	.65890 - .00007	.030	4	4	
7485107	.659	.004	.65880 - .00010	.65880 - .00010	.65880 - .00010	.030	8	8	
7485109	.659	.008 AND UP	.65860 - .00030	.65860 - .00030	.65860 - .00030	.030	8	8	
7485111	.660	.0005	.66000 - .00004	.66000 - .00004	.66000 - .00004	.030	4	4	
7485113	.660	.002	.65990 - .00007	.65990 - .00007	.65990 - .00007	.030	4	4	
7485114	.660	.004	.65980 - .00010	.65980 - .00010	.65980 - .00010	.030	8	8	
7485116	.660	.008 AND UP	.65960 - .00030	.65960 - .00030	.65960 - .00030	.030	8	8	
7485118	.661	.0005	.66100 - .00004	.66100 - .00004	.66100 - .00004	.030	4	4	
7485120	.661	.002	.66090 - .00007	.66090 - .00007	.66090 - .00007	.030	4	4	
7485121	.661	.004	.66080 - .00010	.66080 - .00010	.66080 - .00010	.030	8	8	
7485123	.661	.008 AND UP	.66060 - .00030	.66060 - .00030	.66060 - .00030	.030	8	8	
7485125	.662	.0005	.66200 - .00004	.66200 - .00004	.66200 - .00004	.030	4	4	
7485127	.662	.002	.66190 - .00007	.66190 - .00007	.66190 - .00007	.030	4	4	
7485128	.662	.004	.66180 - .00010	.66180 - .00010	.66180 - .00010	.030	8	8	
7485130	.662	.008 AND UP	.66160 - .00030	.66160 - .00030	.66160 - .00030	.030	8	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FLN-BASE STOCK NO.	MAXIMUM ACCEPTANCE CHECK	COMPONENT DIMENSION	DIA.	E	F	G	H		
A	B	C	D							
7485132	.663	.0005		.66300	-.00004	.030	4	4		
7485134	.663	.002		.66290	-.00007	.030	4	4		
7485135	.663	.004		.66280	-.00010	.030	4	4		
7485137	.663	.006 AND UP		.66260	-.00030	.030	4	4		
7485139	.664	.0005		.66400	-.0004	.030	4	4		
7485141	.664	.002		.66390	-.0007	.030	4	4		
7485142	.664	.004		.66380	-.0010	.030	4	4		
7485144	.664	.006 AND UP		.66360	-.0030	.030	4	4		
7485146	.665	.0005		.66500	-.0004	.030	4	4		
7485148	.665	.002		.66490	-.0007	.030	4	4		
7485149	.665	.004		.66480	-.0010	.030	4	4		
7485151	.665	.006 AND UP		.66460	-.0030	.030	4	4		
7485153	.666	.0005		.66600	-.0004	.030	4	4		
7485155	.666	.002		.66590	-.0007	.030	4	4		
7485156	.666	.004		.66580	-.0010	.030	4	4		
7485158	.666	.006 AND UP		.66560	-.0030	.030	4	4		
7485160	.667	.0005		.66700	-.0004	.030	4	4		
7485162	.667	.002		.66690	-.0007	.030	4	4		
7485163	.667	.004		.66680	-.0010	.030	4	4		
7485165	.667	.006 AND UP		.66660	-.0030	.030	4	4		
7485167	.668	.0005		.66800	-.0004	.030	4	4		
7485169	.668	.002		.66790	-.0007	.030	4	4		
7485170	.668	.004		.66780	-.0010	.030	4	4		
7485172	.668	.006 AND UP		.66760	-.0030	.030	4	4		
7485174	.669	.0005		.66900	-.0004	.030	4	4		
7485176	.669	.002		.66890	-.0007	.030	4	4		
7485177	.669	.004		.66880	-.0010	.030	4	4		
7485179	.669	.006 AND UP		.66860	-.0030	.030	4	4		

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	FIN. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		CHAMFER	HSINIS
		FIN—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G			
	7485181			.670	.0005			.67000	— .00004	.030	
	7485183			.670	.002			.66990	— .00007	.030	
	7485184			.670	.004			.66980	— .00010	.030	
	7485186			.670	.008 AND UP			.66960	— .00030	.030	
	7485188			.671	.0005			.67100	— .00004	.030	
	7485190			.671	.002			.67090	— .00007	.030	
	7485191			.671	.004			.67080	— .00010	.030	
	7485193			.671	.008 AND UP			.67060	— .00030	.030	
	7485195			.672	.0005			.67200	— .00004	.030	
	7485197			.672	.002			.67190	— .00007	.030	
	7485198			.672	.004			.67180	— .00010	.030	
	7485200			.672	.008 AND UP			.67160	— .00030	.030	
	7485202			.673	.0005			.67300	— .00004	.030	
	7485204			.673	.002			.67290	— .00007	.030	
	7485205			.673	.004			.67280	— .00010	.030	
	7485207			.673	.008 AND UP			.67260	— .00030	.030	
	7485209			.674	.0005			.67400	— .00004	.030	
	7485211			.674	.002			.67390	— .00007	.030	
	7485212			.674	.004			.67380	— .00010	.030	
	7485214			.674	.008 AND UP			.67360	— .00030	.030	
	7485216			.675	.0005			.67500	— .00004	.030	
	7485218			.675	.002			.67490	— .00007	.030	
	7485219			.675	.004			.67480	— .00010	.030	
	7485221			.675	.008 AND UP			.67460	— .00030	.030	
	7485223			.676	.0005			.67600	— .00004	.030	
	7485225			.676	.002			.67590	— .00007	.030	
	7485226			.676	.004			.67580	— .00010	.030	
	7485228			.676	.008 AND UP			.67560	— .00030	.030	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN - GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		D	E	
A	B	C	D	E	F	G	H
33333	7485230		.677	.0005	.67700	-.00004	.030
	7485232		.677	.002	.67690	-.00007	.030
	7485233		.677	.004 AND UP	.67680	-.00010	.030
	7485235		.677		.67660	-.00030	.030
33333	7485237		.678	.0005	.67800	-.00004	.030
	7485239		.678	.002	.67790	-.00007	.030
	7485240		.678	.004	.67780	-.00010	.030
	7485242		.678	.008 AND UP	.67760	-.00030	.030
33333	7485244		.679	.0005	.67900	-.00004	.030
	7485246		.679	.002	.67890	-.00007	.030
	7485247		.679	.004	.67880	-.00010	.030
	7485249		.679	.008 AND UP	.67860	-.00030	.030
33333	7485251		.680	.0005	.68000	-.00004	.030
	7485253		.680	.002	.67990	-.00007	.030
	7485254		.680	.004	.67980	-.00010	.030
	7485256		.680	.008 AND UP	.67960	-.00030	.030
33333	7485258		.681	.0005	.68100	-.00004	.030
	7485260		.681	.002	.68090	-.00007	.030
	7485261		.681	.004	.68080	-.00010	.030
	7485263		.681	.008 AND UP	.68060	-.00030	.030
33333	7485265		.682	.0005	.68200	-.00004	.030
	7485267		.682	.002	.68190	-.00007	.030
	7485268		.682	.004	.68180	-.00010	.030
	7485270		.682	.008 AND UP	.68160	-.00030	.030
33333	7485272		.683	.0005	.68300	-.00004	.030
	7485274		.683	.002	.68290	-.00007	.030
	7485275		.683	.004	.68280	-.00010	.030
	7485277		.683	.008 AND UP	.68260	-.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

RING GAGE NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
7485279	.684	.0005	.684	.68400	-.00004	.030	4
7485281	.684	.002	.684	.68390	-.00007	.030	4
7485282	.684	.004	.684	.68380	-.00010	.030	6
7485284	.684	.008 AND UP	.684	.68360	-.00030	.030	8
7485286	.685	.0005	.685	.68500	-.00004	.030	4
7485288	.685	.002	.685	.68490	-.00007	.030	4
7485289	.685	.004	.685	.68480	-.00010	.030	8
7485291	.685	.008 AND UP	.685	.68460	-.00030	.030	8
7485293	.686	.0005	.686	.68600	-.00004	.030	4
7485295	.686	.002	.686	.68590	-.00007	.030	4
7485296	.686	.004	.686	.68580	-.00010	.030	8
7485298	.686	.008 AND UP	.686	.68560	-.00030	.030	8
7485300	.687	.0005	.687	.68700	-.00004	.030	4
7485302	.687	.002	.687	.68690	-.00007	.030	4
7485303	.687	.004	.687	.68680	-.00010	.030	8
7485305	.687	.008 AND UP	.687	.68660	-.00030	.030	8
7485307	.6875	.0005 AND UP	.6875	.68750	-.00004	.030	4
7485308	.688	.0005	.688	.68800	-.00004	.030	4
7485310	.688	.002	.688	.68790	-.00007	.030	4
7485311	.688	.004	.688	.68780	-.00010	.030	8
7485313	.688	.008 AND UP	.688	.68760	-.00030	.030	8
7485315	.689	.0005	.689	.68900	-.00004	.030	4
7485317	.689	.002	.689	.68890	-.00007	.030	4
7485318	.689	.004	.689	.68880	-.00010	.030	8
7485320	.689	.008 AND UP	.689	.68860	-.00030	.030	8
7485322	.690	.0005	.690	.69000	-.00004	.030	4
7485324	.690	.002	.690	.68990	-.00007	.030	4
7485325	.690	.004	.690	.68980	-.00010	.030	8
7485327	.690	.008 AND UP	.690	.68960	-.00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA	E	F	G	H	
7485329	.691	.691	.0005	.69100	-.00004	.030	4		
7485331	.691	.691	.002	.69090	-.00007	.030	4		
7485332	.691	.691	.004	.69080	-.00010	.030	8		
7485334	.691	.691	.008 AND UP	.69060	-.00030	.030	8		
7485336	.692	.692	.0005	.69200	-.00004	.030	4		
7485338	.692	.692	.002	.69190	-.00007	.030	4		
7485339	.692	.692	.004	.69180	-.00010	.030	8		
7485341	.692	.692	.008 AND UP	.69160	-.00030	.030	8		
7485343	.693	.693	.0005	.69300	-.00004	.030	4		
7485345	.693	.693	.002	.69290	-.00007	.030	4		
7485346	.693	.693	.004	.69280	-.00010	.030	8		
7485348	.693	.693	.008 AND UP	.69260	-.00030	.030	8		
7485350	.694	.694	.0005	.69400	-.00004	.030	4		
7485352	.694	.694	.002	.69390	-.00007	.030	4		
7485353	.694	.694	.004	.69380	-.00010	.030	8		
7485355	.694	.694	.008 AND UP	.69360	-.00030	.030	8		
7485357	.695	.695	.0005	.69500	-.00004	.030	4		
7485359	.695	.695	.002	.69490	-.00007	.030	4		
7485360	.695	.695	.004	.69480	-.00010	.030	8		
7485362	.695	.695	.008 AND UP	.69460	-.00030	.030	8		
7485364	.696	.696	.0005	.69600	-.00004	.030	4		
7485366	.696	.696	.002	.69590	-.00007	.030	4		
7485367	.696	.696	.004	.69580	-.00010	.030	8		
7485369	.696	.696	.008 AND UP	.69560	-.00030	.030	8		
7485371	.697	.697	.0005	.69700	-.00004	.030	4		
7485373	.697	.697	.002	.69690	-.00007	.030	4		
7485374	.697	.697	.004	.69680	-.00010	.030	8		
7485376	.697	.697	.008 AND UP	.69660	-.00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH H
			RING GAGE ACCEPTANCE CHECK	C		D	E	
A	B							
3	7485378			.698	.0005	.69800	-.00004	.030
	7485380			.698	.002	.69790	-.00007	.030
	7485381			.698	.004	.69780	-.00010	.030
	7485383			.698	.008 AND UP	.69760	-.00030	.030
	7485385			.699	.0005	.69900	-.00004	.030
	7485387			.699	.002	.69890	-.00007	.030
	7485388			.699	.004	.69880	-.00010	.030
	7485390			.699	.008 AND UP	.69860	-.00030	.030
	7485392			.700	.0005	.70000	-.00004	.030
	7485394			.700	.002	.69990	-.00007	.030
	7485395			.700	.004	.69980	-.00010	.030
	7485397			.700	.008 AND UP	.69960	-.00030	.030
	7485399			.701	.0005	.70100	-.00004	.030
	7485401			.701	.002	.70090	-.00007	.030
	7485402			.701	.004	.70080	-.00010	.030
	7485404			.701	.008 AND UP	.70060	-.00030	.030
	7485406			.702	.0005	.70200	-.00004	.030
	7485408			.702	.002	.70190	-.00007	.030
	7485409			.702	.004	.70180	-.00010	.030
	7485411			.702	.008 AND UP	.70160	-.00030	.030
	7485413			.703	.0005	.70300	-.00004	.030
	7485415			.703	.002	.70290	-.00007	.030
	7485416			.703	.004	.70280	-.00010	.030
	7485418			.703	.008 AND UP	.70260	-.00030	.030
	7485420			.704	.0005	.70400	-.00004	.030
	7485422			.704	.002	.70390	-.00007	.030
	7485423			.704	.004	.70380	-.00010	.030
	7485425			.704	.008 AND UP	.70360	-.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C							
7485427	.705	.0005		.70500	-.00004	.030	4		
7485429	.705	.002		.70490	-.00007	.030	4		
7485430	.705	.004		.70480	-.00010	.030	8		
7485432	.705	.008 AND UP		.70460	-.00030	.030			
7485434	.706	.0005		.70600	-.00004	.030	4		
7485436	.706	.002		.70590	-.00007	.030	4		
7485437	.706	.004		.70580	-.00010	.030	8		
7485439	.706	.008 AND UP		.70560	-.00030	.030	8		
7485441	.707	.0005		.70700	-.00004	.030	4		
7485443	.707	.002		.70690	-.00007	.030	4		
7485444	.707	.004		.70680	-.00010	.030	8		
7485446	.707	.008 AND UP		.70660	-.00030	.030	8		
7485448	.708	.0005		.70800	-.00004	.030	4		
7485450	.708	.002		.70790	-.00007	.030	4		
7485451	.708	.004		.70780	-.00010	.030	8		
7485453	.708	.008 AND UP		.70760	-.00030	.030	8		
7485455	.709	.0005		.70900	-.00004	.030	4		
7485457	.709	.002		.70890	-.00007	.030	4		
7485458	.709	.004		.70880	-.00010	.030	8		
7485460	.709	.008 AND UP		.70860	-.00030	.030			
7485462	.710	.0005		.71000	-.00004	.030	4		
7485464	.710	.002		.70990	-.00007	.030	4		
7485465	.710	.004		.70980	-.00010	.030	8		
7485467	.710	.008 AND UP		.70960	-.00030	.030	8		
7485469	.711	.0105		.71100	-.00004	.030	4		
7485471	.711	.002		.71090	-.00007	.030	4		
7485472	.711	.004		.71080	-.00010	.030	8		
7485474	.711	.008 AND UP		.71060	-.00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE				RING GAGE DIMENSIONS				FINISH
	FLN-GAGE	STOCK NO.	MAXIMUM	TOTAL	COMPONENT	DIA METER	CHAMFER	G	
RING GAGE	ACCEPTANCE	COMPONENT	COMPONENT	TOLE RANCE					
A	B	C	D	E	F		H		
7485476		.712	.0005	.71200	-.00004	.030			
7485478		.712	.002	.71190	-.00007	.030			
7485479		.712	.004	.71180	-.00010	.030			
7485481		.712	.008 AND UP	.71160	-.00030	.030			
7485482		.713	.0005	.71300	-.00004	.030			
7485485		.713	.002	.71290	-.00007	.030			
7485486		.713	.004	.71280	-.00010	.030			
7485488		.713	.008 AND UP	.71260	-.00030	.030			
7485490		.714	.0005	.71400	-.00004	.030			
7485492		.714	.002	.71390	-.00007	.030			
7485493		.714	.004	.71380	-.00010	.030			
7485495		.714	.008 AND UP	.71360	-.00030	.030			
7485497		.715	.0005	.71500	-.00004	.030			
7485499		.715	.002	.71490	-.00007	.030			
7485500		.715	.004	.71480	-.00010	.030			
7485502		.715	.008 AND UP	.71460	-.00030	.030			
7485504		.716	.0005	.71600	-.00004	.030			
7485506		.716	.002	.71590	-.00007	.030			
7485507		.716	.004	.71580	-.00010	.030			
7485509		.716	.008 AND UP	.71560	-.00030	.030			
7485511		.717	.0005	.71700	-.00004	.030			
7485513		.717	.002	.71690	-.00007	.030			
7485514		.717	.004	.71680	-.00010	.030			
7485516		.717	.008 AND UP	.71660	-.00030	.030			
7485518		.718	.0005	.71800	-.00004	.030			
7485520		.718	.002	.71790	-.00007	.030			
7485521		.718	.004	.71780	-.00010	.030			
7485523		.718	.008 AND UP	.71760	-.00030	.030			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
	ACCEPTANCE CHECK									
A	B	C	D	E	F	G	H			
3	7485525		.71875	.0005 AND UP	.71875 - .00004	.030	4			
	7485526		.719	.0005	.71900 - .00004	.030	4 4			
	7485528		.719	.002	.71890 - .00007	.030	8			
	7485529		.719	.004	.71880 - .00010	.030	8			
	7485531		.719	.008 AND UP	.71860 - .00030	.030	8			
	7485533		.720	.0005	.72000 - .00004	.030	4			
	7485535		.720	.002	.71990 - .00007	.030	4 4			
	7485536		.720	.004	.71980 - .00010	.030	8			
	7485538		.720	.008 AND UP	.71960 - .00030	.030	8			
	7485540		.721	.0005	.72100 - .00004	.030	4			
	7485542		.721	.002	.72090 - .00007	.030	4 4			
	7485543		.721	.004	.72080 - .00010	.030	8			
	7485545		.721	.008 AND UP	.72060 - .00030	.030	8			
	7485547		.722	.0005	.72200 - .00004	.030	4			
	7485549		.722	.002	.72190 - .00007	.030	4 4			
	7485550		.722	.004	.72180 - .00010	.030	8			
	7485552		.722	.008 AND UP	.72160 - .00030	.030	8			
	7485554		.723	.0005	.72200 - .00004	.030	4			
	7485556		.723	.002	.72190 - .00007	.030	4 4			
	7485557		.723	.004	.72180 - .00010	.030	8			
	7485559		.723	.008 AND UP	.72160 - .00030	.030	8			
	7485561		.724	.0005	.72200 - .00004	.030	4			
	7485563		.724	.002	.72190 - .00007	.030	4 4			
	7485564		.724	.004	.72180 - .00010	.030	8			
	7485566		.724	.008 AND UP	.72160 - .00030	.030	8			
	7485568		.725	.0005	.72200 - .00004	.030	4			
	7485570		.725	.002	.72190 - .00007	.030	4 4			
	7485571		.725	.004	.72180 - .00010	.030	8			
	7485573		.725	.008 AND UP	.72160 - .00030	.030	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		H
	FIN - GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIA. METER	G	
A	B	C	D	E	F		
333333	7485575	.726	.0005	.72600 - .00004	.030	4	
333333	7485577	.726	.002	.72590 - .00007	.030	4	
333333	7485578	.726	.004 AND UP	.72580 - .00010	.030	8	
333333	7485580	.726	.008 AND UP	.72560 - .00030	.030	8	
333333	7485582	.727	.0005	.72700 - .00004	.030	4	
333333	7485584	.727	.002	.72690 - .00007	.030	4	
333333	7485585	.727	.004	.72680 - .00010	.030	8	
333333	7485587	.727	.008 AND UP	.72660 - .00030	.030	8	
333333	7485589	.728	.0005	.72800 - .00004	.030	4	
333333	7485591	.728	.002	.72790 - .00007	.030	4	
333333	7485592	.728	.004	.72780 - .00010	.030	8	
333333	7485594	.728	.008 AND UP	.72760 - .00030	.030	8	
333333	7485596	.729	.0005	.72900 - .00004	.030	4	
333333	7485598	.729	.002	.72890 - .00007	.030	4	
333333	7485599	.729	.004	.72880 - .00010	.030	8	
333333	7485601	.729	.008 AND UP	.72860 - .00030	.030	8	
333333	7485603	.730	.0005	.73000 - .00004	.030	4	
333333	7485605	.730	.002	.72990 - .00007	.030	4	
333333	7485606	.730	.004	.72980 - .00010	.030	8	
333333	7485608	.730	.008 AND UP	.72960 - .00030	.030	8	
333333	7485610	.731	.0005	.73100 - .00004	.030	4	
333333	7485612	.731	.002	.73090 - .00007	.030	4	
333333	7485613	.731	.004	.73080 - .00010	.030	8	
333333	7485615	.731	.008 AND UP	.73060 - .00030	.030	8	
333333	7485617	.732	.0005	.73200 - .00004	.030	4	
333333	7485619	.732	.002	.73190 - .00007	.030	4	
333333	7485620	.732	.004	.73180 - .00010	.030	8	
333333	7485622	.732	.008 AND UP	.73160 - .00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FINN-GAGE STOCK NO.	MAXIMUM RING GAGE	ACCEPTANCE CHECK	C	D	E	F	G	H	
7485624	.733	.0005			.73300	-.00004	.030	4		
7485626	.733	.002			.73290	-.00007	.030	4	8	
7485627	.733	.004			.73280	-.00010	.030	8		
7485629	.733	.008 AND UP			.73260	-.00030	.030	8		
7485631	.734	.0005			.73400	-.00004	.030	4		
7485633	.734	.002			.73390	-.00007	.030	4	8	
7485634	.734	.004			.73380	-.00010	.030	8		
7485636	.734	.008 AND UP			.73360	-.00030	.030	8		
7485638	.735	.0005			.73500	-.00004	.030	4		
7485640	.735	.002			.73490	-.00007	.030	4	8	
7485641	.735	.004			.73480	-.00010	.030	8		
7485643	.735	.008 AND UP			.73460	-.00030	.030	8		
7485645	.736	.0005			.73600	-.00004	.030	4		
7485647	.736	.002			.73590	-.00007	.030	4	8	
7485648	.736	.004			.73580	-.00010	.030	8		
7485650	.736	.008 AND UP			.73560	-.00030	.030	8		
7485652	.737	.0005			.73700	-.00004	.030	4		
7485654	.737	.002			.73690	-.00007	.030	4	8	
7485655	.737	.004			.73680	-.00010	.030	8		
7485657	.737	.008 AND UP			.73660	-.00030	.030	8		
7485659	.738	.0005			.73800	-.00004	.030	4		
7485661	.738	.002			.73790	-.00007	.030	4	8	
7485662	.738	.004			.73780	-.00010	.030	8		
7485664	.738	.008 AND UP			.73760	-.00030	.030	8		
7485666	.739	.0005			.73900	-.00004	.030	4		
7485668	.739	.002			.73890	-.00007	.030	4	8	
7485669	.739	.004			.73880	-.00010	.030	8		
7485671	.739	.008 AND UP			.73860	-.00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH H
	FIN - GAGE RING GAGE	STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER CHAMFER	G	
A	B	C	D	E	F	G	H
33333	7485673		.740	.0005	.74000 - .00004	.030	4
33333	7485675		.740	.002	.73990 - .00007	.030	4
33333	7485676		.740	.004	.73980 - .00010	.030	8
33333	7485678		.740	.008 AND UP	.73960 - .00030	.030	8
33333	7485680		.741	.0005	.74100 - .00004	.030	4
33333	7485682		.741	.002	.74090 - .00007	.030	4
33333	7485683		.741	.004	.74080 - .00010	.030	8
33333	7485685		.741	.008 AND UP	.74060 - .00030	.030	8
33333	7485687		.742	.0005	.74200 - .00004	.030	4
33333	7485689		.742	.002	.74190 - .00007	.030	4
33333	7485690		.742	.004	.74180 - .00010	.030	8
33333	7485692		.742	.008 AND UP	.74160 - .00030	.030	8
33333	7485694		.743	.0005	.74300 - .00004	.030	4
33333	7485696		.743	.002	.74290 - .00007	.030	4
33333	7485697		.743	.004	.74280 - .00010	.030	8
33333	7485699		.743	.008 AND UP	.74260 - .00030	.030	8
33333	7485701		.744	.0005	.74400 - .00004	.030	4
33333	7485703		.744	.002	.74390 - .00007	.030	4
33333	7485704		.744	.004	.74380 - .00010	.030	8
33333	7485706		.744	.008 AND UP	.74360 - .00030	.030	8
33333	7485708		.745	.0005	.74500 - .00004	.030	4
33333	7485710		.745	.002	.74490 - .00007	.030	4
33333	7485711		.745	.004	.74480 - .00010	.030	8
33333	7485713		.745	.008 AND UP	.74460 - .00030	.030	8
33333	7485715		.746	.0005	.74600 - .00004	.030	4
33333	7485717		.746	.002	.74590 - .00007	.030	4
33333	7485718		.746	.004	.74580 - .00010	.030	8
33333	7485720		.746	.008 AND UP	.74560 - .00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

RING NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	COMPONENT TOLERANCE	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
7485722	.747	.0005	.74700	-.00004	.030	4	
7485724	.747	.002	.74690	-.00007	.030	4	
7485725	.747	.004	.74680	-.00010	.030	4	
7485727	.747	.008 AND UP	.74660	-.00030	.030	4	
7485729	.748	.0005	.74800	-.00004	.030	4	
7485731	.748	.002	.74790	-.00007	.030	4	
7485732	.748	.004	.74780	-.00010	.030	4	
7485734	.748	.008 AND UP	.74760	-.00030	.030	4	
7485736	.749	.0005	.74900	-.00004	.030	4	
7485738	.749	.002	.74890	-.00007	.030	4	
7485739	.749	.004	.74880	-.00010	.030	4	
7485741	.749	.008 AND UP	.74860	-.00030	.030	4	
7485743	.750	.0005	.75000	-.00004	.030	4	
7485745	.750	.002	.74990	-.00007	.030	4	
7485746	.750	.004	.74980	-.00010	.030	4	
7485748	.750	.008 AND UP	.74960	-.00030	.030	4	
7485750	.751	.0005	.75100	-.00004	.030	4	
7485752	.751	.002	.75090	-.00007	.030	4	
7485753	.751	.004	.75080	-.00010	.030	4	
7485755	.751	.008 AND UP	.75060	-.00030	.030	4	
7485757	.752	.0005	.75200	-.00004	.030	4	
7485759	.752	.002	.75190	-.00007	.030	4	
7485760	.752	.004	.75180	-.00010	.030	4	
7485762	.752	.008 AND UP	.75160	-.00030	.030	4	
7485764	.753	.0005	.75300	-.00004	.030	4	
7485766	.753	.002	.75290	-.00007	.030	4	
7485767	.753	.004	.75280	-.00010	.030	4	
7485769	.753	.008 AND UP	.75260	-.00030	.030	4	

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	FIN--GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	DIMENSION	COMPONENT TOLERANCE	DIA METER	CHAMFER	
A	B	C	D	E	F	G	H
M33333	7485771		.754	.0005	.75400	.00004	.030
M33333	7485773		.754	.002	.75390	.00007	.030
M33333	7485774		.754	.004	.75380	.00010	.030
M33333	7485776		.754	.008 AND UP	.75360	.00030	.030
M33333	7485778		.755	.0005	.75500	.00004	.030
M33333	7485780		.755	.002	.75490	.00007	.030
M33333	7485781		.755	.004	.75480	.00010	.030
M33333	7485783		.755	.008 AND UP	.75460	.00030	.030
M33333	7485785		.756	.0005	.75600	.00004	.030
M33333	7485787		.756	.002	.75590	.00007	.030
M33333	7485788		.756	.004	.75580	.00010	.030
M33333	7485790		.756	.008 AND UP	.75560	.00030	.030
M33333	7485792		.757	.0005	.75700	.00004	.030
M33333	7485794		.757	.002	.75690	.00007	.030
M33333	7485795		.757	.004	.75680	.00010	.030
M33333	7485797		.757	.008 AND UP	.75660	.00030	.030
M33333	7485799		.758	.0005	.75800	.00004	.030
M33333	7485801		.758	.002	.75790	.00007	.030
M33333	7485802		.758	.004	.75780	.00010	.030
M33333	7485804		.758	.008 AND UP	.75760	.00030	.030
M33333	7485806		.759	.0005	.75900	.00004	.030
M33333	7485808		.759	.002	.75890	.00007	.030
M33333	7485809		.759	.004	.75880	.00010	.030
M33333	7485811		.759	.008 AND UP	.75860	.00030	.030
M33333	7485813		.760	.0005	.76000	.00004	.030
M33333	7485815		.760	.002	.75990	.00007	.030
M33333	7485816		.760	.004	.75980	.00010	.030
M33333	7485818		.760	.008 AND UP	.75960	.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	RING-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	G	
A	B	C	D	E	F	G	H
7485820	.761	.0005	.76100 - .00004	.030	4		
7485822	.761	.002	.76090 - .00007	.030	4		
7485823	.761	.004	.76080 - .00010	.030	8		
7485825	.761	.008 AND UP	.76060 - .00030	.030	8		
7485827	.762	.0005	.76200 - .00004	.030	4		
7485829	.762	.002	.76190 - .00007	.030	4		
7485830	.762	.004	.76180 - .00010	.030	8		
7485832	.762	.008 AND UP	.76160 - .00030	.030	8		
7485834	.763	.0005	.76300 - .00004	.030	4		
7485836	.763	.002	.76290 - .00007	.030	4		
7485837	.763	.004	.76280 - .00010	.030	8		
7485839	.763	.008 AND UP	.76260 - .00030	.030	8		
7485841	.764	.0005	.76400 - .00004	.030	4		
7485843	.764	.002	.76390 - .00007	.030	4		
7485844	.764	.004	.76380 - .00010	.030	8		
7485846	.764	.008 AND UP	.76360 - .00030	.030	8		
7485848	.765	.0005	.76500 - .00004	.030	4		
7485850	.765	.002	.76490 - .00007	.030	4		
7485851	.765	.004	.76480 - .00010	.030	8		
7485853	.765	.008 AND UP	.76460 - .00030	.030	8		
7485855	.766	.0005	.76600 - .00004	.030	4		
7485857	.766	.002	.76590 - .00007	.030	4		
7485858	.766	.004	.76580 - .00010	.030	8		
7485860	.766	.008 AND UP	.76560 - .00030	.030	8		
7485862	.767	.0005	.76700 - .00004	.030	4		
7485864	.767	.002	.76690 - .00007	.030	4		
7485865	.767	.004	.76680 - .00010	.030	8		
7485867	.767	.008 AND UP	.76660 - .00030	.030	8		

Table I. Tabulation of Design and Identification Data (Continued)

F.I.G. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH		
	FIN - GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	G	H	I
A	B	C	D	E	F	G	H	I	
7485869			.768	.0005	.76800	-.00004	.030	4	
7485871			.768	.002	.76790	-.00007	.030	4	8
7485872			.768	.004	.76780	-.00010	.030	4	8
7485874			.768	.008 AND UP	.76760	-.00030	.030	8	8
7485876			.769	.0005	.76900	-.00004	.030	4	
7485878			.769	.002	.76890	-.00007	.030	4	
7485879			.769	.004	.76880	-.00010	.030	4	
7485881			.769	.008 AND UP	.76860	-.00030	.030	8	8
7485883			.770	.0005	.77000	-.00004	.030	4	
7485885			.770	.002	.76990	-.00007	.030	4	
7485886			.770	.004	.76980	-.00010	.030	4	
7485888			.770	.008 AND UP	.76960	-.00030	.030	8	8
7485890			.771	.0005	.77100	-.00004	.030	4	
7485892			.771	.002	.77090	-.00007	.030	4	
7485893			.771	.004	.77080	-.00010	.030	4	
7485895			.771	.008 AND UP	.77060	-.00030	.030	8	
7485897			.772	.0005	.77200	-.00004	.030	4	
7485899			.772	.002	.77190	-.00007	.030	4	
7485900			.772	.004	.77180	-.00010	.030	4	
7485902			.772	.008 AND UP	.77160	-.00030	.030	8	
7485904			.773	.0005	.77300	-.00004	.030	4	
7485906			.773	.002	.77290	-.00007	.030	4	
7485907			.773	.004	.77280	-.00010	.030	4	
7485909			.773	.008 AND UP	.77260	-.00030	.030	8	
7485911			.774	.0005	.77400	-.00004	.030	4	
7485913			.774	.002	.77390	-.00007	.030	4	
7485914			.774	.004	.77380	-.00010	.030	4	
7485916			.774	.008 AND UP	.77360	-.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C	D						
7485918	.775	.0005	.77500	-	.00004	.030	4	4	
7485920	.775	.002	.77490	-	.00007	.030	4	4	
7485921	.775	.004	.77480	-	.00010	.030	4	4	
7485923	.775	.008 AND UP	.77460	-	.00030	.030	4	4	
7485925	.776	.0005	.77600	-	.00004	.030	4	4	
7485927	.776	.002	.77590	-	.00007	.030	4	4	
7485928	.776	.004	.77580	-	.00010	.030	4	4	
7485930	.776	.008 AND UP	.77560	-	.00030	.030	4	4	
7485932	.777	.0005	.77700	-	.00004	.030	4	4	
7485934	.777	.002	.77690	-	.00007	.030	4	4	
7485935	.777	.004	.77680	-	.00010	.030	4	4	
7485937	.777	.008 AND UP	.77660	-	.00030	.030	4	4	
7485939	.778	.0005	.77800	-	.00004	.030	4	4	
7485941	.778	.002	.77790	-	.00007	.030	4	4	
7485942	.778	.004	.77780	-	.00010	.030	4	4	
7485944	.778	.008 AND UP	.77760	-	.00030	.030	4	4	
7485946	.779	.0005	.77900	-	.00004	.030	4	4	
7485948	.779	.002	.77890	-	.00007	.030	4	4	
7485949	.779	.004	.77880	-	.00010	.030	4	4	
7485951	.779	.008 AND UP	.77860	-	.00030	.030	4	4	
7485953	.780	.0005	.78000	-	.00004	.030	4	4	
7485955	.780	.002	.77990	-	.00007	.030	4	4	
7485956	.780	.004	.77980	-	.00010	.030	4	4	
7485958	.780	.008 AND UP	.77960	-	.00030	.030	4	4	
7485960	.781	.0005	.78100	-	.00004	.030	4	4	
7485962	.781	.002	.78090	-	.00007	.030	4	4	
7485963	.781	.004	.78080	-	.00010	.030	4	4	
7485965	.781	.008 AND UP	.78060	-	.00030	.030	4	4	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE	FIN - GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA	E	F	G	H	
A	B	C	D						
3	7485967		.78125	.0005 AND UP	.78125	-.00004	.030	.4	
	7485968		.782	.0005	.78200	-.00004	.030	.4	
	7485970		.782	.002	.78190	-.00007	.030	.4	
	7485971		.782	.004	.78180	-.00010	.030	.6	
	7485973		.782	.008 AND UP	.78160	-.00030	.030	.6	
	7485975		.783	.0005	.78300	-.00004	.030	.4	
	7485977		.783	.002	.78290	-.00007	.030	.4	
	7485978		.783	.004	.78280	-.00010	.030	.6	
	7485980		.783	.008 AND UP	.78260	-.00030	.030	.6	
	7485982		.784	.0005	.78400	-.00004	.030	.4	
	7485984		.784	.002	.78390	-.00007	.030	.4	
	7485985		.784	.004	.78380	-.00010	.030	.6	
	7485987		.784	.008 AND UP	.78360	-.00030	.030	.6	
	7485989		.785	.0005	.78500	-.00004	.030	.4	
	7485991		.785	.002	.78490	-.00007	.030	.4	
	7485992		.785	.004	.78480	-.00010	.030	.6	
	7485994		.785	.008 AND UP	.78460	-.00030	.030	.6	
	7485996		.786	.0005	.78600	-.00004	.030	.4	
	7485998		.786	.002	.78590	-.00007	.030	.4	
	7485999		.786	.004	.78580	-.00010	.030	.6	
	7486001		.786	.008 AND UP	.78560	-.00030	.030	.6	
	7486003		.787	.0005	.78700	-.00004	.030	.4	
	7486005		.787	.002	.78690	-.00007	.030	.4	
	7486006		.787	.004	.78680	-.00010	.030	.6	
	7486008		.787	.008 AND UP	.78660	-.00030	.030	.6	
	7486010		.788	.0005	.78800	-.00004	.030	.4	
	7486012		.788	.002	.78790	-.00007	.030	.4	
	7486013		.788	.004	.78780	-.00010	.030	.6	
	7486015		.788	.008 AND UP	.78760	-.00030	.030	.6	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FLN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
RING GAGE	ACCEPTANCE CHECK		C	B	A					
7486017		.789	.0005		.78900 - .00004	.030	4			
7486019		.789	.002		.78890 - .00007	.030	4			
7486020		.789	.004		.78880 - .00010	.030	4			
7486022		.789	.008 AND UP		.78860 - .00030	.030	8			
7486024		.790	.0005		.79000 - .00004	.030	4			
7486026		.790	.002		.78990 - .00007	.030	4			
7486027		.790	.004		.78980 - .00010	.030	8			
7486029		.790	.008 AND UP		.78960 - .00030	.030	8			
7486031		.791	.0005		.79100 - .00004	.030	4			
7486033		.791	.002		.79090 - .00007	.030	4			
7486034		.791	.004		.79080 - .00010	.030	8			
7486036		.791	.008 AND UP		.79060 - .00030	.030	8			
7486038		.792	.0005		.79200 - .00004	.030	4			
7486040		.792	.002		.79190 - .00007	.030	4			
7486041		.792	.004		.79180 - .00010	.030	8			
7486043		.792	.008 AND UP		.79160 - .00030	.030	8			
7486045		.793	.0005		.79300 - .00004	.030	4			
7486047		.793	.002		.79290 - .00007	.030	4			
7486048		.793	.004		.79280 - .00010	.030	8			
7486050		.793	.008 AND UP		.79260 - .00030	.030	8			
7486052		.794	.0005		.79400 - .00004	.030	4			
7486054		.794	.002		.79390 - .00007	.030	4			
7486055		.794	.004		.79380 - .00010	.030	8			
7486057		.794	.008 AND UP		.79360 - .00030	.030	8			
7486059		.795	.0005		.79500 - .00004	.030	4			
7486061		.795	.002		.79490 - .00007	.030	4			
7486062		.795	.004		.79480 - .00010	.030	8			
7486064		.795	.008 AND UP		.79460 - .00030	.030	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

TIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS			FINISH CHAMFER
	RING-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIA. E	F	G	
A	B	C	D	E	F	G	H	
3	7486066		.796	.0005	.79600	-.00004	.030	
3	7486068		.796	.002	.79590	-.00007	.030	
3	7486069		.796	.004	.79580	-.00010	.030	
3	7486071		.796	.008 AND UP	.79560	-.00030	.030	
3	7486072		.797	.0005	.79700	-.00004	.030	
3	7486073		.797	.002	.79690	-.00007	.030	
3	7486075		.797	.004	.79680	-.00010	.030	
3	7486076		.797	.008 AND UP	.79660	-.00030	.030	
3	7486078		.797					
3	7486080		.798	.0005	.79800	-.00004	.030	
3	7486082		.798	.002	.79790	-.00007	.030	
3	7486083		.798	.004	.79780	-.00010	.030	
3	7486085		.798	.008 AND UP	.79760	-.00030	.030	
3	7486087		.799	.0005	.79900	-.00004	.030	
3	7486089		.799	.002	.79890	-.00007	.030	
3	7486090		.799	.004	.79880	-.00010	.030	
3	7486092		.799	.008 AND UP	.79860	-.00030	.030	
3	7486094		.800	.0005	.80000	-.00004	.030	
3	7486096		.800	.002	.79990	-.00007	.030	
3	7486097		.800	.004	.79980	-.00010	.030	
3	7486099		.800	.008 AND UP	.79960	-.00030	.030	
3	7486101		.801	.0005	.80100	-.00004	.030	
3	7486103		.801	.002	.80090	-.00007	.030	
3	7486104		.801	.004	.80080	-.00010	.030	
3	7486106		.801	.008 AND UP	.80060	-.00030	.030	
3	7486108		.802	.0005	.80200	-.00004	.030	
3	7486110		.802	.002	.80190	-.00007	.030	
3	7486111		.802	.004	.80180	-.00010	.030	
3	7486113		.802	.008 AND UP	.80160	-.00030	.030	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE				RING GAGE DIMENSIONS				FINISH			
	FIN-GAGE	STOCK NO.	MAXIMUM	TOTAL	COMPONENT	DIA METER	CHAMFER	H	RING GAGE	COMPONENT	DIAMETER	G
	RING GAGE	ACCEPTANCE	COMPONENT	TOLERANCE	E	F						
A	B	C	D									
7486115	.803	.0005	.803	.0004	.80300	-.00004	.030	4	4	4	4	
7486117	.803	.002	.803	.0007	.80290	-.00007	.030	4	4	4	4	
7486118	.803	.004	.803	.0010	.80280	-.00010	.030	4	4	4	4	
7486120	.803	.008 AND UP	.803	.0030	.80260	-.00030	.030	4	4	4	4	
7486122	.804	.0005	.804	.0004	.80400	-.00004	.030	4	4	4	4	
7486124	.804	.002	.804	.0007	.80390	-.00007	.030	4	4	4	4	
7486125	.804	.004	.804	.0010	.80380	-.00010	.030	4	4	4	4	
7486127	.804	.008 AND UP	.804	.0030	.80360	-.00030	.030	4	4	4	4	
7486129	.805	.0005	.805	.0004	.80500	-.00004	.030	4	4	4	4	
7486131	.805	.002	.805	.0007	.80490	-.00007	.030	4	4	4	4	
7486132	.805	.004	.805	.0010	.80480	-.00010	.030	4	4	4	4	
7486134	.805	.008 AND UP	.805	.0030	.80460	-.00030	.030	4	4	4	4	
7486136	.806	.0005	.806	.0004	.80600	-.00004	.030	4	4	4	4	
7486138	.806	.002	.806	.0007	.80590	-.00007	.030	4	4	4	4	
7486139	.806	.004	.806	.0010	.80580	-.00010	.030	4	4	4	4	
7486141	.806	.008 AND UP	.806	.0030	.80560	-.00030	.030	4	4	4	4	
7486143	.807	.0005	.807	.0004	.80700	-.00004	.030	4	4	4	4	
7486145	.807	.002	.807	.0007	.80690	-.00007	.030	4	4	4	4	
7486146	.807	.004	.807	.0010	.80680	-.00010	.030	4	4	4	4	
7486148	.807	.008 AND UP	.807	.0030	.80660	-.00030	.030	4	4	4	4	
7486150	.808	.0005	.808	.0004	.80800	-.00004	.030	4	4	4	4	
7486152	.808	.002	.808	.0007	.80790	-.00007	.030	4	4	4	4	
7486153	.808	.004	.808	.0010	.80780	-.00010	.030	4	4	4	4	
7486155	.808	.008 AND UP	.808	.0030	.80760	-.00030	.030	4	4	4	4	
7486157	.809	.0005	.809	.0004	.80900	-.00004	.030	4	4	4	4	
7486159	.809	.002	.809	.0007	.80890	-.00007	.030	4	4	4	4	
7486160	.809	.004	.809	.0010	.80880	-.00010	.030	4	4	4	4	
7486162	.809	.008 AND UP	.809	.0030	.80860	-.00030	.030	4	4	4	4	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FINN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	G	
A	B	C	D	E	F	H	
7486164	.810	.0005	.81000	-.00004	.030	4	
7486166	.810	.002	.80990	-.00007	.030	4	
7486167	.810	.004	.80980	-.00010	.030	6	
7486169	.810	.008 AND UP	.80960	-.00030	.030	6	
7486171	.811	.0005	.81100	-.00004	.030	4	
7486173	.811	.002	.81090	-.00007	.030	4	
7486174	.811	.004	.81080	-.00010	.030	6	
7486176	.811	.008 AND UP	.81060	-.00030	.030	6	
7486178	.812	.0005	.81200	-.00004	.030	4	
7486180	.812	.002	.81190	-.00007	.030	4	
7486181	.812	.004	.81180	-.00010	.030	6	
7486183	.812	.008 AND UP	.81160	-.00030	.030	6	
7486185	.8125	.0005 AND UP	.81250	-.00004	.030	4	
7486186	.813	.0005	.81300	-.00004	.030	4	
7486188	.813	.002	.81290	-.00007	.030	4	
7486189	.813	.004	.81280	-.00010	.030	6	
7486191	.813	.008 AND UP	.81260	-.00030	.030	6	
7486193	.814	.0005	.81400	-.00004	.030	4	
7486195	.814	.002	.81390	-.00007	.030	4	
7486196	.814	.004	.81380	-.00010	.030	6	
7486198	.814	.008 AND UP	.81360	-.00030	.030	6	
7486200	.815	.0005	.81500	-.00004	.030	4	
7486202	.815	.002	.81490	-.00007	.030	4	
7486203	.815	.004	.81480	-.00010	.030	6	
7486205	.815	.008 AND UP	.81460	-.00030	.030	6	
7486207	.816	.0005	.81600	-.00004	.030	4	
7486209	.816	.002	.81590	-.00007	.030	4	
7486210	.816	.004	.81580	-.00010	.030	6	
7486212	.816	.008 AND UP	.81560	-.00030	.030	6	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL			RING GAGE DIMENSIONS		FINISH
	FINN-GAGE	STOCK NO.	MAXIMUM COMPONENT TOLERANCE	COMPONENT DIMENSION	DIA	E	F	G	
FIG. NO.	RING GAGE	ACCEPTANCE CHECK		D				H	
A	B	C							
7486214				.817	.0005		.81700	-.00004	.030
7486216				.817	.002		.81690	-.00007	.030
7486217				.817	.004	AND UP	.81680	-.00010	.030
7486219				.817	.008	AND UP	.81660	-.00030	.030
7486221				.818	.0005		.81800	-.00004	.030
7486223				.818	.002		.81790	-.00007	.030
7486224				.818	.004		.81780	-.00010	.030
7486226				.818	.008	AND UP	.81760	-.00030	.030
7486228				.819	.0005		.81900	-.00004	.030
7486230				.819	.002		.81890	-.00007	.030
7486231				.819	.004		.81880	-.00010	.030
7486233				.819	.008	AND UP	.81860	-.00030	.030
7486235				.820	.0005		.82000	-.00004	.030
7486237				.820	.002		.81990	-.00007	.030
7486238				.820	.004		.81980	-.00010	.030
7486240				.820	.008	AND UP	.81960	-.00030	.030
7486242				.821	.0005		.82100	-.00004	.030
7486244				.821	.002		.82090	-.00007	.030
7486245				.821	.004		.82080	-.00010	.030
7486247				.821	.008	AND UP	.82060	-.00030	.030
7486249				.822	.0005		.82200	-.00004	.030
7486251				.822	.002		.82190	-.00007	.030
7486252				.822	.004		.82180	-.00010	.030
7486254				.822	.008	AND UP	.82160	-.00030	.030
7486256				.823	.0005		.82300	-.00004	.030
7486258				.823	.002		.82290	-.00007	.030
7486259				.823	.004		.82280	-.00010	.030
7486261				.823	.008	AND UP	.82260	-.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	
A	B	C	D	E	F	G	H
3 3 3 3 3	7486263			.824	.005	.82400 - .00004	.030
	7486265			.824	.002	.82390 - .00007	.030
	7486266			.824	.004	.82380 - .00010	.030
	7486268			.824	.008 AND UP	.82360 - .00030	.030
3 3 3 3 3	7486270			.825	.005	.82500 - .00004	.030
	7486272			.825	.002	.82490 - .00007	.030
	7486273			.825	.004	.82480 - .00010	.030
	7486275			.825	.008 AND UP	.82460 - .00030	.030
3 3 3 3 3	7486277			.826	.005	.82600 - .00006	.030
	7486279			.826	.002	.82590 - .00009	.030
	7486280			.826	.004	.82580 - .00012	.030
	7486282			.826	.008 AND UP	.82560 - .00030	.030
3 3 3 3 3	7486284			.827	.005	.82700 - .00006	.030
	7486286			.827	.002	.82690 - .00009	.030
	7486287			.827	.004	.82680 - .00012	.030
	7486289			.827	.008 AND UP	.82660 - .00030	.030
3 3 3 3 3	7486291			.828	.005	.82800 - .00006	.030
	7486293			.828	.002	.82790 - .00009	.030
	7486294			.828	.004	.82780 - .00012	.030
	7486296			.828	.008 AND UP	.82760 - .00030	.030
3 3 3 3 3	7486298			.829	.005	.82900 - .00006	.030
	7486300			.829	.002	.82890 - .00009	.030
	7486301			.829	.004	.82880 - .00012	.030
	7486303			.829	.008 AND UP	.82860 - .00030	.030
3 3 3 3 3	7486305			.830	.005	.83000 - .00006	.030
	7486307			.830	.002	.82990 - .00009	.030
	7486308			.830	.004	.82980 - .00012	.030
	7486310			.830	.008 AND UP	.82960 - .00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FINN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	G	
RING GAGE	ACCEPTANCE CHECK	D	E	F	H	G	
A	B	C	D	E	F	G	H
3	7486312		.831	.0005	.83100 - .00006	.030	4
	7486314		.831	.002	.83090 - .00009	.030	4
	7486315		.831	.004	.83080 - .00012	.030	6
	7486317		.831	.008 AND UP	.83060 - .00030	.030	6
3	7486319		.832	.0005	.83200 - .00006	.030	4
	7486321		.832	.002	.83190 - .00009	.030	4
	7486322		.832	.004	.83180 - .00012	.030	6
	7486324		.832	.008 AND UP	.83160 - .00030	.030	6
3	7486326		.833	.0005	.83300 - .00006	.030	4
	7486328		.833	.002	.83290 - .00009	.030	4
	7486329		.833	.004	.83280 - .00012	.030	6
	7486331		.833	.008 AND UP	.83260 - .00030	.030	6
3	7486333		.834	.0005	.83400 - .00006	.030	4
	7486335		.834	.002	.83390 - .00009	.030	4
	7486336		.834	.004	.83380 - .00012	.030	6
	7486338		.834	.008 AND UP	.83360 - .00030	.030	6
3	7486340		.835	.0005	.83500 - .00006	.030	4
	7486342		.835	.002	.83490 - .00009	.030	4
	7486343		.835	.004	.83480 - .00012	.030	6
	7486345		.835	.008 AND UP	.83460 - .00030	.030	6
3	7486347		.836	.0005	.83600 - .00006	.030	4
	7486349		.836	.002	.83590 - .00009	.030	4
	7486350		.836	.004	.83580 - .00012	.030	6
	7486352		.836	.008 AND UP	.83560 - .00030	.030	6
3	7486354		.837	.0005	.83700 - .00006	.030	4
	7486356		.837	.002	.83690 - .00009	.030	4
	7486357		.837	.004	.83680 - .00012	.030	6
	7486359		.837	.008 AND UP	.83660 - .00030	.030	6

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON CIR- CL	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE RING GAGE	STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	G	
A	B	C	D	E	F	H	
3	7486361		.838	.005	.83800 - .00006	.030	4
3	7486363		.838	.002	.83790 - .00009	.030	4
3	7486364		.838	.004	.83780 - .00012	.030	8
3	7486366		.838	.008 AND UP	.83760 - .00030	.030	8
3	7486368		.839	.005	.83900 - .00006	.030	4
3	7486370		.839	.002	.83890 - .00009	.030	4
3	7486371		.839	.004	.83880 - .00012	.030	8
3	7486373		.839	.008 AND UP	.83860 - .00030	.030	8
3	7486375		.840	.005	.84000 - .00006	.030	4
3	7486377		.840	.002	.83990 - .00009	.030	4
3	7486378		.840	.004	.83980 - .00012	.030	8
3	7486380		.840	.008 AND UP	.83960 - .00030	.030	8
3	7486382		.841	.005	.84100 - .00006	.030	4
3	7486384		.841	.002	.84090 - .00009	.030	4
3	7486385		.841	.004	.84080 - .00012	.030	8
3	7486387		.841	.008 AND UP	.84060 - .00030	.030	8
3	7486389		.842	.005	.84200 - .00006	.030	4
3	7486391		.842	.002	.84190 - .00009	.030	4
3	7486392		.842	.004	.84180 - .00012	.030	8
3	7486394		.842	.008 AND UP	.84160 - .00030	.030	8
3	7486396		.843	.005	.84200 - .00006	.030	4
3	7486398		.843	.002	.84290 - .00009	.030	4
3	7486399		.843	.004	.84280 - .00012	.030	8
3	7486401		.843	.008 AND UP	.84260 - .00030	.030	8
3	7486403		.84375	.0005 AND UP	.84375 - .00006	.030	4
3	7486404		.844	.0005	.84400 - .00006	.030	4
3	7486406		.844	.002	.84390 - .00009	.030	4
3	7486407		.844	.004	.84380 - .00012	.030	8
3	7486409		.844	.008 AND UP	.84360 - .00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH		
	FIN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	G	H	
A	B	C	D	E	F	G	H		
7486411	.845	.0005	.845	.0006	.84500	.00006	.030	4	
7486413	.845	.002	.845	.0009	.84490	.00009	.030	4	
7486414	.845	.004	.845	.0012	.84480	.00002	.030	8	
7486416	.845	.008 AND UP	.845	.0030	.84460	.00030	.030	8	
7486418	.846	.0005	.846	.0006	.84600	.00006	.030	4	
7486420	.846	.002	.846	.0009	.84590	.00009	.030	4	
7486421	.846	.004	.846	.0012	.84580	.00012	.030	8	
7486423	.846	.008 AND UP	.846	.0030	.84560	.00030	.030	8	
7486425	.847	.0005	.847	.0006	.84700	.00006	.030	4	
7486427	.847	.002	.847	.0009	.84690	.00009	.030	4	
7486428	.847	.004	.847	.0012	.84680	.00012	.030	8	
7486430	.847	.008 AND UP	.847	.0030	.84660	.00030	.030	8	
7486432	.848	.0005	.848	.0006	.84800	.00006	.030	4	
7486434	.848	.002	.848	.0009	.84790	.00009	.030	4	
7486435	.848	.004	.848	.0012	.84780	.00012	.030	8	
7486437	.848	.008 AND UP	.848	.0030	.84760	.00030	.030	8	
7486439	.849	.0005	.849	.0006	.84900	.00006	.030	4	
7486441	.849	.002	.849	.0009	.84890	.00009	.030	4	
7486442	.849	.004	.849	.0012	.84880	.00012	.030	8	
7486444	.849	.008 AND UP	.849	.0030	.84860	.00030	.030	8	
7486446	.850	.0005	.850	.0006	.85000	.00006	.030	4	
7486448	.850	.002	.850	.0009	.84990	.00009	.030	4	
7486449	.850	.004	.850	.0012	.84980	.00012	.030	8	
7486451	.850	.008 AND UP	.850	.0030	.84960	.00030	.030	8	
7486453	.851	.0005	.851	.0006	.85100	.00006	.030	4	
7486455	.851	.002	.851	.0009	.85090	.00009	.030	4	
7486456	.851	.004	.851	.0012	.85080	.00012	.030	8	
7486458	.851	.008 AND UP	.851	.0030	.85060	.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER	
	RING-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIAMETER		F	G			
		RING GAGE	ACCEPTANCE CHECK	D	E					
A	B	C	D	E	F	G	H	I	J	
7486460	7486462	7486463	7486465	.852	.0005	.85200	-.00006	.030	4 4 8 8	
7486467	7486469	7486470	7486472	.852	.002	.85190	-.00009	.030	4 4 8 8	
7486474	7486476	7486477	7486479	.852	.004 AND UP	.85180	-.00012	.030	4 4 8 8	
7486481	7486483	7486484	7486486	.853	.0005	.85300	-.00006	.030	4 4 8 8	
7486488	7486490	7486491	7486493	.853	.002	.85290	-.00009	.030	4 4 8 8	
7486495	7486497	7486498	7486500	.853	.004 AND UP	.85280	-.00012	.030	4 4 8 8	
7486502	7486504	7486505	7486507	.853	.0005	.85360	-.00015	.030	4 4 8 8	
				.853	.002	.85340	-.00018	.030	4 4 8 8	
				.853	.004 AND UP	.85330	-.00020	.030	4 4 8 8	
				.854	.0005	.85400	-.00006	.030	4 4 8 8	
				.854	.002	.85390	-.00009	.030	4 4 8 8	
				.854	.004 AND UP	.85380	-.00012	.030	4 4 8 8	
				.854	.008 AND UP	.85360	-.00015	.030	4 4 8 8	
				.855	.0005	.85500	-.00006	.030	4 4 8 8	
				.855	.002	.85490	-.00009	.030	4 4 8 8	
				.855	.004 AND UP	.85480	-.00012	.030	4 4 8 8	
				.855	.008 AND UP	.85460	-.00015	.030	4 4 8 8	
				.856	.0005	.85600	-.00006	.030	4 4 8 8	
				.856	.002	.85590	-.00009	.030	4 4 8 8	
				.856	.004 AND UP	.85580	-.00012	.030	4 4 8 8	
				.856	.008 AND UP	.85560	-.00015	.030	4 4 8 8	
				.857	.0005	.85700	-.00006	.030	4 4 8 8	
				.857	.002	.85690	-.00009	.030	4 4 8 8	
				.857	.004 AND UP	.85680	-.00012	.030	4 4 8 8	
				.857	.008 AND UP	.85660	-.00015	.030	4 4 8 8	
				.858	.0005	.85800	-.00006	.030	4 4 8 8	
				.858	.002	.85790	-.00009	.030	4 4 8 8	
				.858	.004 AND UP	.85780	-.00012	.030	4 4 8 8	
				.858	.008 AND UP	.85760	-.00015	.030	4 4 8 8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON C.I. FIG.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH	H
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
A	B	C	D	E	F	G	H	I	J	K
3	7486509		.859	.0005	.85900	-.00006	.030	4-4888	4-4888	
3	7486511		.859	.002	.85890	-.00009	.030	4-4888	4-4888	
3	7486512		.859	.004	.85880	-.00012	.030	4-4888	4-4888	
3	7486514		.859	.008 AND UP	.85860	-.00020	.030	4-4888	4-4888	
3	7486516		.860	.0005	.86000	-.00006	.030	4-4888	4-4888	
3	7486518		.860	.002	.85990	-.00009	.030	4-4888	4-4888	
3	7486519		.860	.004	.85980	-.00012	.030	4-4888	4-4888	
3	7486521		.860	.008 AND UP	.85960	-.00020	.030	4-4888	4-4888	
3	7486523		.861	.0005	.86100	-.00006	.030	4-4888	4-4888	
3	7486525		.861	.002	.86090	-.00009	.030	4-4888	4-4888	
3	7486526		.861	.004	.86080	-.00012	.030	4-4888	4-4888	
3	7486528		.861	.008 AND UP	.86060	-.00030	.030	4-4888	4-4888	
3	7486530		.862	.0005	.86200	-.00006	.030	4-4888	4-4888	
3	7486532		.862	.002	.86190	-.00009	.030	4-4888	4-4888	
3	7486533		.862	.004	.86180	-.00012	.030	4-4888	4-4888	
3	7486535		.862	.008 AND UP	.86160	-.00030	.030	4-4888	4-4888	
3	7486537		.863	.0005	.86300	-.00006	.030	4-4888	4-4888	
3	7486539		.863	.002	.86290	-.00009	.030	4-4888	4-4888	
3	7486540		.863	.004	.86280	-.00012	.030	4-4888	4-4888	
3	7486542		.863	.008 AND UP	.86260	-.00030	.030	4-4888	4-4888	
3	7486544		.864	.0005	.86400	-.00006	.030	4-4888	4-4888	
3	7486546		.864	.002	.86390	-.00009	.030	4-4888	4-4888	
3	7486547		.864	.004	.86380	-.00012	.030	4-4888	4-4888	
3	7486549		.864	.008 AND UP	.86360	-.00030	.030	4-4888	4-4888	
3	7486551		.865	.0005	.86500	-.00006	.030	4-4888	4-4888	
3	7486553		.865	.002	.86490	-.00009	.030	4-4888	4-4888	
3	7486554		.865	.004	.86480	-.00012	.030	4-4888	4-4888	
3	7486556		.865	.008 AND UP	.86460	-.00030	.030	4-4888	4-4888	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIA.	E	
A	B	C	D				H
3	7486558		.866	.0005	.86600	-.00006	.030
	7486560		.866	.002	.86590	-.00009	.030
	7486561		.866	.004	.86580	-.00012	.030
	7486563		.866	.008 AND UP	.86560	-.00030	.030
	7486565		.867	.0005	.86700	-.00006	.030
	7486567		.867	.002	.86690	-.00009	.030
	7486568		.867	.004	.86680	-.00012	.030
	7486570		.867	.008 AND UP	.86660	-.00030	.030
	7486572		.868	.0005	.86800	-.00006	.030
	7486574		.868	.002	.86790	-.00009	.030
	7486575		.868	.004	.86780	-.00012	.030
	7486577		.868	.008 AND UP	.86760	-.00030	.030
	7486579		.869	.0005	.86900	-.00006	.030
	7486581		.869	.002	.86890	-.00009	.030
	7486582		.869	.004	.86880	-.00012	.030
	7486584		.869	.008 AND UP	.86860	-.00030	.030
	7486586		.870	.0005	.87000	-.00006	.030
	7486588		.870	.002	.86990	-.00009	.030
	7486589		.870	.004	.86980	-.00012	.030
	7486591		.870	.008 AND UP	.86960	-.00030	.030
	7486593		.871	.0005	.87100	-.00006	.030
	7486595		.871	.002	.87090	-.00009	.030
	7486596		.871	.004	.87080	-.00012	.030
	7486598		.871	.008 AND UP	.87060	-.00030	.030
	7486600		.872	.0005	.87200	-.00006	.030
	7486602		.872	.002	.87190	-.00009	.030
	7486603		.872	.004	.87180	-.00012	.030
	7486605		.872	.008 AND UP	.87160	-.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN - GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		D	E	
RING GAGE	ACCEPTANCE CHECK	C					H
A	B						
74866607			.873	.0005	.87300	-.00006	.030
74866609			.873	.002	.87290	-.00009	.030
74866610			.873	.004	.87280	-.00012	.030
74866612			.873	.008 AND UP	.87260	-.00030	.030
74866614			.874	.0005	.87400	-.00006	.030
74866616			.874	.002	.87390	-.00009	.030
74866617			.874	.004	.87380	-.00012	.030
74866619			.874	.008 AND UP	.87360	-.00030	.030
74866621			.875	.0005	.87500	-.00006	.030
74866623			.875	.002	.87490	-.00009	.030
74866624			.875	.004	.87480	-.00012	.030
74866626			.875	.008 AND UP	.87460	-.00030	.030
74866628			.876	.0005	.87600	-.00006	.030
74866630			.876	.002	.87590	-.00009	.030
74866631			.876	.004	.87580	-.00012	.030
74866633			.876	.008 AND UP	.87560	-.00030	.030
74866635			.877	.0005	.87700	-.00006	.030
74866637			.877	.002	.87690	-.00009	.030
74866638			.877	.004	.87680	-.00012	.030
74866640			.877	.008 AND UP	.87660	-.00030	.030
74866642			.878	.0005	.87800	-.00006	.030
74866644			.878	.002	.87790	-.00009	.030
74866645			.878	.004	.87780	-.00012	.030
74866647			.878	.008 AND UP	.87760	-.00030	.030
74866649			.879	.0005	.87900	-.00006	.030
74866651			.879	.002	.87890	-.00009	.030
74866652			.879	.004	.87880	-.00012	.030
74866654			.879	.008 AND UP	.87860	-.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

G.N. ON FILE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		CHAMFER	H
	RING GAGE	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G			
A	B	C	D							
3	7486656		.880	.0005		.88000 - .00006	.030	4		
3	7486658		.880	.002		.87990 - .00009	.030	4		
3	7486659		.880	.004		.87980 - .00012	.030	4		
3	7486661		.880	.008 AND UP		.87960 - .00030	.030	4		
3	7486663		.881	.0005		.88100 - .00006	.030	4		
3	7486665		.881	.002		.88090 - .00009	.030	4		
3	7486666		.881	.004		.88080 - .00012	.030	4		
3	7486668		.881	.008 AND UP		.88060 - .00030	.030	4		
3	7486670		.882	.0005		.88200 - .00006	.030	4		
3	7486672		.882	.002		.88190 - .00009	.030	4		
3	7486673		.882	.004		.88180 - .00012	.030	4		
3	7486675		.882	.008 AND UP		.88160 - .00030	.030	4		
3	7486677		.883	.0005		.88300 - .00006	.030	4		
3	7486679		.883	.002		.88290 - .00009	.030	4		
3	7486680		.883	.004		.88280 - .00012	.030	4		
3	7486682		.883	.008 AND UP		.88260 - .00030	.030	4		
3	7486684		.884	.0005		.88400 - .00006	.030	4		
3	7486686		.884	.002		.88390 - .00009	.030	4		
3	7486687		.884	.004		.88380 - .00012	.030	4		
3	7486689		.884	.008 AND UP		.88360 - .00030	.030	4		
3	7486691		.885	.0005		.88400 - .00006	.030	4		
3	7486693		.885	.002		.88390 - .00009	.030	4		
3	7486694		.885	.004		.88380 - .00012	.030	4		
3	7486696		.885	.008 AND UP		.88360 - .00030	.030	4		
3	7486698		.886	.0005		.88600 - .00006	.030	4		
3	7486700		.886	.002		.88590 - .00009	.030	4		
3	7486701		.886	.004		.88580 - .00012	.030	4		
3	7486703		.886	.008 AND UP		.88560 - .00030	.030	4		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH	
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	G	H
A	B	C	D	E	F	G	H	
3	7486705		.887	.0005	.88700 -	.00006	.030	4
3	7486707		.887	.002	.88690 -	.00009	.030	4
3	7486708		.887	.004 AND UP	.88680 -	.00012	.030	8
3	7486710		.887	.006 AND UP	.88660 -	.00030	.030	8
3	7486712		.888	.0005	.88800 -	.00006	.030	4
3	7486714		.888	.002	.88790 -	.00009	.030	4
3	7486715		.888	.004	.88780 -	.00012	.030	8
3	7486717		.888	.008 AND UP	.88760 -	.00030	.030	8
3	7486719		.889	.0005	.88900 -	.00006	.030	4
3	7486721		.889	.002	.88890 -	.00009	.030	4
3	7486722		.889	.004	.88880 -	.00012	.030	8
3	7486724		.889	.008 AND UP	.88860 -	.00030	.030	8
3	7486726		.890	.0005	.89000 -	.00006	.030	4
3	7486728		.890	.002	.88990 -	.00009	.030	4
3	7486729		.890	.004	.88980 -	.00012	.030	8
3	7486731		.890	.008 AND UP	.88960 -	.00030	.030	8
3	7486733		.891	.0005	.89100 -	.00006	.030	4
3	7486735		.891	.002	.89090 -	.00009	.030	4
3	7486736		.891	.004	.89080 -	.00012	.030	8
3	7486738		.891	.008 AND UP	.89060 -	.00030	.030	8
3	7486740		.892	.0005	.89200 -	.00006	.030	4
3	7486742		.892	.002	.89190 -	.00009	.030	4
3	7486743		.892	.004	.89180 -	.00012	.030	8
3	7486745		.892	.008 AND UP	.89160 -	.00030	.030	8
3	7486747		.893	.0005	.89300 -	.00006	.030	4
3	7486749		.893	.002	.89290 -	.00009	.030	4
3	7486750		.893	.004	.89280 -	.00012	.030	8
3	7486752		.893	.008 AND UP	.89260 -	.00030	.030	8

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHARACTERISTICS
	FIN-GAGE STOCK NO.	RING GAGE	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
A	B	C								
7486754			.894	.0005	.89400	-.00006	.030	4		
7486756			.894	.002	.89390	-.00009	.030	4		
7486757			.894	.004	.89380	-.00012	.030	8		
7486759			.894	.008 AND UP	.89360	-.00030	.030	8		
7486761			.895	.0005	.89500	-.00006	.030	4		
7486763			.895	.002	.89490	-.00009	.030	4		
7486764			.895	.004	.89480	-.00012	.030	8		
7486766			.895	.008 AND UP	.89460	-.00030	.030	8		
7486768			.896	.0005	.89600	-.00006	.030	4		
7486770			.896	.002	.89590	-.00009	.030	4		
7486771			.896	.004	.89580	-.00012	.030	8		
7486773			.896	.008 AND UP	.89560	-.00030	.030	8		
7486775			.897	.0005	.89700	-.00006	.030	4		
7486777			.897	.002	.89690	-.00009	.030	4		
7486778			.897	.004	.89680	-.00012	.030	8		
7486780			.897	.008 AND UP	.89660	-.00030	.030	8		
7486782			.898	.0005	.89800	-.00006	.030	4		
7486784			.898	.002	.89790	-.00009	.030	4		
7486785			.898	.004	.89780	-.00012	.030	8		
7486787			.898	.008 AND UP	.89760	-.00030	.030	8		
7486789			.899	.0005	.89900	-.00006	.030	4		
7486791			.899	.002	.89890	-.00009	.030	4		
7486792			.899	.004	.89880	-.00012	.030	8		
7486794			.899	.008 AND UP	.89860	-.00030	.030	8		
7486796			.900	.0005	.90000	-.00006	.030	4		
7486798			.900	.002	.89990	-.00009	.030	4		
7486799			.900	.004	.89980	-.00012	.030	8		
7486801			.900	.008 AND UP	.89960	-.00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

RING NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	RING GAGE	STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	
A	B	C	D	E	F	H	
3	7486803			.901	.0005	.90100 - .00006	.030 4
3	7486805			.901	.002	.90090 - .00009	.030 4
3	7486806			.901	.004	.90080 - .00012	.030 8
3	7486808			.901	.008 AND UP	.90060 - .00030	.030 8
3	7486810			.902	.0005	.90200 - .00006	.030 4
3	7486812			.902	.002	.90190 - .00009	.030 4
3	7486813			.902	.004	.90180 - .00012	.030 8
3	7486815			.902	.008 AND UP	.90160 - .00030	.030 8
3	7486817			.903	.0005	.90300 - .00006	.030 4
3	7486819			.903	.002	.90290 - .00009	.030 4
3	7486820			.903	.004	.90280 - .00012	.030 8
3	7486822			.903	.008 AND UP	.90260 - .00030	.030 8
3	7486824			.904	.0005	.90400 - .00006	.030 4
3	7486826			.904	.002	.90390 - .00009	.030 4
3	7486827			.904	.004	.90380 - .00012	.030 8
3	7486829			.904	.008 AND UP	.90360 - .00030	.030 8
3	7486831			.905	.0005	.90500 - .00006	.030 4
3	7486833			.905	.002	.90490 - .00009	.030 4
3	7486834			.905	.004	.90480 - .00012	.030 8
3	7486836			.905	.008 AND UP	.90460 - .00030	.030 8
3	7486838			.906	.0005	.90600 - .00006	.030 4
3	7486840			.906	.002	.90590 - .00009	.030 4
3	7486841			.906	.004	.90580 - .00012	.030 8
3	7486843			.906	.008 AND UP	.90560 - .00030	.030 8
3	7486845			.90625	.0005 AND UP	.90625 - .00006	.030 4
3	7486846			.907	.0005	.90700 - .00006	.030 4
3	7486848			.907	.002	.90690 - .00009	.030 4
3	7486849			.907	.004	.90680 - .00012	.030 8
3	7486851			.907	.008 AND UP	.90660 - .00030	.030 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

TIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS			H
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	D		E	F	G	
A	B	C	D	E	F	G	H	
7486853	.908	.0005	.90800	-.00006	.030	4	4	8
7486855	.908	.002	.90790	-.00009	.030	4	4	8
7486856	.908	.004	.90780	-.00012	.030	4	4	8
7486858	.908	.008 AND UP	.90760	-.00030	.030	4	4	8
7486860	.909	.0005	.90900	-.00006	.030	4	4	8
7486862	.909	.002	.90890	-.00009	.030	4	4	8
7486863	.909	.004	.90880	-.00012	.030	4	4	8
7486865	.909	.008 AND UP	.90860	-.00030	.030	4	4	8
7486867	.910	.0005	.91000	-.00006	.030	4	4	8
7486869	.910	.002	.90990	-.00009	.030	4	4	8
7486870	.910	.004	.90980	-.00012	.030	4	4	8
7486872	.910	.008 AND UP	.90960	-.00030	.030	4	4	8
7486874	.911	.0005	.91100	-.00006	.030	4	4	8
7486876	.911	.002	.91090	-.00009	.030	4	4	8
7486877	.911	.004	.91080	-.00012	.030	4	4	8
7486879	.911	.008 AND UP	.91060	-.00030	.030	4	4	8
7486881	.912	.0005	.91200	-.00006	.030	4	4	8
7486883	.912	.002	.91190	-.00009	.030	4	4	8
7486884	.912	.004	.91180	-.00012	.030	4	4	8
7486886	.912	.008 AND UP	.91160	-.00030	.030	4	4	8
7486888	.913	.0005	.91200	-.00006	.030	4	4	8
7486890	.913	.002	.91290	-.00009	.030	4	4	8
7486891	.913	.004	.91280	-.00012	.030	4	4	8
7486893	.913	.008 AND UP	.91260	-.00030	.030	4	4	8
7486895	.914	.0005	.91400	-.00006	.030	4	4	8
7486897	.914	.002	.91390	-.00009	.030	4	4	8
7486898	.914	.004	.91380	-.00012	.030	4	4	8
7486900	.914	.008 AND UP	.91360	-.00030	.030	4	4	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ITEM NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIA. DIM.	E COMP.	
	A	B	C				
7486902			.915	.0005	.91500 -	.00006	.030
7486904			.915	.002	.91490 -	.00009	.030
7486905			.915	.004	.91480 -	.00012	.030
7486907			.915	.008 AND UP	.91460 -	.00030	.030
7486909			.916	.0005	.91600 -	.00006	.030
7486911			.916	.002	.91590 -	.00009	.030
7486912			.916	.004	.91580 -	.00012	.030
7486914			.916	.008 AND UP	.91560 -	.00030	.030
7486916			.917	.0005	.91700 -	.00006	.030
7486918			.917	.002	.91690 -	.00009	.030
7486919			.917	.004	.91680 -	.00012	.030
7486921			.917	.008 AND UP	.91660 -	.00030	.030
7486923			.918	.0005	.91800 -	.00006	.030
7486925			.918	.002	.91790 -	.00009	.030
7486926			.918	.004	.91780 -	.00012	.030
7486928			.918	.008 AND UP	.91760 -	.00030	.030
7486930			.919	.0005	.91900 -	.00006	.030
7486932			.919	.002	.91890 -	.00009	.030
7486933			.919	.004	.91880 -	.00012	.030
7486935			.919	.008 AND UP	.91860 -	.00030	.030
7486937			.920	.0005	.92000 -	.00006	.030
7486939			.920	.002	.91990 -	.00009	.030
7486940			.920	.004	.91980 -	.00012	.030
7486942			.920	.008 AND UP	.91960 -	.00030	.030
7486944			.921	.0005	.92100 -	.00006	.030
7486946			.921	.002	.92090 -	.00009	.030
7486947			.921	.004	.92080 -	.00012	.030
7486949			.921	.008 AND UP	.92060 -	.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

OZ	C	L	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
			RING GAGE STOCK NO.	MAXIMUM ACCEPTANCE CHECK	TOTAL COMPONENT TOLERANCE	DIA	F	G	
A	B	C	D	E	F	G	H		
7486951	7486953	7486954	7486956	.922	.0005	.92200	-.00006	.030	4 4 4 8 8 8
				.922	.002	.92190	-.00009	.030	
				.922	.004	.92180	-.00012	.030	
				.922	.008 AND UP	.92160	-.00030	.030	
7486958	7486960	7486961	7486963	.923	.0005	.92300	-.00006	.030	4 4 4 8 8 8
				.923	.002	.92290	-.00009	.030	
				.923	.004	.92280	-.00012	.030	
				.923	.008 AND UP	.92260	-.00030	.030	
7486965	7486967	7486968	7486970	.924	.0005	.92400	-.00006	.030	4 4 4 8 8 8
				.924	.002	.92390	-.00009	.030	
				.924	.004	.92380	-.00012	.030	
				.924	.008 AND UP	.92360	-.00030	.030	
7486972	7486974	7486975	7486977	.925	.0005	.92500	-.00006	.030	4 4 4 8 8 8
				.925	.002	.92490	-.00009	.030	
				.925	.004	.92480	-.00012	.030	
				.925	.008 AND UP	.92460	-.00030	.030	
7486979	7486981	7486982	7486984	.926	.0005	.92600	-.00006	.030	4 4 4 8 8 8
				.926	.002	.92590	-.00009	.030	
				.926	.004	.92580	-.00012	.030	
				.926	.008 AND UP	.92560	-.00030	.030	
7486986	7486988	7486989	7486991	.927	.0005	.92700	-.00006	.030	4 4 4 8 8 8
				.927	.002	.92690	-.00009	.030	
				.927	.004	.92680	-.00012	.030	
				.927	.008 AND UP	.92660	-.00030	.030	
7486993	7486995	7486996	7486998	.928	.0005	.92800	-.00006	.030	4 4 4 8 8 8
				.928	.002	.92790	-.00009	.030	
				.928	.004	.92780	-.00012	.030	
				.928	.008 AND UP	.92760	-.00030	.030	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FIN-GAGE STOCK NO.	MAXIMUM RING GAGE	COMPONENT ACCEPTANCE CHECK	TOTAL DIMENSION	COMPONENT DIAMETER	TOLERANCE CHAMFER	
A	B	C	D	E	F	G	H
7487000	.929	.0005		.92900	-.00006	.030	4
7487002	.929	.002		.92890	-.00009	.030	4
7487003	.929	.004		.92880	-.00012	.030	8
7487005	.929	.008 AND UP		.92860	-.00030	.030	8
7487007	.930	.0005		.93000	-.00006	.030	4
7487009	.930	.002		.92990	-.00009	.030	4
7487010	.930	.004		.92980	-.00012	.030	8
7487012	.930	.008 AND UP		.92960	-.00030	.030	8
7487014	.931	.0005		.93100	-.00006	.030	4
7487016	.931	.002		.93090	-.00009	.030	4
7487017	.931	.004		.93080	-.00012	.030	8
7487019	.931	.008 AND UP		.93060	-.00030	.030	8
7487021	.932	.0005		.93200	-.00006	.030	4
7487023	.932	.002		.93190	-.00009	.030	4
7487024	.932	.004		.93180	-.00012	.030	8
7487026	.932	.008 AND UP		.93160	-.00030	.030	8
7487028	.933	.0005		.93300	-.00006	.030	4
7487030	.933	.002		.93290	-.00009	.030	4
7487031	.933	.004		.93280	-.00012	.030	8
7487033	.933	.008 AND UP		.93260	-.00030	.030	8
7487035	.934	.0005		.93400	-.00006	.030	4
7487037	.934	.002		.93390	-.00009	.030	4
7487038	.934	.004		.93380	-.00012	.030	8
7487040	.934	.008 AND UP		.93360	-.00030	.030	8
7487042	.935	.0005		.93500	-.00006	.030	4
7487044	.935	.002		.93490	-.00009	.030	4
7487045	.935	.004		.93480	-.00012	.030	8
7487047	.935	.008 AND UP		.93460	-.00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH H
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIA. E	F F	
A	B	C	D	E	F	G	H
3	7487049		.936	.0005	.93600 - .00006	.030	4
	7487051		.936	.002	.93590 - .00009	.030	4
	7487052		.936	.004	.93580 - .00012	.030	6
	7487054		.936	.008 AND UP	.93560 - .00030	.030	6
3	7487056		.937	.0005	.93700 - .00006	.030	4
	7487058		.937	.002	.93690 - .00009	.030	4
	7487059		.937	.004	.93680 - .00012	.030	6
	7487061		.937	.008 AND UP	.93660 - .00030	.030	8
3	7487063		.9375	.0005 AND UP	.93750 - .00006	.030	4
	7487064		.938	.0005	.93800 - .00006	.030	4
	7487066		.938	.002	.93790 - .00009	.030	4
	7487067		.938	.004	.93780 - .00012	.030	6
	7487069		.938	.008 AND UP	.93760 - .00030	.030	8
	7487071		.939	.0005	.93900 - .00006	.030	4
	7487073		.939	.002	.93890 - .00009	.030	4
	7487074		.939	.004	.93880 - .00012	.030	6
	7487076		.939	.008 AND UP	.93860 - .00030	.030	8
	7487078		.940	.0005	.94000 - .00006	.030	4
	7487080		.940	.002	.93990 - .00009	.030	4
	7487081		.940	.004	.93980 - .00012	.030	6
	7487083		.940	.008 AND UP	.93960 - .00030	.030	8
	7487085		.941	.0005	.94100 - .00006	.030	4
	7487087		.941	.002	.94090 - .00009	.030	4
	7487088		.941	.004	.94080 - .00012	.030	6
	7487090		.941	.008 AND UP	.94060 - .00030	.030	8
	7487092		.942	.0005	.94200 - .00006	.030	4
	7487094		.942	.002	.94190 - .00009	.030	4
	7487095		.942	.004	.94180 - .00012	.030	6
	7487097		.942	.008 AND UP	.94160 - .00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA.	E	F	G	
A	B	C	D				H	
33333	7487099	.943	.0005	.94300	-.00006	.030	4	
33333	7487101	.943	.002	.94290	-.00009	.030	4	
33333	7487102	.943	.004	.94280	-.00012	.030	8	
33333	7487104	.943	.008 AND UP	.94260	-.00030	.030	8	
33333	7487106	.944	.0005	.94400	-.00006	.030	4	
33333	7487108	.944	.002	.94390	-.00009	.030	4	
33333	7487109	.944	.004	.94380	-.00012	.030	8	
33333	7487111	.944	.008 AND UP	.94360	-.00030	.030	8	
33333	7487113	.945	.0005	.94500	-.00006	.030	4	
33333	7487115	.945	.002	.94490	-.00009	.030	4	
33333	7487116	.945	.004	.94480	-.00012	.030	8	
33333	7487118	.945	.008 AND UP	.94460	-.00030	.030	8	
33333	7487120	.946	.0005	.94600	-.00006	.030	4	
33333	7487122	.946	.002	.94590	-.00009	.030	4	
33333	7487123	.946	.004	.94580	-.00012	.030	8	
33333	7487125	.946	.008 AND UP	.94560	-.00030	.030	8	
33333	7487127	.947	.0005	.94700	-.00006	.030	4	
33333	7487129	.947	.002	.94690	-.00009	.030	4	
33333	7487130	.947	.004	.94680	-.00012	.030	8	
33333	7487132	.947	.008 AND UP	.94660	-.00030	.030		
33333	7487134	.948	.0005	.94800	-.00006	.030	4	
33333	7487136	.948	.002	.94790	-.00009	.030	4	
33333	7487137	.948	.004	.94780	-.00012	.030	8	
33333	7487139	.948	.008 AND UP	.94760	-.00030	.030	8	
33333	7487141	.949	.0005	.94900	-.00006	.030	4	
33333	7487143	.949	.002	.94890	-.00009	.030	4	
33333	7487144	.949	.004	.94880	-.00012	.030	8	
33333	7487146	.949	.008 AND UP	.94860	-.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FINISH ON GAGE	MARKING ON GO GAGE			MAXIMUM COMPONENT DIMENSION			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH H
	RING GAGE	STOCK NO.	ACCEPTANCE CHECK	D	E	F	G	H	CHAMFER				
A	B	C											
7487148	.950	.0005		.95000	-.00006	.030							4
7487150	.950	.002		.94990	-.00009	.030							4
7487151	.950	.004	AND UP	.94980	-.00012	.030							8
7487153	.950	.008		.94960	-.00030	.030							8
7487155	.951	.0005		.95100	-.00006	.030							4
7487157	.951	.002		.95090	-.00009	.030							4
7487158	.951	.004		.95080	-.00012	.030							8
7487160	.951	.008	AND UP	.95060	-.00030	.030							8
7487162	.952	.0005		.95200	-.00006	.030							4
7487164	.952	.002		.95190	-.00009	.030							4
7487165	.952	.004		.95180	-.00012	.030							8
7487167	.952	.008	AND UP	.95160	-.00030	.030							8
7487169	.953	.0005		.95300	-.00006	.030							4
7487171	.953	.002		.95290	-.00009	.030							4
7487172	.953	.004		.95280	-.00012	.030							8
7487174	.953	.008	AND UP	.95260	-.00030	.030							8
7487176	.954	.0005		.95400	-.00006	.030							4
7487178	.954	.002		.95390	-.00009	.030							4
7487179	.954	.004		.95380	-.00012	.030							8
7487181	.954	.008	AND UP	.95360	-.00030	.030							8
7487183	.955	.0005		.95500	-.00006	.030							4
7487185	.955	.002		.95490	-.00009	.030							4
7487186	.955	.004		.95480	-.00012	.030							8
7487188	.955	.008	AND UP	.95460	-.00030	.030							8
7487190	.956	.0005		.95600	-.00006	.030							4
7487192	.956	.002		.95590	-.00009	.030							4
7487193	.956	.004		.95580	-.00012	.030							8
7487195	.956	.008	AND UP	.95560	-.00030	.030							8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FIN-GAGE STOCK NO.	MAXIMUM ACCEPTANCE CHECK	COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
	7487197		.957	.0005	.95700	-.00006	.030
	7487199		.957	.002	.95690	-.00009	.030
	7487200		.957	.004	.95680	-.00012	.030
	7487202		.957	.008 AND UP	.95660	-.00030	.030
	7487204		.958	.0005	.95800	-.00006	.030
	7487206		.958	.002	.95790	-.00009	.030
	7487207		.958	.004	.95780	-.00012	.030
	7487209		.958	.008 AND UP	.95760	-.00030	.030
	7487211		.959	.0005	.95900	-.00006	.030
	7487213		.959	.002	.95890	-.00009	.030
	7487214		.959	.004	.95880	-.00012	.030
	7487216		.959	.008 AND UP	.95860	-.00030	.030
	7487218		.960	.0005	.96000	-.00006	.030
	7487220		.960	.002	.95990	-.00009	.030
	7487221		.960	.004	.95980	-.00012	.030
	7487223		.960	.008 AND UP	.95960	-.00030	.030
	7487225		.961	.0005	.96100	-.00006	.030
	7487227		.961	.002	.96090	-.00009	.030
	7487228		.961	.004	.96080	-.00012	.030
	7487230		.961	.008 AND UP	.96060	-.00030	.030
	7487232		.962	.0005	.96200	-.00006	.030
	7487234		.962	.002	.96190	-.00009	.030
	7487235		.962	.004	.96180	-.00012	.030
	7487237		.962	.008 AND UP	.96160	-.00030	.030
	7487239		.963	.0005	.96300	-.00006	.030
	7487241		.963	.002	.96290	-.00009	.030
	7487242		.963	.004	.96280	-.00012	.030
	7487244		.963	.008 AND UP	.96260	-.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE STOCK NO.		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE		DIAMETER	
	RING GAGE	ACCEPTANCE CHECK	D	E	F	G	
A	B	C					H
7487246	.964	.0005		.96400	-.00006	.030	4
7487248	.964	.002		.96390	-.00009	.030	4
7487249	.964	.004		.96380	-.00012	.030	8
7487251	.964	.008 AND UP		.96360	-.00030	.030	8
7487253	.965	.0005		.96500	-.00006	.030	4
7487255	.965	.002		.96490	-.00009	.030	4
7487256	.965	.004		.96480	-.00012	.030	8
7487258	.965	.008 AND UP		.96460	-.00030	.030	8
7487260	.966	.0005		.96600	-.00006	.030	4
7487262	.966	.002		.96590	-.00009	.030	4
7487263	.966	.004		.96580	-.00012	.030	8
7487265	.966	.008 AND UP		.96560	-.00030	.030	8
7487267	.967	.0005		.96700	-.00006	.030	4
7487269	.967	.002		.96690	-.00009	.030	4
7487270	.967	.004		.96680	-.00012	.030	8
7487272	.967	.008 AND UP		.96660	-.00030	.030	8
7487274	.968	.0005		.96800	-.00006	.030	4
7487276	.968	.002		.96790	-.00009	.030	4
7487277	.968	.004		.96780	-.00012	.030	8
7487279	.968	.008 AND UP		.96760	-.00030	.030	8
7487281	.96875	.0005 AND UP		.96875	-.00006	.030	4
7487282	.969	.0005		.96900	-.00006	.030	4
7487284	.969	.002		.96890	-.00009	.030	4
7487285	.969	.004		.96880	-.00012	.030	8
7487287	.969	.008 AND UP		.96860	-.00030	.030	8
7487289	.970	.0005		.97000	-.00006	.030	4
7487291	.970	.002		.96990	-.00009	.020	4
7487292	.970	.004		.96980	-.00012	.030	8
7487294	.970	.008 AND UP		.96960	-.00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN.— RING GAGE	STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION		DIM. E	F	
A	B	C	D	E	F	G	H
7487296	.971	.0005	.97100 - .00006	.030	4		
7487298	.971	.002	.97090 - .00009	.030	4		
7487299	.971	.004	.97080 - .00012	.030	8		
7487301	.971	.006 AND UP	.97060 - .00030	.030	8		
7487303	.972	.0005	.97200 - .00006	.030	4		
7487305	.972	.002	.97190 - .00009	.030	4		
7487306	.972	.004	.97180 - .00012	.030	8		
7487308	.972	.008 AND UP	.97160 - .00030	.030	8		
7487310	.973	.0005	.97300 - .00006	.030	4		
7487312	.973	.002	.97290 - .00009	.030	4		
7487313	.973	.004	.97280 - .00012	.030	8		
7487315	.973	.008 AND UP	.97260 - .00030	.030	8		
7487317	.974	.0005	.97400 - .00006	.030	4		
7487319	.974	.002	.97390 - .00009	.030	4		
7487320	.974	.004	.97380 - .00012	.030	8		
7487322	.974	.008 AND UP	.97360 - .00030	.030	8		
7487324	.975	.0005	.97500 - .00006	.030	4		
7487326	.975	.002	.97490 - .00009	.030	4		
7487327	.975	.004	.97480 - .00012	.030	8		
7487329	.975	.008 AND UP	.97460 - .00030	.030	8		
7487331	.976	.0005	.97600 - .00006	.030	4		
7487333	.976	.002	.97590 - .00009	.030	4		
7487334	.976	.004	.97580 - .00012	.030	8		
7487336	.976	.008 AND UP	.97560 - .00030	.030	8		
7487338	.977	.0005	.97700 - .00006	.030	4		
7487340	.977	.002	.97690 - .00009	.030	4		
7487341	.977	.004	.97680 - .00012	.030	8		
7487343	.977	.008 AND UP	.97660 - .00030	.030	8		

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		CHAMFER	H
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G		
A	B	C							H
M M M M	7487345		.978	.0005	.97800 - .00006	.030	4		
M M M M	7487347		.978	.002	.97790 - .00009	.030	4		
M M M M	7487348		.978	.004	.97780 - .00012	.030	8		
M M M M	7487350		.978	.008 AND UP	.97760 - .00030	.030	8		
M M M M	7487352		.979	.0005	.97900 - .00006	.030	4		
M M M M	7487354		.979	.002	.97890 - .00009	.030	4		
M M M M	7487355		.979	.004	.97880 - .00012	.030	8	R	
M M M M	7487357		.979	.008 AND UP	.97860 - .00030	.030	8		
M M M M	7487359		.980	.0005	.98000 - .00006	.030	4		
M M M M	7487361		.980	.002	.97990 - .00009	.030	4		
M M M M	7487362		.980	.004	.97980 - .00012	.030	8		
M M M M	7487364		.980	.008 AND UP	.97960 - .00030	.030	8		
M M M M	7487366		.981	.0005	.98100 - .00006	.030	4		
M M M M	7487368		.981	.002	.98090 - .00009	.030	4		
M M M M	7487369		.981	.004	.98080 - .00012	.030	8		
M M M M	7487371		.981	.008 AND UP	.98060 - .00030	.030	8		
M M M M	7487373		.982	.0005	.98200 - .00006	.030	4		
M M M M	7487375		.982	.002	.98190 - .00009	.030	4		
M M M M	7487376		.982	.004	.98180 - .00012	.030	8		
M M M M	7487378		.982	.008 AND UP	.98160 - .00030	.030	8		
M M M M	7487380		.983	.0005	.98300 - .00006	.030	4		
M M M M	7487382		.983	.002	.98290 - .00009	.030	4		
M M M M	7487383		.983	.004	.98280 - .00012	.030	8		
M M M M	7487385		.983	.008 AND UP	.98260 - .00030	.030	8		
M M M M	7487387		.984	.0005	.98400 - .00006	.030	4		
M M M M	7487389		.984	.002	.98390 - .00009	.030	4		
M M M M	7487390		.984	.004	.98380 - .00012	.030	8		
M M M M	7487392		.984	.008 AND UP	.98360 - .00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. ON NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK		DIMENSION	DIAMETER	
A	B	C	D	E	F		
7487394	.985	.985	.005	.9850 - .0006	.0006	.030	4
7487396	.985	.985	.002	.9849 - .0009	.0009	.030	4
7487397	.985	.985	.004	.9848 - .0012	.0012	.030	8
7487399	.985	.985	.008 AND UP	.98460 - .00030	.00030	.030	8
7487401	.986	.986	.0005	.9860 - .00006	.00006	.030	4
7487403	.986	.986	.002	.98590 - .00009	.00009	.030	4
7487404	.986	.986	.004	.98580 - .00012	.00012	.030	8
7487406	.986	.986	.008 AND UP	.98560 - .00030	.00030	.030	8
7487408	.987	.987	.0005	.98700 - .00006	.00006	.030	4
7487410	.987	.987	.002	.98690 - .00009	.00009	.030	4
7487411	.987	.987	.004	.98680 - .00012	.00012	.030	8
7487413	.987	.987	.008 AND UP	.98660 - .00030	.00030	.030	8
7487415	.988	.988	.0005	.98800 - .00006	.00006	.030	4
7487417	.988	.988	.002	.98790 - .00009	.00009	.030	4
7487418	.988	.988	.004	.98780 - .00012	.00012	.030	8
7487420	.988	.988	.008 AND UP	.98760 - .00030	.00030	.030	8
7487422	.989	.989	.0005	.98900 - .00006	.00006	.030	4
7487424	.989	.989	.002	.98890 - .00009	.00009	.030	4
7487425	.989	.989	.004	.98880 - .00012	.00012	.030	8
7487427	.989	.989	.008 AND UP	.98860 - .00030	.00030	.030	8
7487429	.990	.990	.0005	.99000 - .00006	.00006	.030	4
7487431	.990	.990	.002	.98990 - .00009	.00009	.030	4
7487432	.990	.990	.004	.98980 - .00012	.00012	.030	8
7487434	.990	.990	.003 AND UP	.98960 - .00030	.00030	.030	8
7487436	.991	.991	.0005	.99100 - .00006	.00006	.030	4
7487438	.991	.991	.002	.99090 - .00009	.00009	.030	4
7487439	.991	.991	.004	.99080 - .00012	.00012	.030	8
7487441	.991	.991	.008 AND UP	.99060 - .00030	.00030	.030	8

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER	H
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	C	D	E	F		
M	7487443		.992	.0005	.99200	-.00006	.030	4 4 8 8 8
M	7487445		.992	.002	.99190	-.00009	.030	4 4 8 8 8
M	7487446		.992	.004	.99180	-.00012	.030	4 4 8 8 8
M	7487448		.992	.008 AND UP	.99160	-.00030	.030	4 4 8 8 8
M	7487450		.993	.0005	.99300	-.00006	.030	4 4 8 8 8
M	7487452		.993	.002	.99290	-.00009	.030	4 4 8 8 8
M	7487453		.993	.004	.99280	-.00012	.030	4 4 8 8 8
M	7487455		.991	.008 AND UP	.99260	-.00030	.030	4 4 8 8 8
M	7487457		.994	.0005	.99400	-.00006	.030	4 4 8 8 8
M	7487459		.994	.002	.99390	-.00009	.030	4 4 8 8 8
M	7487460		.994	.004	.99380	-.00012	.030	4 4 8 8 8
M	7487462		.994	.008 AND UP	.99360	-.00030	.030	4 4 8 8 8
M	7487464		.995	.0005	.99500	-.00006	.030	4 4 8 8 8
M	7487466		.995	.002	.99490	-.00009	.030	4 4 8 8 8
M	7487467		.995	.004	.99480	-.00012	.030	4 4 8 8 8
M	7487469		.995	.008 AND UP	.99460	-.00030	.030	4 4 8 8 8
M	7487471		.996	.0005	.99600	-.00006	.030	4 4 8 8 8
M	7487473		.996	.002	.99590	-.00009	.030	4 4 8 8 8
M	7487474		.996	.004	.99580	-.00012	.030	4 4 8 8 8
M	7487476		.996	.008 AND UP	.99560	-.00030	.030	4 4 8 8 8
M	7487478		.997	.0005	.99700	-.00006	.030	4 4 8 8 8
M	7487480		.997	.002	.99690	-.00009	.030	4 4 8 8 8
M	7487481		.997	.004	.99680	-.00012	.030	4 4 8 8 8
M	7487483		.997	.008 AND UP	.99660	-.00030	.030	4 4 8 8 8
M	7487485		.998	.0005	.99800	-.00006	.030	4 4 8 8 8
M	7487487		.998	.002	.99790	-.00009	.030	4 4 8 8 8
M	7487488		.998	.004	.99780	-.00012	.030	4 4 8 8 8
M	7487490		.998	.008 AND UP	.99760	-.00030	.030	4 4 8 8 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH	
	FINN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	C	D	E	F	G	H	I	J
7487492	7487494	7487495	7487497	7487499	7487501	7487502	7487504	7487506	7487508	7487509
.999	.999	.999	.999	1.000	1.000	1.000	1.000	1.001	1.001	1.001
.0005	.002	.004	.008 AND UP	.0005	.002	.004 AND UP	.0005	.00100	.00090	.0009
.99900	.99890	.99880	.99860	1.00000	.99990	.99980	.99960	.00006	.00012	.00012
.030	.030	.030	.030	.030	.030	.030	.030	.030	.030	.030
7487511	7487513	7487515	7487516	7487518	7487520	7487522	7487523	7487525	7487527	7487529
1.001	1.002	1.002	1.002	1.002	1.003	1.003	1.003	1.003	1.004	1.004
.0005	.002	.004	.004 AND UP	.0005	.002	.004	.004 AND UP	.0005	.00190	.00180
1.00000	.00060	.00060	.00060	1.00000	.00060	.00060	.00060	.00060	.00012	.00012
.030	.030	.030	.030	.030	.030	.030	.030	.030	.030	.030
7487530	7487532	7487534	7487536	7487537	7487539					
1.005	1.005	1.005	1.005	1.005	1.005					
.0005	.002	.004	.004 AND UP	.0005	.002	.004	.004 AND UP	.0005	.00050	.000480
1.00500	.0006	.0006	.0006	1.00500	.0006	.0006	.0006	.00050	.00012	.00012
.030	.030	.030	.030	.030	.030			.030	.030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FIN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	
RING GAGE	ACCEPTANCE CHECK	DIMENSION	E	F	G		
A	B	C	D				H
7487541	7487543	7487544	7487546	1.006	.0005	1.00600 - .00006	.030
				1.006	.002	1.00590 - .00009	.030
				1.006	.004	1.00580 - .00012	.030
				1.006	.008 AND UP	1.00560 - .00030	.030
7487548	7487550	7487551	7487553	1.007	.0005	1.00700 - .00006	.030
				1.007	.002	1.00690 - .00009	.030
				1.007	.004	1.00680 - .00012	.030
				1.007	.008 AND UP	1.00660 - .00030	.030
7487555	7487557	7487558	7487560	1.008	.0005	1.00800 - .00006	.030
				1.008	.002	1.00790 - .00009	.030
				1.008	.004	1.00780 - .00012	.030
				1.008	.008 AND UP	1.00760 - .00030	.030
7487562	7487564	7487565	7487567	1.009	.0005	1.00900 - .00006	.030
				1.009	.002	1.00890 - .00009	.030
				1.009	.004	1.00880 - .00012	.030
				1.009	.008 AND UP	1.00860 - .00030	.030
7487569	7487571	7487572	7487574	1.010	.0005	1.01000 - .00006	.030
				1.010	.002	1.00990 - .00009	.030
				1.010	.004	1.00980 - .00012	.030
				1.010	.008 AND UP	1.00960 - .00030	.030
7487576	7487578	7487579	7487581	1.011	.0005	1.01100 - .00006	.030
				1.011	.002	1.01090 - .00009	.030
				1.011	.004	1.01080 - .00012	.030
				1.011	.008 AND UP	1.01060 - .00030	.030
7487583	7487585	7487586	7487588	1.012	.0005	1.01200 - .00006	.030
				1.012	.002	1.01190 - .00009	.030
				1.012	.004	1.01180 - .00012	.030
				1.012	.008 AND UP	1.01160 - .00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM ACCEPTANCE COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	F	
A	B	C	D	E	F	H	G
7487590	7487592	7487593	7487595	1.013 1.013 1.013 1.013	.0005 .002 .004 .008 AND UP	1.01300 - 1.01290 - 1.01280 - 1.01260 -	.00006 .00009 .00012 .00030
7487597	7487599	7487600	7487602	1.014 1.014 1.014	.0005 .002 .004 .008 AND UP	1.01400 - 1.01390 - 1.01380 - 1.01360 -	.00006 .00009 .00012 .00030
7487604	7487606	7487607	7487609	1.015 1.015 1.015 1.015	.0005 .002 .004 .008 AND UP	1.01500 - 1.01490 - 1.01480 - 1.01460 -	.00006 .00009 .00012 .00030
7487611	7487613	7487614	7487616	1.016 1.016 1.016 1.016	.0005 .002 .004 .008 AND UP	1.01600 - 1.01590 - 1.01580 - 1.01560 -	.00006 .00009 .00012 .00030
7487618	7487620	7487621	7487623	1.017 1.017 1.017 1.017	.0005 .002 .004 .008 AND UP	1.01700 - 1.01690 - 1.01680 - 1.01660 -	.00006 .00009 .00012 .00030
7487625	7487627	7487628	7487630	1.018 1.018 1.018 1.018	.0005 .002 .004 .008 AND UP	1.01800 - 1.01790 - 1.01780 - 1.01760 -	.00006 .00009 .00012 .00030
7487632	7487634	7487635	7487637	1.019 1.019 1.019 1.019	.0005 .002 .004 .008 AND UP	1.01900 - 1.01890 - 1.01880 - 1.01860 -	.00006 .00009 .00012 .00030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

NO. ON GAGE	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	F	
A	B	C	D	E	F	G	
7487639	1.020	.0005	1.0200	-.00006	.030	4	4 8 8
7487641	1.020	.002	1.0199	-.00009	.030	4	4 8 8
7487642	1.020	.004	1.0198	-.00012	.030	4	4 8 8
7487644	1.020	.008 AND UP	1.0196	-.00030	.030	4	4 8 8
7487646	1.021	.0005	1.0210	-.00006	.030	4	4 8 8
7487648	1.021	.002	1.0209	-.00009	.030	4	4 8 8
7487649	1.021	.004	1.0208	-.00012	.030	4	4 8 8
7487651	1.021	.008 AND UP	1.0206	-.00030	.030	4	4 8 8
7487653	1.022	.0005	1.0220	-.00006	.030	4	4 8 8
7487655	1.022	.002	1.0219	-.00009	.030	4	4 8 8
7487656	1.022	.004	1.0218	-.00012	.030	4	4 8 8
7487658	1.022	.008 AND UP	1.0216	-.00030	.030	4	4 8 8
7487660	1.023	.0005	1.0230	-.00006	.030	4	4 8 8
7487662	1.023	.002	1.0229	-.00009	.030	4	4 8 8
7487663	1.023	.004	1.0228	-.00012	.030	4	4 8 8
7487665	1.023	.008 AND UP	1.0226	-.00030	.030	4	4 8 8
7487667	1.024	.0005	1.0240	-.00006	.030	4	4 8 8
7487669	1.024	.002	1.0239	-.00009	.030	4	4 8 8
7487670	1.024	.004	1.0238	-.00012	.030	4	4 8 8
7487672	1.024	.008 AND UP	1.0236	-.00030	.030	4	4 8 8
7487674	1.025	.0005	1.0250	-.00006	.030	4	4 8 8
7487676	1.025	.002	1.0249	-.00009	.030	4	4 8 8
7487677	1.025	.004	1.0248	-.00012	.030	4	4 8 8
7487679	1.025	.008 AND UP	1.0246	-.00030	.030	4	4 8 8
7487681	1.026	.0005	1.0260	-.00006	.030	4	4 8 8
7487683	1.026	.002	1.0259	-.00009	.030	4	4 8 8
7487684	1.026	.004	1.0258	-.00012	.030	4	4 8 8
7487686	1.026	.008 AND UP	1.0256	-.00030	.030	4	4 8 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
7487688	A	B	C	1.027	.0005	1.02700 - .00006	.030	4-4-8-8-8	
7487690				1.027	.002	1.02690 - .00009	.030	4-4-8-8-8	
7487691				1.027	.004	1.02680 - .00012	.030	4-4-8-8-8	
7487693				1.027	.008 AND UP	1.02660 - .00030	.030	4-4-8-8-8	
7487695				1.028	.0005	1.02800 - .00006	.030	4-4-8-8-8	
7487697				1.028	.002	1.02790 - .00009	.030	4-4-8-8-8	
7487698				1.028	.004	1.02780 - .00012	.030	4-4-8-8-8	
7487700				1.028	.008 AND UP	1.02760 - .00030	.030	4-4-8-8-8	
7487702				1.029	.0005	1.02900 - .00006	.030	4-4-8-8-8	
7487704				1.029	.002	1.02890 - .00009	.030	4-4-8-8-8	
7487705				1.029	.004	1.02880 - .00012	.030	4-4-8-8-8	
7487707				1.029	.008 AND UP	1.02860 - .00030	.030	4-4-8-8-8	
7487709				1.030	.0005	1.03000 - .00006	.030	4-4-8-8-8	
7487711				1.030	.002	1.02990 - .00009	.030	4-4-8-8-8	
7487712				1.030	.004	1.02980 - .00012	.030	4-4-8-8-8	
7487714				1.030	.008 AND UP	1.02960 - .00030	.030	4-4-8-8-8	
7487716				1.031	.0005	1.03100 - .00006	.030	4-4-8-8-8	
7487718				1.031	.002	1.03090 - .00009	.030	4-4-8-8-8	
7487719				1.031	.004	1.03080 - .00012	.030	4-4-8-8-8	
7487721				1.031	.008 AND UP	1.03060 - .00030	.030	4-4-8-8-8	
7487723				1.03125	.0005 AND UP	1.03125 - .00006	.030	4-4-8-8-8	
7487724				1.032	.0005	1.03200 - .00006	.030	4-4-8-8-8	
7487726				1.032	.002	1.03190 - .00009	.030	4-4-8-8-8	
7487727				1.032	.004	1.03180 - .00012	.030	4-4-8-8-8	
7487729				1.032	.006 AND UP	1.03160 - .00030	.030	4-4-8-8-8	
7487731				1.033	.0005	1.03300 - .00006	.030	4-4-8-8-8	
7487733				1.033	.002	1.03290 - .00009	.030	4-4-8-8-8	
7487734				1.033	.004	1.03280 - .00012	.030	4-4-8-8-8	
7487736				1.033	.008 AND UP	1.03260 - .00030	.030	4-4-8-8-8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			H
	FIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	COMPONENT TOLERANCE	DIA.	CHAMFER	E	F	G		
A	B	C	D							
7487738		1.034	.0005	1.03400	-	.00006	.030	4		
7487740		1.034	.002	1.03390	-	.00009	.030	4		
7487741		1.034	.004	1.03380	-	.00012	.030	8		
7487743		1.034	.008 AND UP	1.03360	-	.00030	.030			
7487745		1.035	.005	1.03500	-	.00006	.030	4		
7487747		1.035	.002	1.03490	-	.00009	.030	4		
7487748		1.035	.004	1.03480	-	.00012	.030	8		
7487750		1.035	.008 AND UP	1.03460	-	.00030	.030	8		
7487752		1.036	.005	1.03600	-	.00006	.030	4		
7487754		1.036	.002	1.03590	-	.00009	.030	4		
7487755		1.036	.004	1.03580	-	.00012	.030	8		
7487757		1.036	.008 AND UP	1.03560	-	.00030	.030	8		
7487759		1.037	.005	1.03700	-	.00006	.030	4		
7487761		1.037	.002	1.03690	-	.00009	.030	4		
7487762		1.037	.004	1.03680	-	.00012	.030	8		
7487764		1.037	.008 AND UP	1.03660	-	.00030	.030	8		
7487766		1.038	.005	1.03800	-	.00006	.030	4		
7487768		1.038	.002	1.03790	-	.00009	.030	4		
7487769		1.038	.004	1.03780	-	.00012	.030	8		
7487771		1.038	.008 AND UP	1.03760	-	.00030	.030	8		
7487773		1.039	.005	1.03900	-	.00006	.030	4		
7487775		1.039	.002	1.03890	-	.00009	.030	4		
7487776		1.039	.004	1.03880	-	.00012	.030	8		
7487778		1.039	.008 AND UP	1.03860	-	.00030	.030	8		
7487780		1.040	.005	1.04000	-	.00006	.030	4		
7487782		1.040	.002	1.03990	-	.00019	.030	4		
7487783		1.040	.004	1.03980	-	.00012	.030	8		
7487785		1.040	.008 AND UP	1.03960	-	.00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER	
	RING-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION		ACCEPTANCE CHECK	DIAMETER		F	G	H		
		B	C		D	E					
7487787		1.041	.0005		1.04100	-.00006	.030	4			
7487789		1.041	.002		1.04090	-.00009	.030	4			
7487790		1.041	.004	AND UP	1.04080	-.00012	.030	8			
7487792		1.041	.008	AND UP	1.04060	-.00030	.030	8			
7487794		1.042	.0005		1.04200	-.00006	.030	4			
7487796		1.042	.002		1.04190	-.00009	.030	4			
7487797		1.042	.004		1.04180	-.00012	.030	8			
7487799		1.042	.008	AND UP	1.04160	-.00030	.030	8			
7487801		1.043	.0005		1.04300	-.00006	.030	4			
7487803		1.043	.002		1.04290	-.00009	.030	4			
7487804		1.043	.004		1.04280	-.00012	.030	8			
7487806		1.043	.008	AND UP	1.04260	-.00030	.030	8			
7487808		1.044	.0005		1.04400	-.00006	.030	4			
7487810		1.044	.002		1.04390	-.00009	.030	4			
7487811		1.044	.004		1.04380	-.00012	.030	8			
7487813		1.044	.008	AND UP	1.04360	-.00030	.030	8			
7487815		1.045	.0005		1.04500	-.00006	.030	4			
7487817		1.045	.002		1.04490	-.00009	.030	4			
7487818		1.045	.004		1.04480	-.00012	.030	8			
7487820		1.045	.008	AND UP	1.04460	-.00030	.030	8			
7487822		1.046	.0005		1.04600	-.00006	.030	4			
7487824		1.046	.002		1.04590	-.00009	.030	4			
7487825		1.046	.004		1.04580	-.00012	.030	8			
7487827		1.046	.008	AND UP	1.04560	-.00030	.030	8			
7487829		1.047	.0005		1.04700	-.00006	.030	4			
7487831		1.047	.002		1.04690	-.00009	.030	4			
7487832		1.047	.004		1.04680	-.00012	.030	8			
7487834		1.047	.008	AND UP	1.04660	-.00030	.030	8			

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		CHAMFER	HSIN FIN
	FIN-GAGE STOCK NO.	MAXIMUM	COMPONENT	DIA METER	F	G				
RING GAGE	ACCEPTANCE CHECK	COMPONENT DIMENSION		E	F	G				
A	B	C	D							
7487836		1.048	.0005	1.04800	-.00006	.030	4			
7487838		1.048	.002	1.04790	-.00009	.030	4			
7487839		1.048	.004	1.04780	-.00012	.030	6			
7487841		1.048	.008 AND UP	1.04760	-.00030	.030	8			
7487843		1.049	.0005	1.04900	-.00006	.030	4			
7487845		1.049	.002	1.04890	-.00009	.030	4			
7487846		1.049	.004	1.04880	-.00012	.030	6			
7487848		1.049	.008 AND UP	1.04860	-.00030	.030	8			
7487850		1.050	.0005	1.05000	-.00006	.030	4			
7487852		1.050	.002	1.04990	-.00009	.030	4			
7487853		1.050	.004	1.04980	-.00012	.030	6			
7487855		1.050	.008 AND UP	1.04960	-.00030	.030	8			
7487857		1.051	.0005	1.05100	-.00006	.030	4			
7487859		1.051	.002	1.05090	-.00009	.030	4			
7487860		1.051	.004	1.05080	-.00012	.030	6			
7487862		1.051	.008 AND UP	1.05060	-.00030	.030	8			
7487864		1.052	.0005	1.05200	-.00006	.030	4			
7487866		1.052	.002	1.05190	-.00009	.030	4			
7487867		1.052	.004	1.05180	-.00012	.030	6			
7487869		1.052	.008 AND UP	1.05160	-.00030	.030	8			
7487871		1.053	.0005	1.05300	-.00006	.030	4			
7487873		1.053	.002	1.05290	-.00009	.030	4			
7487874		1.053	.004	1.05280	-.00012	.030	6			
7487876		1.053	.008 AND UP	1.05260	-.00030	.030	8			
7487878		1.054	.0005	1.05400	-.00006	.030	4			
7487880		1.054	.002	1.05390	-.00009	.030	4			
7487881		1.054	.004	1.05380	-.00012	.030	6			
7487883		1.054	.008 AND UP	1.05360	-.00030	.030	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	COMPONENT TOLERANCE	DIAMETER	
A	B	C	D	E	F	G	H
7487885	7487887			1.055	.0005	1.05500 - .00006	.030 4
7487888	7487890			1.055	.002	1.05490 - .00009	.030 4
7487892	7487894			1.055	.004	1.05480 - .00012	.030 8
7487895	7487897			1.056	.005	1.05600 - .00006	.030 4
7487899	7487901			1.056	.002	1.05590 - .00009	.030 4
7487902	7487904			1.056	.004	1.05580 - .00012	.030 8
7487906	7487908			1.057	.005	1.05600 - .00006	.030 4
7487909	7487911			1.057	.002	1.05690 - .00009	.030 4
7487913	7487915			1.058	.004	1.05680 - .00012	.030 8
7487916	7487918			1.058	.006 AND UP	1.05660 - .00030	.030 8
7487920	7487922			1.059	.0005	1.05800 - .00006	.030 4
7487923	7487925			1.059	.002	1.05790 - .00009	.030 4
7487927	7487929			1.060	.004	1.05780 - .00012	.030 8
7487930	7487932			1.060	.008 AND UP	1.05760 - .00030	.030 8
7487933				1.061	.0005	1.06100 - .00006	.030 4
				1.061	.002	1.06090 - .00009	.030 4
				1.061	.004	1.06080 - .00012	.030 8
				1.061	.008 AND UP	1.06060 - .00030	.030 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH	
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE				
				D	E	F		
A	B	C	D	E	F	G	H	
3	7487934		1.062	.0005	1.06200	-.00006	.030	
	7487936		1.062	.002	1.06190	-.00009	.030	
	7487937		1.062	.004	1.06180	-.00012	.030	
	7487939		1.062	.008 AND UP	1.06160	-.00030	.030	
3	7487941		1.0625	.0005 AND UP	1.06250	-.00006	.030	
	7487942		1.063	.0005	1.06300	-.00006	.030	
	7487944		1.063	.002	1.06290	-.00009	.030	
	7487945		1.063	.004	1.06280	-.00012	.030	
	7487947		1.063	.008 AND UP	1.06260	-.00030	.030	
	7487949		1.064	.0005	1.06400	-.00006	.030	
	7487951		1.064	.002	1.06390	-.00009	.030	
	7487952		1.064	.004	1.06380	-.00012	.030	
	7487954		1.064	.008 AND UP	1.06360	-.00030	.030	
	7487956		1.065	.0005	1.06500	-.00006	.030	
	7487958		1.065	.002	1.06490	-.00009	.030	
	7487959		1.065	.004	1.06480	-.00012	.030	
	7487961		1.065	.008 AND UP	1.06460	-.00030	.030	
	7487963		1.066	.0005	1.06600	-.00006	.030	
	7487965		1.066	.002	1.06590	-.00009	.030	
	7487966		1.066	.004	1.06580	-.00012	.030	
	7487968		1.066	.008 AND UP	1.06560	-.00030	.030	
	7487970		1.067	.0005	1.06700	-.00006	.030	
	7487972		1.067	.002	1.06690	-.00009	.030	
	7487973		1.067	.004	1.06680	-.00012	.030	
	7487975		1.067	.008 AND UP	1.06660	-.00030	.030	
	7487977		1.068	.0005	1.06800	-.00006	.030	
	7487979		1.068	.002	1.06790	-.00009	.030	
	7487980		1.068	.004	1.06780	-.00012	.030	
	7487982		1.068	.008 AND UP	1.06760	-.00030	.030	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK		D	E	
A	B	C	D	E	F	G	H
3	7487984		1.069	.0005	1.06900 - .00006	.030	4
3	7487986		1.069	.002	1.06890 - .00009	.030	4-4-8-8
3	7487987		1.069	.004	1.06880 - .00012	.030	8
3	7487989		1.069	.008 AND UP	1.06860 - .00030	.030	8
3	7487991		1.070	.0005	1.07000 - .00006	.030	4-4-8-8
3	7487993		1.070	.002	1.06990 - .00009	.030	4-4-8-8
3	7487994		1.070	.004	1.06980 - .00012	.030	8
3	7487996		1.070	.008 AND UP	1.06960 - .00030	.030	8
3	7487998		1.071	.0005	1.07100 - .00006	.030	4-4-8-8
3	7488000		1.071	.002	1.07090 - .00009	.030	8
3	7488001		1.071	.004	1.07080 - .00012	.030	8
3	7488003		1.071	.008 AND UP	1.07060 - .00030	.030	8
3	7488005		1.072	.0005	1.07200 - .00006	.030	4-4-8-8
3	7488007		1.072	.002	1.07190 - .00009	.030	8
3	7488008		1.072	.004	1.07180 - .00012	.030	8
3	7488010		1.072	.008 AND UP	1.07160 - .00030	.030	8
3	7488012		1.073	.0005	1.07300 - .00006	.030	4-4-8-8
3	7488014		1.073	.002	1.07290 - .00009	.030	8
3	7488015		1.073	.004	1.07280 - .00012	.030	8
3	7488017		1.073	.008 AND UP	1.07260 - .00030	.030	8
3	7488019		1.074	.0005	1.07400 - .00006	.030	4-4-8-8
3	7488021		1.074	.002	1.07390 - .00009	.030	8
3	7488022		1.074	.004	1.07380 - .00012	.030	8
3	7488024		1.074	.008 AND UP	1.07360 - .00030	.030	8
3	7488026		1.075	.0005	1.07500 - .00006	.030	4
3	7488028		1.075	.002	1.07490 - .00009	.030	4-4-8-8
3	7488029		1.075	.004	1.07480 - .00012	.030	8
3	7488031		1.075	.008 AND UP	1.07460 - .00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH H
	FIN—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA.METER	CHAMFER	
FIN GAGE	ACCEPTANCE CHECK	D	E	F	F	G	
A	B	C					
7488033	7488033	1.076	.0005	1.07600	—	.00006	.030 4
7488035	7488035	1.076	.002	1.07590	—	.00009	.030 4
7488036	7488036	1.076	.004	1.07580	—	.00012	.030 8
7488038	7488038	1.076	.008 AND UP	1.07560	—	.00030	.030 8
7488040	7488040	1.077	.0005	1.07700	—	.00006	.030 4
7488042	7488042	1.077	.002	1.07690	—	.00009	.030 4
7488043	7488043	1.077	.004	1.07680	—	.00012	.030 8
7488045	7488045	1.077	.008 AND UP	1.07660	—	.00030	.030 8
7488047	7488047	1.078	.0005	1.07800	—	.00006	.030 4
7488049	7488049	1.078	.002	1.07790	—	.00009	.030 4
7488050	7488050	1.078	.004	1.07780	—	.00012	.030 8
7488052	7488052	1.078	.008 AND UP	1.07760	—	.00030	.030 8
7488054	7488054	1.079	.0005	1.07900	—	.00006	.030 4
7488056	7488056	1.079	.002	1.07890	—	.00009	.030 4
7488057	7488057	1.079	.004	1.07880	—	.00012	.030 8
7488059	7488059	1.079	.008 AND UP	1.07860	—	.00030	.030 8
7488061	7488061	1.080	.0005	1.08000	—	.00006	.030 4
7488063	7488063	1.080	.002	1.07990	—	.00009	.030 4
7488064	7488064	1.080	.004	1.07980	—	.00012	.030 8
7488066	7488066	1.080	.008 AND UP	1.07960	—	.00030	.030 8
7488068	7488068	1.081	.0005	1.08100	—	.00006	.030 4
7488070	7488070	1.081	.002	1.08090	—	.00009	.030 4
7488071	7488071	1.081	.004	1.08080	—	.00012	.030 8
7488073	7488073	1.081	.008 AND UP	1.08060	—	.00030	.030 8
7488075	7488075	1.082	.0005	1.08200	—	.00006	.030 4
7488077	7488077	1.082	.002	1.08190	—	.00009	.030 4
7488078	7488078	1.082	.004	1.08180	—	.00012	.030 8
7488080	7488080	1.082	.008 AND UP	1.08160	—	.00030	.030 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	ACCEPTANCE CHECK		DIA. DIM.	E	
3	7488082	1.083	.0005	1.08300 - .00006	1.08300 - .00009	.030	4 4 8
	7488084	1.083	.002	1.08290 - .00009	1.08290 - .00012	.030	4 4 8
	7488085	1.083	.004	1.08280 - .00006	1.08280 - .00012	.030	4 4 8
	7488087	1.083	.008 AND UP	1.08260 - .00030	1.08260 - .00030	.030	4 4 8
	7488089	1.084	.0005	1.08400 - .00006	1.08400 - .00009	.030	4 4 8
	7488091	1.084	.002	1.08390 - .00009	1.08390 - .00012	.030	4 4 8
	7488092	1.084	.004	1.08380 - .00012	1.08380 - .00012	.030	4 4 8
	7488094	1.084	.008 AND UP	1.08360 - .00030	1.08360 - .00030	.030	4 4 8
	7488096	1.085	.0005	1.08500 - .00006	1.08500 - .00009	.030	4 4 8
	7488098	1.085	.002	1.08490 - .00009	1.08490 - .00012	.030	4 4 8
	7488099	1.085	.004	1.08480 - .00012	1.08480 - .00012	.030	4 4 8
	7488101	1.085	.008 AND UP	1.08460 - .00030	1.08460 - .00030	.030	4 4 8
	7488103	1.086	.0005	1.08600 - .00006	1.08600 - .00009	.030	4 4 8
	7488105	1.086	.002	1.08590 - .00009	1.08590 - .00012	.030	4 4 8
	7488106	1.086	.004	1.08580 - .00012	1.08580 - .00012	.030	4 4 8
	7488108	1.086	.008 AND UP	1.08560 - .00030	1.08560 - .00030	.030	4 4 8
	7488110	1.087	.0005	1.08700 - .00006	1.08700 - .00009	.030	4 4 8
	7488112	1.087	.002	1.08690 - .00009	1.08690 - .00012	.030	4 4 8
	7488113	1.087	.004	1.08680 - .00012	1.08680 - .00012	.030	4 4 8
	7488115	1.087	.008 AND UP	1.08660 - .00030	1.08660 - .00030	.030	4 4 8
	7488117	1.088	.0005	1.08800 - .00006	1.08800 - .00009	.030	4 4 8
	7488119	1.088	.002	1.08790 - .00009	1.08790 - .00012	.030	4 4 8
	7488120	1.088	.004	1.08780 - .00012	1.08780 - .00012	.030	4 4 8
	7488122	1.088	.008 AND UP	1.08760 - .00030	1.08760 - .00030	.030	4 4 8
	7488124	1.089	.0005	1.08900 - .00006	1.08900 - .00009	.030	4 4 8
	7488126	1.089	.002	1.08890 - .00009	1.08890 - .00012	.030	4 4 8
	7488127	1.089	.004	1.08880 - .00012	1.08880 - .00012	.030	4 4 8
	7488129	1.089	.008 AND UP	1.08860 - .00030	1.08860 - .00030	.030	4 4 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	D	C	E	F	G	H	
A	B								
7488131			1.090	.0005	1.09000	-.00006	.030	4	
7488133			1.090	.002	1.08990	-.00009	.030	4	
7488134			1.090	.004	1.08980	-.00012	.030	4	
7488136			1.090	.008 AND UP	1.08960	-.00030	.030	8	
7488138			1.091	.0005	1.09100	-.00006	.030	4	
7488140			1.091	.002	1.09090	-.00009	.030	4	
7488141			1.091	.004	1.09080	-.00012	.030	8	
7488143			1.091	.008 AND UP	1.09060	-.00030	.030	8	
7488145			1.092	.0005	1.09200	-.00006	.030	4	
7488147			1.092	.002	1.09190	-.00009	.030	4	
7488148			1.092	.004	1.09180	-.00012	.030	8	
7488150			1.092	.008 AND UP	1.09160	-.00030	.030	8	
7488152			1.093	.0005	1.09300	-.00006	.030	4	
7488154			1.093	.002	1.09290	-.00009	.030	4	
7488155			1.093	.004	1.09280	-.00012	.030	8	
7488157			1.093	.008 AND UP	1.09260	-.00030	.030	8	
7488159		1.09375		.0005 AND UP	1.09375	-.00006	.030	4	
7488160			1.094	.0005	1.09400	-.00006	.030	4	
7488162			1.094	.002	1.09390	-.00009	.030	4	
7488163			1.094	.004	1.09380	-.00012	.030	8	
7488165			1.094	.008 AND UP	1.09360	-.00030	.030	8	
7488167			1.095	.0005	1.09500	-.00006	.030	4	
7488169			1.095	.002	1.09490	-.00009	.030	4	
7488170			1.095	.004	1.09480	-.00012	.030	8	
7488172			1.095	.008 AND UP	1.09460	-.00030	.030	8	
7488174			1.096	.0005	1.09600	-.00006	.030	4	
7488176			1.096	.002	1.09590	-.00009	.030	4	
7488177			1.096	.004	1.09580	-.00012	.030	8	
7488179			1.096	.008 AND UP	1.09560	-.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FIN. GAGE	STOCK NO.	MAXIMUM ACCEPTANCE COMPONENT DIMENSION	DIA. E	F	G	H	CHAMFER		
A	B	C	D	E	F	G	H			
7488181			1.097	.0005	1.09700	-.00006	.030	4		
7488183			1.097	.002	1.09690	-.00009	.030	4		
7488184			1.097	.004	1.09680	-.00012	.030	8		
7488186			1.097	.008 AND UP	1.09660	-.00030	.030	8		
7488188			1.098	.0005	1.09800	-.00006	.030	4		
7488190			1.098	.002	1.09790	-.00009	.030	8		
7488191			1.098	.004	1.09780	-.00012	.030	8		
7488193			1.098	.008 AND UP	1.09760	-.00030	.030	8		
7488195			1.099	.0005	1.09900	-.00006	.030	4		
7488197			1.099	.002	1.09890	-.00009	.030	4		
7488198			1.099	.004	1.09880	-.00012	.030	8		
7488200			1.099	.008 AND UP	1.09860	-.00030	.030	8		
7488202			1.100	.0005	1.10000	-.00006	.030	4		
7488204			1.100	.002	1.09990	-.00009	.030	4		
7488205			1.100	.004	1.09980	-.00012	.030	8		
7488207			1.100	.008 AND UP	1.09960	-.00030	.030	8		
7488209			1.101	.0005	1.10100	-.00006	.030	4		
7488211			1.101	.002	1.10090	-.00009	.030	4		
7488212			1.101	.004	1.10080	-.00012	.030	8		
7488214			1.101	.008 AND UP	1.10060	-.00030	.030	8		
7488216			1.102	.0005	1.10200	-.00006	.030	4		
7488218			1.102	.002	1.10190	-.00009	.030	4		
7488219			1.102	.004	1.10180	-.00012	.030	8		
7488221			1.102	.008 AND UP	1.10160	-.00030	.030	8		
7488223			1.103	.0005	1.10300	-.00006	.030	4		
7488225			1.103	.002	1.10290	-.00009	.030	4		
7488226			1.103	.004	1.10280	-.00012	.030	8		
7488228			1.103	.008 AND UP	1.10260	-.00030	.030	8		

Table I. Tabulation of Design and Identification Data (Continued)

ON. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FIN-GAGE STOCK NO.	MAXIMUM ACCEPTANCE CHECK	COMPONENT DIMENSION	DIA. E	DIA. F	DIA. G	CHAMFER	CHAMFER	CHAMFER	
A	B	C	D	E	F	G	H	I	J	
7488230	7488232	7488233	7488235	1.104	.0005	1.10400 -	.00006	.030	.030	4
7488237	7488239	7488240	7488242	1.104	.002	1.10390 -	.00009	.030	.030	4
7488244	7488246	7488247	7488249	1.104	.004	1.10380 -	.00012	.030	.030	8
7488251	7488253	7488254	7488256	1.105	.008 AND UP	1.10360 -	.00030	.030	.030	8
7488260	7488261	7488263	7488265	1.105	.0005	1.10500 -	.00006	.030	.030	4
7488267	7488268	7488270	7488272	1.105	.002	1.10490 -	.00009	.030	.030	4
7488274	7488275	7488277		1.105	.004	1.10480 -	.00012	.030	.030	8
				1.105	.008 AND UP	1.10460 -	.00030	.030	.030	8
				1.106	.0005	1.10600 -	.00006	.030	.030	4
				1.106	.002	1.10590 -	.00009	.030	.030	4
				1.106	.004	1.10580 -	.00012	.030	.030	8
				1.106	.008 AND UP	1.10560 -	.00030	.030	.030	8
				1.107	.0005	1.10700 -	.00006	.030	.030	4
				1.107	.002	1.10690 -	.00009	.030	.030	4
				1.107	.004	1.10680 -	.00012	.030	.030	8
				1.107	.008 AND UP	1.10660 -	.00030	.030	.030	8
				1.108	.0005	1.10800 -	.00006	.030	.030	4
				1.108	.002	1.10790 -	.00009	.030	.030	4
				1.108	.004	1.10780 -	.00012	.030	.030	8
				1.108	.008 AND UP	1.10760 -	.00030	.030	.030	8
				1.109	.0005	1.10900 -	.00006	.030	.030	4
				1.109	.002	1.10890 -	.00009	.030	.030	4
				1.109	.004	1.10889 -	.00012	.030	.030	8
				1.109	.008 AND UP	1.10860 -	.00030	.030	.030	8
				1.110	.0005	1.11000 -	.00006	.030	.030	4
				1.110	.002	1.10990 -	.00009	.030	.030	4
				1.110	.004	1.10980 -	.00012	.030	.030	8
				1.110	.008 AND UP	1.10960 -	.00030	.030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

LIG. NO.	MARKING ON GO GAGE				RING GAGE DIMENSIONS				FINISH
	FIN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	G	H	
A	B	C	D	E	F	G	H		
7488279			1.111	.0005	1.11100	-.00006	.030	4	
7488281			1.111	.002	1.11090	-.00009	.030	4	
7488282			1.111	.004	1.11080	-.00012	.030	4	
7488284			1.111	.008 AND UP	1.11060	-.00030	.030	8	
7488286			1.112	.0005	1.11200	-.00006	.030	4	
7488288			1.112	.002	1.11190	-.00009	.030	4	
7488289			1.112	.004	1.11180	-.00012	.030	8	
7488291			1.112	.008 AND UP	1.11160	-.00030	.030	8	
7488293			1.113	.0005	1.11300	-.00006	.030	4	
7488295			1.113	.002	1.11290	-.00009	.030	4	
7488296			1.113	.004	1.11280	-.00012	.030	8	
7488298			1.113	.008 AND UP	1.11260	-.00030	.030	8	
7488300			1.114	.0005	1.11400	-.00006	.030	4	
7488302			1.114	.002	1.11390	-.00009	.030	4	
7488303			1.114	.004	1.11380	-.00012	.030	8	
7488305			1.114	.008 AND UP	1.11360	-.00030	.030	8	
7488307			1.115	.0005	1.11500	-.00006	.030	4	
7488309			1.115	.002	1.11490	-.00009	.030	4	
7488310			1.115	.004	1.11480	-.00012	.030	8	
7488312			1.115	.008 AND UP	1.11460	-.00030	.030	8	
7488314			1.116	.0005	1.11600	-.00006	.030	4	
7488316			1.116	.002	1.11590	-.00009	.030	4	
7488317			1.116	.004	1.11580	-.00012	.030	8	
7488319			1.116	.008 AND UP	1.11560	-.00030	.030	8	
7488321			1.117	.0005	1.11700	-.00006	.030	4	
7488323			1.117	.002	1.11690	-.00009	.030	4	
7488324			1.117	.004	1.11680	-.00012	.030	8	
7488326			1.117	.008 AND UP	1.11660	-.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FIN—GAGE STOCK NO.	RING GAGE	MAXIMUM ACCEPTANCE CHECK	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	
A	B	C	D	E	F	G	H
7488328			1.118	.0005	1.11800	—	.030
7488330			1.118	.002	1.11790	—	.030
7488331			1.118	.004	1.11780	—	.030
7488333			1.118	.008 AND UP	1.11760	—	.030
7488335			1.119	.0005	1.11900	—	.030
7488337			1.119	.002	1.11890	—	.030
7488338			1.119	.004	1.11880	—	.030
7488340			1.119	.008 AND UP	1.11860	—	.030
7488342			1.120	.0005	1.12000	—	.030
7488344			1.120	.002	1.11990	—	.030
7488345			1.120	.004	1.11980	—	.030
7488347			1.120	.008 AND UP	1.11960	—	.030
7488349			1.121	.0005	1.12100	—	.030
7488351			1.121	.002	1.12090	—	.030
7488352			1.121	.004	1.12080	—	.030
7488354			1.121	.008 AND UP	1.12060	—	.030
7488356			1.122	.0005	1.12200	—	.030
7488358			1.122	.002	1.12190	—	.030
7488359			1.122	.004	1.12180	—	.030
7488361			1.122	.008 AND UP	1.12160	—	.030
7488363			1.123	.0005	1.12300	—	.030
7488365			1.123	.002	1.12290	—	.030
7488366			1.123	.004	1.12280	—	.030
7488368			1.123	.008 AND UP	1.12260	—	.030
7488370			1.124	.0005	1.12400	—	.030
7488372			1.124	.002	1.12390	—	.030
7488373			1.124	.004	1.12380	—	.030
7488375			1.124	.008 AND UP	1.12360	—	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ITEM NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	ACCEPTANCE CHECK	DIA.	E	F	G	H	
A	B	C	D						
7488377		1.125	.0005	1.12500	-.00006	.030	4		
7488379		1.125	.002	1.12490	-.00009	.030	4		
7488380		1.125	.004	1.12480	-.00012	.030	4		
7488382		1.125	.008 AND UP	1.12460	-.00030	.030	8		
7488384		1.126	.0005	1.12600	-.00006	.030	4		
7488386		1.126	.002	1.12590	-.00009	.030	4		
7488387		1.126	.004	1.12580	-.00012	.030	8		
7488389		1.126	.008 AND UP	1.12560	-.00030	.030	8		
7488391		1.127	.0005	1.12700	-.00006	.030	4		
7488393		1.127	.002	1.12690	-.00009	.030	4		
7488394		1.127	.004	1.12680	-.00012	.030	8		
7488396		1.127	.008 AND UP	1.12660	-.00030	.030	8		
7488398		1.128	.0005	1.12800	-.00006	.030	4		
7488400		1.128	.002	1.12790	-.00009	.030	4		
7488401		1.128	.004	1.12780	-.00012	.030	8		
7488403		1.128	.008 AND UP	1.12760	-.00030	.030	8		
7488405		1.129	.0005	1.12900	-.00006	.030	4		
7488407		1.129	.002	1.12890	-.00009	.030	4		
7488408		1.129	.004	1.12880	-.00012	.030	8		
7488410		1.129	.008 AND UP	1.12860	-.00030	.030	8		
7488412		1.130	.0005	1.13000	-.00006	.030	4		
7488414		1.130	.002	1.12990	-.00009	.030	4		
7488415		1.130	.004	1.12980	-.00012	.030	8		
7488417		1.130	.008 AND UP	1.12960	-.00030	.030	8		
7488419		1.131	.0005	1.13100	-.00006	.030	4		
7488421		1.131	.002	1.13090	-.00009	.030	4		
7488422		1.131	.004	1.13080	-.00012	.030	8		
7488424		1.131	.008 AND UP	1.13060	-.00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN—GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C	D	E	F	G	H		
3	7488426		1.132	.0005	1.13200	-.00006	.030	4	
	7488428		1.132	.002	1.13190	-.00009	.030	4	
	7488429		1.132	.004	1.13180	-.00012	.030	4	
	7488431		1.132	.008 AND UP	1.13160	-.00030	.030	8	
	7488433		1.133	.0005	1.13300	-.00006	.030	4	
	7488435		1.133	.002	1.13290	-.00009	.030	4	
	7488436		1.133	.004	1.13280	-.00012	.030	8	
	7488438		1.133	.008 AND UP	1.13260	-.00030	.030	8	
	7488440		1.134	.0005	1.13400	-.00006	.030	4	
	7488442		1.134	.002	1.13390	-.00009	.030	4	
	7488443		1.134	.004	1.13380	-.00012	.030	8	
	7488445		1.134	.008 AND UP	1.13360	-.00030	.030	8	
	7488447		1.135	.0005	1.13500	-.00006	.030	4	
	7488449		1.135	.002	1.13490	-.00009	.030	4	
	7488450		1.135	.004	1.13480	-.00012	.030	8	
	7488452		1.135	.008 AND UP	1.13460	-.00030	.030	8	
	7488454		1.136	.0005	1.13600	-.00006	.030	4	
	7488456		1.136	.002	1.13590	-.00009	.030	4	
	7488457		1.136	.004	1.13580	-.00012	.030	8	
	7488459		1.136	.008 AND UP	1.13560	-.00030	.030	8	
	7488461		1.137	.0005	1.13700	-.00006	.030	4	
	7488463		1.137	.002	1.13690	-.00009	.030	4	
	7488464		1.137	.004	1.13680	-.00012	.030	8	
	7488466		1.137	.008 AND UP	1.13660	-.00030	.030	8	
	7488468		1.138	.0005	1.13800	-.00006	.030	4	
	7488470		1.138	.002	1.13790	-.00009	.030	4	
	7488471		1.138	.004	1.13780	-.00012	.030	8	
	7488473		1.138	.008 AND UP	1.13760	-.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN.—GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	C	D	E	
3	7488475			1.139	.0005	1.13900	— .030
3	7488477			1.139	.002	1.13890	— .030
3	7488478			1.139	.004	1.13880	— .030
3	7488480			1.139	.008 AND UP	1.13860	— .030
3	7488482			1.140	.0005	1.14000	— .030
3	7488484			1.140	.002	1.13990	— .030
3	7488485			1.140	.004	1.13980	— .030
3	7488487			1.140	.008 AND UP	1.13960	— .030
3	7488489			1.141	.0005	1.14100	— .030
3	7488491			1.141	.002	1.14090	— .030
3	7488492			1.141	.004	1.14080	— .030
3	7488494			1.141	.008 AND UP	1.14060	— .030
3	7488496			1.142	.0005	1.14200	— .030
3	7488498			1.142	.002	1.14190	— .030
3	7488499			1.142	.004	1.14180	— .030
3	7488501			1.142	.008 AND UP	1.14160	— .030
3	7488503			1.143	.0005	1.14300	— .030
3	7488505			1.143	.002	1.14290	— .030
3	7488506			1.143	.004	1.14280	— .030
3	7488508			1.143	.008 AND UP	1.14260	— .030
3	7488510			1.144	.0005	1.14400	— .030
3	7488512			1.144	.002	1.14390	— .030
3	7488513			1.144	.004	1.14380	— .030
3	7488515			1.144	.008 AND UP	1.14360	— .030
3	7488517			1.145	.0005	1.14500	— .030
3	7488519			1.145	.002	1.14490	— .030
3	7488520			1.145	.004	1.14480	— .030
3	7488522			1.145	.008 AND UP	1.14460	— .030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON S/N	MARKING ON GO GAGE	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS			FINISH
					D	E	F	
7488524		7488526	1.146	.0005	1.14600	-.00006	.030	4
7488526		7488527	1.146	.002	1.14590	-.00009	.030	4
7488527		7488529	1.146	.004	1.14580	-.00012	.030	4
7488529			1.146	.008 AND UP	1.14560	-.00030	.030	8
7488531		7488533	1.147	.0005	1.14700	-.00006	.030	4
7488533		7488534	1.147	.002	1.14690	-.00009	.030	4
7488534		7488536	1.147	.004	1.14680	-.00012	.030	4
7488536		7488538	1.147	.008 AND UP	1.14660	-.00030	.030	8
7488538		7488540	1.148	.0005	1.14800	-.00006	.030	4
7488540		7488541	1.148	.002	1.14790	-.00009	.030	4
7488541		7488543	1.148	.004	1.14780	-.00012	.030	4
7488543		7488545	1.148	.008 AND UP	1.14760	-.00030	.030	8
7488545		7488547	1.149	.0005	1.14900	-.00006	.030	4
7488547		7488548	1.149	.002	1.14890	-.00009	.030	4
7488548		7488550	1.149	.004	1.14880	-.00012	.030	8
7488550		7488552	1.149	.008 AND UP	1.14860	-.00030	.030	8
7488552		7488554	1.150	.0005	1.15000	-.00006	.030	4
7488554		7488555	1.150	.002	1.14990	-.00009	.030	4
7488555		7488557	1.150	.004	1.14980	-.00012	.030	8
7488557		7488559	1.150	.008 AND UP	1.14960	-.00030	.030	8
7488559		7488561	1.151	.0005	1.15100	-.00006	.030	4
7488561		7488562	1.151	.002	1.15090	-.00009	.030	4
7488562		7488564	1.151	.004	1.15080	-.00012	.030	8
7488564			1.151	.008 AND UP	1.15060	-.00030	.030	8
		7488566	1.152	.0005	1.15200	-.00006	.030	4
		7488568	1.152	.002	1.15190	-.00009	.030	4
		7488569	1.152	.004	1.15180	-.00012	.030	8
		7488571	1.152	.008 AND UP	1.15160	-.00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS				H
	FIN.— RING GAGE	STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	G	
A	B	C	D	E	F	G		
M M M M M	7488573		1.153	.0005	1.15300	-.00006	.030	4
M M M M M	7488575		1.153	.002	1.15290	-.00009	.030	4
M M M M M	7488576		1.153	.004	1.15280	-.00012	.030	8
M M M M M	7488578		1.153	.008 AND UP	1.15260	-.00030	.030	8
M M M M M	7488580		1.154	.0005	1.15400	-.00006	.030	4
M M M M M	7488582		1.154	.002	1.15390	-.00009	.030	4
M M M M M	7488583		1.154	.004	1.15380	-.00012	.030	8
M M M M M	7488585		1.154	.008 AND UP	1.15360	-.00030	.030	8
M M M M M	7488587		1.155	.0005	1.15500	-.00006	.030	4
M M M M M	7488589		1.155	.002	1.15490	-.00009	.030	4
M M M M M	7488590		1.155	.004	1.15480	-.00012	.030	8
M M M M M	7488592		1.155	.008 AND UP	1.15460	-.00030	.030	8
M M M M M	7488594		1.156	.0005	1.15600	-.00006	.030	4
M M M M M	7488596		1.156	.002	1.15590	-.00009	.030	4
M M M M M	7488597		1.156	.004	1.15580	-.00012	.030	8
M M M M M	7488599		1.156	.008 AND UP	1.15560	-.00030	.030	8
M M M M M	7488601		1.15625	.0005 AND UP	1.15625	-.00006	.030	4
M M M M M	7488602		1.157	.0005	1.15700	-.00006	.030	4
M M M M M	7488604		1.157	.002	1.15690	-.00009	.030	4
M M M M M	7488605		1.157	.004	1.15680	-.00012	.030	8
M M M M M	7488607		1.157	.008 AND UP	1.15660	-.00030	.030	8
M M M M M	7488609		1.158	.0005	1.15800	-.00006	.030	4
M M M M M	7488611		1.158	.002	1.15790	-.00009	.030	4
M M M M M	7488612		1.158	.004	1.15780	-.00012	.030	8
M M M M M	7488614		1.158	.008 AND UP	1.15760	-.00030	.030	8
M M M M M	7488616		1.159	.0005	1.15900	-.00006	.030	4
M M M M M	7488618		1.159	.002	1.15890	-.00009	.030	4
M M M M M	7488619		1.159	.004	1.15880	-.00012	.030	8
M M M M M	7488621		1.159	.008 AND UP	1.15860	-.00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	RING GAGE		RING GAGE		FINISH
				MARKING ON GO GAGE	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	
A	B	C	D	E	F	G	H	
3	7488623	1.160	.0005	1.16000 - .00006	.030	4-4-8 8		
3	7488625	1.160	.002	1.15990 - .00009	.030	4-4-8 8		
3	7488626	1.160	.004	1.15980 - .00012	.030	4-4-8 8		
3	7488628	1.160	.008 AND UP	1.15960 - .00030	.030	4-4-8 8		
3	7488630	1.161	.0005	1.16100 - .00006	.030	4-4-8 8		
3	7488632	1.161	.002	1.16090 - .00009	.030	4-4-8 8		
3	7488633	1.161	.004	1.16080 - .00012	.030	4-4-8 8		
3	7488635	1.161	.008 AND UP	1.16060 - .00030	.030	4-4-8 8		
3	7488637	1.162	.0005	1.16200 - .00006	.030	4-4-8 8		
3	7488639	1.162	.002	1.16190 - .00009	.030	4-4-8 8		
3	7488640	1.162	.004	1.16180 - .00012	.030	4-4-8 8		
3	7488642	1.162	.008 AND UP	1.16160 - .00030	.030	4-4-8 8		
3	7488644	1.163	.0005	1.16300 - .00006	.030	4-4-8 8		
3	7488646	1.163	.002	1.16290 - .00009	.030	4-4-8 8		
3	7488647	1.163	.004	1.16280 - .00012	.030	4-4-8 8		
3	7488649	1.163	.008 AND UP	1.16260 - .00030	.030	4-4-8 8		
3	7488651	1.164	.0005	1.16400 - .00006	.030	4-4-8 8		
3	7488653	1.164	.002	1.16390 - .00009	.030	4-4-8 8		
3	7488654	1.164	.004	1.16380 - .00012	.030	4-4-8 8		
3	7488656	1.164	.008 AND UP	1.16360 - .00030	.030	4-4-8 8		
3	7488658	1.165	.0005	1.16500 - .00006	.030	4-4-8 8		
3	7488660	1.165	.002	1.16490 - .00009	.030	4-4-8 8		
3	7488661	1.165	.004	1.16480 - .00012	.030	4-4-8 8		
3	7488663	1.165	.008 AND UP	1.16460 - .00030	.030	4-4-8 8		
3	7488665	1.166	.0005	1.16600 - .00006	.030	4-4-8 8		
3	7488667	1.166	.002	1.16590 - .00009	.030	4-4-8 8		
3	7488668	1.166	.004	1.16580 - .00012	.030	4-4-8 8		
3	7488670	1.166	.008 AND UP	1.16560 - .00030	.030	4-4-8 8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FLIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	F	G	
A	B	C	D	E	F	H	
7488672		1.167	.0005	1.16700 -	.00006	.030	
7488674		1.167	.002	1.16690 -	.00009	.030	
7488675		1.167	.004	1.16680 -	.00012	.030	
7488677		1.167	.008 AND UP	1.16660 -	.00030	.030	
7488679		1.168	.0005	1.16800 -	.00006	.030	
7488681		1.168	.002	1.16790 -	.00009	.030	
7488682		1.168	.004	1.16780 -	.00012	.030	
7488684		1.168	.008 AND UP	1.16760 -	.00030	.030	
7488686		1.169	.0005	1.16900 -	.00006	.030	
7488688		1.169	.002	1.16890 -	.00009	.030	
7488689		1.169	.004	1.16880 -	.00012	.030	
7488691		1.169	.008 AND UP	1.16860 -	.00030	.030	
7488693		1.170	.0005	1.17000 -	.00006	.030	
7488695		1.170	.002	1.16990 -	.00009	.030	
7488696		1.170	.004	1.16980 -	.00012	.030	
7488698		1.170	.008 AND UP	1.16960 -	.00030	.030	
7488700		1.171	.0005	1.17100 -	.00006	.030	
7488702		1.171	.002	1.17090 -	.00009	.030	
7488703		1.171	.004	1.17080 -	.00012	.030	
7488705		1.171	.008 AND UP	1.17060 -	.00030	.030	
7488707		1.172	.0005	1.17200 -	.00006	.030	
7488709		1.172	.002	1.17190 -	.00009	.030	
7488710		1.172	.004	1.17180 -	.00012	.030	
7488712		1.172	.008 AND UP	1.17160 -	.00030	.030	
7488714		1.173	.0005	1.17300 -	.00006	.030	
7488716		1.173	.002	1.17290 -	.00009	.030	
7488717		1.173	.004	1.17280 -	.00012	.030	
7488719		1.173	.008 AND UP	1.17260 -	.00030	.030	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON. G.I. L.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	FINN.— RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	
A	B	C	D				H	
3 33333	7488721	1.174	.0005	1.17400	-.00006	.030	4	
	7488723	1.174	.002	1.17390	-.00009	.030	4	
	7488724	1.174	.004	1.17380	-.00012	.030	8	
	7488726	1.174	.008 AND UP	1.17360	-.00030	.030	8	
3 33333	7488728	1.175	.0005	1.17500	-.00006	.030	4	
	7488730	1.175	.002	1.17490	-.00009	.030	4	
	7488731	1.175	.004	1.17480	-.00012	.030	8	
	7488733	1.175	.008 AND UP	1.17460	-.00030	.030	8	
3 33333	7488735	1.176	.0005	1.17600	-.00006	.030	4	
	7488737	1.176	.002	1.17590	-.00009	.030	4	
	7488738	1.176	.004	1.17580	-.00012	.030	8	
	7488740	1.176	.008 AND UP	1.17560	-.00030	.030	8	
3 33333	7488742	1.177	.0005	1.17700	-.00006	.030	4	
	7488744	1.177	.002	1.17690	-.00009	.030	4	
	7488745	1.177	.004	1.17680	-.00012	.030	8	
	7488747	1.177	.008 AND UP	1.17660	-.00030	.030	8	
3 33333	7488749	1.178	.0005	1.17800	-.00006	.030	4	
	7488751	1.178	.002	1.17790	-.00009	.030	4	
	7488752	1.178	.004	1.17780	-.00012	.030	8	
	7488754	1.178	.008 AND UP	1.17760	-.00030	.030	8	
3 33333	7488756	1.179	.0005	1.17900	-.00006	.030	4	
	7488758	1.179	.002	1.17890	-.00009	.030	4	
	7488759	1.179	.004	1.17880	-.00012	.030	8	
	7488761	1.179	.008 AND UP	1.17860	-.00030	.030	8	
3 33333	7488763	1.180	.0005	1.18000	-.00006	.030	4	
	7488765	1.180	.002	1.17990	-.00009	.030	4	
	7488766	1.180	.004	1.17980	-.00012	.030	8	
	7488768	1.180	.008 AND UP	1.17960	-.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	FIN-GAGE	RING GAGE	MARKING ON GO GAGE	STOCK NO.	MAXIMUM ACCEPTANCE CHECK	COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		CHAMFER	FINISH
								D	E		
A	B	C									
3	7488770		1.181	.0005		1.18100 -	.00006	.030		4	
3	7488772		1.181	.002		1.18090 -	.00009	.030		4	
3	7488773		1.181	.004		1.18080 -	.00012	.030		8	
3	7488775		1.181	.008 AND UP		1.18060 -	.00030	.030		8	
3	7488777		1.182	.0005		1.18200 -	.00006	.030		4	
3	7488779		1.182	.002		1.18190 -	.00009	.030		4	
3	7488780		1.182	.004		1.18180 -	.00012	.030		8	
3	7488782		1.182	.008 AND UP		1.18160 -	.00030	.030		8	
M	7488784		1.183	.0005		1.18300 -	.00006	.030		4	
M	7488786		1.183	.002		1.18290 -	.00009	.030		4	
M	7488787		1.183	.004		1.18280 -	.00012	.030		8	
M	7488789		1.183	.008 AND UP		1.18260 -	.00030	.030		8	
M	7488791		1.184	.0005		1.18400 -	.00006	.030		4	
M	7488793		1.184	.002		1.18390 -	.00009	.030		4	
M	7488794		1.184	.004		1.18380 -	.00012	.030		8	
M	7488796		1.184	.008 AND UP		1.18360 -	.00030	.030		8	
M	7488798		1.185	.0005		1.18500 -	.00006	.030		4	
M	7488800		1.185	.002		1.18490 -	.00009	.030		4	
M	7488801		1.185	.004		1.18480 -	.00012	.030		8	
M	7488803		1.185	.008 AND UP		1.18460 -	.00030	.030		8	
M	7488805		1.186	.0005		1.18600 -	.00006	.030		4	
M	7488807		1.186	.002		1.18590 -	.00009	.030		4	
M	7488808		1.186	.004		1.18580 -	.00012	.030		8	
M	7488810		1.186	.008 AND UP		1.18560 -	.00030	.030		8	
M	7488812		1.187	.0005		1.18700 -	.00006	.030		4	
M	7488814		1.187	.002		1.18690 -	.00009	.030		4	
M	7488815		1.187	.004		1.18680 -	.00012	.030		8	
M	7488817		1.187	.008 AND UP		1.18660 -	.00030	.030		8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS		FINISH CHAMFER	
	FIN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER		
A	B	C	D	E	F	G	
3	7488819		1.1875	.0005 AND UP	1.18750 - .00006	.030	4
	7488820		1.188	.0005	1.18800 - .00006	.030	4
	7488822		1.188	.002	1.18790 - .00009	.030	4
	7488823		1.188	.004	1.18780 - .00012	.030	4
	7488825		1.188	.008 AND UP	1.18760 - .00030	.030	8
	7488827		1.189	.0005	1.18900 - .00006	.030	4
	7488829		1.189	.002	1.18890 - .00009	.030	4
	7488830		1.189	.004	1.18880 - .00012	.030	4
	7488832		1.189	.008 AND UP	1.18860 - .00030	.030	8
	7488834		1.190	.0005	1.19000 - .00006	.030	4
	7488836		1.190	.002	1.18990 - .00009	.030	4
	7488837		1.190	.004	1.18980 - .00012	.030	4
	7488839		1.190	.008 AND UP	1.18960 - .00030	.030	8
	7488841		1.191	.0005	1.19100 - .00006	.030	4
	7488843		1.191	.002	1.19090 - .00009	.030	4
	7488844		1.191	.004	1.19080 - .00012	.030	4
	7488846		1.191	.008 AND UP	1.19060 - .00030	.030	8
	7488848		1.192	.0005	1.19200 - .00006	.030	4
	7488850		1.192	.002	1.19190 - .00009	.030	4
	7488851		1.192	.004	1.19180 - .00012	.030	4
	7488853		1.192	.008 AND UP	1.19160 - .00030	.030	8
	7488855		1.193	.0005	1.19300 - .00006	.030	4
	7488857		1.193	.002	1.19290 - .00009	.030	4
	7488858		1.193	.004	1.19280 - .00012	.030	4
	7488860		1.193	.008 AND UP	1.19260 - .00030	.030	8
	7488862		1.194	.0005	1.19400 - .00006	.030	4
	7488864		1.194	.002	1.19390 - .00009	.030	4
	7488865		1.194	.004	1.19380 - .00012	.030	4
	7488867		1.194	.008 AND UP	1.19360 - .00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	FINN—GAGE RING GAGE	STOCK NO.	ACCEPTANCE CHECK	D	E	F	G	
74888869	74888871			1.195	.0005	1.19500	-.00006	.030
74888872	74888874			1.195	.002	1.19490	-.00009	.030
74888874	74888874			1.195	.004 AND UP	1.19480	-.00012	.030
74888876				1.196	.0005	1.19600	-.00006	.030
74888878	74888878			1.196	.002	1.19590	-.00009	.030
74888879	74888879			1.196	.004 AND UP	1.19580	-.00012	.030
74888881				1.196	.008 AND UP	1.19560	-.00030	.030
74888883				1.197	.0005	1.19700	-.00006	.030
74888885				1.197	.002	1.19690	-.00009	.030
74888886				1.197	.004 AND UP	1.19680	-.00012	.030
74888888				1.197	.008 AND UP	1.19660	-.00030	.030
74888890				1.198	.0005	1.19800	-.00006	.030
74888892				1.198	.002	1.19790	-.00009	.030
74888893				1.198	.004 AND UP	1.19780	-.00012	.030
74888895				1.198	.008 AND UP	1.19760	-.00030	.030
74888897				1.199	.0005	1.19900	-.00006	.030
74888899				1.199	.002	1.19890	-.00009	.030
74888900				1.199	.004 AND UP	1.19880	-.00012	.030
74888902				1.199	.008 AND UP	1.19860	-.00030	.030
74888904				1.200	.0005	1.20000	-.00006	.030
74888906				1.200	.002	1.19990	-.00009	.030
74888907				1.200	.004 AND UP	1.19980	-.00012	.030
74888909				1.200	.008 AND UP	1.19960	-.00030	.030
7488911				1.201	.0005	1.20100	-.00006	.030
7488913				1.201	.002	1.20090	-.00009	.030
7488914				1.201	.004 AND UP	1.20080	-.00012	.030
7488916				1.201	.008 AND UP	1.20060	-.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM STOCK NO.		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	FIN--GAGE	RING GAGE	ACCEPTANCE CHECK	CHECK	COMPONENT DIMENSION	DIMENSION	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H		
7488918		1.202	.0005		1.20200	-.00006	.030	4	
7488920		1.202	.002		1.20190	-.00009	.030	4	
7488921		1.202	.004		1.20180	-.00012	.030	8	
7488923		1.202	.008 AND UP		1.20160	-.00030	.030	8	
7488925		1.203	.0005		1.20300	-.00006	.030	4	
7488927		1.203	.002		1.20290	-.00009	.030	4	
7488928		1.203	.004		1.20280	-.00012	.030	8	
7488930		1.203	.008 AND UP		1.20260	-.00030	.030	8	
7488932		1.204	.0005		1.20400	-.00006	.030	4	
7488934		1.204	.002		1.20390	-.00009	.030	4	
7488935		1.204	.004		1.20380	-.00012	.030	8	
7488937		1.204	.008 AND UP		1.20360	-.00030	.030	8	
7488939		1.205	.0005		1.20500	-.00006	.030	4	
7488941		1.205	.002		1.20490	-.00009	.030	4	
7488942		1.205	.004		1.20480	-.00012	.030	8	
7488944		1.205	.008 AND UP		1.20460	-.00030	.030	8	
7488946		1.206	.0005		1.20600	-.00006	.030	4	
7488948		1.206	.002		1.20590	-.00009	.030	4	
7488949		1.206	.004		1.20580	-.00012	.030	8	
7488951		1.206	.008 AND UP		1.20560	-.00030	.030	8	
7488953		1.207	.0005		1.20700	-.00006	.030	4	
7488955		1.207	.002		1.20690	-.00009	.030	4	
7488956		1.207	.004		1.20680	-.00012	.030	8	
7488958		1.207	.008 AND UP		1.20660	-.00030	.030	8	
7488960		1.208	.0005		1.20800	-.00006	.030	4	
7488962		1.208	.002		1.20790	-.00009	.030	4	
7488963		1.208	.004		1.20780	-.00012	.030	8	
7488965		1.208	.008 AND UP		1.20760	-.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH					
					A	B	C	D	E	F	G	H
7488967	7488969	7488970	7488972	.0005	1.209	1.209	1.209	1.209	1.20900	-.00006	.030	4
7488974	7488976	7488977	7488979	.0004	1.209	1.209	1.209	1.209	1.20890	-.00009	.030	4
7488981	7488983	7488984	7488986	.0005	1.210	1.210	1.210	1.210	1.20880	-.00012	.030	8
7488988	7488990	7488991	7488993	.0005	1.211	1.211	1.211	1.211	1.20990	-.00006	.030	4
7488995	7488997	7488998	7489000	.0004	1.212	1.212	1.212	1.212	1.20980	-.00012	.030	8
7489002	7489004	7489005	7489007	.0005	1.213	1.213	1.213	1.213	1.21090	-.00009	.030	4
7489009	7489011	7489012	7489014	.0005	1.215	1.215	1.215	1.215	1.21080	-.00012	.030	8
				.0004	1.214	1.214	1.214	1.214	1.21380	-.00012	.030	8
				.0008 AND UP	1.214	1.214	1.214	1.214	1.21360	-.00030	.030	8
					1.214	1.214	1.214	1.214	1.21400	-.00006	.030	4
					1.214	1.214	1.214	1.214	1.21390	-.00009	.030	4
					1.214	1.214	1.214	1.214	1.21380	-.00012	.030	8
					1.214	1.214	1.214	1.214	1.21360	-.00030	.030	8
					1.215	1.215	1.215	1.215	1.21500	-.00006	.030	4
					1.215	1.215	1.215	1.215	1.21490	-.00009	.030	4
					1.215	1.215	1.215	1.215	1.21480	-.00012	.030	8
					1.215	1.215	1.215	1.215	1.21460	-.00030	.030	8

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	C	D	E	F	G	
A	B	RING GAGE ACCEPTANCE CHECK							
7489016				1.216	.0005	1.21600	—	.00006	.030 4
7489018				1.216	.002	1.21590	—	.00009	.030 4
7489019				1.216	.004	1.21580	—	.00012	.030 8
7489021				1.216	.008 AND UP	1.21560	—	.00030	.030 8
7489023				1.217	.0005	1.21700	—	.00006	.030 4
7489025				1.217	.002	1.21690	—	.00009	.030 4
7489026				1.217	.004	1.21680	—	.00012	.030 8
7489028				1.217	.008 AND UP	1.21660	—	.00030	.030 8
7489030				1.218	.0005	1.21800	—	.00006	.030 4
7489032				1.218	.002	1.21790	—	.00009	.030 4
7489033				1.218	.004	1.21780	—	.00012	.030 8
7489035				1.218	.008 AND UP	1.21760	—	.00030	.030 8
7489037				1.21875	.0005 AND UP	1.21875	—	.00006	.030 4
7489038				1.219	.0005	1.21900	—	.00006	.030 4
7489040				1.219	.002	1.21890	—	.00009	.030 4
7489041				1.219	.004	1.21880	—	.00012	.030 8
7489043				1.219	.008 AND UP	1.21860	—	.00030	.030 8
7489045				1.220	.0005	1.22000	—	.00006	.030 4
7489047				1.220	.002	1.21990	—	.00009	.030 4
7489048				1.220	.004	1.21980	—	.00012	.030 8
7489050				1.220	.008 AND UP	1.21960	—	.00030	.030 8
7489052				1.221	.0005	1.22100	—	.00006	.030 4
7489054				1.221	.002	1.22090	—	.00009	.030 4
7489055				1.221	.004	1.22080	—	.00012	.030 8
7489057				1.221	.008 AND UP	1.22060	—	.00030	.030 8
7489059				1.222	.0005	1.22200	—	.00006	.030 4
7489061				1.222	.002	1.22190	—	.00009	.030 4
7489062				1.222	.004	1.22180	—	.00012	.030 8
7489064				1.222	.008 AND UP	1.22160	—	.00030	.030 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER	H
	FIN—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		E	F		
FIG.	B	C	D					
5	7489066	1.223	.0005	1.22300	—	.00006	.030	4
5	7489068	1.223	.002	1.22290	—	.00009	.030	4
5	7489069	1.223	.004	1.22280	—	.00012	.030	8
5	7489071	1.223	.008 AND UP	1.22260	—	.00030	.030	8
5	7489073	1.224	.0005	1.22400	—	.00006	.030	4
5	7489075	1.224	.002	1.22390	—	.00009	.030	4
5	7489076	1.224	.004	1.22380	—	.00012	.030	8
5	7489078	1.224	.008 AND UP	1.22360	—	.00030	.030	8
5	7489080	1.225	.0005	1.22500	—	.00006	.030	4
5	7489082	1.225	.002	1.22490	—	.00009	.030	4
5	7489083	1.225	.004	1.22480	—	.00012	.030	8
5	7489085	1.225	.008 AND UP	1.22460	—	.00030	.030	8
5	7489087	1.226	.0005	1.22600	—	.00006	.030	4
5	7489089	1.226	.002	1.22590	—	.00009	.030	4
5	7489090	1.226	.004	1.22580	—	.00012	.030	8
5	7489092	1.226	.008 AND UP	1.22560	—	.00030	.030	8
5	7489094	1.227	.0005	1.22700	—	.00006	.030	4
5	7489096	1.227	.002	1.22690	—	.00009	.030	4
5	7489097	1.227	.004	1.22680	—	.00012	.030	8
5	7489099	1.227	.008 AND UP	1.22660	—	.00030	.030	8
5	7489101	1.228	.0005	1.22800	—	.00006	.030	4
5	7489103	1.228	.002	1.22790	—	.00009	.030	4
5	7489104	1.228	.004	1.22780	—	.00012	.030	8
5	7489106	1.228	.008 AND UP	1.22760	—	.00030	.030	8
5	7489108	1.229	.0005	1.22900	—	.00006	.030	4
5	7489110	1.229	.002	1.22890	—	.00009	.030	4
5	7489111	1.229	.004	1.22880	—	.00012	.030	8
5	7489113	1.229	.008 AND UP	1.22860	—	.00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

O.N. 914	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		CHAMFER	FINISH	H
	RING GAGE	STOCK NO.			E	F			
A	B	C	D						
7489115		1.230	.0005	1.23000 - .00006	.030	4			
7489117		1.230	.002	1.22990 - .00009	.030	4			
7489118		1.230	.004	1.22980 - .00012	.030	8			
7489120		1.230	.008 AND UP	1.22960 - .00030	.030	8			
7489122		1.231	.0005	1.23100 - .00006	.030	4			
7489124		1.231	.002	1.23090 - .00009	.030	4			
7489125		1.231	.004	1.23080 - .00012	.030	8			
7489127		1.231	.008 AND UP	1.23060 - .00030	.030	8			
7489129		1.232	.0005	1.23200 - .00006	.030	4			
7489131		1.232	.002	1.23190 - .00009	.030	4			
7489132		1.232	.004	1.23180 - .00012	.030	8			
7489134		1.232	.008 AND UP	1.23160 - .00030	.030	8			
7489136		1.233	.0005	1.23300 - .00006	.030	4			
7489138		1.233	.002	1.23290 - .00009	.030	4			
7489139		1.233	.004	1.23280 - .00012	.030	8			
7489141		1.233	.008 AND UP	1.23260 - .00030	.030	8			
7489143		1.234	.0005	1.23400 - .00006	.030	4			
7489145		1.234	.002	1.23390 - .00009	.030	4			
7489146		1.234	.004	1.23380 - .00012	.030	8			
7489148		1.234	.008 AND UP	1.23360 - .00030	.030	8			
7489150		1.235	.0005	1.23500 - .00006	.030	4			
7489152		1.235	.002	1.23490 - .00009	.030	4			
7489153		1.235	.004	1.23480 - .00012	.030	8			
7489155		1.235	.008 AND UP	1.23460 - .00030	.030	8			
7489157		1.236	.0005	1.23600 - .00006	.030	4			
7489159		1.236	.002	1.23590 - .00009	.030	4			
7489160		1.236	.004	1.23580 - .00012	.030	8			
7489162		1.236	.008 AND UP	1.23560 - .00030	.030	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN—GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	
A	B	C	D	E	F	G	H
7489164		1.237	.0005	1.23700	-.00006	.030	
7489166		1.237	.002	1.23690	-.00009	.030	
7489167		1.237	.004	1.23680	-.00012	.030	
7489169		1.237	.008 AND UP	1.23660	-.00030	.030	
7489171		1.238	.0005	1.23800	-.00006	.030	
7489173		1.238	.002	1.23790	-.00009	.030	
7489174		1.238	.004	1.23780	-.00012	.030	
7489176		1.238	.008 AND UP	1.23760	-.00030	.030	
7489178		1.239	.0005	1.23900	-.00006	.030	
7489180		1.239	.002	1.23890	-.00009	.030	
7489181		1.239	.004	1.23880	-.00012	.030	
7489183		1.239	.008 AND UP	1.23860	-.00030	.030	
7489185		1.240	.0005	1.24000	-.00006	.030	
7489187		1.240	.002	1.23990	-.00009	.030	
7489188		1.240	.004	1.23980	-.00012	.030	
7489190		1.240	.008 AND UP	1.23960	-.00030	.030	
7489192		1.241	.0005	1.24100	-.00006	.030	
7489194		1.241	.002	1.24090	-.00009	.030	
7489195		1.241	.004	1.24080	-.00012	.030	
7489197		1.241	.008 AND UP	1.24060	-.00030	.030	
7489199		1.242	.0005	1.24200	-.00006	.030	
7489201		1.242	.002	1.24190	-.00009	.030	
7489202		1.242	.004	1.24180	-.00012	.030	
7489204		1.242	.008 AND UP	1.24160	-.00030	.030	
7489206		1.243	.0005	1.24300	-.00006	.030	
7489208		1.243	.002	1.24290	-.00009	.030	
7489209		1.243	.004	1.24280	-.00012	.030	
7489211		1.243	.008 AND UP	1.24260	-.00030	.030	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	RING GAGE STOCK NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER
		RING GAGE	ACCEPTANCE CHECK		D	E	
A	B	C	D	E	F	G	H
3	7489213		1.244	.0005	1.24400	-.00006	.030
3	7489215		1.244	.002	1.24390	-.00009	.030
3	7489216		1.244	.004	1.24380	-.00012	.030
3	7489218		1.244	.008 AND UP	1.24360	-.00030	.030
3	7489220		1.245	.0005	1.24500	-.00006	.030
3	7489222		1.245	.002	1.24490	-.00009	.030
3	7489223		1.245	.004	1.24480	-.00012	.030
3	7489225		1.245	.008 AND UP	1.24460	-.00030	.030
3	7489227		1.246	.0005	1.24600	-.00006	.030
3	7489229		1.246	.002	1.24590	-.00009	.030
3	7489230		1.246	.004	1.24580	-.00012	.030
3	7489232		1.246	.008 AND UP	1.24560	-.00030	.030
3	7489234		1.247	.0005	1.24700	-.00006	.030
3	7489236		1.247	.002	1.24690	-.00009	.030
3	7489237		1.247	.004	1.24680	-.00012	.030
3	7489239		1.247	.008 AND UP	1.24660	-.00030	.030
3	7489241		1.248	.0005	1.24800	-.00006	.030
3	7489243		1.248	.002	1.24790	-.00009	.030
3	7489244		1.248	.004	1.24780	-.00012	.030
3	7489246		1.248	.008 AND UP	1.24760	-.00030	.030
3	7489248		1.249	.0005	1.24900	-.00006	.030
3	7489250		1.249	.002	1.24890	-.00009	.030
3	7489251		1.249	.004	1.24880	-.00012	.030
3	7489253		1.249	.008 AND UP	1.24860	-.00030	.030
3	7489255		1.250	.0005	1.25000	-.00006	.030
3	7489257		1.250	.002	1.24990	-.00009	.030
3	7489258		1.250	.004	1.24980	-.00012	.030
3	7489260		1.250	.008 AND UP	1.24960	-.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	
A	B	C	D					
7489262	7489264	7489265	7489267	1.251	.0005	1.25100	-.00006	.030 4
				1.251	.002	1.25090	-.00009	.030 4
				1.251	.004	1.25080	-.00012	.030 8
				1.251	.008 AND UP	1.25060	-.00030	.030 8
7489269	7489271	7489272	7489274	1.252	.0005	1.25200	-.00006	.030 4
				1.252	.002	1.25190	-.00009	.030 4
				1.252	.004	1.25180	-.00012	.030 8
				1.252	.008 AND UP	1.25160	-.00030	.030 8
7489276	7489278	7489279	7489281	1.253	.0005	1.25300	-.00006	.030 4
				1.253	.002	1.25290	-.00009	.030 4
				1.253	.004	1.25280	-.00012	.030 8
				1.253	.008 AND UP	1.25260	-.00030	.030 8
7489283	7489285	7489286	7489288	1.254	.0005	1.25400	-.00006	.030 4
				1.254	.002	1.25390	-.00009	.030 4
				1.254	.004	1.25380	-.00012	.030 8
				1.254	.008 AND UP	1.25360	-.00030	.030 8
7489290	7489292	7489293	7489295	1.255	.0005	1.25500	-.00006	.030 4
				1.255	.002	1.25490	-.00009	.030 4
				1.255	.004	1.25480	-.00012	.030 8
				1.255	.008 AND UP	1.25460	-.00030	.030 8
7489297	7489299	7489300	7489302	1.256	.0005	1.25600	-.00006	.030 4
				1.256	.002	1.25590	-.00009	.030 4
				1.256	.004	1.25580	-.00012	.030 8
				1.256	.008 AND UP	1.25560	-.00030	.030 8
7489304	7489306	7489307	7489309	1.257	.0005	1.25700	-.00006	.030 4
				1.257	.002	1.25690	-.00009	.030 4
				1.257	.004	1.25680	-.00012	.030 8
				1.257	.008 AND UP	1.25660	-.00030	.030 8

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA. E	F	G	
A	B	C	D	E	F	G	H
7489311	1.258	.0005	1.2580 - .0006	.030	4		
7489313	1.258	.002	1.25790 - .0009	.030	4		
7489314	1.258	.004	1.25780 - .0012	.030	8		
7489316	1.258	.008 AND UP	1.25760 - .00030	.030	8		
7489318	1.259	.0005	1.25900 - .0006	.030	4		
7489320	1.259	.002	1.25890 - .0009	.030	4		
7489321	1.259	.004	1.25880 - .0012	.030	8		
7489323	1.259	.008 AND UP	1.25860 - .00030	.030	8		
7489325	1.260	.0005	1.26000 - .0006	.030	4		
7489327	1.260	.002	1.25990 - .0009	.030	4		
7489328	1.260	.004	1.25980 - .0012	.030	8		
7489330	1.260	.008 AND UP	1.25960 - .00030	.030	8		
7489332	1.261	.0005	1.26100 - .0006	.030	4		
7489334	1.261	.002	1.26090 - .0009	.030	4		
7489335	1.261	.004	1.26080 - .0012	.030	8		
7489337	1.261	.008 AND UP	1.26060 - .00030	.030	8		
7489339	1.262	.0005	1.26200 - .0006	.030	4		
7489341	1.262	.002	1.26190 - .0009	.030	4		
7489342	1.262	.004	1.26180 - .0012	.030	8		
7489344	1.262	.008 AND UP	1.26160 - .00030	.030	8		
7489346	1.263	.0005	1.26300 - .0006	.030	4		
7489348	1.263	.002	1.26290 - .0009	.030	4		
7489349	1.263	.004	1.26280 - .0012	.030	8		
7489351	1.263	.008 AND UP	1.26260 - .00030	.030	8		
7489353	1.264	.0005	1.26400 - .0006	.030	4		
7489355	1.264	.002	1.26390 - .0009	.030	4		
7489356	1.264	.004	1.26380 - .0012	.030	8		
7489358	1.264	.008 AND UP	1.26360 - .00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	
A	B	C	D					H	
3	7489360			1.265	.0005	1.26500	-.00006	.030	4
3	7489362			1.265	.002	1.26490	-.00009	.030	4
3	7489363			1.265	.004	1.26480	-.00012	.030	4
3	7489365			1.265	.008 AND UP	1.26460	-.00030	.030	4
3	7489367			1.266	.0005	1.26600	-.00006	.030	4
3	7489369			1.266	.002	1.26590	-.00009	.030	4
3	7489370			1.266	.004	1.26580	-.00012	.030	4
3	7489372			1.266	.008 AND UP	1.26560	-.00030	.030	4
3	7489374			1.267	.0005	1.26700	-.00006	.030	4
3	7489376			1.267	.002	1.26690	-.00009	.030	4
3	7489377			1.267	.004	1.26680	-.00012	.030	4
3	7489379			1.267	.008 AND UP	1.26660	-.00030	.030	4
3	7489381			1.268	.0005	1.26800	-.00006	.030	4
3	7489383			1.268	.002	1.26790	-.00009	.030	4
3	7489384			1.268	.004	1.26780	-.00012	.030	4
3	7489386			1.268	.008 AND UP	1.26760	-.00030	.030	4
3	7489388			1.269	.0005	1.26900	-.00006	.030	4
3	7489390			1.269	.002	1.26890	-.00009	.030	4
3	7489391			1.269	.004	1.26880	-.00012	.030	4
3	7489393			1.269	.008 AND UP	1.26860	-.00030	.030	4
3	7489395			1.270	.0005	1.27000	-.00006	.030	4
3	7489397			1.270	.002	1.26990	-.00009	.030	4
3	7489398			1.270	.004	1.26980	-.00012	.030	4
3	7489400			1.270	.008 AND UP	1.26960	-.00030	.030	4
3	7489402			1.271	.0005	1.27100	-.00006	.030	4
3	7489404			1.271	.002	1.27090	-.00009	.030	4
3	7489405			1.271	.004	1.27080	-.00012	.030	4
3	7489407			1.271	.008 AND UP	1.27060	-.00030	.030	4

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FINN—GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
7489409			1.272	.0005	1.27200	-.00006	.030
7489411			1.272	.002	1.27190	-.00009	.030
7489412			1.272	.004	1.27180	-.00012	.030
7489414			1.272	.008 AND UP	1.27160	-.00030	.030
7489416			1.273	.0005	1.27300	-.00006	.030
7489418			1.273	.002	1.27290	-.00009	.030
7489419			1.273	.004	1.27280	-.00012	.030
7489421			1.273	.008 AND UP	1.27260	-.00030	.030
7489423			1.274	.0005	1.27400	-.00006	.030
7489425			1.274	.002	1.27390	-.00009	.030
7489426			1.274	.004	1.27380	-.00012	.030
7489428			1.274	.008 AND UP	1.27360	-.00030	.030
7489430			1.275	.0005	1.27500	-.00006	.030
7489432			1.275	.002	1.27490	-.00009	.030
7489433			1.275	.004	1.27480	-.00012	.030
7489435			1.275	.008 AND UP	1.27460	-.00030	.030
7489437			1.276	.0005	1.27600	-.00006	.030
7489439			1.276	.002	1.27590	-.00009	.030
7489440			1.276	.004	1.27580	-.00012	.030
7489442			1.276	.008 AND UP	1.27560	-.00030	.030
7489444			1.277	.0005	1.27700	-.00006	.030
7489446			1.277	.002	1.27690	-.00009	.030
7489447			1.277	.004	1.27680	-.00012	.030
7489449			1.277	.008 AND UP	1.27660	-.00030	.030
7489451			1.278	.0005	1.27800	-.00006	.030
7489453			1.278	.002	1.27790	-.00009	.030
7489454			1.278	.004	1.27780	-.00012	.030
7489456			1.278	.008 AND UP	1.27760	-.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

F.I.D. NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		CHANGER	H
	FIN.—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F		
A	B	C	D					
3	7489458		1.279	.0005	1.27900	-.00006	.030	4 4 8 8 8
	7489460		1.279	.002	1.27890	-.00009	.030	
	7489461		1.279	.004	1.27880	-.00012	.030	
	7489463		1.279	.008 AND UP	1.27860	-.00030	.030	
	7489465		1.280	.0005	1.28000	-.00006	.030	4 4 8 8 8
	7489467		1.280	.002	1.27990	-.00009	.030	
	7489468		1.280	.004	1.27980	-.00012	.030	
	7489470		1.280	.008 AND UP	1.27960	-.00030	.030	4 4 8 8 8
	7489472		1.281	.0005	1.28100	-.00006	.030	
	7489474		1.281	.002	1.28090	-.00009	.030	4 4 8 8 8
	7489475		1.281	.004	1.28080	-.00012	.030	
	7489477		1.281	.008 AND UP	1.28060	-.00030	.030	4 4 8 8 8
3	7489479		1.28125	.0005 AND UP	1.28125	-.00006	.030	4
	7489480		1.282	.0005	1.28200	-.00006	.030	4 4 8 8 8
	7489482		1.282	.002	1.28190	-.00009	.030	
	7489483		1.282	.004	1.28180	-.00012	.030	
	7489485		1.282	.008 AND UP	1.28160	-.00030	.030	
	7489487		1.283	.0005	1.28300	-.00006	.030	4 4 8 8 8
	7489489		1.283	.002	1.28290	-.00009	.030	
	7489490		1.283	.004	1.28280	-.00012	.030	
	7489492		1.283	.008 AND UP	1.28260	-.00030	.030	4 4 8 8 8
	7489494		1.284	.0005	1.28400	-.00006	.030	
	7489496		1.284	.002	1.28390	-.00009	.030	4 4 8 8 8
	7489497		1.284	.004	1.28380	-.00012	.030	
	7489499		1.284	.008 AND UP	1.28360	-.00030	.030	4 4 8 8 8
	7489501		1.285	.0005	1.28500	-.00006	.030	
	7489503		1.285	.002	1.28490	-.00009	.030	4 4 8 8 8
	7489504		1.285	.004	1.28480	-.00012	.030	
	7489506		1.285	.008 AND UP	1.28460	-.00020	.030	4 4 8 8 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ITEM NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		CHAMFER
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	COMPONENT TOLERANCE	DIA. D	E	F	G	
A	B	C					H	
3	7489508	1.286	.0005	1.28600	-.00006	.00006	.030	4
3	7489510	1.286	.002	1.28590	-.00009	.00009	.030	4
3	7489511	1.286	.004	1.28580	-.00012	.00012	.030	8
3	7489513	1.286	.008 AND UP	1.28560	-.00030	.00030	.030	8
3	7489515	1.287	.0005	1.28700	-.00006	.00006	.030	4
3	7489517	1.287	.002	1.28690	-.00009	.00009	.030	4
3	7489518	1.287	.004	1.28680	-.00012	.00012	.030	8
3	7489520	1.287	.008 AND UP	1.28660	-.00030	.00030	.030	8
3	7489522	1.288	.0005	1.28800	-.00006	.00006	.030	4
3	7489524	1.288	.002	1.28790	-.00009	.00009	.030	4
3	7489525	1.288	.004	1.28780	-.00012	.00012	.030	8
3	7489527	1.288	.008 AND UP	1.28760	-.00030	.00030	.030	8
3	7489529	1.289	.0005	1.28900	-.00006	.00006	.030	4
3	7489531	1.289	.002	1.28890	-.00009	.00009	.030	4
3	7489532	1.289	.004	1.28880	-.00012	.00012	.030	8
3	7489534	1.289	.008 AND UP	1.28860	-.00030	.00030	.030	8
3	7489536	1.290	.0005	1.29000	-.00006	.00006	.030	4
3	7489538	1.290	.002	1.28990	-.00009	.00009	.030	4
3	7489539	1.290	.004	1.28980	-.00012	.00012	.030	8
3	7489541	1.290	.008 AND UP	1.28960	-.00030	.00030	.030	8
3	7489543	1.291	.0005	1.29100	-.00006	.00006	.030	4
3	7489545	1.291	.002	1.29090	-.00009	.00009	.030	4
3	7489546	1.291	.004	1.29080	-.00012	.00012	.030	8
3	7489548	1.291	.008 AND UP	1.29060	-.00030	.00030	.030	8
3	7489550	1.292	.0005	1.29200	-.00006	.00006	.030	4
3	7489552	1.292	.002	1.29190	-.00009	.00009	.030	4
3	7489553	1.292	.004	1.29180	-.00012	.00012	.030	8
3	7489555	1.292	.008 AND UP	1.29160	-.00030	.00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

RING NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FIN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
RING GAGE	ACCEPTANCE CHECK									
A	B	C	D	E	F	G	H			
3	7489557		1.293	.0005	1.29300	-.00006	.030	4		
3	7489559		1.293	.002	1.29290	-.00009	.030	4		
3	7489560		1.293	.004	1.29280	-.00012	.030	8		
3	7489562		1.293	.008 AND UP	1.29260	-.00030	.030	8		
3	7489564		1.294	.0005	1.29400	-.00006	.030	4		
3	7489566		1.294	.002	1.29390	-.00009	.030	4		
3	7489567		1.294	.004	1.29380	-.00012	.030	8		
3	7489569		1.294	.008 AND UP	1.29360	-.00030	.030	8		
3	7489571		1.295	.0005	1.29500	-.00006	.030	4		
3	7489573		1.295	.002	1.29490	-.00009	.030	4		
3	7489574		1.295	.004	1.29480	-.00012	.030	8		
3	7489576		1.295	.008 AND UP	1.29460	-.00030	.030	8		
3	7489578		1.296	.0005	1.29600	-.00006	.030	4		
3	7489580		1.296	.002	1.29590	-.00009	.030	4		
3	7489581		1.296	.004	1.29580	-.00012	.030	8		
3	7489583		1.296	.008 AND UP	1.29560	-.00030	.030	8		
3	7489585		1.297	.0005	1.29700	-.00006	.030	4		
3	7489587		1.297	.002	1.29690	-.00009	.030	4		
3	7489588		1.297	.004	1.29680	-.00012	.030	8		
3	7489590		1.297	.008 AND UP	1.29660	-.00030	.030	8		
3	7489592		1.298	.0005	1.29800	-.00006	.030	4		
3	7489594		1.298	.002	1.29790	-.00009	.030	4		
3	7489595		1.298	.004	1.29780	-.00012	.030	8		
3	7489597		1.298	.008 AND UP	1.29760	-.00030	.030	8		
3	7489599		1.299	.0005	1.29900	-.00006	.030	4		
3	7489601		1.299	.002	1.29890	-.00009	.030	4		
3	7489602		1.299	.004	1.29880	-.00012	.030	8		
3	7489604		1.299	.008 AND UP	1.29860	-.00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FINISH NO. 915	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			H	
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION		E	DIAMETER		G				
		A	B	C	D	F					
3	7489606	1.300	.0005	1.30000	-	.00006	.030	4	4	4	
3	7489608	1.300	.0002	1.29990	-	.00009	.030	4	4	4	
3	7489609	1.300	.0004	1.29980	-	.00012	.030	4	4	4	
3	7489611	1.300	.0008 AND UP	1.29960	-	.00030	.030	4	4	4	
3	7489613	1.301	.0005	1.30100	-	.00006	.030	4	4	4	
3	7489615	1.301	.0002	1.30090	-	.00009	.030	4	4	4	
3	7489616	1.301	.0004	1.30080	-	.00012	.030	4	4	4	
3	7489618	1.301	.0008 AND UP	1.30060	-	.00030	.030	4	4	4	
3	7489620	1.302	.0005	1.30200	-	.00006	.030	4	4	4	
3	7489622	1.302	.0002	1.30190	-	.00009	.030	4	4	4	
3	7489623	1.302	.0004	1.30180	-	.00012	.030	4	4	4	
3	7489625	1.302	.0008 AND UP	1.30160	-	.00030	.030	4	4	4	
3	7489627	1.303	.0005	1.30300	-	.00006	.030	4	4	4	
3	7489629	1.303	.0002	1.30290	-	.00009	.030	4	4	4	
3	7489630	1.303	.0004	1.30280	-	.00012	.030	4	4	4	
3	7489632	1.303	.0008 AND UP	1.30260	-	.00030	.030	4	4	4	
3	7489634	1.304	.0005	1.30400	-	.00006	.030	4	4	4	
3	7489636	1.304	.0002	1.30390	-	.00009	.030	4	4	4	
3	7489637	1.304	.0004	1.30380	-	.00012	.030	4	4	4	
3	7489639	1.304	.0008 AND UP	1.30360	-	.00030	.030	4	4	4	
3	7489641	1.305	.0005	1.30500	-	.00006	.030	4	4	4	
3	7489643	1.305	.0002	1.30490	-	.00009	.030	4	4	4	
3	7489644	1.305	.0004	1.30480	-	.00012	.030	4	4	4	
3	7489646	1.305	.0008 AND UP	1.30460	-	.00030	.030	4	4	4	
3	7489648	1.306	.0005	1.30600	-	.00006	.030	4	4	4	
3	7489650	1.306	.0002	1.30590	-	.00009	.030	4	4	4	
3	7489651	1.306	.0004	1.30580	-	.00012	.030	4	4	4	
3	7489653	1.306	.0008 AND UP	1.30560	-	.00030	.030	4	4	4	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS				FINISH
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION		TOTAL COMPONENT TOLERANCE	DIAMETER	F	G	
		C	D	E				
7489655	7489655	1.307	.0005	1.30700	-.00006	.030	4	
7489657	7489657	1.307	.002	1.30690	-.00009	.030	4	
7489658	7489660	1.307	.004	1.30680	-.00012	.030	8	
7489660		1.307	.008 AND UP	1.30660	-.00030	.030	8	
7489662		1.308	.0005	1.30800	-.00006	.030	4	
7489664		1.308	.002	1.30790	-.00009	.030	4	
7489665		1.308	.004	1.30780	-.00012	.030	8	
7489667		1.308	.008 AND UP	1.30760	-.00030	.030	8	
7489669		1.309	.0005	1.30900	-.00006	.030	4	
7489671		1.309	.002	1.30890	-.00009	.030	4	
7489672		1.309	.004	1.30880	-.00012	.030	8	
7489674		1.309	.008 AND UP	1.30860	-.00030	.030	8	
7489676		1.310	.0005	1.31000	-.00006	.030	4	
7489678		1.310	.002	1.30990	-.00009	.030	4	
7489679		1.310	.004	1.30980	-.00012	.030	8	
7489681		1.310	.008 AND UP	1.30960	-.00030	.030	8	
7489683		1.311	.0005	1.31100	-.00006	.030	4	
7489685		1.311	.002	1.31090	-.00009	.030	4	
7489686		1.311	.004	1.31080	-.00012	.030	8	
7489688		1.311	.008 AND UP	1.31060	-.00030	.030		
7489690		1.312	.0005	1.31200	-.00006	.030	4	
7489692		1.312	.002	1.31190	-.00009	.030	4	
7489693		1.312	.004	1.31180	-.00012	.030	8	
7489695		1.312	.008 AND UP	1.31160	-.00030	.030		
7489697		1.3125	.0005 AND UP	1.31250	-.00006	.030	4	
7489698		1.313	.0005	1.31300	-.00006	.030	4	
7489700		1.313	.002	1.31290	-.00009	.030	4	
7489701		1.313	.004	1.31280	-.00012	.030	8	
7489703		1.313	.008 AND UP	1.31260	-.00030	.030		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

NO. ON FIG.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G			
A	B	C						H	
3	7489705	1.314	.0005	1.31400	-.00006	.030	4		
3	7489707	1.314	.002	1.31390	-.00009	.030	4		
3	7489708	1.314	.004	1.31380	-.00012	.030	8		
3	7489710	1.314	.008 AND UP	1.31360	-.00030	.030	4		
3	7489712	1.315	.0005	1.31500	-.00006	.030	4		
3	7489714	1.315	.002	1.31490	-.00009	.030	4		
3	7489715	1.315	.004	1.31480	-.00012	.030	8		
3	7489717	1.315	.008 AND UP	1.31460	-.00030	.030	8		
3	7489719	1.316	.0005	1.31600	-.00006	.030	4		
3	7489721	1.316	.002	1.31590	-.00009	.030	4		
3	7489722	1.316	.004	1.31580	-.00012	.030	8		
3	7489724	1.316	.008 AND UP	1.31560	-.00030	.030	8		
3	7489726	1.317	.0005	1.31700	-.00006	.030	4		
3	7489728	1.317	.002	1.31690	-.00009	.030	4		
3	7489729	1.317	.004	1.31680	-.00012	.030	8		
3	7489731	1.317	.008 AND UP	1.31660	-.00030	.030	8		
3	7489733	1.318	.0005	1.31800	-.00006	.030	4		
3	7489735	1.318	.002	1.31790	-.00009	.030	4		
3	7489736	1.318	.004	1.31780	-.00012	.030	8		
3	7489738	1.318	.008 AND UP	1.31760	-.00030	.030	8		
3	7489740	1.319	.0005	1.31900	-.00006	.030	4		
3	7489742	1.319	.002	1.31890	-.00009	.030	4		
3	7489743	1.319	.004	1.31880	-.00012	.030	8		
3	7489745	1.319	.008 AND UP	1.31860	-.00030	.030	8		
3	7489747	1.320	.0005	1.32000	-.00006	.030	4		
3	7489749	1.320	.002	1.31990	-.00009	.030	4		
3	7489750	1.320	.004	1.31980	-.00012	.030	8		
3	7489752	1.320	.008 AND UP	1.31960	-.00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FINN-GAGE RING GAGE	STOCK NO.	MAXIMUM ACCEPTANCE DIMENSION	DIA.	E	F	G	H	
A	B	C	D						
3	7489754			1.321	.0005	1.32100 - .00006	.030	4	
	7489756			1.321	.002	1.32090 - .00009	.030	4	
	7489757			1.321	.004	1.32080 - .00012	.030	3	
	7489759			1.321	.008 AND UP	1.32060 - .00030	.030	8	
	7489761			1.322	.0005	1.32200 - .00006	.030	4	
	7489763			1.322	.002	1.32190 - .00009	.030	4	
	7489764			1.322	.004	1.32180 - .00012	.030	8	
	7489766			1.322	.008 AND UP	1.32160 - .00030	.030	8	
	7489768			1.323	.0005	1.32300 - .00006	.030	4	
	7489770			1.323	.002	1.32290 - .00009	.030	4	
	7489771			1.323	.004	1.32280 - .00012	.030	8	
	7489773			1.323	.008 AND UP	1.32260 - .00030	.030	8	
	7489775			1.324	.0005	1.32400 - .00006	.030	4	
	7489777			1.324	.002	1.32390 - .00009	.030	4	
	7489778			1.324	.004	1.32380 - .00012	.030	8	
	7489780			1.324	.008 AND UP	1.32360 - .00030	.030	8	
	7489782			1.325	.0005	1.32500 - .00006	.030	4	
	7489784			1.325	.002	1.32490 - .00009	.030	4	
	7489785			1.325	.004	1.32480 - .00012	.030	8	
	7489787			1.325	.008 AND UP	1.32460 - .00030	.030	8	
	7489789			1.326	.0005	1.32600 - .00006	.030	4	
	7489791			1.326	.002	1.32590 - .00009	.030	4	
	7489792			1.326	.004	1.32580 - .00012	.030	8	
	7489794			1.326	.008 AND UP	1.32560 - .00030	.030	8	
	7489796			1.327	.0005	1.32700 - .00006	.030	4	
	7489798			1.327	.002	1.32690 - .00009	.030	4	
	7489799			1.327	.004	1.32680 - .00012	.030	8	
	7489801			1.327	.008 AND UP	1.32660 - .00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ITEM NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	RING GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C							
7489803			1.328	.0005	1.32800	-.00006	.030	4	
7489805			1.328	.002	1.32790	-.00009	.030	4	
7489806			1.328	.004	1.32780	-.00012	.030	8	
7489808			1.328	.008 AND UP	1.32760	-.00030	.030	8	
7489810			1.329	.0005	1.32900	-.00006	.030	4	
7489812			1.329	.002	1.32890	-.00009	.030	4	
7489813			1.329	.004	1.32880	-.00012	.030	8	
7489815			1.329	.008 AND UP	1.32860	-.00030	.030	8	
7489817			1.330	.0005	1.33000	-.00006	.030	4	
7489819			1.330	.002	1.32990	-.00009	.030	4	
7489820			1.330	.004	1.32980	-.00012	.030	8	
7489822			1.330	.008 AND UP	1.32960	-.00030	.030	8	
7489824			1.331	.0005	1.33100	-.00006	.030	4	
7489826			1.331	.002	1.33090	-.00009	.030	4	
7489827			1.331	.004	1.33080	-.00012	.030	8	
7489829			1.331	.008 AND UP	1.33060	-.00030	.030	8	
7489831			1.332	.0005	1.33200	-.00006	.030	4	
7489833			1.332	.002	1.33190	-.00009	.030	4	
7489834			1.332	.004	1.33180	-.00012	.030	8	
7489836			1.332	.008 AND UP	1.33160	-.00030	.030	8	
7489838			1.333	.0005	1.33300	-.00006	.030	4	
7489840			1.333	.002	1.33290	-.00009	.030	4	
7489841			1.333	.004	1.33280	-.00012	.030	8	
7489843			1.333	.008 AND UP	1.33260	-.00030	.030	8	
7489845			1.334	.0005	1.33400	-.00006	.030	4	
7489847			1.334	.002	1.33390	-.00009	.030	4	
7489848			1.334	.004	1.33380	-.00012	.030	8	
7489850			1.334	.008 AND UP	1.33360	-.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	RING GAGE	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA.	E	F	G	H		
A	B	C	D							
3	7489852		1.335	.0005	1.33500	-.00006	.030	4		
3	7489854		1.335	.002	1.33490	-.00009	.030	4		
3	7489855		1.335	.004	1.33480	-.00012	.030	4		
3	7489857		1.335	.008 AND UP	1.33460	-.00030	.030	4		
3	7489859		1.336	.0005	1.33600	-.00006	.030	4		
3	7489861		1.336	.002	1.33590	-.00009	.030	4		
3	7489862		1.336	.004	1.33580	-.00012	.030	4		
3	7489864		1.336	.008 AND UP	1.33560	-.00030	.030	4		
3	7489866		1.337	.0005	1.33700	-.00006	.030	4		
3	7489868		1.337	.002	1.33690	-.00009	.030	4		
3	7489869		1.337	.004	1.33680	-.00012	.030	4		
3	7489871		1.337	.008 AND UP	1.33660	-.00030	.030	4		
3	7489873		1.338	.0005	1.33800	-.00006	.030	4		
3	7489875		1.338	.002	1.33790	-.00009	.030	4		
3	7489876		1.338	.004	1.33780	-.00012	.030	4		
3	7489878		1.338	.008 AND UP	1.33760	-.00030	.030	4		
3	7489880		1.339	.0005	1.33900	-.00006	.030	4		
3	7489882		1.339	.002	1.33890	-.00009	.030	4		
3	7489883		1.339	.004	1.33880	-.00012	.030	4		
3	7489885		1.339	.008 AND UP	1.33860	-.00030	.030	4		
3	7489887		1.340	.0005	1.34000	-.00006	.030	4		
3	7489889		1.340	.002	1.33990	-.00009	.030	4		
3	7489890		1.340	.004	1.33980	-.00012	.030	4		
3	7489892		1.340	.008 AND UP	1.33960	-.00030	.030	4		
3	7489894		1.341	.0005	1.34100	-.00006	.030	4		
3	7489896		1.341	.002	1.34090	-.00009	.030	4		
3	7489897		1.341	.004	1.34080	-.00012	.030	4		
3	7489899		1.341	.008 AND UP	1.34060	-.00030	.030	4		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	
A	B	C	D	E	F	G	H
3	7489901		1.34.2	.0005	1.34.200	-.00006	.030
3	7489903		1.34.2	.002	1.34.190	-.00009	.030
3	7489904		1.34.2	.004	1.34.180	-.00012	.030
3	7489906		1.34.2	.008 AND UP	1.34.160	-.00030	.030
3	7489908		1.34.3	.0005	1.34.300	-.00006	.030
3	7489910		1.34.3	.002	1.34.290	-.00009	.030
3	7489911		1.34.3	.004	1.34.280	-.00012	.030
3	7489913		1.34.3	.008 AND UP	1.34.260	-.00030	.030
2	7489915		1.34.375	.0005 AND UP	1.34.375	-.00006	.030
2	7489916		1.34.4	.0005	1.34.400	-.00006	.030
2	7489918		1.34.4	.002	1.34.390	-.00009	.030
2	7489919		1.34.4	.004	1.34.380	-.00012	.030
2	7489921		1.34.4	.008 AND UP	1.34.360	-.00030	.030
3	7489923		1.34.5	.0005	1.34.500	-.00006	.030
3	7489925		1.34.5	.002	1.34.490	-.00009	.030
3	7489926		1.34.5	.004	1.34.480	-.00012	.030
3	7489928		1.34.5	.008 AND UP	1.34.460	-.00030	.030
3	7489930		1.34.6	.0005	1.34.600	-.00006	.030
3	7489932		1.34.6	.002	1.34.590	-.00009	.030
3	7489933		1.34.6	.004	1.34.580	-.00012	.030
3	7489935		1.34.6	.008 AND UP	1.34.560	-.00030	.030
3	7489937		1.34.7	.0005	1.34.700	-.00006	.030
3	7489939		1.34.7	.002	1.34.690	-.00009	.030
3	7489940		1.34.7	.004	1.34.680	-.00012	.030
3	7489942		1.34.7	.008 AND UP	1.34.660	-.00030	.030
3	7489944		1.34.8	.0005	1.34.800	-.00006	.030
3	7489946		1.34.8	.002	1.34.790	-.00009	.030
3	7489947		1.34.8	.004	1.34.780	-.00012	.030
3	7489949		1.34.8	.008 AND UP	1.34.760	-.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	FIN - GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	ACCEPTANCE CHECK	D	E	F	G	H	
A	B	C							
7489951	7489953	7489954	7489956	1.349	.0005	1.34900	-.00006	.030	4
				1.349	.002	1.34890	-.00009	.030	4
				1.349	.004	1.34880	-.00012	.030	8
				1.349	.008 AND UP	1.34860	-.00030	.030	8
7489958	7489960	7489961	7489963	1.350	.0005	1.35000	-.00006	.030	4
				1.350	.002	1.34990	-.00009	.030	4
				1.350	.004	1.34980	-.00012	.030	8
				1.350	.008 AND UP	1.34960	-.00030	.030	8
7489965	7489967	7489968	7489970	1.351	.0005	1.35100	-.00006	.030	4
				1.351	.002	1.35090	-.00009	.030	4
				1.351	.004	1.35080	-.00012	.030	8
				1.351	.008 AND UP	1.35060	-.00030	.030	8
7489972	7489974	7489975	7489977	1.352	.0005	1.35200	-.00006	.030	4
				1.352	.002	1.35190	-.00009	.030	4
				1.352	.004	1.35180	-.00012	.030	8
				1.352	.008 AND UP	1.35160	-.00030	.030	8
7489979	7489981	7489982	7489984	1.353	.0005	1.35300	-.00006	.030	4
				1.353	.002	1.35290	-.00009	.030	4
				1.353	.004	1.35280	-.00012	.030	8
				1.353	.008 AND UP	1.35260	-.00030	.030	8
7489986	7489988	7489989	7489991	1.354	.0005	1.35400	-.00006	.030	4
				1.354	.002	1.35390	-.00009	.030	4
				1.354	.004	1.35380	-.00012	.030	8
				1.354	.008 AND UP	1.35360	-.00030	.030	8
7489993	7489995	7489996	7489998	1.355	.0005	1.35500	-.00006	.030	4
				1.355	.002	1.35490	-.00009	.030	4
				1.355	.004	1.35480	-.00012	.030	8
				1.355	.008 AND UP	1.35460	-.00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN.— RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIA. E	F	G	
A	B	C	D	E	F	G	H	
3 mm m	74900000		1.356	.0005	1.35600	-.00006	.030	4
3 mm m	74900002		1.356	.002	1.35590	-.00009	.030	4
3 mm m	74900003		1.356	.004	1.35580	-.00012	.030	8
3 mm m	74900005		1.356	.008 AND UP	1.35560	-.00030	.030	8
3 mm m	74900007		1.357	.0005	1.35700	-.00006	.030	4
3 mm m	74900009		1.357	.002	1.35690	-.00009	.030	4
3 mm m	74900010		1.357	.004	1.35680	-.00012	.030	8
3 mm m	74900012		1.357	.008 AND UP	1.35660	-.00030	.030	8
3 mm m	74900014		1.358	.0005	1.35800	-.00006	.030	4
3 mm m	74900016		1.358	.002	1.35790	-.00009	.030	4
3 mm m	74900017		1.358	.004	1.35780	-.00012	.030	8
3 mm m	74900019		1.358	.008 AND UP	1.35760	-.00030	.030	8
3 mm m	74900021		1.359	.0005	1.35900	-.00006	.030	4
3 mm m	74900023		1.359	.002	1.35890	-.00009	.030	4
3 mm m	74900024		1.359	.004	1.35880	-.00012	.030	8
3 mm m	74900026		1.359	.008 AND UP	1.35860	-.00030	.030	8
3 mm m	74900028		1.360	.0005	1.36000	-.00006	.030	4
3 mm m	74900030		1.360	.002	1.35990	-.00009	.030	4
3 mm m	74900031		1.360	.004	1.35980	-.00012	.030	8
3 mm m	74900033		1.360	.008 AND UP	1.35960	-.00030	.030	8
3 mm m	74900035		1.361	.0005	1.36100	-.00006	.030	4
3 mm m	74900037		1.361	.002	1.36090	-.00009	.030	4
3 mm m	74900038		1.361	.004	1.36080	-.00012	.030	8
3 mm m	74900040		1.361	.008 AND UP	1.36060	-.00030	.030	8
3 mm m	74900042		1.362	.0005	1.36200	-.00006	.030	4
3 mm m	74900044		1.362	.002	1.36190	-.00009	.030	4
3 mm m	74900045		1.362	.004	1.36180	-.00012	.030	8
3 mm m	74900047		1.362	.008 AND UP	1.36160	-.00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE		RING GAGE		RING GAGE		FINISH	
	FIN-GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	G	H
A	B	C	D	E	F	G	H	
7490049	7490049		1.363	.0005	1.36300	-.00006	.030	4
7490051	7490051		1.363	.002	1.36290	-.00009	.030	4
7490052	7490052		1.363	.004	1.36280	-.00012	.030	8
7490054	7490054		1.363	.008 AND UP	1.36260	-.00030	.030	8
7490056	7490056		1.364	.0005	1.36400	-.00006	.030	4
7490058	7490058		1.364	.002	1.36390	-.00009	.030	4
7490059	7490059		1.364	.004	1.36380	-.00012	.030	8
7490061	7490061		1.364	.008 AND UP	1.36360	-.00030	.030	8
7490063	7490063		1.365	.0005	1.36500	-.00006	.030	4
7490065	7490065		1.365	.002	1.36490	-.00009	.030	4
7490066	7490066		1.365	.004	1.36480	-.00012	.030	8
7490068	7490068		1.365	.008 AND UP	1.36460	-.00030	.030	8
7490070	7490070		1.366	.0005	1.36600	-.00006	.030	4
7490072	7490072		1.366	.002	1.36590	-.00009	.030	4
7490073	7490073		1.366	.004	1.36580	-.00012	.030	8
7490075	7490075		1.366	.008 AND UP	1.36560	-.00030	.030	8
7490077	7490077		1.367	.0005	1.36700	-.00006	.030	4
7490079	7490079		1.367	.002	1.36690	-.00009	.030	4
7490080	7490080		1.367	.004	1.36680	-.00012	.030	8
7490082	7490082		1.367	.008 AND UP	1.36660	-.00030	.030	8
7490084	7490084		1.368	.0005	1.36800	-.00006	.030	4
7490086	7490086		1.368	.002	1.36790	-.00009	.030	4
7490087	7490087		1.368	.004	1.36780	-.00012	.030	8
7490089	7490089		1.368	.008 AND UP	1.36760	-.00030	.030	8
7490091	7490091		1.369	.0005	1.36900	-.00006	.030	4
7490093	7490093		1.369	.002	1.36890	-.00009	.030	4
7490094	7490094		1.369	.004	1.36880	-.00012	.030	8
7490096	7490096		1.369	.008 AND UP	1.36860	-.00030	.030	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

F.I.G. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER	
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIAMETER		G					
		B	C	D	E		F				
3	7490098	1.370	.0005	1.37000	-.00006	.030	4				
3	7490100	1.370	.002	1.36990	-.00009	.030	4				
3	7490101	1.370	.004	1.36980	-.00012	.030	8				
3	7490103	1.370	.008 AND UP	1.36960	-.00030	.030	8				
3	7490105	1.371	.0005	1.37100	-.00006	.030	4				
3	7490107	1.371	.002	1.37090	-.00009	.030	4				
3	7490108	1.371	.004	1.37080	-.00012	.030	8				
3	7490110	1.371	.008 AND UP	1.37060	-.00030	.030	8				
3	7490112	1.372	.0005	1.37200	-.00006	.030	4				
3	7490114	1.372	.002	1.37190	-.00009	.030	4				
3	7490115	1.372	.004	1.37180	-.00012	.030	8				
3	7490117	1.372	.008 AND UP	1.37160	-.00030	.030	8				
3	7490119	1.373	.0005	1.37300	-.00006	.030	4				
3	7490121	1.373	.002	1.37290	-.00009	.030	4				
3	7490122	1.373	.004	1.37280	-.00012	.030	8				
3	7490124	1.373	.008 AND UP	1.37260	-.00030	.030	8				
3	7490126	1.374	.0005	1.37400	-.00006	.030	4				
3	7490128	1.374	.002	1.37390	-.00009	.030	4				
3	7490129	1.374	.004	1.37380	-.00012	.030	8				
3	7490131	1.374	.008 AND UP	1.37360	-.00030	.030	8				
3	7490133	1.375	.0005	1.37500	-.00006	.030	4				
3	7490135	1.375	.002	1.37490	-.00009	.030	4				
3	7490136	1.375	.004	1.37480	-.00012	.030	8				
3	7490138	1.375	.008 AND UP	1.37460	-.00030	.030	8				
3	7490140	1.376	.0005	1.37600	-.00006	.030	4				
3	7490142	1.376	.002	1.37590	-.00009	.030	4				
3	7490143	1.376	.004	1.37580	-.00012	.030	8				
3	7490145	1.376	.008 AND UP	1.37560	-.00030	.030	8				

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
A	B	C								
33333	7490147		1.377	.0005	1.37700 - .00006	.030	4			
33333	7490149		1.377	.002	1.37690 - .00009	.030	4			
33333	7490150		1.377	.004	1.37680 - .00012	.030	8			
33333	7490152		1.377	.008 AND UP	1.37660 - .00030	.030	8			
33333	7490154		1.378	.0005	1.37800 - .00006	.030	4			
33333	7490156		1.378	.002	1.37790 - .00009	.030	4			
33333	7490157		1.378	.004	1.37780 - .00012	.030	8			
33333	7490159		1.378	.008 AND UP	1.37760 - .00030	.030	8			
33333	7490161		1.379	.0005	1.37900 - .00006	.030	4			
33333	7490163		1.379	.002	1.37890 - .00009	.030	4			
33333	7490164		1.379	.004	1.37880 - .00012	.030	8			
33333	7490166		1.379	.008 AND UP	1.37860 - .00030	.030	8			
33333	7490168		1.380	.0005	1.38000 - .00006	.030	4			
33333	7490170		1.380	.002	1.37990 - .00009	.030	4			
33333	7490171		1.380	.004	1.37980 - .00012	.030	8			
33333	7490173		1.380	.008 AND UP	1.37960 - .00030	.030	8			
33333	7490175		1.381	.0005	1.38100 - .00006	.030	4			
33333	7490177		1.381	.002	1.38090 - .00009	.030	4			
33333	7490178		1.381	.004	1.38080 - .00012	.030	8			
33333	7490180		1.381	.008 AND UP	1.38060 - .00030	.030	8			
33333	7490182		1.382	.0005	1.38200 - .00006	.030	4			
33333	7490184		1.382	.002	1.38190 - .00009	.030	4			
33333	7490185		1.382	.004	1.38180 - .00012	.030	8			
33333	7490187		1.382	.008 AND UP	1.38160 - .00030	.030	8			
33333	7490189		1.383	.0005	1.38200 - .00006	.030	4			
33333	7490191		1.383	.002	1.38290 - .00009	.030	4			
33333	7490192		1.383	.004	1.38280 - .00012	.030	8			
33333	7490194		1.383	.008 AND UP	1.38260 - .00030	.030	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	
A	B	C	D	E	F	G	H
33333	7490196			1.384	.0005	1.38400 - .00006	.030 4
33333	7490198			1.384	.002	1.38390 - .00009	.030 4
33333	7490199			1.384	.004 AND UP	1.38380 - .00012	.030 8
33333	7490201			1.384	.008	1.38360 - .00030	.030 8
33333	7490203			1.385	.0005	1.38500 - .00006	.030 4
33333	7490205			1.385	.002	1.38490 - .00009	.030 4
33333	7490206			1.385	.004	1.38480 - .00012	.030 8
33333	7490208			1.385	.008 AND UP	1.38460 - .00030	.030 8
33333	7490210			1.386	.0005	1.38600 - .00006	.030 4
33333	7490212			1.386	.002	1.38590 - .00009	.030 4
33333	7490213			1.386	.004	1.38580 - .00012	.030 8
33333	7490215			1.386	.008 AND UP	1.38560 - .00030	.030 8
33333	7490217			1.387	.0005	1.38700 - .00006	.030 4
33333	7490219			1.387	.002	1.38690 - .00009	.030 4
33333	7490220			1.387	.004	1.38680 - .00012	.030 8
33333	7490222			1.387	.008 AND UP	1.38660 - .00030	.030 8
33333	7490224			1.388	.0005	1.38800 - .00006	.030 4
33333	7490226			1.388	.002	1.38790 - .00009	.030 4
33333	7490227			1.388	.004	1.38780 - .00012	.030 8
33333	7490229			1.388	.008 AND UP	1.38760 - .00030	.030 8
33333	7490231			1.389	.0005	1.38900 - .00006	.030 4
33333	7490233			1.389	.002	1.38890 - .00009	.030 4
33333	7490234			1.389	.004	1.38880 - .00012	.030 8
33333	7490236			1.389	.008 AND UP	1.38860 - .00030	.030 8
33333	7490238			1.390	.0005	1.39000 - .00006	.030 4
33333	7490240			1.390	.002	1.38990 - .00009	.030 4
33333	7490241			1.390	.004	1.38980 - .00012	.030 8
33333	7490243			1.390	.008 AND UP	1.38960 - .00030	.030 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Deslan and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	FIN-GAGE STOCK NO.	RING GAGE	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C	D	E	F	G	H		
3	7490245		1.391	.0005	1.39100	-.00006	.030	4	
3	7490247		1.391	.002	1.39090	-.00009	.030	4	
3	7490248		1.391	.004	1.39080	-.00012	.030	4	
3	7490250		1.391	.008 AND UP	1.39060	-.00030	.030	8	
3	7490252		1.392	.0005	1.39200	-.00006	.030	4	
3	7490254		1.392	.002	1.39190	-.00009	.030	4	
3	7490255		1.392	.004	1.39180	-.00012	.030	8	
3	7490257		1.392	.008 AND UP	1.39160	-.00030	.030	8	
3	7490259		1.393	.0005	1.39300	-.00006	.030	4	
3	7490261		1.393	.002	1.39290	-.00009	.030	4	
3	7490262		1.393	.004	1.39280	-.00012	.030	8	
3	7490264		1.393	.008 AND UP	1.39260	-.00030	.030	8	
3	7490266		1.394	.0005	1.39400	-.00006	.030	4	
3	7490268		1.394	.002	1.39390	-.00009	.030	4	
3	7490269		1.394	.004	1.39380	-.00012	.030	8	
3	7490271		1.394	.008 AND UP	1.39360	-.00030	.030	8	
3	7490273		1.395	.0005	1.39500	-.00006	.030	4	
3	7490275		1.395	.002	1.39490	-.00009	.030	4	
3	7490276		1.395	.004	1.39480	-.00012	.030	8	
3	7490278		1.395	.008 AND UP	1.39460	-.00030	.030	8	
3	7490280		1.396	.0005	1.39600	-.00006	.030	4	
3	7490282		1.396	.002	1.39590	-.00009	.030	4	
3	7490283		1.396	.004	1.39580	-.00012	.030	8	
3	7490285		1.396	.008 AND UP	1.39560	-.00030	.030	8	
3	7490287		1.397	.0005	1.39700	-.00006	.030	4	
3	7490289		1.397	.002	1.39690	-.00009	.030	4	
3	7490290		1.397	.004	1.39680	-.00012	.030	8	
3	7490292		1.397	.008 AND UP	1.39660	-.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		CHAMFER	HSINIS
	RING GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
A	B	C	D	E	F	G	H			
7490294			1.398	.0005	1.39800	-.00006	.030	4		
7490296			1.398	.002	1.39790	-.00009	.030	4		
7490297			1.398	.004	1.39780	-.00012	.030	5		
7490299			1.398	.008 AND UP	1.39760	-.00030	.030	8		
7490301			1.399	.005	1.39900	-.00006	.030	4		
7490303			1.399	.002	1.39890	-.00009	.030	4		
7490304			1.399	.004	1.39880	-.00012	.030	8		
7490306			1.399	.008 AND UP	1.39860	-.00030	.030	8		
7490308			1.400	.0005	1.40000	-.00006	.030	4		
7490310			1.400	.002	1.39990	-.00009	.030	4		
7490311			1.400	.004	1.39980	-.00012	.030	8		
7490313			1.400	.008 AND UP	1.39960	-.00030	.030	8		
7490315			1.401	.0005	1.40100	-.00006	.030	4		
7490317			1.401	.002	1.40090	-.00009	.030	4		
7490318			1.401	.004	1.40080	-.00012	.030	8		
7490320			1.401	.008 AND UP	1.40060	-.00030	.030	8		
7490322			1.402	.0005	1.40200	-.00006	.030	4		
7490324			1.402	.002	1.40190	-.00009	.030	4		
7490325			1.402	.004	1.40180	-.00012	.030	8		
7490327			1.402	.008 AND UP	1.40160	-.00030	.030	8		
7490329			1.403	.0005	1.40300	-.00006	.030	4		
7490331			1.403	.002	1.40290	-.00009	.030	4		
7490332			1.403	.004	1.40280	-.00012	.030	8		
7490334			1.403	.008 AND UP	1.40260	-.00030	.030	8		
7490336			1.404	.0005	1.40400	-.00006	.030	4		
7490338			1.404	.002	1.40390	-.00009	.030	4		
7490339			1.404	.004	1.40380	-.00012	.030	8		
7490341			1.404	.008 AND UP	1.40360	-.00030	.030	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE		TOTAL		RING GAGE DIMENSIONS		FINISH
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM DIMENSION	COMPONENT TOLERANCE	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
3	7490343		1.405	.0005	1.40500	-.00006	.030
3	7490345		1.405	.002	1.40490	-.00009	.030
3	7490346		1.405	.004	1.40480	-.00012	.030
3	7490348		1.405	.008 AND UP	1.40460	-.00030	.030
3	7490350		1.406	.0005	1.40600	-.00006	.030
3	7490352		1.406	.002	1.40590	-.00009	.030
3	7490353		1.406	.004	1.40580	-.00012	.030
3	7490355		1.406	.008 AND UP	1.40560	-.00030	.030
3	7490357		1.40625	.0005 AND UP	1.40625	-.00006	.030
3	7490358		1.407	.0005	1.40700	-.00006	.030
3	7490360		1.407	.002	1.40690	-.00009	.030
3	7490361		1.407	.004	1.40680	-.00012	.030
3	7490363		1.407	.008 AND UP	1.40660	-.00030	.030
3	7490365		1.408	.0005	1.40800	-.00006	.030
3	7490367		1.408	.002	1.40790	-.00009	.030
3	7490368		1.408	.004	1.40780	-.00012	.030
3	7490370		1.408	.008 AND UP	1.40760	-.00030	.030
3	7490372		1.409	.0005	1.40900	-.00006	.030
3	7490374		1.409	.002	1.40890	-.00009	.030
3	7490375		1.409	.004	1.40880	-.00012	.030
3	7490377		1.409	.008 AND UP	1.40860	-.00030	.030
3	7490379		1.410	.0005	1.41000	-.00006	.030
3	7490381		1.410	.002	1.40990	-.00009	.030
3	7490382		1.410	.004	1.40980	-.00012	.030
3	7490384		1.410	.008 AND UP	1.40960	-.00030	.030
3	7490386		1.411	.0005	1.41100	-.00006	.030
3	7490388		1.411	.002	1.41090	-.00009	.030
3	7490389		1.411	.008 AND UP	1.41060	-.00030	.030
3	7490391						

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH	H
					D	E		
A	B	C						
3	7490393	7490395	1.412	.0005	1.41200	-.00006	.030	4 4 8 8
3	7490395	7490396	1.412	.002	1.41190	-.00009	.030	4 4 8 8
3	7490398	7490398	1.412	.004	1.41180	-.00012	.030	4 4 8 8
3	7490400	7490400	1.413	.0005	1.41300	-.00006	.030	4 4 8 8
3	7490402	7490403	1.413	.002	1.41290	-.00009	.030	4 4 8 8
3	7490403	7490405	1.413	.004	1.41280	-.00012	.030	4 4 8 8
3	7490405	7490405	1.413	.008 AND UP	1.41260	-.00030	.030	4 4 8 8
3	7490407	7490407	1.414	.0005	1.41400	-.00006	.030	4 4 8 8
3	7490409	7490410	1.414	.002	1.41390	-.00009	.030	4 4 8 8
3	7490410	7490412	1.414	.004	1.41380	-.00012	.030	4 4 8 8
3	7490412	7490412	1.414	.008 AND UP	1.41360	-.00030	.030	4 4 8 8
3	7490414	7490414	1.415	.0005	1.41500	-.00006	.030	4 4 8 8
3	7490416	7490416	1.415	.002	1.41490	-.00009	.030	4 4 8 8
3	7490417	7490417	1.415	.004	1.41480	-.00012	.030	4 4 8 8
3	7490419	7490419	1.415	.008 AND UP	1.41460	-.00030	.030	4 4 8 8
3	7490421	7490423	1.416	.0005	1.41600	-.00006	.030	4 4 8 8
3	7490423	7490424	1.416	.002	1.41590	-.00009	.030	4 4 8 8
3	7490424	7490426	1.416	.004	1.41580	-.00012	.030	4 4 8 8
3	7490426	7490428	1.416	.008 AND UP	1.41560	-.00030	.030	4 4 8 8
3	7490428	7490430	1.417	.0005	1.41700	-.00006	.030	4 4 8 8
3	7490430	7490431	1.417	.002	1.41690	-.00009	.030	4 4 8 8
3	7490431	7490433	1.417	.004	1.41680	-.00012	.030	4 4 8 8
3	7490433	7490435	1.417	.008 AND UP	1.41660	-.00030	.030	4 4 8 8
3	7490435	7490437	1.418	.0005	1.41800	-.00006	.030	4 4 8 8
3	7490437	7490438	1.418	.002	1.41790	-.00009	.030	4 4 8 8
3	7490438	7490440	1.418	.004	1.41780	-.00012	.030	4 4 8 8
3	7490440	7490442	1.418	.008 AND UP	1.41760	-.00030	.030	4 4 8 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH		
	FIN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	G	H	
A	B	C	D	E	F	G	H		
7490442	7490444	7490445	7490447	1.419 .002 .004 .008 AND UP	1.41900 1.41890 1.41880 1.41860	-.0006 .0009 .0012 .0030	.030 .030 .030 .030	4 4 4 8	
7490449	7490451	7490452	7490454	1.420 .002 .004 .008 AND UP	1.42000 1.41990 1.41980 1.41960	-.0006 .0009 .0012 .0030	.030 .030 .030 .030	4 4 4 8	
7490456	7490458	7490459	7490461	1.421 .002 .004 .008 AND UP	1.42100 1.42090 1.42080 1.42060	-.0006 .0009 .0012 .0030	.030 .030 .030 .030	4 4 4 8	
7490463	7490465	7490466	7490468	1.422 .002 .004 .008 AND UP	1.42200 1.42190 1.42180 1.42160	-.0006 .0009 .0012 .0030	.030 .030 .030 .030	4 4 4 8	
7490470	7490472	7490473	7490475	1.423 .002 .004 .008 AND UP	1.42300 1.42290 1.42280 1.42260	-.0006 .0009 .0012 .0030	.030 .030 .030 .030	4 4 4 8	
7490477	7490479	7490480	7490482	1.424 .002 .004 .008 AND UP	1.42400 1.42390 1.42380 1.42360	-.0006 .0009 .0012 .0030	.030 .030 .030 .030	4 4 4 8	
7490484	7490486	7490487	7490489	1.425 .002 .004 .008 AND UP	1.42500 1.42490 1.42480 1.42460	-.0006 .0009 .0012 .0030	.030 .030 .030 .030	4 4 4 8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER	
	RING GAGE	RING GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION			DIAMETER		F		
				B	C	D	E	F			
3	7490491			1.426	.0005		1.42600	-.00006	.030	4	
3	7490493			1.426	.002		1.42590	-.00009	.030	4	
3	7490494			1.426	.004	AND UP	1.42580	-.00012	.030	8	
3	7490496			1.426	.008	AND UP	1.42560	-.00030	.030	8	
3	7490498			1.427	.0005		1.42700	-.00006	.030	4	
3	7490500			1.427	.002		1.42690	-.00009	.030	4	
3	7490501			1.427	.004		1.42680	-.00012	.030	8	
3	7490503			1.427	.008	AND UP	1.42660	-.00030	.030	8	
M	7490505			1.428	.0005		1.42800	-.00006	.030	4	
M	7490507			1.428	.002		1.42790	-.00009	.030	4	
M	7490508			1.428	.004		1.42780	-.00012	.030	8	
M	7490510			1.428	.008	AND UP	1.42760	-.00030	.030	8	
M	7490512			1.429	.0005		1.42900	-.00006	.030	4	
M	7490514			1.429	.002		1.42890	-.00009	.030	4	
M	7490515			1.429	.004		1.42880	-.00012	.030	8	
M	7490517			1.429	.008	AND UP	1.42860	-.00030	.030	8	
M	7490519			1.430	.0005		1.43000	-.00006	.030	4	
M	7490521			1.430	.002		1.42990	-.00009	.030	4	
M	7490522			1.430	.004		1.42980	-.00012	.030	8	
M	7490524			1.430	.008	AND UP	1.42960	-.00030	.030	8	
M	7490526			1.431	.0005		1.43100	-.00006	.030	4	
M	7490528			1.431	.002		1.43090	-.00009	.030	4	
M	7490529			1.431	.004		1.43080	-.00012	.030	8	
M	7490531			1.431	.008	AND UP	1.43060	-.00030	.030	8	
M	7490533			1.432	.0005		1.43200	-.00006	.030	4	
M	7490535			1.432	.002		1.43190	-.00009	.030	4	
M	7490536			1.432	.004		1.43180	-.00012	.030	8	
M	7490538			1.432	.008	AND UP	1.43160	-.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

F. I. G. O. N.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			H
	FIN-GAGE RING GAGE	STOCK NO.	ACCEPTANCE CHECK	C	D	E	F	G	H	
3	7490540			1.433	.0005	1.43300 - .00006	.030	4		
3	7490542			1.433	.002	1.43290 - .00009	.030	4		
3	7490543			1.433	.004	1.43280 - .00012	.030	4		
3	7490545			1.433	.008 AND UP	1.43260 - .00030	.030	4		
3	7490547			1.434	.0005	1.43400 - .00006	.030	4		
3	7490549			1.434	.002	1.43390 - .00009	.030	4		
3	7490550			1.434	.004	1.43380 - .00012	.030	4		
3	7490552			1.434	.008 AND UP	1.43360 - .00030	.030	4		
3	7490554			1.435	.0005	1.43500 - .00006	.030	4		
3	7490556			1.435	.002	1.43490 - .00009	.030	4		
3	7490557			1.435	.004	1.43480 - .00012	.030	4		
3	7490559			1.435	.008 AND UP	1.43460 - .00030	.030	4		
3	7490561			1.436	.0005	1.43600 - .00006	.030	4		
3	7490563			1.436	.002	1.43590 - .00009	.030	4		
3	7490564			1.436	.004	1.43580 - .00012	.030	4		
3	7490566			1.436	.008 AND UP	1.43560 - .00030	.030	4		
3	7490568			1.437	.0005	1.43700 - .00006	.030	4		
3	7490570			1.437	.002	1.43690 - .00009	.030	4		
3	7490571			1.437	.004	1.43680 - .00012	.030	4		
3	7490573			1.437	.008 AND UP	1.43660 - .00030	.030	4		
3	7490575			1.4375	.0005 AND UP	1.43750 - .00006	.030	4		
3	7490576			1.438	.0005	1.43800 - .00006	.030	4		
3	7490578			1.438	.002	1.43790 - .00009	.030	4		
3	7490579			1.438	.004	1.43780 - .00012	.030	4		
3	7490581			1.438	.008 AND UP	1.43760 - .00030	.030	4		
3	7490583			1.439	.0005	1.43900 - .00006	.030	4		
3	7490585			1.439	.002	1.43890 - .00009	.030	4		
3	7490586			1.439	.004	1.43880 - .00012	.030	4		
3	7490588			1.439	.008 AND UP	1.43860 - .00030	.030	4		

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH		
	FINN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	G	H	I
A	B	C	D	E	F	G	H	I	
7490590	1.440	.0005	1.44000	-.00006	.030	4	4	4	
7490592	1.440	.002	1.43990	-.00009	.030	4	4	4	
7490593	1.440	.004	1.43980	-.00012	.030	8	8	8	
7490595	1.440	.008 AND UP	1.43960	-.00030	.030	8	8	8	
7490597	1.441	.0005	1.44100	-.00006	.030	4	4	4	
7490599	1.441	.002	1.44090	-.00009	.030	4	4	4	
7490600	1.441	.004	1.44080	-.00012	.030	8	8	8	
7490602	1.441	.008 AND UP	1.44060	-.00030	.030	8	8	8	
7490604	1.442	.0005	1.44200	-.00006	.030	4	4	4	
7490606	1.442	.002	1.44190	-.00009	.030	4	4	4	
7490607	1.442	.004	1.44180	-.00012	.030	8	8	8	
7490609	1.442	.008 AND UP	1.44160	-.00030	.030	8	8	8	
7490611	1.443	.0005	1.44300	-.00006	.030	4	4	4	
7490613	1.443	.002	1.44290	-.00009	.030	4	4	4	
7490614	1.443	.004	1.44280	-.00012	.030	8	8	8	
7490616	1.443	.008 AND UP	1.44260	-.00030	.030	8	8	8	
7490618	1.444	.0005	1.44400	-.00006	.030	4	4	4	
7490620	1.444	.002	1.44390	-.00009	.030	4	4	4	
7490621	1.444	.004	1.44380	-.00012	.030	8	8	8	
7490623	1.444	.008 AND UP	1.44360	-.00030	.030	8	8	8	
7490625	1.445	.0005	1.44500	-.00006	.030	4	4	4	
7490627	1.445	.002	1.44490	-.00009	.030	4	4	4	
7490628	1.445	.004	1.44480	-.00012	.030	8	8	8	
7490630	1.445	.008 AND UP	1.44460	-.00030	.030	8	8	8	
7490632	1.446	.0005	1.44600	-.00006	.030	4	4	4	
7490634	1.446	.002	1.44590	-.00009	.030	4	4	4	
7490635	1.446	.004	1.44580	-.00012	.030	8	8	8	
7490637	1.446	.008 AND UP	1.44560	-.00030	.030	8	8	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G		
A	B	C	D						
7490639	7490639		1.447	.0005	1.44700	-.00006	.030	4	
7490641			1.447	.002	1.44690	-.00009	.030	4	
7490642	7490642		1.447	.004	1.44680	-.00012	.030	8	
7490644			1.447	.008 AND UP	1.44660	-.00030	.030	8	
7490646	7490646		1.448	.0005	1.44800	-.00006	.030	4	
7490648			1.448	.002	1.44790	-.00009	.030	4	
7490649	7490649		1.448	.004	1.44780	-.00012	.030	8	
7490651			1.448	.008 AND UP	1.44760	-.00030	.030	8	
7490653	7490653		1.449	.0005	1.44900	-.00006	.030	4	
7490655			1.449	.002	1.44890	-.00009	.030	4	
7490656	7490656		1.449	.004	1.44880	-.00012	.030	8	
7490658			1.449	.008 AND UP	1.44860	-.00030	.030	8	
7490660	7490660		1.450	.0005	1.45000	-.00006	.030	4	
7490662			1.450	.002	1.44990	-.00009	.030	4	
7490663	7490663		1.450	.004	1.44980	-.00012	.030	8	
7490665			1.450	.008 AND UP	1.44960	-.00030	.030	8	
7490667	7490667		1.451	.0005	1.45100	-.00006	.030	4	
7490669			1.451	.002	1.45090	-.00009	.030	4	
7490670	7490670		1.451	.004	1.45080	-.00012	.030	8	
7490672			1.451	.008 AND UP	1.45060	-.00030	.030	8	
7490674	7490674		1.452	.0005	1.45200	-.00006	.030	4	
7490676			1.452	.002	1.45190	-.00009	.030	4	
7490677	7490677		1.452	.004	1.45180	-.00012	.030	8	
7490679			1.452	.008 AND UP	1.45160	-.00030	.030	8	
7490681	7490681		1.453	.0005	1.45300	-.00006	.030	4	
7490683			1.453	.002	1.45290	-.00009	.030	4	
7490684	7490684		1.453	.004	1.45280	-.00012	.030	8	
7490686			1.453	.008 AND UP	1.45260	-.00030	.030	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	FIN-GAGE RING GAGE	STOCK NO.	ACCEPTANCE CHECK	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER
				B	C		D	E	
A				1.454	.0005	1.45400 - .00006	1.45390 - .00009	.030	4 4 8 8
	7490688			1.454	.002	1.45390 - .00012	1.45380 - .00012	.030	4 4 8 8
	7490690			1.454	.004	1.45380 - .00030	1.45360 - .00030	.030	4 4 8 8
	7490691			1.454	.008 AND UP	1.45360 - .00030	1.45360 - .00030	.030	4 4 8 8
	7490693			1.454					
	7490695			1.455	.0005	1.45500 - .00006	1.45490 - .00009	.030	4 4 8 8
	7490697			1.455	.002	1.45500 - .00012	1.45490 - .00012	.030	4 4 8 8
	7490698			1.455	.004	1.45500 - .00030	1.45490 - .00030	.030	4 4 8 8
	7490700			1.455	.008 AND UP	1.45460 - .00030	1.45460 - .00030	.030	4 4 8 8
	7490702			1.456	.0005	1.45600 - .00006	1.45590 - .00009	.030	4 4 8 8
	7490704			1.456	.002	1.45590 - .00012	1.45580 - .00012	.030	4 4 8 8
	7490705			1.456	.004	1.45590 - .00030	1.45580 - .00030	.030	4 4 8 8
	7490707			1.456	.008 AND UP	1.45560 - .00030	1.45560 - .00030	.030	4 4 8 8
	7490709			1.457	.0005	1.45700 - .00006	1.45690 - .00009	.030	4 4 8 8
	7490711			1.457	.002	1.45690 - .00012	1.45680 - .00012	.030	4 4 8 8
	7490712			1.457	.004	1.45690 - .00030	1.45680 - .00030	.030	4 4 8 8
	7490714			1.457	.008 AND UP	1.45660 - .00030	1.45660 - .00030	.030	4 4 8 8
	7490716			1.458	.0005	1.45800 - .00006	1.45790 - .00009	.030	4 4 8 8
	7490718			1.458	.002	1.45790 - .00012	1.45780 - .00012	.030	4 4 8 8
	7490719			1.458	.004	1.45790 - .00030	1.45780 - .00030	.030	4 4 8 8
	7490721			1.458	.008 AND UP	1.45760 - .00030	1.45760 - .00030	.030	4 4 8 8
	7490723			1.459	.0005	1.45900 - .00006	1.45890 - .00009	.030	4 4 8 8
	7490725			1.459	.002	1.45890 - .00012	1.45880 - .00012	.030	4 4 8 8
	7490726			1.459	.004	1.45890 - .00030	1.45880 - .00030	.030	4 4 8 8
	7490728			1.459	.008 AND UP	1.45860 - .00030	1.45860 - .00030	.030	4 4 8 8
	7490730			1.460	.0005	1.46000 - .00006	1.45990 - .00009	.030	4 4 8 8
	7490732			1.460	.002	1.45990 - .00012	1.45980 - .00012	.030	4 4 8 8
	7490733			1.460	.004	1.45990 - .00030	1.45980 - .00030	.030	4 4 8 8
	7490735			1.460	.008 AND UP	1.45960 - .00030	1.45960 - .00030	.030	4 4 8 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	FIN—GAGE	STOCK NO.	MAXIMUM	TOTAL	RING GAGE			FINISH
					RING GAGE	COMPONENT	DIAMETER	
A	B	C	D	E	F	G	H	
3	7490737		1.461	.0005	1.46100	—	.00006	.030
3	7490739		1.461	.002	1.46090	—	.00009	.030
3	7490740		1.461	.004	1.46080	—	.00012	.030
3	7490742		1.461	.008 AND UP	1.46060	—	.00030	.030
3	7490744		1.462	.0005	1.46200	—	.00006	.030
3	7490746		1.462	.002	1.46190	—	.00009	.030
3	7490747		1.462	.004	1.46180	—	.00012	.030
3	7490749		1.462	.008 AND UP	1.46160	—	.00030	.030
3	7490751		1.463	.0005	1.46300	—	.00006	.030
3	7490753		1.463	.002	1.46290	—	.00009	.030
3	7490754		1.463	.004	1.46280	—	.00012	.030
3	7490756		1.463	.008 AND UP	1.46260	—	.00030	.030
3	7490758		1.464	.0005	1.46400	—	.00006	.030
3	7490760		1.464	.002	1.46390	—	.00009	.030
3	7490761		1.464	.004	1.46380	—	.00012	.030
3	7490763		1.464	.008 AND UP	1.46360	—	.00030	.030
3	7490765		1.465	.0005	1.46500	—	.00006	.030
3	7490767		1.465	.002	1.46490	—	.00009	.030
3	7490768		1.465	.004	1.46480	—	.00012	.030
3	7490770		1.465	.008 AND UP	1.46460	—	.00030	.030
3	7490772		1.466	.0005	1.46600	—	.00006	.030
3	7490774		1.466	.002	1.46590	—	.00009	.030
3	7490775		1.466	.004	1.46580	—	.00012	.030
3	7490777		1.466	.008 AND UP	1.46560	—	.00030	.030
3	7490779		1.467	.0005	1.46700	—	.00006	.030
3	7490781		1.467	.002	1.46690	—	.00009	.030
3	7490782		1.467	.004	1.46680	—	.00012	.030
3	7490784		1.467	.008 AND UP	1.46660	—	.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS			FINISH CHAMFER
					A	B	C	
3	7490786		1.468	.0005	1.46800	-	.00006	.030
3	7490788		1.468	.002	1.46790	-	.00009	.030
3	7490789		1.468	.004	1.46780	-	.00012	.030
3	7490791		1.468	.008 AND UP	1.46760	-	.00030	.030
3	7490793		1.46875	.0005 AND UP	1.46875	-	.00006	.030
3	7490794		1.469	.0005	1.46900	-	.00006	.030
3	7490796		1.469	.002	1.46890	-	.00009	.030
3	7490797		1.469	.004	1.46880	-	.00012	.030
3	7490799		1.469	.008 AND UP	1.46860	-	.00030	.030
	7490801		1.470	.0005	1.47000	-	.00006	.030
	7490803		1.470	.002	1.46990	-	.00009	.030
	7490804		1.470	.004	1.46980	-	.00012	.030
	7490806		1.470	.008 AND UP	1.46960	-	.00030	.030
	7490808		1.471	.0005	1.47100	-	.00006	.030
	7490810		1.471	.002	1.47090	-	.00009	.030
	7490811		1.471	.004	1.47080	-	.00012	.030
	7490813		1.471	.008 AND UP	1.47060	-	.00030	.030
	7490815		1.472	.0005	1.47200	-	.00006	.030
	7490817		1.472	.002	1.47190	-	.00009	.030
	7490818		1.472	.004	1.47180	-	.00012	.030
	7490820		1.472	.008 AND UP	1.47160	-	.00030	.030
	7490822		1.473	.0005	1.47300	-	.00006	.030
	7490824		1.473	.002	1.47290	-	.00009	.030
	7490825		1.473	.004	1.47280	-	.00012	.030
	7490827		1.473	.008 AND UP	1.47260	-	.00030	.030
	7490829		1.474	.0005	1.47400	-	.00006	.030
	7490831		1.474	.002	1.47390	-	.00009	.030
	7490832		1.474	.004	1.47380	-	.00012	.030
	7490834		1.474	.008 AND UP	1.47360	-	.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	RING GAGE STOCK NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
		RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	DIA. AND UP	DIA. AND DOWN	F	G	
A	B	C	D	E	F	G	H	
7490836	7490838		1.475	.0005	1.47500	-.00006	.030	4
7490839			1.475	.002	1.47490	-.00009	.030	4-4
7490841			1.475	.004	1.47480	-.00012	.030	4-4-4
7490843			1.475	.008 AND UP	1.47460	-.00030	.030	4-4-4-4
7490845			1.476	.0005	1.47600	-.00006	.030	4-4-4-4-4
7490846			1.476	.002	1.47590	-.00009	.030	4-4-4-4-4-4
7490848			1.476	.004	1.47580	-.00012	.030	4-4-4-4-4-4-4
7490850			1.476	.008 AND UP	1.47560	-.00030	.030	4-4-4-4-4-4-4-4
7490852			1.477	.0005	1.47700	-.00006	.030	4-4-4-4-4-4-4-4
7490853			1.477	.002	1.47690	-.00009	.030	4-4-4-4-4-4-4-4-4
7490855			1.477	.004	1.47680	-.00012	.030	4-4-4-4-4-4-4-4-4-4
7490857			1.477	.008 AND UP	1.47660	-.00030	.030	4-4-4-4-4-4-4-4-4-4-4
7490859			1.478	.0005	1.47800	-.00006	.030	4-4-4-4-4-4-4-4-4-4-4-4
7490860			1.478	.002	1.47790	-.00009	.030	4-4-4-4-4-4-4-4-4-4-4-4-4
7490862			1.478	.004	1.47780	-.00012	.030	4-4-4-4-4-4-4-4-4-4-4-4-4-4
7490864			1.478	.008 AND UP	1.47760	-.00030	.030	4-4-4-4-4-4-4-4-4-4-4-4-4-4-4
7490866			1.479	.0005	1.47900	-.00006	.030	4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4
7490867			1.479	.002	1.47890	-.00009	.030	4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4
7490869			1.479	.004	1.47880	-.00012	.030	4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4
7490871			1.480	.0005	1.47880	-.00012	.030	4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4
7490873			1.480	.002	1.47960	-.00030	.030	4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4-4
7490874			1.480	.004	1.47960	-.00030	.030	4-4
7490876			1.480	.008 AND UP	1.47860	-.00030	.030	4-4
7490878			1.481	.0005	1.48100	-.00006	.030	4-4
7490880			1.481	.002	1.48090	-.00009	.030	4-4
7490881			1.481	.004	1.48080	-.00012	.030	4-4
7490883			1.481	.008 AND UP	1.48060	-.00030	.030	4-4

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS			FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIA. CHAMFER	F	G	
A	B	C	D	E	F	G	H	
3	7490885		1.482	.0005	1.48200	-.00006	.030	4 4 8 8 8
3	7490887		1.482	.0002	1.48190	-.00009	.030	4 4 8 8 8
3	7490888		1.482	.004 AND UP	1.48180	-.00012	.030	4 4 8 8 8
3	7490890		1.482	.008 AND UP	1.48160	-.00030	.030	4 4 8 8 8
3	7490892		1.483	.0005	1.48300	-.00006	.030	4 4 8 8 8
3	7490894		1.483	.002	1.48290	-.00009	.030	4 4 8 8 8
3	7490895		1.483	.004	1.48280	-.00012	.030	4 4 8 8 8
3	7490897		1.483	.008 AND UP	1.48260	-.00030	.030	4 4 8 8 8
3	7490899		1.484	.0005	1.48400	-.00006	.030	4 4 8 8 8
3	7490901		1.484	.002	1.48390	-.00009	.030	4 4 8 8 8
3	7490902		1.484	.004	1.48380	-.00012	.030	4 4 8 8 8
3	7490904		1.484	.008 AND UP	1.48360	-.00030	.030	4 4 8 8 8
3	7490906		1.485	.0005	1.48500	-.00006	.030	4 4 8 8 8
3	7490908		1.485	.002	1.48490	-.00009	.030	4 4 8 8 8
3	7490909		1.485	.004	1.48480	-.00012	.030	4 4 8 8 8
3	7490911		1.485	.008 AND UP	1.48460	-.00030	.030	4 4 8 8 8
3	7490913		1.486	.0005	1.48600	-.00006	.030	4 4 8 8 8
3	7490915		1.486	.002	1.48590	-.00009	.030	4 4 8 8 8
3	7490916		1.486	.004	1.48580	-.00012	.030	4 4 8 8 8
3	7490918		1.486	.008 AND UP	1.48560	-.00030	.030	4 4 8 8 8
3	7490920		1.487	.0005	1.48700	-.00006	.030	4 4 8 8 8
3	7490922		1.487	.002	1.48690	-.00009	.030	4 4 8 8 8
3	7490923		1.487	.004	1.48680	-.00012	.030	4 4 8 8 8
3	7490925		1.487	.008 AND UP	1.48660	-.00030	.030	4 4 8 8 8
3	7490927		1.488	.0005	1.48800	-.00006	.030	4 4 8 8 8
3	7490929		1.488	.002	1.48790	-.00009	.030	4 4 8 8 8
3	7490930		1.488	.004	1.48780	-.00012	.030	4 4 8 8 8
3	7490932		1.488	.008 AND UP	1.48760	-.00030	.030	4 4 8 8 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA	E	F	G	H	
A	B	C	D						
7490934		1.489	.0005	1.48900	-.00006	.030	4		
7490936		1.489	.002	1.48890	-.00009	.030	4	8	
7490937		1.489	.004	1.48880	-.00012	.030	4	8	
7490939		1.489	.008 AND UP	1.48860	-.00030	.030	4	8	
7490941		1.490	.0005	1.49000	-.00006	.030	4	4	
7490943		1.490	.002	1.48990	-.00009	.030	4	8	
7490944		1.490	.004	1.48980	-.00012	.030	4	8	
7490946		1.490	.008 AND UP	1.48960	-.00030	.030	4	8	
7490948		1.491	.0005	1.49100	-.00006	.030	4	4	
7490950		1.491	.002	1.49090	-.00009	.030	4	8	
7490951		1.491	.004	1.49080	-.00012	.030	4	8	
7490953		1.491	.008 AND UP	1.49060	-.00030	.030	4	8	
7490955		1.492	.0005	1.49200	-.00006	.030	4		
7490957		1.492	.002	1.49190	-.00009	.030	4		
7490958		1.492	.004	1.49180	-.00012	.030	4		
7490960		1.492	.008 AND UP	1.49160	-.00030	.030	4		
7490962		1.493	.0005	1.49300	-.00006	.030	4		
7490964		1.493	.002	1.49290	-.00009	.030	4		
7490965		1.493	.004	1.49280	-.00012	.030	4		
7490967		1.493	.008 AND UP	1.49260	-.00030	.030	4		
7490969		1.494	.0005	1.49400	-.00006	.030	4		
7490971		1.494	.002	1.49390	-.00009	.030	4		
7490972		1.494	.004	1.49380	-.00012	.030	4		
7490974		1.494	.008 AND UP	1.49360	-.00030	.030	4		
7490976		1.495	.0005	1.49500	-.00006	.030	4		
7490978		1.495	.002	1.49490	-.00009	.030	4		
7490979		1.495	.004	1.49480	-.00012	.030	4		
7490981		1.495	.008 AND UP	1.49460	-.00030	.030	4		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

SIL	ON	FIN-GAGE STOCK NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
			RING GAGE	ACCEPTANCE CHECK		D	E	
A	B	C						
3	7490983		1.496	.0005	1.49600	-	.00006	.030
3	7490985		1.496	.002	1.49590	-	.00009	.030
3	7490986		1.496	.004	1.49580	-	.00012	.030
3	7490988		1.496	.008 AND UP	1.49560	-	.00030	.030
3	7490990		1.497	.0005	1.49700	-	.00006	.030
3	7490992		1.497	.002	1.49690	-	.00009	.030
3	7490993		1.497	.004	1.49680	-	.00012	.030
3	7490995		1.497	.008 AND UP	1.49660	-	.00030	.030
3	7490997		1.498	.0005	1.49800	-	.00006	.030
3	7490999		1.498	.002	1.49790	-	.00009	.030
3	7491000		1.498	.004	1.49780	-	.00012	.030
3	7491002		1.498	.008 AND UP	1.49760	-	.00030	.030
3	7491004		1.499	.0005	1.49900	-	.00006	.030
3	7491006		1.499	.002	1.49890	-	.00009	.030
3	7491007		1.499	.004	1.49880	-	.00012	.030
3	7491009		1.499	.008 AND UP	1.49860	-	.00030	.030
3	7491011		1.500	.0005	1.50000	-	.00006	.030
3	7491013		1.500	.002	1.49990	-	.00009	.030
3	7491014		1.500	.004	1.49980	-	.00012	.030
3	7491016		1.500	.008 AND UP	1.49960	-	.00030	.030
3	7491018		1.501	.0005	1.50100	-	.00006	.030
3	7491020		1.501	.002	1.50090	-	.00009	.030
3	7491021		1.501	.004	1.50080	-	.00012	.030
3	7491023		1.501	.008 AND UP	1.50060	-	.00030	.030
3	7491025		1.502	.0005	1.50200	-	.00006	.030
3	7491027		1.502	.002	1.50190	-	.00009	.030
3	7491028		1.502	.004	1.50180	-	.00012	.030
3	7491030		1.502	.008 AND UP	1.50160	-	.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	RING GAGE	MARKING ON GO GAGE	TOTAL		RING GAGE		H
			FIN - GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	COMPONENT TOLERANCE	DIAMETER	
B	C	D	E	F	G	H	
7491032	7491034	7491035	1.503	.0005	1.50300	-.00006	.030
7491037			1.503	.002	1.50290	-.00009	.030
			1.503	.004	1.50280	-.00012	.030
			1.503	.008 AND UP	1.50260	-.00030	.030
7491039			1.504	.0005	1.50400	-.00006	.030
7491041			1.504	.002	1.50390	-.00009	.030
7491042			1.504	.004	1.50380	-.00012	.030
7491044			1.504	.008 AND UP	1.50360	-.00030	.030
7491046			1.505	.0005	1.50500	-.00006	.030
7491048			1.505	.002	1.50490	-.00009	.030
7491049			1.505	.004	1.50480	-.00012	.030
7491051			1.505	.008 AND UP	1.50460	-.00030	.030
7491053			1.506	.0005	1.50600	-.00006	.030
7491055			1.506	.002	1.50590	-.00009	.030
7491056			1.506	.004	1.50580	-.00012	.030
7491058			1.506	.008 AND UP	1.50560	-.00030	.030
7491060			1.507	.0005	1.50700	-.00006	.030
7491062			1.507	.002	1.50690	-.00009	.030
7491063			1.507	.004	1.50680	-.00012	.030
7491065			1.507	.008 AND UP	1.50660	-.00030	.030
7491067			1.508	.0005	1.50800	-.00006	.030
7491069			1.508	.002	1.50790	-.00009	.030
7491070			1.508	.004	1.50780	-.00012	.030
7491072			1.508	.008 AND UP	1.50760	-.00030	.030
7491074			1.509	.0005	1.50900	-.00006	.030
7491076			1.509	.002	1.50890	-.00009	.030
7491077			1.509	.004	1.50880	-.00012	.030
7491079			1.509	.008 AND UP	1.50860	-.00030	.030

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ITEM NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	DIA. E	F	G	H	
A	B	C	D						
3	7491081			1.510	.0005	1.51000	-.00006	.030	4
3	7491083			1.510	.002	1.50990	-.00009	.030	4
3	7491084			1.510	.004	1.50980	-.00012	.030	8
3	7491086			1.510	.008 AND UP	1.50960	-.00030	.030	8
4	7491088			1.511	.001	1.51100	-.00008	.050	4
4	7491089			1.511	.002	1.51092	-.00012	.050	4
4	7491090			1.511	.004	1.51080	-.00016	.050	8
4	7491092			1.511	.008 AND UP	1.51060	-.00040	.050	8
4	7491094			1.512	.001	1.51200	-.00008	.050	4
4	7491095			1.512	.002	1.51192	-.00012	.050	4
4	7491096			1.512	.004	1.51180	-.00016	.050	8
4	7491098			1.512	.008 AND UP	1.51160	-.00040	.050	8
4	7491100			1.513	.001	1.51300	-.00008	.050	4
4	7491101			1.513	.002	1.51292	-.00012	.050	4
4	7491102			1.513	.004	1.51280	-.00016	.050	8
4	7491104			1.513	.008 AND UP	1.51260	-.00040	.050	8
4	7491106			1.514	.001	1.51400	-.00008	.050	4
4	7491107			1.514	.002	1.51392	-.00012	.050	4
4	7491108			1.514	.004	1.51380	-.00016	.050	8
4	7491110			1.514	.008 AND UP	1.51360	-.00040	.050	8
4	7491112			1.515	.001	1.51500	-.00008	.050	4
4	7491113			1.515	.002	1.51492	-.00012	.050	4
4	7491114			1.515	.004	1.51480	-.00016	.050	8
4	7491116			1.515	.008 AND UP	1.51460	-.00040	.050	8
4	7491118			1.516	.001	1.51600	-.00008	.050	4
4	7491119			1.516	.002	1.51592	-.00012	.050	4
4	7491120			1.516	.004	1.51580	-.00016	.050	8
4	7491122			1.516	.008 AND UP	1.51560	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLEFRANCE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
A	B	C								
4	7491124		1.517	.001	1.51700	-.00008	.050	4		
4	7491125		1.517	.002	1.51692	-.00012	.050	4		
4	7491126		1.517	.004	1.51680	-.00016	.050	4		
4	7491128		1.517	.008 AND UP	1.51660	-.00040	.050	4		
4	7491130		1.518	.001	1.51800	-.00008	.050	4		
4	7491131		1.518	.002	1.51792	-.00012	.050	4		
4	7491132		1.518	.004	1.51780	-.00016	.050	4		
4	7491134		1.518	.008 AND UP	1.51760	-.00040	.050	4		
4	7491136		1.519	.001	1.51900	-.00008	.050	4		
4	7491137		1.519	.002	1.51892	-.00012	.050	4		
4	7491138		1.519	.004	1.51880	-.00016	.050	4		
4	7491140		1.519	.008 AND UP	1.51860	-.00040	.050	4		
4	7491142		1.520	.001	1.52000	-.00008	.050	4		
4	7491143		1.520	.002	1.51992	-.00012	.050	4		
4	7491144		1.520	.004	1.51980	-.00016	.050	4		
4	7491146		1.520	.008 AND UP	1.51960	-.00040	.050	4		
4	7491148		1.521	.001	1.52100	-.00008	.050	4		
4	7491149		1.521	.002	1.52092	-.00012	.050	4		
4	7491150		1.521	.004	1.52080	-.00016	.050	4		
4	7491152		1.521	.008 AND UP	1.52060	-.00040	.050	4		
4	7491154		1.522	.001	1.52200	-.00008	.050	4		
4	7491155		1.522	.002	1.52192	-.00012	.050	4		
4	7491156		1.522	.004	1.52180	-.00016	.050	4		
4	7491158		1.522	.008 AND UP	1.52160	-.00040	.050	4		
4	7491160		1.523	.001	1.52300	-.00008	.050	4		
4	7491161		1.523	.002	1.52292	-.00012	.050	4		
4	7491162		1.523	.004	1.52280	-.00016	.050	4		
4	7491164		1.523	.008 AND UP	1.52260	-.00040	.050	4		

Table I. Tabulation of Design and Identification Data (Continued)

NO. ON FILE	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIAMETER	F	G	
A	B	C	D	E	F	H	
4	7491166		1.524	.001	1.52400	-.00008	.050
4	7491167		1.524	.002	1.52392	-.00012	.050
4	7491168		1.524	.004 AND UP	1.52380	-.00016	.050
4	7491170		1.524	.008 AND UP	1.52360	-.00040	.050
4	7491172		1.525	.001	1.52500	-.00008	.050
4	7491173		1.525	.002	1.52492	-.00012	.050
4	7491174		1.525	.004 AND UP	1.52480	-.00016	.050
4	7491176		1.525	.008 AND UP	1.52460	-.00040	.050
4	7491178		1.526	.001	1.52600	-.00008	.050
4	7491179		1.526	.002	1.52592	-.00012	.050
4	7491180		1.526	.004 AND UP	1.52580	-.00016	.050
4	7491182		1.526	.008 AND UP	1.52560	-.00040	.050
4	7491184		1.527	.001	1.52700	-.00008	.050
4	7491185		1.527	.002	1.52692	-.00012	.050
4	7491186		1.527	.004 AND UP	1.52680	-.00016	.050
4	7491188		1.527	.008 AND UP	1.52660	-.00040	.050
4	7491190		1.528	.001	1.52800	-.00008	.050
4	7491191		1.528	.002	1.52792	-.00012	.050
4	7491192		1.528	.004 AND UP	1.52780	-.00016	.050
4	7491194		1.528	.008 AND UP	1.52760	-.00040	.050
4	7491196		1.529	.001	1.52900	-.00008	.050
4	7491197		1.529	.002	1.52892	-.00012	.050
4	7491198		1.529	.004 AND UP	1.52880	-.00016	.050
4	7491200		1.529	.008 AND UP	1.52860	-.00040	.050
4	7491202		1.530	.001	1.53000	-.00008	.050
4	7491203		1.530	.002	1.52992	-.00012	.050
4	7491204		1.530	.004 AND UP	1.52980	-.00016	.050
4	7491206		1.530	.008 AND UP	1.52960	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
4	7491208		1.531	.001	1.53100	-.00008	.050
4	7491209		1.531	.002	1.53092	-.00012	.050
4	7491210		1.531	.004	1.53080	-.00016	.050
4	7491212		1.531	.008 AND UP	1.53060	-.00040	.050
4	7491214		1.53125	.001 AND UP	1.53125	-.00008	.050
4	7491215		1.532	.001	1.53200	-.00008	.050
4	7491216		1.532	.002	1.53192	-.00012	.050
4	7491217		1.532	.004 AND UP	1.53180	-.00016	.050
4	7491219		1.532	.008 AND UP	1.53160	-.00040	.050
4	7491221		1.533	.001	1.53300	-.00008	.050
4	7491222		1.533	.002	1.53292	-.00012	.050
4	7491223		1.533	.004	1.53280	-.00016	.050
4	7491225		1.533	.008 AND UP	1.53260	-.00040	.050
4	7491227		1.534	.001	1.53400	-.00008	.050
4	7491228		1.534	.002	1.53392	-.00012	.050
4	7491229		1.534	.004 AND UP	1.53380	-.00016	.050
4	7491231		1.534	.008 AND UP	1.53360	-.00040	.050
4	7491233		1.535	.001	1.53500	-.00008	.050
4	7491234		1.535	.002	1.53492	-.00012	.050
4	7491235		1.535	.004	1.53480	-.00016	.050
4	7491237		1.535	.008 AND UP	1.53460	-.00040	.050
4	7491239		1.536	.001	1.53600	-.00008	.050
4	7491240		1.536	.002	1.53592	-.00012	.050
4	7491241		1.536	.004	1.53580	-.00016	.050
4	7491243		1.536	.008 AND UP	1.53560	-.00040	.050
4	7491245		1.537	.001	1.53700	-.00008	.050
4	7491246		1.537	.002	1.53692	-.00012	.050
4	7491247		1.537	.004	1.53680	-.00016	.050
4	7491249		1.537	.008 AND UP	1.53660	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE			
				D	E	F	G
4	7491251		1.538	.001	1.53800	-.00008	.050
4	7491252		1.538	.002	1.53792	-.00012	.050
4	7491253		1.538	.004	1.53780	-.00016	.050
4	7491255		1.538	.008 AND UP	1.53760	-.00040	.050
4	7491257		1.539	.001	1.53900	-.00008	.050
4	7491258		1.539	.002	1.53892	-.00012	.050
4	7491259		1.539	.004	1.53880	-.00016	.050
4	7491261		1.539	.008 AND UP	1.53860	-.00040	.050
4	7491263		1.540	.001	1.54000	-.00008	.050
4	7491264		1.540	.002	1.53992	-.00012	.050
4	7491265		1.540	.004	1.53980	-.00016	.050
4	7491267		1.540	.008 AND UP	1.53960	-.00040	.050
4	7491269		1.541	.001	1.54100	-.00008	.050
4	7491270		1.541	.002	1.54092	-.00012	.050
4	7491271		1.541	.004	1.54080	-.00016	.050
4	7491273		1.541	.008 AND UP	1.54060	-.00040	.050
4	7491275		1.542	.001	1.54200	-.00008	.050
4	7491276		1.542	.002	1.54192	-.00012	.050
4	7491277		1.542	.004	1.54180	-.00016	.050
4	7491279		1.542	.008 AND UP	1.54160	-.00040	.050
4	7491281		1.543	.001	1.54300	-.00008	.050
4	7491282		1.543	.002	1.54292	-.00012	.050
4	7491283		1.543	.004	1.54280	-.00016	.050
4	7491285		1.543	.008 AND UP	1.54260	-.00040	.050
4	7491287		1.544	.001	1.54400	-.00008	.050
4	7491288		1.544	.002	1.54392	-.00012	.050
4	7491289		1.544	.004	1.54380	-.00016	.050
4	7491291		1.544	.008 AND UP	1.54360	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON FIN #	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHARACTER
	FIN - GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	
A	B	C						H
7491293			1.545	.001	1.54500	-.00008	.050	4
7491294			1.545	.002	1.54492	-.00012	.050	4
7491295			1.545	.004	1.54480	-.00016	.050	8
7491297			1.545	.008 AND UP	1.54460	-.00040	.050	8
7491299			1.546	.001	1.54600	-.00008	.050	4
7491300			1.546	.002	1.54592	-.00012	.050	4
7491301			1.546	.004	1.54580	-.00016	.050	8
7491303			1.546	.008 AND UP	1.54560	-.00040	.050	8
7491305			1.547	.001	1.54700	-.00008	.050	4
7491306			1.547	.002	1.54692	-.00012	.050	4
7491307			1.547	.004	1.54680	-.00016	.050	8
7491309			1.547	.008 AND UP	1.54660	-.00040	.050	8
7491311			1.548	.001	1.54800	-.00008	.050	4
7491312			1.548	.002	1.54792	-.00012	.050	4
7491313			1.548	.004	1.54780	-.00016	.050	8
7491315			1.548	.008 AND UP	1.54760	-.00040	.050	8
7491317			1.549	.001	1.54900	-.00008	.050	4
7491318			1.549	.002	1.54892	-.00012	.050	4
7491319			1.549	.004	1.54880	-.00016	.050	8
7491321			1.549	.008 AND UP	1.54860	-.00040	.050	8
7491323			1.550	.001	1.55000	-.00008	.050	4
7491324			1.550	.002	1.54992	-.00012	.050	4
7491325			1.550	.004	1.54980	-.00016	.050	8
7491327			1.550	.008 AND UP	1.54960	-.00040	.050	8
7491329			1.551	.001	1.55100	-.00008	.050	4
7491330			1.551	.002	1.55092	-.00012	.050	4
7491331			1.551	.004	1.55080	-.00016	.050	8
7491333			1.551	.008 AND UP	1.55060	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN— RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	G	
A	B	C	D	E	F	G	
7491335			1.552	.001	1.55200	-.00008	.050
7491336			1.552	.002	1.55192	-.00012	.050
7491337			1.552	.004	1.55180	-.00016	.050
7491339			1.552	.008 AND UP	1.55160	-.00040	.050
7491341			1.553	.001	1.55300	-.00008	.050
7491342			1.553	.002	1.55292	-.00012	.050
7491343			1.553	.004	1.55280	-.00016	.050
7491345			1.553	.008 AND UP	1.55260	-.00040	.050
7491347			1.554	.001	1.55400	-.00008	.050
7491348			1.554	.002	1.55392	-.00012	.050
7491349			1.554	.004	1.55380	-.00016	.050
7491351			1.554	.008 AND UP	1.55360	-.00040	.050
7491353			1.555	.001	1.55500	-.00008	.050
7491354			1.555	.002	1.55492	-.00012	.050
7491355			1.555	.004	1.55480	-.00016	.050
7491357			1.555	.008 AND UP	1.55460	-.00040	.050
7491359			1.556	.001	1.55600	-.00008	.050
7491360			1.556	.002	1.55592	-.00012	.050
7491361			1.556	.004	1.55580	-.00016	.050
7491363			1.556	.008 AND UP	1.55560	-.00040	.050
7491365			1.557	.001	1.55700	-.00008	.050
7491366			1.557	.002	1.55692	-.00012	.050
7491367			1.557	.004	1.55680	-.00016	.050
7491369			1.557	.008 AND UP	1.55660	-.00040	.050
7491371			1.558	.001	1.55800	-.00008	.050
7491372			1.558	.002	1.55792	-.00012	.050
7491373			1.558	.004	1.55780	-.00016	.050
7491375			1.558	.008 AND UP	1.55760	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	FAN—GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	
RING GAGE	ACCEPTANCE CHECK	C	D				
A	B						
7491377		1.559	.001	1.55900	-.00008	.050	4
7491378		1.559	.002	1.55892	-.00012	.050	4
7491379		1.559	.004	1.55880	-.00016	.050	4
7491381		1.559	.008 AND UP	1.55860	-.00040	.050	4
7491383		1.560	.001	1.56000	-.00008	.050	4
7491384		1.560	.002	1.55992	-.00012	.050	4
7491385		1.560	.004	1.55980	-.00016	.050	4
7491387		1.560	.008 AND UP	1.55960	-.00040	.050	4
7491389		1.561	.001	1.56100	-.00008	.050	4
7491390		1.561	.002	1.56092	-.00012	.050	4
7491391		1.561	.004	1.56080	-.00016	.050	4
7491393		1.561	.008 AND UP	1.56060	-.00040	.050	4
7491395		1.562	.001	1.56200	-.00008	.050	4
7491396		1.562	.002	1.56192	-.00012	.050	4
7491397		1.562	.004	1.56180	-.00016	.050	4
7491399		1.562	.008 AND UP	1.56160	-.00040	.050	4
7491401		1.5625	.001 AND UP	1.56250	-.00008	.050	4
7491402		1.563	.001	1.56300	-.00008	.050	4
7491403		1.563	.002	1.56292	-.00012	.050	4
7491404		1.563	.004	1.56280	-.00016	.050	4
7491406		1.563	.008 AND UP	1.56260	-.00040	.050	4
7491408		1.564	.001	1.56400	-.00008	.050	4
7491409		1.564	.002	1.56392	-.00012	.050	4
7491410		1.564	.004	1.56380	-.00016	.050	4
7491412		1.564	.008 AND UP	1.56360	-.00040	.050	4
7491414		1.565	.001	1.56500	-.00008	.050	4
7491415		1.565	.002	1.56492	-.00012	.050	4
7491416		1.565	.004	1.56480	-.00016	.050	4
7491418		1.565	.008 AND UP	1.56460	-.00040	.050	4

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

F1G. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			H
	F1N - GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	G	
A	B	C	D	E	F	G	H
4	7491420	1.566	.001	1.56600	—	.00008	.050
4	7491421	1.566	.002	1.56592	—	.00012	.050
4	7491422	1.566	.004	1.56580	—	.00016	.050
4	7491424	1.566	.008 AND UP	1.56560	—	.00040	.050
4	7491426	1.567	.001	1.56700	—	.00008	.050
4	7491427	1.567	.002	1.56692	—	.00012	.050
4	7491428	1.567	.004	1.56680	—	.00016	.050
4	7491430	1.567	.008 AND UP	1.56660	—	.00040	.050
4	7491432	1.568	.001	1.56800	—	.00008	.050
4	7491433	1.568	.002	1.56792	—	.00012	.050
4	7491434	1.568	.004	1.56780	—	.00016	.050
4	7491436	1.568	.008 AND UP	1.56760	—	.00040	.050
4	7491438	1.569	.001	1.56900	—	.00008	.050
4	7491439	1.569	.002	1.56892	—	.00012	.050
4	7491440	1.569	.004	1.56880	—	.00016	.050
4	7491442	1.569	.008 AND UP	1.56860	—	.00040	.050
4	7491444	1.570	.001	1.57000	—	.00008	.050
4	7491445	1.570	.002	1.56992	—	.00012	.050
4	7491446	1.570	.004	1.56980	—	.00016	.050
4	7491448	1.570	.008 AND UP	1.56960	—	.00040	.050
4	7491450	1.571	.001	1.57100	—	.00008	.050
4	7491451	1.571	.002	1.57092	—	.00012	.050
4	7491452	1.571	.004	1.57080	—	.00016	.050
4	7491454	1.571	.008 AND UP	1.57060	—	.00040	.050
4	7491456	1.572	.001	1.57200	—	.00008	.050
4	7491457	1.572	.002	1.57192	—	.00012	.050
4	7491458	1.572	.004	1.57180	—	.00016	.050
4	7491460	1.572	.008 AND UP	1.57160	—	.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FIN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
RING GAGE	ACCEPTANCE CHECK		C	D					CHAMFER	
A	B									
4	7491462		1.573	.001	1.57300	-.00008	.050	4		
4	7491463		1.573	.002	1.57292	-.00012	.050	4		
4	7491464		1.573	.004 AND UP	1.57280	-.00016	.050	6		
4	7491466		1.573	.008 AND UP	1.57260	-.00040	.050	6		
4	7491468		1.574	.001	1.57400	-.00008	.050	4		
4	7491469		1.574	.002	1.57392	-.00012	.050	4		
4	7491470		1.574	.004	1.57380	-.00016	.050	6		
4	7491472		1.574	.008 AND UP	1.57360	-.00040	.050	6		
4	7491474		1.575	.001	1.57500	-.00008	.050	4		
4	7491475		1.575	.002	1.57492	-.00012	.050	4		
4	7491476		1.575	.004	1.57480	-.00016	.050	6		
4	7491478		1.575	.008 AND UP	1.57460	-.00040	.050	6		
4	7491480		1.576	.001	1.57600	-.00008	.050	4		
4	7491481		1.576	.002	1.57592	-.00012	.050	4		
4	7491482		1.576	.004	1.57580	-.00016	.050	6		
4	7491484		1.576	.008 AND UP	1.57560	-.00040	.050	6		
4	7491486		1.577	.001	1.57700	-.00008	.050	4		
4	7491487		1.577	.002	1.57692	-.00012	.050	4		
4	7491488		1.577	.004	1.57680	-.00016	.050	6		
4	7491490		1.577	.008 AND UP	1.57660	-.00040	.050	6		
4	7491492		1.578	.001	1.57800	-.00008	.050	4		
4	7491493		1.578	.002	1.57792	-.00012	.050	4		
4	7491494		1.578	.004	1.57780	-.00016	.050	6		
4	7491496		1.578	.008 AND UP	1.57760	-.00040	.050	6		
4	7491498		1.579	.001	1.57900	-.00008	.050	4		
4	7491499		1.579	.002	1.57892	-.00012	.050	4		
4	7491500		1.579	.004	1.57880	-.00016	.050	6		
4	7491502		1.579	.008 AND UP	1.57860	-.00040	.050	6		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ITEM NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIA	E	
A	B	C	D				H
4	7491504		1.580	.001	1.58000	-.00008	.050
4	7491505		1.580	.002	1.57992	-.00012	.050
4	7491506		1.580	.004	1.57980	-.00016	.050
4	7491508		1.580	.008 AND UP	1.57960	-.00040	.050
4	7491510		1.581	.001	1.58100	-.00008	.050
4	7491511		1.581	.002	1.58092	-.00012	.050
4	7491512		1.581	.004	1.58080	-.00016	.050
4	7491514		1.581	.008 AND UP	1.58060	-.00040	.050
4	7491516		1.582	.001	1.58200	-.00008	.050
4	7491517		1.582	.002	1.58192	-.00012	.050
4	7491518		1.582	.004	1.58180	-.00016	.050
4	7491520		1.582	.008 AND UP	1.58160	-.00040	.050
4	7491522		1.583	.001	1.58300	-.00008	.050
4	7491523		1.583	.002	1.58292	-.00012	.050
4	7491524		1.583	.004	1.58280	-.00016	.050
4	7491526		1.583	.008 AND UP	1.58260	-.00040	.050
4	7491528		1.584	.001	1.58400	-.00008	.050
4	7491529		1.584	.002	1.58392	-.00012	.050
4	7491530		1.584	.004	1.58380	-.00016	.050
4	7491532		1.584	.008 AND UP	1.58360	-.00040	.050
4	7491534		1.585	.001	1.58500	-.00008	.050
4	7491535		1.585	.002	1.58492	-.00012	.050
4	7491536		1.585	.004	1.58480	-.00016	.050
4	7491538		1.585	.008 AND UP	1.58460	-.00040	.050
4	7491540		1.586	.001	1.58600	-.00008	.050
4	7491541		1.586	.002	1.58592	-.00012	.050
4	7491542		1.586	.004	1.58580	-.00016	.050
4	7491544		1.586	.008 AND UP	1.58560	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISHES	
	RING-GAGE STOCK NO.	MAXIMUM ACCEPTANCE CHECK		COMPONENT DIMENSION		DIAMETER		CHAMFER			
		B	C	D	E	F	G	H			
4	7491546	1.587	.001	1.587	.0008	.00008	.050	4			
4	7491547	1.587	.002	1.587	.0012	.00012	.050	4			
4	7491548	1.587	.004	1.587	.0016	.00016	.050	8			
4	7491550	1.587	.008 AND UP	1.58660	.00040	.00040	.050				
4	7491552	1.588	.001	1.58800	.0008	.00008	.050	4			
4	7491553	1.588	.002	1.58792	.0012	.00012	.050	4			
4	7491554	1.588	.004	1.58780	.0016	.00016	.050	8			
4	7491556	1.588	.008 AND UP	1.58760	.00040	.00040	.050				
4	7491558	1.589	.001	1.58900	.0008	.00008	.050	4			
4	7491559	1.589	.002	1.58892	.0012	.00012	.050	4			
4	7491560	1.589	.004	1.58880	.0016	.00016	.050	8			
4	7491562	1.589	.008 AND UP	1.58860	.00040	.00040	.050				
4	7491564	1.590	.001	1.59000	.0008	.00008	.050	4			
4	7491565	1.590	.002	1.58992	.0012	.00012	.050	4			
4	7491566	1.590	.004	1.58980	.0016	.00016	.050	8			
4	7491568	1.590	.008 AND UP	1.58960	.00040	.00040	.050				
4	7491570	1.591	.001	1.59100	.0008	.00008	.050	4			
4	7491571	1.591	.002	1.59092	.0012	.00012	.050	4			
4	7491572	1.591	.004	1.59080	.0016	.00016	.050	8			
4	7491574	1.591	.008 AND UP	1.59060	.00040	.00040	.050				
4	7491576	1.592	.001	1.59200	.0008	.00008	.050	4			
4	7491577	1.592	.002	1.59192	.0012	.00012	.050	4			
4	7491578	1.592	.004	1.59180	.0016	.00016	.050	8			
4	7491580	1.592	.008 AND UP	1.59160	.00040	.00040	.050				
4	7491582	1.593	.001	1.59300	.0008	.00008	.050	4			
4	7491583	1.593	.002	1.59292	.0012	.00012	.050	4			
4	7491584	1.593	.004	1.59280	.0016	.00016	.050	8			
4	7491586	1.593	.008 AND UP	1.59260	.00040	.00040	.050				

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH H.S.I.N.	H
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIA. E	F F		
FIG.	B	C	D	E	F	G	H	
4	7491588		1.59375	.001 AND UP	1.59375	-.00008	.050	4
4	7491589		1.594	.001	1.59400	-.00008	.050	4 4 8 8
4	7491590		1.594	.002	1.59392	-.00012	.050	4 4 8 8
4	7491591		1.594	.004	1.59380	-.00016	.050	4 4 8 8
4	7491593		1.594	.008 AND UP	1.59360	-.00040	.050	4 4 8 8
4	7491595		1.595	.001	1.59500	-.00008	.050	4 4 4 8
4	7491596		1.595	.002	1.59492	-.00012	.050	4 4 4 8
4	7491597		1.595	.004	1.59480	-.00016	.050	4 4 4 8
4	7491599		1.595	.008 AND UP	1.59460	-.00040	.050	4 4 4 8
4	7491601		1.596	.001	1.59600	-.00008	.050	4 4 4 8 8
4	7491602		1.596	.002	1.59592	-.00012	.050	4 4 4 8 8
4	7491603		1.596	.004	1.59580	-.00016	.050	4 4 4 8 8
4	7491605		1.596	.008 AND UP	1.59560	-.00040	.050	4 4 4 8 8
4	7491607		1.597	.001	1.59700	-.00008	.050	4 4 4 8 8
4	7491608		1.597	.002	1.59692	-.00012	.050	4 4 4 8 8
4	7491609		1.597	.004	1.59680	-.00016	.050	4 4 4 8 8
4	7491611		1.597	.008 AND UP	1.59660	-.00040	.050	4 4 4 8 8
4	7491613		1.598	.001	1.59800	-.00008	.050	4 4 4 8 8
4	7491614		1.598	.002	1.59792	-.00012	.050	4 4 4 8 8
4	7491615		1.598	.004	1.59780	-.00016	.050	4 4 4 8 8
4	7491617		1.598	.008 AND UP	1.59760	-.00040	.050	4 4 4 8 8
4	7491619		1.599	.001	1.59900	-.00008	.050	4 4 4 8 8
4	7491620		1.599	.002	1.59892	-.00012	.050	4 4 4 8 8
4	7491621		1.599	.004	1.59880	-.00016	.050	4 4 4 8 8
4	7491623		1.599	.008 AND UP	1.59860	-.00040	.050	4 4 4 8 8
4	7491625		1.600	.001	1.60000	-.00008	.050	4 4 4 8 8
4	7491626		1.600	.002	1.59992	-.00012	.050	4 4 4 8 8
4	7491627		1.600	.004	1.59980	-.00016	.050	4 4 4 8 8
4	7491629		1.600	.008 AND UP	1.59960	-.00040	.050	4 4 4 8 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G		
A	B	C	D	E	F	G			
4	7491631		1.601	.001	1.60100	-.00008	.050	4	
4	7491632		1.601	.002	1.60092	-.00012	.050	4	
4	7491633		1.601	.004	1.60080	-.00016	.050	4	
4	7491635		1.601	.008 AND UP	1.60060	-.00040	.050	8	
4	7491637		1.602	.001	1.60200	-.00008	.050	4	
4	7491638		1.602	.002	1.60192	-.00012	.050	4	
4	7491639		1.602	.004	1.60180	-.00016	.050	8	
4	7491641		1.602	.008 AND UP	1.60160	-.00040	.050	8	
4	7491643		1.603	.001	1.60300	-.00008	.050	4	
4	7491644		1.603	.002	1.60292	-.00012	.050	4	
4	7491645		1.603	.004	1.60280	-.00016	.050	8	
4	7491647		1.603	.008 AND UP	1.60260	-.00040	.050	8	
4	7491649		1.604	.001	1.60400	-.00008	.050	4	
4	7491650		1.604	.002	1.60392	-.00012	.050	4	
4	7491651		1.604	.004	1.60380	-.00016	.050	8	
4	7491653		1.604	.008 AND UP	1.60360	-.00040	.050	8	
4	7491655		1.605	.001	1.60500	-.00008	.050	4	
4	7491656		1.605	.002	1.60492	-.00012	.050	4	
4	7491657		1.605	.004	1.60480	-.00016	.050	8	
4	7491659		1.605	.008 AND UP	1.60460	-.00040	.050	8	
4	7491661		1.606	.001	1.60600	-.00008	.050	4	
4	7491662		1.606	.002	1.60592	-.00012	.050	4	
4	7491663		1.606	.004	1.60580	-.00016	.050	8	
4	7491665		1.606	.008 AND UP	1.60560	-.00040	.050	8	
4	7491667		1.607	.001	1.60700	-.00008	.050	4	
4	7491668		1.607	.002	1.60692	-.00012	.050	4	
4	7491669		1.607	.004	1.60680	-.00016	.050	8	
4	7491671		1.607	.008 AND UP	1.60660	-.00040	.050	8	

MIL-STD-112A
6 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	ACCEPTANCE CHECK	DIA. OF GAGE	DIAMETER	CHAMFER	G	H	
A	B	C	D	E	F	G	H		
4	7491673	1.608	.001	1.60800	-.00008	.050	4	4	
4	7491674	1.608	.002	1.60792	-.00012	.050			
4	7491675	1.608	.004 AND UP	1.60780	-.00016	.050			
4	7491677	1.608	.008 AND UP	1.60760	-.00040	.050			
4	7491679	1.609	.001	1.60900	-.00008	.050	4	4	
4	7491680	1.609	.002	1.60892	-.00012	.050			
4	7491681	1.609	.004 AND UP	1.60880	-.00016	.050			
4	7491683	1.609	.008 AND UP	1.60860	-.00040	.050			
4	7491685	1.610	.001	1.61000	-.00008	.050	4	4	
4	7491686	1.610	.002	1.60992	-.00012	.050			
4	7491687	1.610	.004 AND UP	1.60980	-.00016	.050			
4	7491689	1.610	.008 AND UP	1.60960	-.00040	.050			
4	7491691	1.611	.001	1.61100	-.00008	.050	4	4	
4	7491692	1.611	.002	1.61092	-.00012	.050			
4	7491693	1.611	.004 AND UP	1.61080	-.00016	.050			
4	7491695	1.611	.008 AND UP	1.61060	-.00040	.050			
4	7491697	1.612	.001	1.61200	-.00008	.050	4	4	
4	7491698	1.612	.002	1.61192	-.00012	.050			
4	7491699	1.612	.004 AND UP	1.61180	-.00016	.050			
4	7491701	1.612	.008 AND UP	1.61160	-.00040	.050			
4	7491703	1.613	.001	1.61300	-.00008	.050	4	4	
4	7491704	1.613	.002	1.61292	-.00012	.050			
4	7491705	1.613	.004 AND UP	1.61280	-.00016	.050			
4	7491707	1.613	.008 AND UP	1.61260	-.00040	.050			
4	7491709	1.614	.001	1.61400	-.00008	.050	4	4	
4	7491710	1.614	.002	1.61392	-.00012	.050			
4	7491711	1.614	.004 AND UP	1.61380	-.00016	.050			
4	7491713	1.614	.008 AND UP	1.61360	-.00040	.050			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

NO. ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE NO.	STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	DIMETER	DIAMETER	G	
A	B	C	D	E	F	G	H	
4	7491715			1.615	.001	1.61500	-.00008	.050
4	7491716			1.615	.002	1.61492	-.00012	.050
4	7491717			1.615	.004	1.61480	-.00016	.050
4	7491719			1.615	.008 AND UP	1.61460	-.00040	.050
4	7491721			1.616	.001	1.61600	-.00008	.050
4	7491722			1.616	.002	1.61592	-.00012	.050
4	7491723			1.616	.004	1.61580	-.00016	.050
4	7491725			1.616	.008 AND UP	1.61560	-.00040	.050
4	7491727			1.617	.001	1.61700	-.00008	.050
4	7491728			1.617	.002	1.61692	-.00012	.050
4	7491729			1.617	.004	1.61680	-.00016	.050
4	7491731			1.617	.008 AND UP	1.61660	-.00040	.050
4	7491733			1.618	.001	1.61800	-.00008	.050
4	7491734			1.618	.002	1.61792	-.00012	.050
4	7491735			1.618	.004	1.61780	-.00016	.050
4	7491737			1.618	.008 AND UP	1.61760	-.00040	.050
4	7491739			1.619	.001	1.61900	-.00008	.050
4	7491740			1.619	.002	1.61892	-.00012	.050
4	7491741			1.619	.004	1.61880	-.00016	.050
4	7491743			1.619	.008 AND UP	1.61860	-.00040	.050
4	7491745			1.620	.001	1.62000	-.00008	.050
4	7491746			1.620	.002	1.61992	-.00012	.050
4	7491747			1.620	.004	1.61980	-.00016	.050
4	7491749			1.620	.008 AND UP	1.61960	-.00040	.050
4	7491751			1.621	.001	1.62100	-.00008	.050
4	7491752			1.621	.002	1.62092	-.00012	.050
4	7491753			1.621	.004	1.62080	-.00016	.050
4	7491755			1.621	.008 AND UP	1.62060	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
4	7491757	1.622	.001	1.62200	-.00008	.050	4
4	7491758	1.622	.002	1.62192	-.00012	.050	4
4	7491759	1.622	.004	1.62180	-.00016	.050	8
4	7491761	1.622	.008 AND UP	1.62160	-.00040	.050	8
4	7491763	1.623	.001	1.62300	-.00008	.050	4
4	7491764	1.623	.002	1.62292	-.00012	.050	4
4	7491765	1.623	.004	1.62280	-.00016	.050	8
4	7491767	1.623	.008 AND UP	1.62260	-.00040	.050	8
4	7491769	1.624	.001	1.62400	-.00008	.050	4
4	7491770	1.624	.002	1.62392	-.00012	.050	4
4	7491771	1.624	.004	1.62380	-.00016	.050	8
4	7491773	1.624	.008 AND UP	1.62360	-.00040	.050	8
4	7491775	1.625	.001	1.62500	-.00008	.050	4
4	7491776	1.625	.002	1.62492	-.00012	.050	4
4	7491777	1.625	.004	1.62480	-.00016	.050	8
4	7491779	1.625	.008 AND UP	1.62460	-.00040	.050	8
4	7491781	1.626	.001	1.62600	-.00008	.050	4
4	7491782	1.626	.002	1.62592	-.00012	.050	4
4	7491783	1.626	.004	1.62580	-.00016	.050	8
4	7491785	1.626	.008 AND UP	1.62560	-.00040	.050	8
4	7491787	1.627	.001	1.62700	-.00008	.050	4
4	7491788	1.627	.002	1.62692	-.00012	.050	4
4	7491789	1.627	.004	1.62680	-.00016	.050	8
4	7491791	1.627	.008 AND UP	1.62660	-.00040	.050	8
4	7491793	1.628	.001	1.62800	-.00008	.050	4
4	7491794	1.628	.002	1.62792	-.00012	.050	4
4	7491795	1.628	.004	1.62780	-.00016	.050	8
4	7491797	1.628	.008 AND UP	1.62760	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	DIA. METER	F	G	H			
A	B	C	D	E	F	G	H			
4	7491799		1.629	.001	1.62900	-.00008	.050	4		
4	7491800		1.629	.002	1.62892	-.00012	.050	4		
4	7491801		1.629	.004	1.62880	-.00016	.050	4		
4	7491803		1.629	.008 AND UP	1.62860	-.00040	.050	8		
4	7491805		1.630	.001	1.63000	-.00008	.050	4		
4	7491806		1.630	.002	1.62992	-.00012	.050	4		
4	7491807		1.630	.004	1.62980	-.00016	.050	8		
4	7491809		1.630	.008 AND UP	1.62960	-.00040	.050	8		
4	7491811		1.631	.001	1.63100	-.00008	.050	4		
4	7491812		1.631	.002	1.63092	-.00012	.050	4		
4	7491813		1.631	.004	1.63080	-.00016	.050	8		
4	7491815		1.631	.008 AND UP	1.63060	-.00040	.050	8		
4	7491817		1.632	.001	1.63200	-.00008	.050	4		
4	7491818		1.632	.002	1.63192	-.00012	.050	4		
4	7491819		1.632	.004	1.63180	-.00016	.050	8		
4	7491821		1.632	.008 AND UP	1.63160	-.00040	.050	8		
4	7491823		1.633	.001	1.63300	-.00008	.050	4		
4	7491824		1.633	.002	1.63292	-.00012	.050	4		
4	7491825		1.633	.004	1.63280	-.00016	.050	8		
4	7491827		1.633	.008 AND UP	1.63260	-.00040	.050	8		
4	7491829		1.634	.001	1.63400	-.00008	.050	4		
4	7491830		1.634	.002	1.63392	-.00012	.050	4		
4	7491831		1.634	.004	1.63380	-.00016	.050	8		
4	7491833		1.634	.008 AND UP	1.63360	-.00040	.050	8		
4	7491835		1.635	.001	1.63500	-.00008	.050	4		
4	7491836		1.635	.002	1.63492	-.00012	.050	4		
4	7491837		1.635	.004	1.63480	-.00016	.050	8		
4	7491839		1.635	.008 AND UP	1.63460	-.00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA.	E	F	G	
A	B	C	D				H	
4	7491841		1.636	.001	1.63600	-.00008	.050	
4	7491842		1.636	.002	1.63592	-.00012	.050	
4	7491843		1.636	.004	1.63580	-.00016	.050	
4	7491845		1.636	.008 AND UP	1.63560	-.00040	.050	
4	7491847		1.637	.001	1.63700	-.00008	.050	
4	7491848		1.637	.002	1.63692	-.00012	.050	
4	7491849		1.637	.004	1.63680	-.00016	.050	
4	7491851		1.637	.008 AND UP	1.63660	-.00040	.050	
4	7491853		1.638	.001	1.63800	-.00008	.050	
4	7491854		1.638	.002	1.63792	-.00012	.050	
4	7491855		1.638	.004	1.63780	-.00016	.050	
4	7491857		1.638	.008 AND UP	1.63760	-.00040	.050	
4	7491859		1.639	.001	1.63900	-.00008	.050	
4	7491860		1.639	.002	1.63892	-.00012	.050	
4	7491861		1.639	.004	1.63880	-.00016	.050	
4	7491863		1.639	.008 AND UP	1.63860	-.00040	.050	
4	7491865		1.640	.001	1.64000	-.00008	.050	
4	7491866		1.640	.002	1.63992	-.00012	.050	
4	7491867		1.640	.004	1.63980	-.00016	.050	
4	7491869		1.640	.008 AND UP	1.63960	-.00040	.050	
4	7491871		1.641	.001	1.64100	-.00008	.050	
4	7491872		1.641	.002	1.64092	-.00012	.050	
4	7491873		1.641	.004	1.64080	-.00016	.050	
4	7491875		1.641	.008 AND UP	1.64060	-.00040	.050	
4	7491877		1.642	.001	1.64200	-.00008	.050	
4	7491878		1.642	.002	1.64192	-.00012	.050	
4	7491879		1.642	.004	1.64180	-.00016	.050	
4	7491881		1.642	.008 AND UP	1.64160	-.00040	.050	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	RING-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	CHECK	D	E	F	G	H		
A	B	C								
4	7491883	1.643	.001	1.64300	-.00008	.050	4			
4	7491884	1.643	.002	1.64292	-.00012	.050	4			
4	7491885	1.643	.004	1.64280	-.00016	.050	8			
4	7491887	1.643	.008 AND UP	1.64260	-.00040	.050	8			
4	7491889	1.644	.001	1.64400	-.00008	.050	4			
4	7491890	1.644	.002	1.64392	-.00012	.050	4			
4	7491891	1.644	.004	1.64380	-.00016	.050	8			
4	7491893	1.644	.008 AND UP	1.64360	-.00040	.050	4			
4	7491895	1.645	.001	1.64500	-.00008	.050	4			
4	7491896	1.645	.002	1.64492	-.00012	.050	4			
4	7491897	1.645	.004	1.64480	-.00016	.050	8			
4	7491899	1.645	.008 AND UP	1.64460	-.00040	.050	8			
4	7491901	1.646	.001	1.64600	-.00008	.050	4			
4	7491902	1.646	.002	1.64592	-.00012	.050	4			
4	7491903	1.646	.004	1.64580	-.00016	.050	8			
4	7491905	1.646	.008 AND UP	1.64560	-.00040	.050	8			
4	7491907	1.647	.001	1.64700	-.00008	.050	4			
4	7491908	1.647	.002	1.64692	-.00012	.050	4			
4	7491909	1.647	.004	1.64680	-.00016	.050	8			
4	7491911	1.647	.008 AND UP	1.64660	-.00040	.050	8			
4	7491913	1.648	.001	1.64800	-.00008	.050	4			
4	7491914	1.648	.002	1.64792	-.00012	.050	4			
4	7491915	1.648	.004	1.64780	-.00016	.050	8			
4	7491917	1.648	.008 AND UP	1.64760	-.00040	.050	8			
4	7491919	1.649	.001	1.64900	-.00008	.050	4			
4	7491920	1.649	.002	1.64892	-.00012	.050	4			
4	7491921	1.649	.004	1.64880	-.00016	.050	8			
4	7491923	1.649	.008 AND UP	1.64860	-.00040	.050	8			

Table I. Tabulation of Design and Identification Data (Continued)

NO. OF ITEM	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		CHAMFER H
	RING GAGE STOCK NO.	ACCEPTANCE CHECK	D	E	F	G		
A	B	C	D	E	F	G	H	
4	7491925		1.650	.001	1.65000	-.00008	.050	4
4	7491926		1.650	.002	1.64992	-.00012	.050	4
4	7491927		1.650	.004	1.64980	-.00016	.050	8
4	7491929		1.650	.008 AND UP	1.64960	-.00040	.050	8
4	7491931		1.651	.001	1.65100	-.00008	.050	4
4	7491932		1.651	.002	1.65092	-.00012	.050	4
4	7491933		1.651	.004	1.65080	-.00016	.050	8
4	7491935		1.651	.008 AND UP	1.65060	-.00040	.050	8
4	7491937		1.652	.001	1.65200	-.00008	.050	4
4	7491938		1.652	.002	1.65192	-.00012	.050	4
4	7491939		1.652	.004	1.65180	-.00016	.050	8
4	7491941		1.652	.008 AND UP	1.65160	-.00040	.050	8
4	7491943		1.653	.001	1.65300	-.00008	.050	4
4	7491944		1.653	.002	1.65292	-.00012	.050	4
4	7491945		1.653	.004	1.65280	-.00016	.050	8
4	7491947		1.653	.008 AND UP	1.65260	-.00040	.050	8
4	7491949		1.654	.001	1.65400	-.00008	.050	4
4	7491950		1.654	.002	1.65392	-.00012	.050	4
4	7491951		1.654	.004	1.65380	-.00016	.050	8
4	7491953		1.654	.008 AND UP	1.65360	-.00040	.050	8
4	7491955		1.655	.001	1.65500	-.00008	.050	4
4	7491956		1.655	.002	1.65492	-.00012	.050	4
4	7491957		1.655	.004	1.65480	-.00016	.050	8
4	7491959		1.655	.008 AND UP	1.65460	-.00040	.050	8
4	7491961		1.656	.001	1.65600	-.00008	.050	4
4	7491962		1.656	.002	1.65592	-.00012	.050	4
4	7491963		1.656	.004	1.65580	-.00016	.050	8
4	7491965		1.656	.008 AND UP	1.65560	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

TIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
A	B	C								
4	7491967		1.65625	.001 AND UP	1.65625 -	.00008	.050	.4		
4	7491968		1.657	.001	1.65700 -	.00008	.050	.4		
4	7491969		1.657	.002	1.65692 -	.00012	.050	.4		
4	7491970		1.657	.004	1.65680 -	.00016	.050	.8		
4	7491972		1.657	.008 AND UP	1.65660 -	.00040	.050	.8		
4	7491974		1.658	.001	1.65800 -	.00008	.050	.4		
4	7491975		1.658	.002	1.65792 -	.00012	.050	.4		
4	7491976		1.658	.004	1.65780 -	.00016	.050	.8		
4	7491978		1.658	.008 AND UP	1.65760 -	.00040	.050	.8		
4	7491980		1.659	.001	1.65900 -	.00008	.050	.4		
4	7491981		1.659	.002	1.65892 -	.00012	.050	.4		
4	7491982		1.659	.004	1.65880 -	.00016	.050	.8		
4	7491984		1.659	.008 AND UP	1.65860 -	.00040	.050	.8		
4	7491986		1.660	.001	1.66000 -	.00008	.050	.4		
4	7491987		1.660	.002	1.65992 -	.00012	.050	.4		
4	7491988		1.660	.004	1.65980 -	.00016	.050	.8		
4	7491990		1.660	.008 AND UP	1.65960 -	.00040	.050	.8		
4	7491992		1.661	.001	1.66100 -	.00008	.050	.4		
4	7491993		1.661	.002	1.66092 -	.00012	.050	.4		
4	7491994		1.661	.004	1.66080 -	.00016	.050	.8		
4	7491996		1.661	.008 AND UP	1.66060 -	.00040	.050	.8		
4	7491998		1.662	.001	1.66200 -	.00008	.050	.4		
4	7491999		1.662	.002	1.66192 -	.00012	.050	.4		
4	7492000		1.662	.004	1.66180 -	.00016	.050	.8		
4	7492002		1.662	.008 AND UP	1.66160 -	.00040	.050	.8		
4	7492004		1.663	.001	1.66300 -	.00008	.050	.4		
4	7492005		1.663	.002	1.66292 -	.00012	.050	.4		
4	7492006		1.663	.004	1.66280 -	.00016	.050	.8		
4	7492008		1.663	.008 AND UP	1.66260 -	.00040	.050	.8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	RING-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	CHECK	D	E	F	G	H		
A	B	C								
4	7492010	1.664	.001	1.66400	-.00008	.050	4	4	4	
4	7492011	1.664	.002	1.66392	-.00012	.050	4	4	4	
4	7492012	1.664	.004	1.66380	-.00016	.050	4	4	4	
4	7492014	1.664	.008 AND UP	1.66360	-.00040	.050	4	4	4	
4	7492016	1.665	.001	1.66500	-.00008	.050	4	4	4	
4	7492017	1.665	.002	1.66492	-.00012	.050	4	4	4	
4	7492018	1.665	.004	1.66480	-.00016	.050	4	4	4	
4	7492020	1.665	.008 AND UP	1.66460	-.00040	.050	4	4	4	
4	7492022	1.666	.001	1.66600	-.00008	.050	4	4	4	
4	7492023	1.666	.002	1.66592	-.00012	.050	4	4	4	
4	7492024	1.666	.004	1.66580	-.00016	.050	4	4	4	
4	7492026	1.666	.008 AND UP	1.66560	-.00040	.050	4	4	4	
4	7492028	1.667	.001	1.66700	-.00008	.050	4	4	4	
4	7492029	1.667	.002	1.66692	-.00012	.050	4	4	4	
4	7492030	1.667	.004	1.66680	-.00016	.050	4	4	4	
4	7492032	1.667	.008 AND UP	1.66660	-.00040	.050	4	4	4	
4	7492034	1.668	.001	1.66800	-.00008	.050	4	4	4	
4	7492035	1.668	.002	1.66792	-.00012	.050	4	4	4	
4	7492036	1.668	.004	1.66780	-.00016	.050	4	4	4	
4	7492038	1.668	.008 AND UP	1.66760	-.00040	.050	4	4	4	
4	7492040	1.669	.001	1.66900	-.00008	.050	4	4	4	
4	7492041	1.669	.002	1.66892	-.00012	.050	4	4	4	
4	7492042	1.669	.004	1.66880	-.00016	.050	4	4	4	
4	7492044	1.669	.008 AND UP	1.66860	-.00040	.050	4	4	4	
4	7492046	1.670	.001	1.67000	-.00008	.050	4	4	4	
4	7492047	1.670	.002	1.66992	-.00012	.050	4	4	4	
4	7492048	1.670	.004	1.66980	-.00016	.050	4	4	4	
4	7492050	1.670	.008 AND UP	1.66960	-.00040	.050	4	4	4	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE				RING GAGE DIMENSIONS				FINISH	H		
	FIN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER		G					
					C	D	F					
A	B											
7492052		7492053		1.671	.001	1.67100	-	.00008	.050	4		
7492054		7492056		1.671	.002	1.67092	-	.00012	.050	4		
7492058		7492059		1.671	.004 AND UP	1.67080	-	.00016	.050	8		
7492060		7492062		1.671	.008	1.67060	-	.00040	.050	8		
7492064		7492065		1.672	.001	1.67200	-	.00008	.050	4		
7492066		7492068		1.672	.002	1.67192	-	.00012	.050	4		
7492068		7492070		1.672	.004 AND UP	1.67180	-	.00016	.050	8		
7492070		7492071		1.673	.001	1.67160	-	.00040	.050	8		
7492072		7492074		1.673	.002	1.67300	-	.00008	.050	4		
7492074		7492076		1.673	.004 AND UP	1.67292	-	.00012	.050	4		
7492076		7492077		1.674	.001	1.67280	-	.00016	.050	8		
7492077		7492078		1.674	.002	1.67260	-	.00040	.050	8		
7492078		7492080		1.674	.004 AND UP	1.67160	-	.00040	.050	8		
7492080		7492082		1.675	.001	1.67400	-	.00008	.050	4		
7492082		7492083		1.675	.002	1.67392	-	.00012	.050	4		
7492083		7492084		1.675	.004	1.67380	-	.00016	.050	8		
7492084		7492086		1.675	.008 AND UP	1.67460	-	.00040	.050	8		
7492086		7492088		1.676	.001	1.67600	-	.00008	.050	4		
7492088		7492089		1.676	.002	1.67592	-	.00012	.050	4		
7492089		7492090		1.676	.004	1.67580	-	.00016	.050	8		
7492090		7492092		1.677	.008 AND UP	1.67560	-	.00040	.050	8		
7492092												

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER	
	RING-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIAMETER	RING GAGE DIMENSIONS		G	H			
		RING-GAGE ACCEPTANCE CHECK	D		E	F					
A	B	C	D	E	F	G	H				
4	7492094		1.678	.001	1.67800	-.00008	.050	4			
4	7492095		1.678	.002	1.67792	-.00012	.050	4			
4	7492096		1.678	.004 AND UP	1.67780	-.00016	.050	8			
4	7492098		1.678	.008 AND UP	1.67760	-.00040	.050	8			
4	7492100		1.679	.001	1.67900	-.00008	.050	4			
4	7492101		1.679	.002	1.67892	-.00012	.050	4			
4	7492102		1.679	.004 AND UP	1.67880	-.00016	.050	8			
4	7492104		1.679	.008 AND UP	1.67860	-.00040	.050	8			
4	7492106		1.680	.001	1.68000	-.00008	.050	4			
4	7492107		1.680	.002	1.67992	-.00012	.050	4			
4	7492108		1.680	.004 AND UP	1.67980	-.00016	.050	8			
4	7492110		1.680	.008 AND UP	1.67960	-.00040	.050	8			
4	7492112		1.681	.001	1.68100	-.00008	.050	4			
4	7492113		1.681	.002	1.68092	-.00012	.050	4			
4	7492114		1.681	.004 AND UP	1.68080	-.00016	.050	8			
4	7492116		1.681	.008 AND UP	1.68060	-.00040	.050	8			
4	7492118		1.682	.001	1.68220	-.00008	.050	4			
4	7492119		1.682	.002	1.68192	-.00012	.050	4			
4	7492120		1.682	.004 AND UP	1.68180	-.00016	.050	8			
4	7492122		1.682	.008 AND UP	1.68160	-.00040	.050	8			
4	7492124		1.683	.001	1.68300	-.00008	.050	4			
4	7492125		1.683	.002	1.68292	-.00012	.050	4			
4	7492126		1.683	.004 AND UP	1.68280	-.00016	.050	8			
4	7492128		1.683	.008 AND UP	1.68260	-.00040	.050	8			
4	7492130		1.684	.001	1.68400	-.00008	.050	4			
4	7492131		1.684	.002	1.68392	-.00012	.050	4			
4	7492132		1.684	.004 AND UP	1.68380	-.00016	.050	8			
4	7492134		1.684	.008 AND UP	1.68360	-.00040	.050	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA. E	F	G	H	
RING GAGE	ACCEPTANCE CHECK		D	E	F	G	H	
4	7492136		1.685	.001	1.68500 - .00008	.050	4	
4	7492137		1.685	.002	1.68492 - .00012	.050	4	
4	7492138		1.685	.004	1.68480 - .00016	.050	4	
4	7492140		1.685	.008 AND UP	1.68460 - .00040	.050	4	
4	7492142		1.686	.001	1.68600 - .00008	.050	4	
4	7492143		1.686	.002	1.68592 - .00012	.050	4	
4	7492144		1.686	.004	1.68580 - .00016	.050	4	
4	7492146		1.686	.008 AND UP	1.68560 - .00040	.050	4	
4	7492148		1.687	.001	1.68700 - .00008	.050	4	
4	7492149		1.687	.002	1.68692 - .00012	.050	4	
4	7492150		1.687	.004	1.68680 - .00016	.050	4	
4	7492152		1.687	.008 AND UP	1.68660 - .00040	.050	4	
4	7492154		1.6875	.001 AND UP	1.68750 - .00008	.050	4	
4	7492155		1.688	.001	1.68800 - .00008	.050	4	
4	7492156		1.688	.002	1.68792 - .00012	.050	4	
4	7492157		1.688	.004	1.68780 - .00016	.050	4	
4	7492159		1.688	.008 AND UP	1.68760 - .00040	.050	4	
4	7492161		1.689	.001	1.68900 - .00008	.050	4	
4	7492162		1.689	.002	1.68892 - .00012	.050	4	
4	7492163		1.689	.004	1.68880 - .00016	.050	4	
4	7492165		1.689	.008 AND UP	1.68860 - .00040	.050	4	
4	7492167		1.690	.001	1.69000 - .00008	.050	4	
4	7492168		1.690	.002	1.68992 - .00012	.050	4	
4	7492169		1.690	.004	1.68980 - .00016	.050	4	
4	7492171		1.690	.008 AND UP	1.68960 - .00040	.050	4	
4	7492173		1.691	.001	1.69100 - .00008	.050	4	
4	7492174		1.691	.002	1.69092 - .00012	.050	4	
4	7492175		1.691	.004	1.69080 - .00016	.050	4	
4	7492177		1.691	.008 AND UP	1.69060 - .00040	.050	4	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

F1G. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	FIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	ACCEPTANCE CHECK	D	E	F	G	H	
A	B	C							
4	7492179	1.692	.001	1.69200	-.00008	.050	4	4	
4	7492180	1.692	.002	1.69192	-.00012	.050			
4	7492181	1.692	.004 AND UP	1.69180	-.00016	.050			
4	7492183	1.692	.008 AND UP	1.69160	-.00040	.050			
4	7492185	1.693	.001	1.69300	-.00008	.050	4	4	
4	7492186	1.693	.002	1.69292	-.00012	.050			
4	7492187	1.693	.004 AND UP	1.69280	-.00016	.050			
4	7492189	1.693	.008 AND UP	1.69260	-.00040	.050			
4	7492191	1.694	.001	1.69400	-.00008	.050	4	4	
4	7492192	1.694	.002	1.69392	-.00012	.050			
4	7492193	1.694	.004	1.69380	-.00016	.050			
4	7492195	1.694	.008 AND UP	1.69360	-.00040	.050			
4	7492197	1.695	.001	1.69500	-.00008	.050	4	4	
4	7492198	1.695	.002	1.69492	-.00012	.050			
4	7492199	1.695	.004	1.69480	-.00016	.050			
4	7492201	1.695	.008 AND UP	1.69460	-.00040	.050			
4	7492203	1.696	.001	1.69600	-.00008	.050	4	4	
4	7492204	1.696	.002	1.69592	-.00012	.050			
4	7492205	1.696	.004	1.69580	-.00016	.050			
4	7492207	1.696	.008 AND UP	1.69560	-.00040	.050			
4	7492209	1.697	.001	1.69700	-.00008	.050	4	4	
4	7492210	1.697	.002	1.69692	-.00012	.050			
4	7492211	1.697	.004	1.69680	-.00016	.050			
4	7492213	1.697	.008 AND UP	1.69660	-.00040	.050			
4	7492215	1.698	.001	1.69800	-.00008	.050	4	4	
4	7492216	1.698	.002	1.69792	-.00012	.050			
4	7492217	1.698	.004	1.69780	-.00016	.050			
4	7492219	1.698	.008 AND UP	1.69760	-.00040	.050			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FINISH ON GAGE NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		CHAMFER
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	COMPONENT DIMENSION		DIA. METER	F	
A	B	C	D	E	F	G	
4	7492221	1.699	.001	1.69900 - .00008	.050	4	
4	7492222	1.699	.002	1.69892 - .00012	.050	4	
4	7492223	1.699	.004 AND UP	1.69880 - .00016	.050	8	
4	7492225	1.699	.008 AND UP	1.69860 - .00040	.050	8	
4	7492227	1.700	.001	1.70000 - .00008	.050	4	
4	7492228	1.700	.002	1.69992 - .00012	.050	4	
4	7492229	1.700	.004	1.69980 - .00016	.050	8	
4	7492231	1.700	.008 AND UP	1.69960 - .00040	.050	8	
4	7492233	1.701	.001	1.70100 - .00008	.050	4	
4	7492234	1.701	.002	1.70092 - .00012	.050	4	
4	7492235	1.701	.004	1.70080 - .00016	.050	8	
4	7492237	1.701	.008 AND UP	1.70060 - .00040	.050	8	
4	7492239	1.702	.001	1.70200 - .00008	.050	4	
4	7492240	1.702	.002	1.70192 - .00012	.050	4	
4	7492241	1.702	.004	1.70180 - .00016	.050	8	
4	7492243	1.702	.008 AND UP	1.70160 - .00040	.050	8	
4	7492245	1.703	.001	1.70300 - .00008	.050	4	
4	7492246	1.703	.002	1.70292 - .00012	.050	4	
4	7492247	1.703	.004	1.70280 - .00016	.050	8	
4	7492249	1.703	.008 AND UP	1.70260 - .00040	.050	8	
4	7492251	1.704	.001	1.70400 - .00008	.050	4	
4	7492252	1.704	.002	1.70392 - .00012	.050	4	
4	7492253	1.704	.004	1.70380 - .00016	.050	8	
4	7492255	1.704	.008 AND UP	1.70360 - .00040	.050	8	
4	7492257	1.705	.001	1.70500 - .00008	.050	4	
4	7492258	1.705	.002	1.70492 - .00012	.050	4	
4	7492259	1.705	.004	1.70480 - .00016	.050	8	
4	7492261	1.705	.008 AND UP	1.70460 - .00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER	H
	FIN-GAGE RING GAGE	STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G		
A	B	C	D							
4	7492263			1.706	.001	1.70600 - .00008	.050	4		
4	7492264			1.706	.002	1.70592 - .00012	.050	4		
4	7492265			1.706	.004	1.70580 - .00016	.050	8		
4	7492267			1.706	.008 AND UP	1.70560 - .00040	.050	8		
4	7492269			1.707	.001	1.70700 - .00008	.050	4		
4	7492270			1.707	.002	1.70692 - .00012	.050	4		
4	7492271			1.707	.004	1.70680 - .00016	.050	8		
4	7492273			1.707	.008 AND UP	1.70660 - .00040	.050	8		
4	7492275			1.708	.001	1.70800 - .00008	.050	4		
4	7492276			1.708	.002	1.70792 - .00012	.050	4		
4	7492277			1.708	.004	1.70780 - .00016	.050	8		
4	7492279			1.708	.008 AND UP	1.70760 - .00040	.050	8		
4	7492281			1.709	.001	1.70900 - .00008	.050	4		
4	7492282			1.709	.002	1.70892 - .00012	.050	4		
4	7492283			1.709	.004	1.70880 - .00016	.050	8		
4	7492285			1.709	.008 AND UP	1.70860 - .00040	.050	8		
4	7492287			1.710	.001	1.71000 - .00008	.050	4		
4	7492288			1.710	.002	1.70992 - .00012	.050	4		
4	7492289			1.710	.004	1.70980 - .00016	.050	8		
4	7492291			1.710	.008 AND UP	1.70960 - .00040	.050	8		
4	7492293			1.711	.001	1.71100 - .00008	.050	4		
4	7492294			1.711	.002	1.71092 - .00012	.050	4		
4	7492295			1.711	.004	1.71080 - .00016	.050	8		
4	7492297			1.711	.008 AND UP	1.71060 - .00040	.050	8		
4	7492299			1.712	.001	1.71200 - .00008	.050	4		
4	7492300			1.712	.002	1.71192 - .00012	.050	4		
4	7492301			1.712	.004	1.71180 - .00016	.050	8		
4	7492303			1.712	.008 AND UP	1.71160 - .00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

C N O L I T	FIN-GAGE STOCK NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
		RING GAGE	ACCEPTANCE CHECK	D	E	F	G	
A	B	C						H
4	7492305	1.713	.001	1.71300	-.00008	.050	4	
4	7492306	1.713	.002	1.71292	-.00012	.050	4	
4	7492307	1.713	.004	1.71280	-.00016	.050	8	
4	7492309	1.713	.008 AND UP	1.71260	-.00040	.050	8	
4	7492311	1.714	.001	1.71400	-.00008	.050	4	
4	7492312	1.714	.002	1.71392	-.00012	.050	4	
4	7492313	1.714	.004	1.71380	-.00016	.050	8	
4	7492314	1.714	.008 AND UP	1.71360	-.00040	.050	8	
4	7492315	1.715	.001	1.71500	-.00008	.050	4	
4	7492317	1.715	.002	1.71492	-.00012	.050	4	
4	7492318	1.715	.004	1.71480	-.00016	.050	8	
4	7492319	1.715	.008 AND UP	1.71460	-.00040	.050	8	
4	7492321	1.715		1.71600	-.00008	.050	4	
4	7492323	1.716	.001	1.71592	-.00012	.050	4	
4	7492324	1.716	.002	1.71580	-.00016	.050	8	
4	7492325	1.716	.004	1.71560	-.00040	.050	8	
4	7492327	1.716	.008 AND UP	1.71540	-.00040	.050	8	
4	7492329	1.717	.001	1.71700	-.00008	.050	4	
4	7492330	1.717	.002	1.71692	-.00012	.050	4	
4	7492331	1.717	.004	1.71680	-.00016	.050	8	
4	7492333	1.717	.008 AND UP	1.71660	-.00040	.050	8	
4	7492335	1.718	.001	1.71800	-.00008	.050	4	
4	7492336	1.718	.002	1.71792	-.00012	.050	4	
4	7492337	1.718	.004	1.71780	-.00016	.050	8	
4	7492339	1.718	.008 AND UP	1.71760	-.00040	.050	8	
4	7492341	1.71875	.001 AND UP	1.71875	-.00008	.050	4	
4	7492342	1.719	.001	1.71900	-.00008	.050	4	
4	7492343	1.719	.002	1.71892	-.00012	.050	4	
4	7492344	1.719	.004	1.71880	-.00016	.050	8	
4	7492346	1.719	.008 AND UP	1.71860	-.00040	.050	8	

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			CHAMFER	FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	G		
A	B	C	D	E	F	G	H	
4	7492348		1.720	.001	1.72000	-.00008	.050	4
4	7492349		1.720	.002	1.71992	-.00012	.050	4
4	7492350		1.720	.004	1.71980	-.00016	.050	8
4	7492352		1.720	.008 AND UP	1.71960	-.00040	.050	8
4	7492354		1.721	.001	1.72100	-.00008	.050	4
4	7492355		1.721	.002	1.72092	-.00012	.050	4
4	7492356		1.721	.004	1.72080	-.00016	.050	8
4	7492358		1.721	.008 AND UP	1.72060	-.00040	.050	8
4	7492360		1.722	.001	1.72200	-.00008	.050	4
4	7492361		1.722	.002	1.72192	-.00012	.050	4
4	7492362		1.722	.004	1.72180	-.00016	.050	8
4	7492364		1.722	.008 AND UP	1.72160	-.00040	.050	8
4	7492366		1.723	.001	1.72300	-.00008	.050	4
4	7492367		1.723	.002	1.72292	-.00012	.050	4
4	7492368		1.723	.004	1.72280	-.00016	.050	8
4	7492370		1.723	.008 AND UP	1.72260	-.00040	.050	8
4	7492372		1.724	.001	1.72400	-.00008	.050	4
4	7492373		1.724	.002	1.72392	-.00012	.050	4
4	7492374		1.724	.004	1.72380	-.00016	.050	8
4	7492376		1.724	.008 AND UP	1.72360	-.00040	.050	8
4	7492378		1.725	.001	1.72500	-.00008	.050	4
4	7492379		1.725	.002	1.72492	-.00012	.050	4
4	7492380		1.725	.004	1.72480	-.00016	.050	8
4	7492382		1.725	.008 AND UP	1.72460	-.00040	.050	8
4	7492384		1.726	.001	1.72600	-.00008	.050	4
4	7492385		1.726	.002	1.72592	-.00012	.050	4
4	7492386		1.726	.004	1.72580	-.00016	.050	8
4	7492388		1.726	.008 AND UP	1.72560	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL			RING GAGE DIMENSIONS		FINISH
	FIN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	CHECK	COMPONENT TOLERANCE	DIA. METER	CHAMFER	G	
A	B	C	D	E	F	G			
4	7492390		1.727	.001	1.72700	-.00008	.050	4	
4	7492391		1.727	.002	1.72692	-.00012	.050	4	
4	7492392		1.727	.004	1.72680	-.00016	.050	8	
4	7492394		1.727	.008 AND UP	1.72660	-.00040	.050	8	
4	7492396		1.728	.001	1.72800	-.00008	.050	4	
4	7492397		1.728	.002	1.72792	-.00012	.050	4	
4	7492398		1.728	.004	1.72780	-.00016	.050	8	
4	7492400		1.728	.008 AND UP	1.72760	-.00040	.050	8	
4	7492402		1.729	.001	1.72900	-.00008	.050	4	
4	7492403		1.729	.002	1.72892	-.00012	.050	4	
4	7492404		1.729	.004	1.72880	-.00016	.050	8	
4	7492406		1.729	.008 AND UP	1.72860	-.00040	.050	8	
4	7492408		1.730	.001	1.73000	-.00008	.050	4	
4	7492409		1.730	.002	1.72992	-.00012	.050	4	
4	7492410		1.730	.004	1.72980	-.00016	.050	8	
4	7492412		1.730	.008 AND UP	1.72960	-.00040	.050	8	
4	7492414		1.731	.001	1.73100	-.00008	.050	4	
4	7492415		1.731	.002	1.73092	-.00012	.050	4	
4	7492416		1.731	.004	1.73080	-.00016	.050	8	
4	7492418		1.731	.008 AND UP	1.73060	-.00040	.050	8	
4	7492420		1.732	.001	1.73200	-.00008	.050	4	
4	7492421		1.732	.002	1.73192	-.00012	.050	4	
4	7492422		1.732	.004	1.73180	-.00016	.050	8	
4	7492424		1.732	.008 AND UP	1.73160	-.00040	.050	8	
4	7492426		1.733	.001	1.73300	-.00008	.050	4	
4	7492427		1.733	.002	1.73292	-.00012	.050	4	
4	7492428		1.733	.004	1.73280	-.00016	.050	8	
4	7492430		1.733	.008 AND UP	1.73260	-.00040	.050	8	

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO. GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			H
	FIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	RING GAGE ACCEPTANCE CHECK	D	E	F	G	H		
A	B	C	D	E	F	G	H			
4	7492432	1.734	.001	1.73400	-.00008	.050	4			
4	7492433	1.734	.002	1.73392	-.00012	.050	4			
4	7492434	1.734	.004 AND UP	1.73380	-.00016	.050	4			
4	7492436	1.734	.008 AND UP	1.73360	-.00040	.050	8			
4	7492438	1.735	.001	1.73500	-.00008	.050	4			
4	7492439	1.735	.002	1.73492	-.00012	.050	4			
4	7492440	1.735	.004 AND UP	1.73480	-.00016	.050	8			
4	7492442	1.735	.008 AND UP	1.73460	-.00040	.050	8			
4	7492444	1.736	.001	1.73600	-.00008	.050	4			
4	7492445	1.736	.002	1.73592	-.00012	.050	4			
4	7492446	1.736	.004 AND UP	1.73580	-.00016	.050	8			
4	7492448	1.736	.008 AND UP	1.73560	-.00040	.050	8			
4	7492450	1.737	.001	1.73700	-.00008	.050	4			
4	7492451	1.737	.002	1.73692	-.00012	.050	4			
4	7492452	1.737	.004 AND UP	1.73680	-.00016	.050	8			
4	7492454	1.737	.008 AND UP	1.73660	-.00040	.050	8			
4	7492456	1.738	.001	1.73800	-.00008	.050	4			
4	7492457	1.738	.002	1.73792	-.00012	.050	4			
4	7492458	1.738	.004 AND UP	1.73780	-.00016	.050	8			
4	7492460	1.738	.008 AND UP	1.73760	-.00040	.050	8			
4	7492462	1.739	.001	1.73900	-.00008	.050	4			
4	7492463	1.739	.002	1.73892	-.00012	.050	4			
4	7492464	1.739	.004 AND UP	1.73880	-.00016	.050	8			
4	7492466	1.739	.008 AND UP	1.73860	-.00040	.050	8			
4	7492468	1.740	.001	1.74000	-.00008	.050	4			
4	7492469	1.740	.002	1.73992	-.00012	.050	4			
4	7492470	1.740	.004 AND UP	1.73980	-.00016	.050	8			
4	7492472	1.740	.008 AND UP	1.73960	-.00040	.050	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE STOCK NO.	MAXIMUM ACCEPTANCE RING GAGE	COMPONENT DIMENSION	D	E	F	G	H	
A	B	C							
4	7492474		1.741	.001	1.741100 -	.00008	.050	4	
4	7492475		1.741	.002	1.74092 -	.00012	.050	4	
4	7492476		1.741	.004	1.74080 -	.00016	.050	8	
4	7492478		1.741	.006 AND UP	1.74060 -	.00040	.050	6	
4	7492480		1.742	.001	1.74200 -	.00008	.050	4	
4	7492481		1.742	.002	1.74192 -	.00012	.050	4	
4	7492482		1.742	.004	1.74180 -	.00016	.050	8	
4	7492484		1.742	.008 AND UP	1.74160 -	.00040	.050	8	
4	7492486		1.743	.001	1.74300 -	.00008	.050	4	
4	7492487		1.743	.002	1.74292 -	.00012	.050	4	
4	7492488		1.743	.004	1.74280 -	.00016	.050	8	
4	7492490		1.743	.008 AND UP	1.74260 -	.00040	.050	8	
4	7492492		1.744	.001	1.74400 -	.00008	.050	4	
4	7492493		1.744	.002	1.74392 -	.00012	.050	4	
4	7492494		1.744	.004	1.74380 -	.00016	.050	8	
4	7492496		1.744	.008 AND UP	1.74360 -	.00040	.050	8	
4	7492498		1.745	.001	1.74500 -	.00008	.050	4	
4	7492499		1.745	.002	1.74492 -	.00012	.050	4	
4	7492500		1.745	.004	1.74480 -	.00016	.050	8	
4	7492502		1.745	.008 AND UP	1.74460 -	.00040	.050	8	
4	7492504		1.746	.001	1.74600 -	.00008	.050	4	
4	7492505		1.746	.002	1.74592 -	.00012	.050	4	
4	7492506		1.746	.004	1.74580 -	.00016	.050	8	
4	7492508		1.746	.008 AND UP	1.74560 -	.00040	.050	8	
4	7492510		1.747	.001	1.74700 -	.00008	.050	4	
4	7492511		1.747	.002	1.74692 -	.00012	.050	4	
4	7492512		1.747	.004	1.74680 -	.00016	.050	8	
4	7492514		1.747	.008 AND UP	1.74660 -	.00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

MIL-GAGE NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER	
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIAMETER		G		F	G		
		RING GAGE	ACCEPTANCE CHECK	D	E	F	G				
A	B	C								H	
4	7492516			1.748	.001	1.74800	-.00008	.050	4		
4	7492517			1.748	.002	1.74792	-.00012	.050	4		
4	7492518			1.748	.004	1.74780	-.00016	.050	8		
4	7492520			1.748	.008 AND UP	1.74760	-.00040	.050	8		
4	7492522			1.749	.001	1.74900	-.00008	.050	4		
4	7492523			1.749	.002	1.74892	-.00012	.050	4		
4	7492524			1.749	.004	1.74880	-.00016	.050	8		
4	7492526			1.749	.008 AND UP	1.74860	-.00040	.050	8		
4	7492528			1.750	.001	1.75000	-.00008	.050	4		
4	7492529			1.750	.002	1.74992	-.00012	.050	4		
4	7492530			1.750	.004	1.74980	-.00016	.050	8		
4	7492532			1.750	.008 AND UP	1.74960	-.00040	.050	8		
4	7492534			1.751	.001	1.75100	-.00008	.050	4		
4	7492535			1.751	.002	1.75092	-.00012	.050	4		
4	7492536			1.751	.004	1.75080	-.00016	.050	8		
4	7492538			1.751	.008 AND UP	1.75060	-.00040	.050	8		
4	7492540			1.752	.001	1.75200	-.00008	.050	4		
4	7492541			1.752	.002	1.75192	-.00012	.050	4		
4	7492542			1.752	.004	1.75180	-.00016	.050	8		
4	7492544			1.752	.008 AND UP	1.75160	-.00040	.050	8		
4	7492546			1.753	.001	1.75300	-.00008	.050	4		
4	7492547			1.753	.002	1.75292	-.00012	.050	4		
4	7492548			1.753	.004	1.75280	-.00016	.050	8		
4	7492550			1.753	.008 AND UP	1.75260	-.00040	.050	8		
4	7492552			1.754	.001	1.75400	-.00008	.050	4		
4	7492553			1.754	.002	1.75392	-.00012	.050	4		
4	7492554			1.754	.004	1.75380	-.00016	.050	8		
4	7492556			1.754	.008 AND UP	1.75360	-.00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	CHAMFER	
A	B	C								
4	7492558		1.755	.001	1.75500	-.00008	.050	4		
4	7492559		1.755	.002	1.75492	-.00012	.050	4		
4	7492560		1.755	.004 AND UP	1.75480	-.00016	.050	4	8 8	
4	7492562		1.755	.008 AND UP	1.75460	-.00040	.050	4	8 8	
4	7492564		1.756	.001	1.75600	-.00008	.050	4		
4	7492565		1.756	.002	1.75592	-.00012	.050	4		
4	7492566		1.756	.004 AND UP	1.75580	-.00016	.050	4	8 8	
4	7492568		1.756	.008 AND UP	1.75560	-.00040	.050	4	8 8	
4	7492570		1.757	.001	1.75700	-.00008	.050	4		
4	7492571		1.757	.002	1.75692	-.00012	.050	4		
4	7492572		1.757	.004 AND UP	1.75680	-.00016	.050	4	8 8	
4	7492574		1.757	.008 AND UP	1.75660	-.00040	.050	4	8 8	
4	7492576		1.758	.001	1.75800	-.00008	.050	4		
4	7492577		1.758	.002	1.75792	-.00012	.050	4		
4	7492578		1.758	.004 AND UP	1.75780	-.00016	.050	4	8 8	
4	7492580		1.758	.008 AND UP	1.75760	-.00040	.050	4	8 8	
4	7492582		1.759	.001	1.75900	-.00008	.050	4		
4	7492583		1.759	.002	1.75892	-.00012	.050	4		
4	7492584		1.759	.004 AND UP	1.75880	-.00016	.050	4	8 8	
4	7492586		1.759	.008 AND UP	1.75860	-.00040	.050	4	8 8	
4	7492588		1.760	.001	1.76000	-.00008	.050	4		
4	7492589		1.760	.002	1.75992	-.00012	.050	4		
4	7492590		1.760	.004 AND UP	1.75980	-.00016	.050	4	8 8	
4	7492592		1.760	.008 AND UP	1.75960	-.00040	.050	4	8 8	
4	7492594		1.761	.001	1.76100	-.00008	.050	4		
4	7492595		1.761	.002	1.76092	-.00012	.050	4		
4	7492596		1.761	.004 AND UP	1.76080	-.00016	.050	4	8 8	
4	7492598		1.761	.008 AND UP	1.76060	-.00040	.050	4	8 8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON C.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE	STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	DIA METER	F	G	
A	B	C	D	E	F	G	H	
4	7492600			1.762	.001	1.76200	-.00008	.050
	7492601			1.762	.002	1.76192	-.00012	.050
	7492602			1.762	.004 AND UP	1.76180	-.00016	.050
	7492604			1.762		1.76160	-.00040	.050
4	7492606			1.763	.001	1.76300	-.00008	.050
	7492607			1.763	.002	1.76292	-.00012	.050
	7492608			1.763	.004	1.76280	-.00016	.050
	7492610			1.763	.008 AND UP	1.76260	-.00040	.050
4	7492612			1.764	.001	1.76400	-.00008	.050
	7492613			1.764	.002	1.76392	-.00012	.050
	7492614			1.764	.004	1.76380	-.00016	.050
	7492616			1.764	.008 AND UP	1.76360	-.00040	.050
4	7492618			1.765	.001	1.76500	-.00008	.050
	7492619			1.765	.002	1.76492	-.00012	.050
	7492620			1.765	.004	1.76480	-.00016	.050
	7492622			1.765	.008 AND UP	1.76460	-.00040	.050
4	7492624			1.766	.001	1.76600	-.00008	.050
	7492625			1.766	.002	1.76592	-.00012	.050
	7492626			1.766	.004	1.76580	-.00016	.050
	7492628			1.766	.008 AND UP	1.76560	-.00040	.050
4	7492630			1.767	.001	1.76700	-.00008	.050
	7492631			1.767	.002	1.76692	-.00012	.050
	7492632			1.767	.004	1.76680	-.00016	.050
	7492634			1.767	.008 AND UP	1.76660	-.00040	.050
4	7492636			1.768	.001	1.76800	-.00008	.050
	7492637			1.768	.002	1.76792	-.00012	.050
	7492638			1.768	.004	1.76780	-.00016	.050
	7492640			1.768	.008 AND UP	1.76760	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
4	7492642			1.769	.001	1.76900	-.00008	.050	4	
4	7492643			1.769	.002	1.76892	-.00012	.050	4	
4	7492644			1.769	.004 AND UP	1.76880	-.00016	.050	8	
4	7492646			1.769	.008 AND UP	1.76860	-.00040	.050	8	
4	7492648			1.770	.001	1.77000	-.00008	.050	4	
4	7492649			1.770	.002	1.76992	-.00012	.050	4	
4	7492650			1.770	.004 AND UP	1.76980	-.00016	.050	8	
4	7492652			1.770	.008 AND UP	1.76960	-.00040	.050	8	
4	7492654			1.771	.001	1.77100	-.00008	.050	4	
4	7492655			1.771	.002	1.77092	-.00012	.050	4	
4	7492656			1.771	.004	1.77080	-.00016	.050	8	
4	7492658			1.771	.008 AND UP	1.77060	-.00040	.050	8	
4	7492660			1.772	.001	1.77200	-.00008	.050	4	
4	7492661			1.772	.002	1.77192	-.00012	.050	4	
4	7492662			1.772	.004	1.77180	-.00016	.050	8	
4	7492664			1.772	.008 AND UP	1.77160	-.00040	.050	8	
4	7492666			1.773	.001	1.77300	-.00008	.050	4	
4	7492667			1.773	.002	1.77292	-.00012	.050	4	
4	7492668			1.773	.004	1.77280	-.00016	.050	8	
4	7492670			1.773	.008 AND UP	1.77260	-.00040	.050	8	
4	7492672			1.774	.001	1.77400	-.00008	.050	4	
4	7492673			1.774	.002	1.77392	-.00012	.050	4	
4	7492674			1.774	.004	1.77380	-.00016	.050	8	
4	7492676			1.774	.008 AND UP	1.77360	-.00040	.050	8	
4	7492678			1.775	.001	1.77500	-.00008	.050	4	
4	7492679			1.775	.002	1.77492	-.00012	.050	4	
4	7492680			1.775	.004	1.77480	-.00016	.050	8	
4	7492682			1.775	.008 AND UP	1.77460	-.00040	.050	8	

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	ACCEPTANCE CHECK	D	E	F	G	H		
A	B	C								
4	7492684	1.776	.001	1.77600	-.00008	.050	4			
4	7492685	1.776	.002	1.77592	-.00012	.050	4			
4	7492686	1.776	.004	1.77580	-.00016	.050	8			
4	7492688	1.776	.008 AND UP	1.77560	-.00040	.050	8			
4	7492690	1.777	.001	1.77700	-.00008	.050	4			
4	7492691	1.777	.002	1.77692	-.00012	.050	4			
4	7492692	1.777	.004	1.77680	-.00016	.050	8			
4	7492694	1.777	.008 AND UP	1.77660	-.00040	.050	8			
4	7492696	1.778	.001	1.77800	-.00008	.050	4			
4	7492697	1.778	.002	1.77792	-.00012	.050	4			
4	7492698	1.778	.004	1.77780	-.00016	.050	8			
4	7492700	1.778	.008 AND UP	1.77760	-.00040	.050	8			
4	7492702	1.779	.001	1.77900	-.00008	.050	4			
4	7492703	1.779	.002	1.77892	-.00012	.050	4			
4	7492704	1.779	.004	1.77880	-.00016	.050	8			
4	7492706	1.779	.008 AND UP	1.77860	-.00040	.050	8			
4	7492708	1.780	.001	1.78000	-.00008	.050	4			
4	7492709	1.780	.002	1.77992	-.00012	.050	4			
4	7492710	1.780	.004	1.77980	-.00016	.050	8			
4	7492712	1.780	.008 AND UP	1.77960	-.00040	.050	8			
4	7492714	1.781	.001	1.78100	-.00008	.050	4			
4	7492715	1.781	.002	1.78092	-.00012	.050	4			
4	7492716	1.781	.004	1.78080	-.00016	.050	8			
4	7492718	1.781	.008 AND UP	1.78060	-.00040	.050	8			
4	7492720	1.78125	.001 AND UP	1.78125	-.00008	.050	4			
4	7492721	1.782	.001	1.78200	-.00008	.050	4			
4	7492722	1.782	.002	1.78192	-.00012	.050	4			
4	7492723	1.782	.004	1.78180	-.00016	.050	8			
4	7492725	1.782	.008 AND UP	1.78160	-.00040	.050	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

TIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	FIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA.	E	F	G	H	
A	B	C	D						
7492727	1.783	.001		1.78300	-.00008	.050	4		
7492728	1.783	.002		1.78292	-.00012	.050	4		
7492729	1.783	.004	AND UP	1.78280	-.00016	.050	8		
7492731	1.783	.008		1.78260	-.00040	.050	8		
7492733	1.784	.001		1.78400	-.00008	.050	4		
7492734	1.784	.002		1.78392	-.00012	.050	4		
7492735	1.784	.004		1.78380	-.00016	.050	8		
7492737	1.784	.008	AND UP	1.78360	-.00040	.050	8		
7492739	1.785	.001		1.78500	-.00008	.050	4		
7492740	1.785	.002		1.78492	-.00012	.050	4		
7492741	1.785	.004		1.78480	-.00016	.050	8		
7492743	1.785	.008	AND UP	1.78460	-.00040	.050	8		
7492745	1.786	.001		1.78600	-.00008	.050	4		
7492746	1.786	.002		1.78592	-.00012	.050	4		
7492747	1.786	.004		1.78580	-.00016	.050	8		
7492749	1.786	.008	AND UP	1.78560	-.00040	.050	8		
7492751	1.787	.001		1.78700	-.00008	.050	4		
7492752	1.787	.002		1.78692	-.00012	.050	4		
7492753	1.787	.004		1.78680	-.00016	.050	8		
7492755	1.787	.008	AND UP	1.78660	-.00040	.050	8		
7492757	1.788	.001		1.78800	-.00008	.050	4		
7492758	1.788	.002		1.78792	-.00012	.050	4		
7492759	1.788	.004		1.78780	-.00016	.050	8		
7492761	1.788	.008	AND UP	1.78760	-.00040	.050	8		
7492763	1.789	.001		1.78900	-.00008	.050	4		
7492764	1.789	.002		1.78892	-.00012	.050	4		
7492765	1.789	.004		1.78880	-.00016	.050	8		
7492767	1.789	.008	AND UP	1.78860	-.00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FILE NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		CHAMFER
	FIN—GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	ACCEPTANCE CHECK	D	E	F	G	H	
A	B	C							
4	7492769			1.790	.001	1.79000 - .00008	.050	4	
4	7492770			1.790	.002	1.78992 - .00012	.050	4	
4	7492771			1.790	.004	1.78980 - .00016	.050	8	
4	7492773			1.790	.008 AND UP	1.78960 - .00040	.050	8	
4	7492775			1.791	.001	1.79100 - .00008	.050	4	
4	7492776			1.791	.002	1.79092 - .00012	.050	4	
4	7492777			1.791	.004	1.79080 - .00016	.050	8	
4	7492779			1.791	.008 AND UP	1.79060 - .00040	.050	8	
4	7492781			1.792	.001	1.79200 - .00008	.050	4	
4	7492782			1.792	.002	1.79192 - .00012	.050	4	
4	7492783			1.792	.004	1.79180 - .00016	.050	8	
4	7492785			1.792	.008 AND UP	1.79160 - .00040	.050	8	
4	7492787			1.793	.001	1.79300 - .00008	.050	4	
4	7492788			1.793	.002	1.79292 - .00012	.050	4	
4	7492789			1.793	.004	1.79280 - .00016	.050	8	
4	7492791			1.793	.008 AND UP	1.79260 - .00040	.050	8	
4	7492793			1.794	.001	1.79400 - .00008	.050	4	
4	7492794			1.794	.002	1.79392 - .00012	.050	4	
4	7492795			1.794	.004	1.79380 - .00016	.050	8	
4	7492797			1.794	.008 AND UP	1.79360 - .00040	.050	8	
4	7492799			1.795	.001	1.79500 - .00008	.050	4	
4	7492800			1.795	.002	1.79492 - .00012	.050	4	
4	7492801			1.795	.004	1.79480 - .00016	.050	8	
4	7492803			1.795	.008 AND UP	1.79460 - .00040	.050	8	
4	7492805			1.796	.001	1.79600 - .00008	.050	4	
4	7492806			1.796	.002	1.79592 - .00012	.050	4	
4	7492807			1.796	.004	1.79580 - .00016	.050	8	
4	7492809			1.796	.008 AND UP	1.79560 - .00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIA METER	CHAMFER	
A	B	C	D	E	F	G	H
4	7492811		1.797	.001	1.79700	-.00008	.050
4	7492812		1.797	.002	1.79692	-.00012	.050
4	7492813		1.797	.004 AND UP	1.79680	-.00016	.050
4	7492815		1.797	.008 AND UP	1.79660	-.00040	.050
4	7492817		1.798	.001	1.79800	-.00008	.050
4	7492818		1.798	.002	1.79792	-.00012	.050
4	7492819		1.798	.004 AND UP	1.79780	-.00016	.050
4	7492821		1.798	.008 AND UP	1.79760	-.00040	.050
4	7492823		1.799	.001	1.79900	-.00008	.050
4	7492824		1.799	.002	1.79892	-.00012	.050
4	7492825		1.799	.004 AND UP	1.79880	-.00016	.050
4	7492827		1.799	.008 AND UP	1.79860	-.00040	.050
4	7492829		1.800	.001	1.80000	-.00008	.050
4	7492830		1.800	.002	1.79992	-.00012	.050
4	7492831		1.800	.004 AND UP	1.79980	-.00016	.050
4	7492833		1.800	.008 AND UP	1.79960	-.00040	.050
4	7492835		1.801	.001	1.80100	-.00008	.050
4	7492836		1.801	.002	1.80092	-.00012	.050
4	7492837		1.801	.004 AND UP	1.80080	-.00016	.050
4	7492839		1.801	.008 AND UP	1.80060	-.00040	.050
4	7492841		1.802	.001	1.80200	-.00008	.050
4	7492842		1.802	.002	1.80192	-.00012	.050
4	7492843		1.802	.004 AND UP	1.80180	-.00016	.050
4	7492845		1.802	.008 AND UP	1.80160	-.00040	.050
4	7492847		1.803	.001	1.80300	-.00008	.050
4	7492848		1.803	.002	1.80292	-.00012	.050
4	7492849		1.803	.004 AND UP	1.80280	-.00016	.050
4	7492851		1.803	.008 AND UP	1.80260	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			H
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
4	7492853		1.804	.001	1.80400	-.00008	.050	4		
4	7492854		1.804	.002	1.80392	-.00012	.050	4		
4	7492855		1.804	.004	1.80380	-.00016	.050	8		
4	7492857		1.804	.008 AND UP	1.80360	-.00040	.050	8		
4	7492859		1.805	.001	1.80500	-.00008	.050	4		
4	7492860		1.805	.002	1.80492	-.00012	.050	4		
4	7492861		1.805	.004	1.80480	-.00016	.050	8		
4	7492863		1.805	.008 AND UP	1.80460	-.00040	.050	8		
4	7492865		1.806	.001	1.80600	-.00008	.050	4		
4	7492866		1.806	.002	1.80592	-.00012	.050	4		
4	7492867		1.806	.004	1.80580	-.00016	.050	8		
4	7492869		1.806	.008 AND UP	1.80560	-.00040	.050	8		
4	7492871		1.807	.001	1.80700	-.00008	.050	4		
4	7492872		1.807	.002	1.80692	-.00012	.050	4		
4	7492873		1.807	.004	1.80680	-.00016	.050	8		
4	7492875		1.807	.008 AND UP	1.80660	-.00040	.050	8		
4	7492877		1.808	.001	1.80800	-.00008	.050	4		
4	7492878		1.808	.002	1.80792	-.00012	.050	4		
4	7492879		1.808	.004	1.80780	-.00016	.050	8		
4	7492881		1.808	.008 AND UP	1.80760	-.00040	.050	8		
4	7492883		1.809	.001	1.80900	-.00008	.050	4		
4	7492884		1.809	.002	1.80892	-.00012	.050	4		
4	7492885		1.809	.004	1.80880	-.00016	.050	8		
4	7492887		1.809	.008 AND UP	1.80860	-.00040	.050	8		
4	7492889		1.810	.001	1.81000	-.00008	.050	4		
4	7492890		1.810	.002	1.80992	-.00012	.050	4		
4	7492891		1.810	.004	1.80980	-.00016	.050	8		
4	7492893		1.810	.008 AND UP	1.80960	-.00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN - GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA	E	F	G	H	
RING GAGE	ACCEPTANCE CHECK		C	D					
A	B								
4	7492895		1.811	.001	1.81100	-.00008	.050	4	
4	7492896		1.811	.002	1.81092	-.00012	.050	4	
4	7492897		1.811	.004 AND UP	1.81080	-.00016	.050	8	
4	7492899		1.811	.008	1.81060	-.00040	.050		
4	7492901		1.812	.001	1.81200	-.00008	.050	4	
4	7492902		1.812	.002	1.81192	-.00012	.050	4	
4	7492903		1.812	.004	1.81180	-.00016	.050	8	
4	7492905		1.812	.008 AND UP	1.81160	-.00040	.050	8	
4	7492907		1.8125	.001 AND UP	1.81250	-.00008	.050	4	
4	7492908		1.813	.001	1.81300	-.00008	.050	4	
4	7492909		1.813	.002	1.81292	-.00012	.050	4	
4	7492910		1.813	.004	1.81280	-.00016	.050	8	
4	7492912		1.813	.008 AND UP	1.81260	-.00040	.050	8	
4	7492914		1.814	.001	1.81400	-.00008	.050	4	
4	7492915		1.814	.002	1.81392	-.00012	.050	4	
4	7492916		1.814	.004	1.81380	-.00016	.050	8	
4	7492918		1.814	.008 AND UP	1.81360	-.00040	.050		
4	7492920		1.815	.001	1.81500	-.00008	.050	4	
4	7492921		1.815	.002	1.81492	-.00012	.050	4	
4	7492922		1.815	.004	1.81480	-.00016	.050	8	
4	7492924		1.815	.008 AND UP	1.81460	-.00040	.050		
4	7492926		1.816	.001	1.81600	-.00008	.050	4	
4	7492927		1.816	.002	1.81592	-.00012	.050	4	
4	7492928		1.816	.004 AND UP	1.81580	-.00016	.050	8	
4	7492930		1.816	.008	1.81560	-.00040	.050	8	
4	7492932		1.817	.001	1.81700	-.00008	.050	4	
4	7492933		1.817	.002	1.81692	-.00012	.050	4	
4	7492934		1.817	.004	1.81680	-.00016	.050	8	
4	7492936		1.817	.008 AND UP	1.81660	-.00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	RING GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	
A	B	C	D	E	F	G	H	
4	7492938		1.818	.001	1.81800	-.00008	.050	4
4	7492939		1.818	.002	1.81792	-.00012	.050	4
4	7492940		1.818	.004	1.81780	-.00016	.050	8
4	7492942		1.818	.008 AND UP	1.81760	-.00040	.050	8
4	7492944		1.819	.001	1.81900	-.00008	.050	4
4	7492945		1.819	.002	1.81892	-.00012	.050	4
4	7492946		1.819	.004	1.81880	-.00016	.050	8
4	7492948		1.819	.008 AND UP	1.81860	-.00040	.050	8
4	7492950		1.820	.001	1.82000	-.00008	.050	4
4	7492951		1.820	.002	1.81992	-.00012	.050	4
4	7492952		1.820	.004	1.81980	-.00016	.050	8
4	7492954		1.820	.008 AND UP	1.81960	-.00040	.050	
4	7492956		1.821	.001	1.82100	-.00008	.050	4
4	7492957		1.821	.002	1.82092	-.00012	.050	4
4	7492958		1.821	.004	1.82080	-.00016	.050	8
4	7492960		1.821	.008 AND UP	1.82060	-.00040	.050	8
4	7492962		1.822	.001	1.82200	-.00008	.050	4
4	7492963		1.822	.002	1.82192	-.00012	.050	4
4	7492964		1.822	.004	1.82180	-.00016	.050	8
4	7492966		1.822	.008 AND UP	1.82160	-.00040	.050	
4	7492968		1.823	.001	1.82300	-.00008	.050	4
4	7492969		1.823	.002	1.82292	-.00012	.050	4
4	7492970		1.823	.004	1.82280	-.00016	.050	8
4	7492972		1.823	.008 AND UP	1.82260	-.00040	.050	
4	7492974		1.824	.001	1.82400	-.00008	.050	4
4	7492975		1.824	.002	1.82392	-.00012	.050	4
4	7492976		1.824	.004	1.82380	-.00016	.050	8
4	7492978		1.824	.008 AND UP	1.82360	-.00040	.050	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

RING NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH CHAMFER
	RING-GAGE STOCK NO.	MAXIMUM RING GAGE ACCEPTANCE CHECK	COMPONENT DIMENSION	D	E	F	G	H	
A	B	C							
7492980	7492981		1.825	.001	1.82500	-.00008	.050	4	
7492982			1.825	.002	1.82492	-.00012	.050	4	
7492984	7492984		1.825	.004	1.82480	-.00016	.050	8	
7492986			1.825	.008 AND UP	1.82460	-.00040	.050	8	
7492987	7492987		1.826	.001	1.82600	-.00008	.050	4	
7492988			1.826	.002	1.82592	-.00012	.050	4	
7492990	7492990		1.826	.004	1.82580	-.00016	.050	8	
7492992			1.826	.008 AND UP	1.82560	-.00040	.050	8	
7492993	7492993		1.827	.001	1.82700	-.00008	.050	4	
7492994			1.827	.002	1.82692	-.00012	.050	4	
7492996	7492996		1.827	.004	1.82680	-.00016	.050	8	
			1.827	.008 AND UP	1.82660	-.00040	.050	8	
7492998			1.828	.001	1.82800	-.00008	.050	4	
7492999	7492999		1.828	.002	1.82792	-.00012	.050	4	
7493000			1.828	.004	1.82780	-.00016	.050	8	
7493002	7493002		1.828	.008 AND UP	1.82760	-.00040	.050	8	
7493004			1.829	.001	1.82900	-.00008	.050	4	
7493005	7493005		1.829	.002	1.82892	-.00012	.050	4	
7493006			1.829	.004	1.82880	-.00016	.050	8	
7493008	7493008		1.829	.008 AND UP	1.82860	-.00040	.050	8	
7493010			1.830	.001	1.83000	-.00008	.050	4	
7493011	7493011		1.830	.002	1.82992	-.00012	.050	4	
7493012			1.830	.004	1.82980	-.00016	.050	8	
7493014	7493014		1.830	.008 AND UP	1.82960	-.00040	.050	8	
7493016			1.831	.001	1.83100	-.00008	.050	4	
7493017	7493017		1.831	.002	1.83092	-.00012	.050	4	
7493018			1.831	.004	1.83080	-.00016	.050	8	
7493020	7493020		1.831	.008 AND UP	1.83060	-.00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FINISH NO.	MARKING ON GO GAGE RING GAGE	STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION D	TOTAL COMPONENT TOLERANCE E	RING GAGE DIMENSIONS		FINISH H
					DIAMETER F	CHAMFER G	
4	7493022		1.832	.001	1.83200	-.00008	.050
4	7493023		1.832	.002	1.83192	-.00012	.050
4	7493024		1.832	.004	1.83180	-.00016	.050
4	7493026		1.832	.008 AND UP	1.83160	-.00040	.050
4	7493028		1.833	.001	1.83300	-.00008	.050
4	7493029		1.833	.002	1.83292	-.00012	.050
4	7493030		1.833	.004	1.83280	-.00016	.050
4	7493032		1.833	.008 AND UP	1.83260	-.00040	.050
4	7493034		1.834	.001	1.83400	-.00008	.050
4	7493035		1.834	.002	1.83392	-.00012	.050
4	7493036		1.834	.004	1.83380	-.00016	.050
4	7493038		1.834	.008 AND UP	1.83360	-.00040	.050
4	7493040		1.835	.001	1.83500	-.00008	.050
4	7493041		1.835	.002	1.83492	-.00012	.050
4	7493042		1.835	.004	1.83480	-.00016	.050
4	7493044		1.835	.008 AND UP	1.83460	-.00040	.050
4	7493046		1.836	.001	1.83600	-.00008	.050
4	7493047		1.836	.002	1.83592	-.00012	.050
4	7493048		1.836	.004	1.83580	-.00016	.050
4	7493050		1.836	.008 AND UP	1.83560	-.00040	.050
4	7493052		1.837	.001	1.83700	-.00008	.050
4	7493053		1.837	.002	1.83692	-.00012	.050
4	7493054		1.837	.004	1.83680	-.00016	.050
4	7493056		1.837	.008 AND UP	1.83660	-.00040	.050
4	7493058		1.838	.001	1.83800	-.00008	.050
4	7493059		1.838	.002	1.83792	-.00012	.050
4	7493060		1.838	.004	1.83780	-.00016	.050
4	7493062		1.838	.008 AND UP	1.83760	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	F	G	
A	B	C	D	E	F	G	H
4	7493064	1.8339	.001	1.83900	-.00008	.050	4
4	7493065	1.8339	.002	1.83892	-.00012	.050	4
4	7493066	1.8339	.004	1.83880	-.00016	.050	8
4	7493068	1.8339	.008 AND UP	1.83860	-.00040	.050	8
4	7493070	1.840	.001	1.84000	-.00008	.050	4
4	7493071	1.840	.002	1.83992	-.00012	.050	4
4	7493072	1.840	.004	1.83980	-.00016	.050	8
4	7493074	1.840	.008 AND UP	1.83960	-.00040	.050	8
4	7493076	1.841	.001	1.84100	-.00008	.050	4
4	7493077	1.841	.002	1.84092	-.00012	.050	4
4	7493078	1.841	.004	1.84080	-.00016	.050	8
4	7493080	1.841	.008 AND UP	1.84060	-.00040	.050	8
4	7493082	1.842	.001	1.84200	-.00008	.050	4
4	7493083	1.842	.002	1.84192	-.00012	.050	4
4	7493084	1.842	.004	1.84180	-.00016	.050	8
4	7493086	1.842	.008 AND UP	1.84160	-.00040	.050	8
4	7493088	1.843	.001	1.84300	-.00008	.050	4
4	7493089	1.843	.002	1.84292	-.00012	.050	4
4	7493090	1.843	.004	1.84280	-.00016	.050	8
4	7493092	1.843	.008 AND UP	1.84260	-.00040	.050	8
4	7493094	1.84375	.001 AND UP	1.84375	-.00008	.050	4
4	7493095	1.844	.001	1.84400	-.00008	.050	4
4	7493096	1.844	.002	1.84392	-.00012	.050	4
4	7493097	1.844	.004	1.84380	-.00016	.050	8
4	7493099	1.844	.008 AND UP	1.84360	-.00040	.050	8
4	7493101	1.845	.001	1.84500	-.00008	.050	4
4	7493102	1.845	.002	1.84492	-.00012	.050	4
4	7493103	1.845	.004	1.84480	-.00016	.050	8
4	7493105	1.845	.008 AND UP	1.84460	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

NO. ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C	D	E	F	G	H	
4	7493107	1.846	.001	1.84600	-.00008	.050	4	
4	7493108	1.846	.002	1.84592	-.00012	.050	4	
4	7493109	1.846	.004	1.84580	-.00016	.050	8	
4	7493111	1.846	.008 AND UP	1.84560	-.00040	.050	8	
4	7493113	1.847	.001	1.84700	-.00008	.050	4	
4	7493114	1.847	.002	1.84692	-.00012	.050	4	
4	7493115	1.847	.004	1.84680	-.00016	.050	8	
4	7493117	1.847	.008 AND UP	1.84660	-.00040	.050	8	
4	7493119	1.848	.001	1.84800	-.00008	.050	4	
4	7493120	1.848	.002	1.84792	-.00012	.050	4	
4	7493121	1.848	.004	1.84780	-.00016	.050	8	
4	7493123	1.848	.008 AND UP	1.84760	-.00040	.050	8	
4	7493125	1.849	.001	1.84900	-.00008	.050	4	
4	7493126	1.849	.002	1.84892	-.00012	.050	4	
4	7493127	1.849	.004	1.84880	-.00016	.050	8	
4	7493129	1.849	.008 AND UP	1.84860	-.00040	.050	8	
4	7493131	1.850	.001	1.85000	-.00008	.050	4	
4	7493132	1.850	.002	1.84992	-.00012	.050	4	
4	7493133	1.850	.004	1.84980	-.00016	.050	8	
4	7493135	1.850	.008 AND UP	1.84960	-.00040	.050	8	
4	7493137	1.851	.001	1.85100	-.00008	.050	4	
4	7493138	1.851	.002	1.85092	-.00012	.050	4	
4	7493139	1.851	.004	1.85080	-.00016	.050	8	
4	7493141	1.851	.008 AND UP	1.85060	-.00040	.050	8	
4	7493143	1.852	.001	1.85200	-.00008	.050	4	
4	7493144	1.852	.002	1.85192	-.00012	.050	4	
4	7493145	1.852	.004	1.85180	-.00016	.050	8	
4	7493147	1.852	.008 AND UP	1.85160	-.00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	FIN-GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
RING GAGE	ACCEPTANCE CHECK	COMPONENT DIMENSION						CHAMFER	
A	B	C	D	E	F	G	H		
4	7493149		1.853	.001	1.85300	-.00008	.050	4	
4	7493150		1.853	.002	1.85292	-.00012	.050	4	8
4	7493151		1.853	.004	1.85280	-.00016	.050	4	8
4	7493153		1.853	.008 AND UP	1.85260	-.00040	.050	8	
4	7493155		1.854	.001	1.85400	-.00008	.050	4	
4	7493156		1.854	.002	1.85392	-.00012	.050	4	8
4	7493157		1.854	.004	1.85380	-.00016	.050	8	
4	7493159		1.854	.008 AND UP	1.85360	-.00040	.050	8	
4	7493161		1.855	.001	1.85500	-.00008	.050	4	4
4	7493162		1.855	.002	1.85492	-.00012	.050	4	8
4	7493163		1.855	.004	1.85480	-.00016	.050	8	
4	7493165		1.855	.008 AND UP	1.85460	-.00040	.050	8	
4	7493167		1.856	.001	1.85600	-.00008	.050	4	
4	7493168		1.856	.002	1.85592	-.00012	.050	4	8
4	7493169		1.856	.004	1.85580	-.00016	.050	8	
4	7493171		1.856	.008 AND UP	1.85560	-.00040	.050	8	
4	7493173		1.857	.001	1.85700	-.00008	.050	4	
4	7493174		1.857	.002	1.85692	-.00012	.050	4	8
4	7493175		1.857	.004	1.85680	-.00016	.050	8	
4	7493177		1.857	.008 AND UP	1.85660	-.00040	.050	8	
4	7493179		1.858	.001	1.85800	-.00008	.050	4	
4	7493180		1.858	.002	1.85792	-.00012	.050	4	8
4	7493181		1.858	.004	1.85780	-.00016	.050	8	
4	7493183		1.858	.008 AND UP	1.85760	-.00040	.050	8	
4	7493185		1.859	.001	1.85900	-.00008	.050	4	
4	7493186		1.859	.002	1.85892	-.00012	.050	4	8
4	7493187		1.859	.004	1.85880	-.00016	.050	8	
4	7493189		1.859	.008 AND UP	1.85860	-.00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		H
	FIN--GAGE STOCK NO.	RING GAGE	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C							H
4	7493191		1.860	.001	1.86000	-.00008	.050	4	
4	7493192		1.860	.002	1.85992	-.00012	.050	4	
4	7493193		1.860	.004	1.85980	-.00016	.050	8	
4	7493195		1.860	.008 AND UP	1.85960	-.00040	.050	8	
4	7493197		1.861	.001	1.86100	-.00008	.050	4	
4	7493198		1.861	.002	1.86092	-.00012	.050	4	
4	7493199		1.861	.004	1.86080	-.00016	.050	8	
4	7493201		1.861	.008 AND UP	1.86060	-.00040	.050	8	
4	7493203		1.862	.001	1.86200	-.00008	.050	4	
4	7493204		1.862	.002	1.86192	-.00012	.050	4	
4	7493205		1.862	.004	1.86180	-.00016	.050	8	
4	7493207		1.862	.008 AND UP	1.86160	-.00040	.050	8	
4	7493209		1.863	.001	1.86300	-.00008	.050	4	
4	7493210		1.863	.002	1.86292	-.00012	.050	4	
4	7493211		1.863	.004	1.86280	-.00016	.050	8	
4	7493213		1.863	.008 AND UP	1.86260	-.00040	.050	8	
4	7493215		1.864	.001	1.86400	-.00008	.050	4	
4	7493216		1.864	.002	1.86392	-.00012	.050	4	
4	7493217		1.864	.004	1.86380	-.00016	.050	8	
4	7493219		1.864	.008 AND UP	1.86360	-.00040	.050	8	
4	7493221		1.865	.001	1.86500	-.00008	.050	4	
4	7493222		1.865	.002	1.86492	-.00012	.050	4	
4	7493223		1.865	.004	1.86480	-.00016	.050	8	
4	7493225		1.865	.008 AND UP	1.86460	-.00040	.050	8	
4	7493227		1.866	.001	1.86600	-.00008	.050	4	
4	7493228		1.866	.002	1.86592	-.00012	.050	4	
4	7493229		1.866	.004	1.86580	-.00016	.050	8	
4	7493231		1.866	.008 AND UP	1.86560	-.00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	CHAMFER	
A	B	C	D	E	F	G	H			
4	7493233		1.867	.001	1.86700	-.00008	.050	4		
4	7493234		1.867	.002	1.86692	-.00012	.050	4		
4	7493235		1.867	.004	1.86680	-.00016	.050	8		
4	7493237		1.867	.008 AND UP	1.86660	-.00040	.050	8		
4	7493239		1.868	.001	1.86800	-.00008	.050	4		
4	7493240		1.868	.002	1.86792	-.00012	.050	4		
4	7493241		1.868	.004	1.86780	-.00016	.050	8		
4	7493243		1.868	.008 AND UP	1.86760	-.00040	.050	8		
4	7493245		1.869	.001	1.86900	-.00008	.050	4		
4	7493246		1.869	.002	1.86892	-.00012	.050	4		
4	7493247		1.869	.004	1.86880	-.00016	.050	8		
4	7493249		1.869	.008 AND UP	1.86860	-.00040	.050	8		
4	7493251		1.870	.001	1.87000	-.00008	.050	4		
4	7493252		1.870	.002	1.86992	-.00012	.050	4		
4	7493253		1.870	.004	1.86980	-.00016	.050	8		
4	7493255		1.870	.008 AND UP	1.86960	-.00040	.050			
4	7493257		1.871	.001	1.87100	-.00008	.050	4		
4	7493258		1.871	.002	1.87092	-.00012	.050	4		
4	7493259		1.871	.004	1.87080	-.00016	.050	8		
4	7493261		1.871	.008 AND UP	1.87060	-.00040	.050			
4	7493263		1.872	.001	1.87200	-.00008	.050	4		
4	7493264		1.872	.002	1.87192	-.00012	.050	4		
4	7493265		1.872	.004	1.87180	-.00016	.050	8		
4	7493267		1.872	.008 AND UP	1.87160	-.00040	.050			
4	7493269		1.873	.001	1.87300	-.00008	.050	4		
4	7493270		1.873	.002	1.87292	-.00012	.050	4		
4	7493271		1.873	.004	1.87280	-.00016	.050	8		
4	7493273		1.873	.008 AND UP	1.87260	-.00040	.050			

MIL-STD-112A
6 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
A	B	C								
4	7493275		1.874	.001		1.87400	-.00008	.050	4	
4	7493276		1.874	.002		1.87392	-.00012	.050	4	
4	7493277		1.874	.004 AND UP		1.87380	-.00016	.050	8	
4	7493279		1.874	.008 AND UP		1.87360	-.00040	.050	8	
4	7493281		1.875	.001		1.87500	-.00008	.050	4	
4	7493282		1.875	.002		1.87492	-.00012	.050	4	
4	7493283		1.875	.004 AND UP		1.87480	-.00016	.050	8	
4	7493285		1.875	.008 AND UP		1.87460	-.00040	.050	8	
4	7493287		1.876	.001		1.87600	-.00008	.050	4	
4	7493288		1.876	.002		1.87592	-.00012	.050	4	
4	7493289		1.876	.004 AND UP		1.87580	-.00016	.050	8	
4	7493291		1.876	.008 AND UP		1.87560	-.00040	.050	8	
4	7493293		1.877	.001		1.87700	-.00008	.050	4	
4	7493294		1.877	.002		1.87692	-.00012	.050	4	
4	7493295		1.877	.004 AND UP		1.87680	-.00016	.050	8	
4	7493297		1.877	.008 AND UP		1.87660	-.00040	.050	8	
4	7493299		1.878	.001		1.87800	-.00008	.050	4	
4	7493300		1.878	.002		1.87792	-.00012	.050	4	
4	7493301		1.878	.004 AND UP		1.87780	-.00016	.050	8	
4	7493303		1.878	.008 AND UP		1.87760	-.00040	.050	8	
4	7493305		1.879	.001		1.87900	-.00008	.050	4	
4	7493306		1.879	.002		1.87892	-.00012	.050	4	
4	7493307		1.879	.004 AND UP		1.87880	-.00016	.050	8	
4	7493309		1.879	.008 AND UP		1.87860	-.00040	.050	8	
4	7493311		1.880	.001		1.88000	-.00008	.050	4	
4	7493312		1.880	.002		1.87992	-.00012	.050	4	
4	7493313		1.880	.004 AND UP		1.87980	-.00016	.050	8	
4	7493315		1.880	.008 AND UP		1.87960	-.00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

TIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIA. DIMETER	E	
A	B	C	D	E	F	G	H
4	7493317		1.881	.001	1.88100	-.00008	.050
4	7493318		1.881	.002	1.88092	-.00012	.050
4	7493319		1.881	.004 AND UP	1.88080	-.00016	.050
4	7493321		1.881		1.88060	-.00040	.050
4	7493323		1.882	.001	1.88200	-.00008	.050
4	7493324		1.882	.002	1.88192	-.00012	.050
4	7493325		1.882	.004	1.88180	-.00016	.050
4	7493327		1.882	.008 AND UP	1.88160	-.00040	.050
4	7493329		1.883	.001	1.88300	-.00008	.050
4	7493330		1.883	.002	1.88292	-.00012	.050
4	7493331		1.883	.004	1.88280	-.00016	.050
4	7493333		1.883	.008 AND UP	1.88260	-.00040	.050
4	7493335		1.884	.001	1.88400	-.00008	.050
4	7493336		1.884	.002	1.88392	-.00012	.050
4	7493337		1.884	.004	1.88380	-.00016	.050
4	7493339		1.884	.008 AND UP	1.88360	-.00040	.050
4	7493341		1.885	.001	1.88500	-.00008	.050
4	7493342		1.885	.002	1.88492	-.00012	.050
4	7493343		1.885	.004	1.88480	-.00016	.050
4	7493345		1.885	.008 AND UP	1.88460	-.00040	.050
4	7493347		1.886	.001	1.88600	-.00008	.050
4	7493348		1.886	.002	1.88592	-.00012	.050
4	7493349		1.886	.004	1.88580	-.00016	.050
4	7493351		1.886	.008 AND UP	1.88560	-.00040	.050
4	7493353		1.887	.001	1.88700	-.00008	.050
4	7493354		1.887	.002	1.88692	-.00012	.050
4	7493355		1.887	.004	1.88680	-.00016	.050
4	7493357		1.887	.008 AND UP	1.88660	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	FIN — GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	CHECK	D	E	F	G	
RING GAGE	ACCEPTANCE						H	
A	B	C	D	E	F	G		
4	7493359	1.888	.001	1.88800	—	.00008	.050	4
4	7493360	1.888	.002	1.88792	—	.00012	.050	4
4	7493361	1.888	.004 AND UP	1.88780	—	.00016	.050	8
4	7493363	1.888	.008 AND UP	1.88760	—	.00040	.050	8
4	7493365	1.889	.001	1.88900	—	.00008	.050	4
4	7493366	1.889	.002	1.88892	—	.00012	.050	4
4	7493367	1.889	.004 AND UP	1.88880	—	.00016	.050	8
4	7493369	1.889	.008 AND UP	1.88860	—	.00040	.050	8
4	7493371	1.890	.001	1.89000	—	.00008	.050	4
4	7493372	1.890	.002	1.88992	—	.00012	.050	4
4	7493373	1.890	.004 AND UP	1.88980	—	.00016	.050	8
4	7493375	1.890	.008 AND UP	1.88960	—	.00040	.050	8
4	7493377	1.891	.001	1.89100	—	.00008	.050	4
4	7493378	1.891	.002	1.89092	—	.00012	.050	4
4	7493379	1.891	.004 AND UP	1.89080	—	.00016	.050	8
4	7493381	1.891	.008 AND UP	1.89060	—	.00040	.050	8
4	7493383	1.892	.001	1.89200	—	.00008	.050	4
4	7493384	1.892	.002	1.89192	—	.00012	.050	4
4	7493385	1.892	.004 AND UP	1.89180	—	.00016	.050	8
4	7493387	1.892	.008 AND UP	1.89160	—	.00040	.050	8
4	7493389	1.893	.001	1.89300	—	.00008	.050	4
4	7493390	1.893	.002	1.89292	—	.00012	.050	4
4	7493391	1.893	.004 AND UP	1.89280	—	.00016	.050	8
4	7493393	1.893	.008 AND UP	1.89260	—	.00040	.050	8
4	7493395	1.894	.001	1.89400	—	.00008	.050	4
4	7493396	1.894	.002	1.89392	—	.00012	.050	4
4	7493397	1.894	.004 AND UP	1.89380	—	.00016	.050	8
4	7493399	1.894	.008 AND UP	1.89360	—	.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	RING GAGE	STOCK NO.	MAXIMUM ACCEPTANCE CHECK	D	E	F	G	H	
A	B	C							
4	7493401	1.895	.001	1.89500	-.00008	.050	4		
4	7493402	1.895	.002	1.89492	-.00012	.050	4		
4	7493403	1.895	.004	1.89480	-.00016	.050	8		
4	7493405	1.895	.008 AND UP	1.89460	-.00040	.050	4		
4	7493407	1.896	.001	1.89600	-.00008	.050	4		
4	7493408	1.896	.002	1.89592	-.00012	.050	4		
4	7493409	1.896	.004	1.89580	-.00016	.050	8		
4	7493411	1.896	.008 AND UP	1.89560	-.00040	.050	4		
4	7493413	1.897	.001	1.89700	-.00008	.050	4		
4	7493414	1.897	.002	1.89692	-.00012	.050	4		
4	7493415	1.897	.004	1.89680	-.00016	.050	8		
4	7493417	1.897	.008 AND UP	1.89660	-.00040	.050	4		
4	7493419	1.898	.001	1.89800	-.00008	.050	4		
4	7493420	1.898	.002	1.89792	-.00012	.050	4		
4	7493421	1.898	.004	1.89780	-.00016	.050	8		
4	7493423	1.898	.008 AND UP	1.89760	-.00040	.050	4		
4	7493425	1.899	.001	1.89900	-.00008	.050	4		
4	7493426	1.899	.002	1.89892	-.00012	.050	4		
4	7493427	1.899	.004	1.89880	-.00016	.050	8		
4	7493429	1.899	.008 AND UP	1.89860	-.00040	.050	4		
4	7493431	1.900	.001	1.90000	-.00008	.050	4		
4	7493432	1.900	.002	1.89992	-.00012	.050	4		
4	7493433	1.900	.004	1.89980	-.00016	.050	8		
4	7493435	1.900	.008 AND UP	1.89960	-.00040	.050	4		
4	7493437	1.901	.001	1.90100	-.00008	.050	4		
4	7493438	1.901	.002	1.90092	-.00012	.050	4		
4	7493439	1.901	.004	1.90080	-.00016	.050	8		
4	7493441	1.901	.008 AND UP	1.90060	-.00040	.050	4		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	FIN—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	COMPONENT TOLERANCE	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
4	7493443		1.902	.001	1.90200	-.00008	.050
4	7493444		1.902	.002	1.90192	-.00012	.050
4	7493445		1.902	.004	1.90180	-.00016	.050
4	7493447		1.902	.008 AND UP	1.90160	-.00040	.050
4	7493449		1.903	.001	1.90300	-.00008	.050
4	7493450		1.903	.002	1.90292	-.00012	.050
4	7493451		1.903	.004	1.90280	-.00016	.050
4	7493453		1.903	.008 AND UP	1.90260	-.00040	.050
4	7493455		1.904	.001	1.90400	-.00008	.050
4	7493456		1.904	.002	1.90392	-.00012	.050
4	7493457		1.904	.004	1.90380	-.00016	.050
4	7493459		1.904	.008 AND UP	1.90360	-.00040	.050
4	7493461		1.905	.001	1.90500	-.00008	.050
4	7493462		1.905	.002	1.90492	-.00012	.050
4	7493463		1.905	.004	1.90480	-.00016	.050
4	7493465		1.905	.008 AND UP	1.90460	-.00040	.050
4	7493467		1.906	.001	1.90600	-.00008	.050
4	7493468		1.906	.002	1.90592	-.00012	.050
4	7493469		1.906	.004	1.90580	-.00016	.050
4	7493471		1.906	.008 AND UP	1.90560	-.00040	.050
4	7493473		1.90625	.001 AND UP	1.90625	-.00008	.050
4	7493474		1.907	.001	1.90700	-.00008	.050
4	7493475		1.907	.002	1.90692	-.00012	.050
4	7493476		1.907	.004	1.90680	-.00016	.050
4	7493478		1.907	.008 AND UP	1.90660	-.00040	.050
4	7493480		1.908	.001	1.90800	-.00008	.050
4	7493481		1.908	.002	1.90792	-.00012	.050
4	7493482		1.908	.004	1.90780	-.00016	.050
4	7493484		1.908	.008 AND UP	1.90760	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FIM—GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	CHECK	D	E	F	G	H	
A	B	C								
4	7493486		1.909	.001	1.90900	—	.00008	.050	4	
4	7493487		1.909	.002	1.90892	—	.00012	.050	4	
4	7493488		1.909	.004	1.90880	—	.00016	.050	6	
4	7493490		1.909	.008 AND UP	1.90860	—	.00040	.050	6	
4	7493492		1.910	.001	1.91000	—	.00008	.050	4	
4	7493493		1.910	.002	1.90992	—	.00012	.050	4	
4	7493494		1.910	.004	1.90980	—	.00016	.050	6	
4	7493496		1.910	.008 AND UP	1.90960	—	.00040	.050	6	
4	7493498		1.911	.001	1.91100	—	.00008	.050	4	
4	7493499		1.911	.002	1.91092	—	.00012	.050	4	
4	7493500		1.911	.004	1.91080	—	.00016	.050	6	
4	7493502		1.911	.008 AND UP	1.91060	—	.00040	.050	6	
4	7493504		1.912	.001	1.91200	—	.00008	.050	4	
4	7493505		1.912	.002	1.91192	—	.00012	.050	4	
4	7493506		1.912	.004	1.91180	—	.00016	.050	6	
4	7493508		1.912	.008 AND UP	1.91160	—	.00040	.050	6	
4	7493510		1.913	.001	1.91300	—	.00008	.050	4	
4	7493511		1.913	.002	1.91292	—	.00012	.050	4	
4	7493512		1.913	.004	1.91280	—	.00016	.050	6	
4	7493514		1.913	.008 AND UP	1.91260	—	.00040	.050	6	
4	7493516		1.914	.001	1.91400	—	.00008	.050	4	
4	7493517		1.914	.002	1.91392	—	.00012	.050	4	
4	7493518		1.914	.004	1.91380	—	.00016	.050	6	
4	7493520		1.914	.008 AND UP	1.91360	—	.00040	.050	6	
4	7493522		1.915	.001	1.91500	—	.00008	.050	4	
4	7493523		1.915	.002	1.91492	—	.00012	.050	4	
4	7493524		1.915	.004	1.91480	—	.00016	.050	6	
4	7493526		1.915	.008 AND UP	1.91460	—	.00040	.050	6	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

G. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH H		
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION			DIAMETER CHAMFER	G			
		B	C		E	F			
4	7493528	1.916	.001	1.91600 - .00008	.050	.050	4		
4	7493529	1.916	.002	1.91592 - .00012	.050	.050	4		
4	7493530	1.916	.004	1.91580 - .00016	.050	.050	8		
4	7493532	1.916	.008 AND UP	1.91560 - .00040	.050	.050	8		
4	7493534	1.917	.001	1.91700 - .00008	.050	.050	4		
4	7493535	1.917	.002	1.91692 - .00012	.050	.050	4		
4	7493536	1.917	.004	1.91680 - .00016	.050	.050	8		
4	7493538	1.917	.008 AND UP	1.91660 - .00040	.050	.050	8		
4	7493540	1.918	.001	1.91800 - .00008	.050	.050	4		
4	7493541	1.918	.002	1.91792 - .00012	.050	.050	4		
4	7493542	1.918	.004	1.91780 - .00016	.050	.050	8		
4	7493544	1.918	.008 AND UP	1.91760 - .00040	.050	.050	8		
4	7493546	1.919	.001	1.91900 - .00008	.050	.050	4		
4	7493547	1.919	.002	1.91892 - .00012	.050	.050	4		
4	7493548	1.919	.004	1.91880 - .00016	.050	.050	8		
4	7493550	1.919	.008 AND UP	1.91860 - .00040	.050	.050	8		
4	7493552	1.920	.001	1.92000 - .00008	.050	.050	4		
4	7493553	1.920	.002	1.91992 - .00012	.050	.050	4		
4	7493554	1.920	.004	1.91980 - .00016	.050	.050	8		
4	7493556	1.920	.008 AND UP	1.91960 - .00040	.050	.050	8		
4	7493558	1.921	.001	1.92100 - .00008	.050	.050	4		
4	7493559	1.921	.002	1.92092 - .00012	.050	.050	4		
4	7493560	1.921	.004	1.92080 - .00016	.050	.050	8		
4	7493562	1.921	.008 AND UP	1.92060 - .00040	.050	.050	8		
4	7493564	1.922	.001	1.92200 - .00008	.050	.050	4		
4	7493565	1.922	.002	1.92192 - .00012	.050	.050	4		
4	7493566	1.922	.004	1.92180 - .00016	.050	.050	8		
4	7493568	1.922	.008 AND UP	1.92160 - .00040	.050	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FIN—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	
A	B	C	D	E	F	G	H
4	7493570		1.923	.001	1.92300	-.00008	.050
4	7493571		1.923	.002	1.92292	-.00012	.050
4	7493572		1.923	.004 AND UP	1.92280	-.00016	.050
4	7493574		1.923	.008	1.92260	-.00040	.050
4	7493576		1.924	.001	1.92400	-.00008	.050
4	7493577		1.924	.002	1.92392	-.00012	.050
4	7493578		1.924	.004	1.92380	-.00016	.050
4	7493580		1.924	.008 AND UP	1.92360	-.00040	.050
4	7493582		1.925	.001	1.92500	-.00008	.050
4	7493583		1.925	.002	1.92492	-.00012	.050
4	7493584		1.925	.004	1.92480	-.00016	.050
4	7493586		1.925	.008 AND UP	1.92460	-.00040	.050
4	7493588		1.926	.001	1.92600	-.00008	.050
4	7493589		1.926	.002	1.92592	-.00012	.050
4	7493590		1.926	.004	1.92580	-.00016	.050
4	7493592		1.926	.008 AND UP	1.92560	-.00040	.050
4	7493594		1.927	.001	1.92700	-.00008	.050
4	7493595		1.927	.002	1.92692	-.00012	.050
4	7493596		1.927	.004	1.92680	-.00016	.050
4	7493598		1.927	.008 AND UP	1.92660	-.00040	.050
4	7493600		1.928	.001	1.92800	-.00008	.050
4	7493601		1.928	.002	1.92792	-.00012	.050
4	7493602		1.928	.004	1.92780	-.00016	.050
4	7493604		1.928	.008 AND UP	1.92760	-.00040	.050
4	7493606		1.929	.001	1.92900	-.00008	.050
4	7493607		1.929	.002	1.92892	-.00012	.050
4	7493608		1.929	.004	1.92880	-.00016	.050
4	7493610		1.929	.008 AND UP	1.92860	-.00040	.050

MIL-STD-112A
6 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON CIR.	FIN-GAGE STOCK NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
		RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	DIA METER	CHAMFER	G	
A	B	C	D	E	F	G		
4	7493612	1.930	.001	1.93000 - .00008	.050	4		
4	7493613	1.930	.002	1.92992 - .00012	.050	4		
4	7493614	1.930	.004	1.92980 - .00016	.050	8		
4	7493616	1.930	.008 AND UP	1.92960 - .00040	.050	8		
4	7493618	1.931	.001	1.93100 - .00008	.050	4		
4	7493619	1.931	.002	1.93092 - .00012	.050	4		
4	7493620	1.931	.004	1.93080 - .00016	.050	8		
4	7493622	1.931	.008 AND UP	1.93060 - .00040	.050	8		
4	7493624	1.932	.001	1.93200 - .00008	.050	4		
4	7493625	1.932	.002	1.93192 - .00012	.050	4		
4	7493626	1.932	.004	1.93180 - .00016	.050	8		
4	7493628	1.932	.008 AND UP	1.93160 - .00040	.050	8		
4	7493630	1.933	.001	1.93300 - .00008	.050	4		
4	7493631	1.933	.002	1.93292 - .00012	.050	4		
4	7493632	1.933	.004	1.93280 - .00016	.050	8		
4	7493634	1.933	.008 AND UP	1.93260 - .00040	.050	8		
4	7493636	1.934	.001	1.93400 - .00008	.050	4		
4	7493637	1.934	.002	1.93392 - .00012	.050	4		
4	7493638	1.934	.004	1.93380 - .00016	.050	8		
4	7493640	1.934	.008 AND UP	1.93360 - .00040	.050	8		
4	7493642	1.935	.001	1.93500 - .00008	.050	4		
4	7493643	1.935	.002	1.93492 - .00012	.050	4		
4	7493644	1.935	.004	1.93480 - .00016	.050	8		
4	7493646	1.935	.008 AND UP	1.93460 - .00040	.050	8		
4	7493648	1.936	.001	1.93600 - .00008	.050	4		
4	7493649	1.936	.002	1.93592 - .00012	.050	4		
4	7493650	1.936	.004	1.93580 - .00016	.050	8		
4	7493652	1.936	.008 AND UP	1.93560 - .00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

G. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		CHAMFER
	FIN—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	E	F	G	H	
A	B	C	D	E	F	G	H	
4	7493654		1.937	.001	1.93700	-.00008	.050	4
4	7493655		1.937	.002	1.93692	-.00012	.050	4
4	7493656		1.937	.004	1.93680	-.00016	.050	8
4	7493658		1.937	.008 AND UP	1.93660	-.00040	.050	8
4	7493660		1.9375	.001 AND UP	1.93750	-.00008	.050	4
4	7493661		1.938	.001	1.93800	-.00008	.050	4
4	7493662		1.938	.002	1.93792	-.00012	.050	4
4	7493663		1.938	.004	1.93780	-.00016	.050	8
4	7493665		1.938	.008 AND UP	1.93760	-.00040	.050	8
4	7493667		1.939	.001	1.93900	-.00008	.050	4
4	7493668		1.939	.002	1.93892	-.00012	.050	4
4	7493669		1.939	.004	1.93880	-.00016	.050	8
4	7493671		1.939	.008 AND UP	1.93860	-.00040	.050	8
4	7493673		1.940	.001	1.94000	-.00008	.050	4
4	7493674		1.940	.002	1.93992	-.00012	.050	4
4	7493675		1.940	.004	1.93980	-.00016	.050	8
4	7493677		1.940	.008 AND UP	1.93960	-.00040	.050	8
4	7493679		1.941	.001	1.94100	-.00008	.050	4
4	7493680		1.941	.002	1.94092	-.00012	.050	4
4	7493681		1.941	.004	1.94080	-.00016	.050	8
4	7493683		1.941	.008 AND UP	1.94060	-.00040	.050	8
4	7493685		1.942	.001	1.94200	-.00008	.050	4
4	7493686		1.942	.002	1.94192	-.00012	.050	4
4	7493687		1.942	.004	1.94180	-.00016	.050	8
4	7493689		1.942	.008 AND UP	1.94160	-.00040	.050	8
4	7493691		1.943	.001	1.94300	-.00008	.050	4
4	7493692		1.943	.002	1.94292	-.00012	.050	4
4	7493693		1.943	.004	1.94280	-.00016	.050	8
4	7493695		1.943	.008 AND UP	1.94260	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

TIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH	
	RING-GAGE STOCK NO.		ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION		DIAMETER	CHAMFER				
	A	B		C	D		E	F	G		
4	7493697			1.944	.001	1.94400	-.00008	.050	4		
4	7493698			1.944	.002	1.94392	-.00012	.050	4		
4	7493699			1.944	.004	1.94380	-.00016	.050	8		
4	7493701			1.944	.008 AND UP	1.94360	-.00040	.050	8		
4	7493703			1.945	.001	1.94500	-.00008	.050	4		
4	7493704			1.945	.002	1.94492	-.00012	.050	4		
4	7493705			1.945	.004	1.94480	-.00016	.050	8		
4	7493707			1.945	.008 AND UP	1.94460	-.00040	.050	8		
4	7493709			1.946	.001	1.94600	-.00008	.050	4		
4	7493710			1.946	.002	1.94592	-.00012	.050	4		
4	7493711			1.946	.004	1.94580	-.00016	.050	8		
4	7493713			1.946	.008 AND UP	1.94560	-.00040	.050	8		
4	7493715			1.947	.001	1.94700	-.00008	.050	4		
4	7493716			1.947	.002	1.94692	-.00012	.050	4		
4	7493717			1.947	.004	1.94680	-.00016	.050	8		
4	7493719			1.947	.008 AND UP	1.94660	-.00040	.050	8		
4	7493721			1.948	.001	1.94800	-.00008	.050	4		
4	7493722			1.948	.002	1.94792	-.00012	.050	4		
4	7493723			1.948	.004	1.94780	-.00016	.050	8		
4	7493725			1.948	.008 AND UP	1.94760	-.00040	.050	8		
4	7493727			1.949	.001	1.94900	-.00008	.050	4		
4	7493728			1.949	.002	1.94892	-.00012	.050	4		
4	7493729			1.949	.004	1.94880	-.00016	.050	8		
4	7493731			1.949	.008 AND UP	1.94860	-.00040	.050	8		
4	7493733			1.950	.001	1.95000	-.00008	.050	4		
4	7493734			1.950	.002	1.94992	-.00012	.050	4		
4	7493735			1.950	.004	1.94980	-.00016	.050	8		
4	7493737			1.950	.008 AND UP	1.94960	-.00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FINN-GAGE STOCK NO.	MAXIMUM ACCEPTANCE DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	F	G	
A	B	C	D	E	F	G	
4	7493739	1.951	.001	1.95100	-.00008	.050	4
4	7493740	1.951	.002	1.95092	-.00012	.050	4
4	7493741	1.951	.004	1.95080	-.00016	.050	8
4	7493743	1.951	.008 AND UP	1.95060	-.00040	.050	8
4	7493745	1.952	.001	1.95200	-.00008	.050	4
4	7493746	1.952	.002	1.95192	-.00012	.050	4
4	7493747	1.952	.004	1.95180	-.00016	.050	8
4	7493749	1.952	.008 AND UP	1.95160	-.00040	.050	8
4	7493751	1.953	.001	1.95300	-.00008	.050	4
4	7493752	1.953	.002	1.95292	-.00012	.050	4
4	7493753	1.953	.004	1.95280	-.00016	.050	8
4	7493755	1.953	.008 AND UP	1.95260	-.00040	.050	8
4	7493757	1.954	.001	1.95400	-.00008	.050	4
4	7493758	1.954	.002	1.95392	-.00012	.050	4
4	7493759	1.954	.004	1.95380	-.00016	.050	8
4	7493761	1.954	.008 AND UP	1.95360	-.00040	.050	8
4	7493763	1.955	.001	1.95500	-.00008	.050	4
4	7493764	1.955	.002	1.95492	-.00012	.050	4
4	7493765	1.955	.004	1.95480	-.00016	.050	8
4	7493767	1.955	.008 AND UP	1.95460	-.00040	.050	8
4	7493769	1.956	.001	1.95600	-.00008	.050	4
4	7493770	1.956	.002	1.95592	-.00012	.050	4
4	7493771	1.956	.004	1.95580	-.00016	.050	8
4	7493773	1.956	.008 AND UP	1.95560	-.00040	.050	8
4	7493775	1.957	.001	1.95700	-.00008	.050	4
4	7493776	1.957	.002	1.95692	-.00012	.050	4
4	7493777	1.957	.004	1.95680	-.00016	.050	8
4	7493779	1.957	.008 AND UP	1.95660	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ITEM NO.	MARKING ON GO GAGE	RING GAGE STOCK NO.	MAXIMUM ACCEPTANCE CHECK DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER
					D	E	
A	B	C	D	E	F	G	H
4	7493781	7493782	1.958	.001	1.95800	-.00008	.050
4	7493783	7493784	1.958	.002	1.95792	-.00012	.050
4	7493785	7493786	1.958	.004	1.95780	-.00016	.050
4	7493787	7493788	1.959	.001	1.95900	-.00008	.050
4	7493789	7493790	1.959	.002	1.95892	-.00012	.050
4	7493791	7493792	1.959	.004	1.95880	-.00016	.050
4	7493793	7493794	1.960	.001	1.96000	-.00008	.050
4	7493794	7493795	1.960	.002	1.95992	-.00012	.050
4	7493795	7493796	1.960	.004	1.95980	-.00016	.050
4	7493797	7493798	1.960	.008 AND UP	1.95960	-.00040	.050
4	7493799	7493800	1.961	.001	1.96100	-.00008	.050
4	7493800	7493801	1.961	.002	1.96092	-.00012	.050
4	7493801	7493802	1.961	.004	1.96080	-.00016	.050
4	7493802	7493803	1.961	.008 AND UP	1.96060	-.00040	.050
4	7493803	7493804	1.962	.001	1.96200	-.00008	.050
4	7493804	7493805	1.962	.002	1.96192	-.00012	.050
4	7493805	7493806	1.962	.004	1.96180	-.00016	.050
4	7493806	7493807	1.962	.008 AND UP	1.96160	-.00040	.050
4	7493807	7493808	1.962	.001	1.96300	-.00008	.050
4	7493808	7493809	1.963	.002	1.96292	-.00012	.050
4	7493809	7493810	1.963	.004	1.96280	-.00016	.050
4	7493810	7493811	1.963	.008 AND UP	1.96260	-.00040	.050
4	7493811	7493812	1.964	.001	1.96400	-.00008	.050
4	7493812	7493813	1.964	.002	1.96392	-.00012	.050
4	7493813	7493814	1.964	.004	1.96380	-.00016	.050
4	7493814	7493815	1.964	.008 AND UP	1.96360	-.00040	.050
4	7493815	7493816	1.964	.001	1.96400	-.00008	.050
4	7493816	7493817	1.964	.002	1.96392	-.00012	.050
4	7493817	7493818	1.964	.004	1.96380	-.00016	.050
4	7493818	7493819	1.964	.008 AND UP	1.96360	-.00040	.050
4	7493819	7493820	1.964	.001	1.96400	-.00008	.050
4	7493820	7493821	1.964	.002	1.96392	-.00012	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER	
	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION		COMPONENT TOLERANCE	DIAMETER		G	H	I		
		RING GAGE	ACCEPTANCE CHECK		D	E					
A	B	C									
4	7493823	1.965	.001		1.96500	-.00008	.050	4			
4	7493824	1.965	.002		1.96492	-.00012	.050	4			
4	7493825	1.965	.004		1.96480	-.00016	.050	8			
4	7493827	1.965	.008 AND UP		1.96460	-.00040	.050	8			
4	7493829	1.966	.001		1.96600	-.00008	.050	4			
4	7493830	1.966	.002		1.96592	-.00012	.050	4			
4	7493831	1.966	.004		1.96580	-.00016	.050	8			
4	7493833	1.966	.008 AND UP		1.96560	-.00040	.050	8			
4	7493835	1.967	.001		1.96700	-.00008	.050	4			
4	7493836	1.967	.002		1.96692	-.00012	.050	4			
4	7493837	1.967	.004		1.96680	-.00016	.050	8			
4	7493839	1.967	.008 AND UP		1.96660	-.00040	.050	8			
4	7493841	1.968	.001		1.96800	-.00008	.050	4			
4	7493842	1.968	.002		1.96792	-.00012	.050	4			
4	7493843	1.968	.004		1.96780	-.00016	.050	8			
4	7493845	1.968	.008 AND UP		1.96760	-.00040	.050	8			
4	7493847	1.96875	.001 AND UP		1.96875	-.00008	.050	4			
4	7493848	1.969	.001		1.96900	-.00008	.050	4			
4	7493849	1.969	.002		1.96892	-.00012	.050	4			
4	7493850	1.969	.004		1.96880	-.00016	.050	8			
4	7493852	1.969	.008 AND UP		1.96860	-.00040	.050	8			
4	7493854	1.970	.001		1.97000	-.00008	.050	4			
4	7493855	1.970	.002		1.96992	-.00012	.050	4			
4	7493856	1.970	.004		1.96980	-.00016	.050	8			
4	7493858	1.970	.008 AND UP		1.96960	-.00040	.050	8			
4	7493860	1.971	.001		1.97100	-.00008	.050	4			
4	7493861	1.971	.002		1.97092	-.00012	.050	4			
4	7493862	1.971	.004		1.97080	-.00016	.050	8			
4	7493864	1.971	.008 AND UP		1.97060	-.00040	.050	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS				FINISH
	FIN-GAGE STOCK NO.	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	G	
RING GAGE	ACCEPTANCE CHECK	D	E	F	G	H		
A	B	C	D	E	F	G		
4	7493866		1.972	.001	1.97200	-.00008	.050	4
4	7493867		1.972	.002	1.97192	-.00012	.050	4
4	7493868		1.972	.004	1.97180	-.00016	.050	8
4	7493870		1.972	.008 AND UP	1.97160	-.00040	.050	8
4	7493872		1.973	.001	1.97300	-.00008	.050	4
4	7493873		1.973	.002	1.97292	-.00012	.050	4
4	7493874		1.973	.004	1.97280	-.00016	.050	8
4	7493876		1.973	.008 AND UP	1.97260	-.00040	.050	8
4	7493878		1.974	.001	1.97400	-.00008	.050	4
4	7493879		1.974	.002	1.97392	-.00012	.050	4
4	7493880		1.974	.004	1.97380	-.00016	.050	8
4	7493882		1.974	.008 AND UP	1.97360	-.00040	.050	8
4	7493884		1.975	.001	1.97500	-.00008	.050	4
4	7493885		1.975	.002	1.97492	-.00012	.050	4
4	7493886		1.975	.004	1.97480	-.00016	.050	8
4	7493888		1.975	.008 AND UP	1.97460	-.00040	.050	8
4	7493890		1.976	.001	1.97600	-.00008	.050	4
4	7493891		1.976	.002	1.97592	-.00012	.050	4
4	7493892		1.976	.004	1.97580	-.00016	.050	8
4	7493894		1.976	.008 AND UP	1.97560	-.00040	.050	8
4	7493896		1.977	.001	1.97700	-.00008	.050	4
4	7493897		1.977	.002	1.97692	-.00012	.050	4
4	7493898		1.977	.004	1.97680	-.00016	.050	8
4	7493900		1.977	.008 AND UP	1.97660	-.00040	.050	8
4	7493902		1.978	.001	1.97800	-.00008	.050	4
4	7493903		1.978	.002	1.97792	-.00012	.050	4
4	7493904		1.978	.004	1.97780	-.00016	.050	8
4	7493906		1.978	.008 AND UP	1.97760	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	FIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIMETER	E	F	G	
A	B	C				H	
4	7493908	1.979	.001	1.9790	-.0008	.050	4
4	7493909	1.979	.002	1.97892	-.00012	.050	4
4	7493910	1.979	.004	1.97880	-.00016	.050	8
4	7493912	1.979	.008 AND UP	1.97860	-.00040	.050	8
4	7493914	1.980	.001	1.98000	-.00008	.050	4
4	7493915	1.980	.002	1.97992	-.00012	.050	4
4	7493916	1.980	.004	1.97980	-.00016	.050	8
4	7493918	1.980	.008 AND UP	1.97960	-.00040	.050	8
4	7493920	1.981	.001	1.98100	-.00008	.050	4
4	7493921	1.981	.002	1.98092	-.00012	.050	4
4	7493922	1.981	.004	1.98080	-.00016	.050	8
4	7493924	1.981	.008 AND UP	1.98060	-.00040	.050	8
4	7493926	1.982	.001	1.98200	-.00008	.050	4
4	7493927	1.982	.002	1.98192	-.00012	.050	4
4	7493928	1.982	.004	1.98180	-.00016	.050	8
4	7493930	1.982	.008 AND UP	1.98160	-.00040	.050	8
4	7493932	1.983	.001	1.98300	-.00008	.050	4
4	7493933	1.983	.002	1.98292	-.00012	.050	4
4	7493934	1.983	.004	1.98280	-.00016	.050	8
4	7493936	1.983	.008 AND UP	1.98260	-.00040	.050	8
4	7493938	1.984	.001	1.98400	-.00008	.050	4
4	7493939	1.984	.002	1.98392	-.00012	.050	4
4	7493940	1.984	.004	1.98380	-.00016	.050	8
4	7493942	1.984	.008 AND UP	1.98360	-.00040	.050	8
4	7493944	1.985	.001	1.98500	-.00008	.050	4
4	7493945	1.985	.002	1.98492	-.00012	.050	4
4	7493946	1.985	.004	1.98480	-.00016	.050	8
4	7493948	1.985	.008 AND UP	1.98460	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
	FIN—GAGE	STOCK NO.			D	E	
	RING GAGE	ACCEPTANCE CHECK					
A	B	C					
4	7493950		1.986	.001	1.98600	-.00008	.050
4	7493951		1.986	.002	1.98592	-.00012	.050
4	7493952		1.986	.004	1.98580	-.00016	.050
4	7493954		1.986	.008 AND UP	1.98560	-.00040	.050
4	7493956		1.987	.001	1.98700	-.00008	.050
4	7493957		1.987	.002	1.98692	-.00012	.050
4	7493958		1.987	.004	1.98680	-.00016	.050
4	7493960		1.987	.008 AND UP	1.98660	-.00040	.050
4	7493962		1.988	.001	1.98800	-.00008	.050
4	7493963		1.988	.002	1.98792	-.00012	.050
4	7493964		1.988	.004	1.98780	-.00016	.050
4	7493966		1.988	.008 AND UP	1.98760	-.00040	.050
4	7493968		1.989	.001	1.98900	-.00008	.050
4	7493969		1.989	.002	1.98892	-.00012	.050
4	7493970		1.989	.004	1.98880	-.00016	.050
4	7493972		1.989	.008 AND UP	1.98860	-.00040	.050
4	7493974		1.990	.001	1.99000	-.00008	.050
4	7493975		1.990	.002	1.98992	-.00012	.050
4	7493976		1.990	.004	1.98980	-.00016	.050
4	7493978		1.990	.008 AND UP	1.98960	-.00040	.050
4	7493980		1.991	.001	1.99100	-.00008	.050
4	7493981		1.991	.002	1.99092	-.00012	.050
4	7493982		1.991	.004	1.99080	-.00016	.050
4	7493984		1.991	.008 AND UP	1.99060	-.00040	.050
4	7493986		1.992	.001	1.99200	-.00008	.050
4	7493987		1.992	.002	1.99192	-.00012	.050
4	7493988		1.992	.004	1.99180	-.00016	.050
4	7493990		1.992	.008 AND UP	1.99160	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FIN - GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
	RING GAGE	ACCEPTANCE CHECK	C						CHAMFER	
A	B									
4	7493992		1.993	.001	1.99300	-.00008	.050	4		
4	7493993		1.993	.002	1.99292	-.00012	.050	4		
4	7493994		1.993	.004	1.99280	-.00016	.050	8		
4	7493996		1.993	.008 AND UP	1.99260	-.00040	.050	8		
4	7493998		1.994	.001	1.99400	-.00008	.050	4		
4	7493999		1.994	.002	1.99392	-.00012	.050	4		
4	7494000		1.994	.004	1.99380	-.00016	.050	8		
4	7494002		1.994	.008 AND UP	1.99360	-.00040	.050	8		
4	7494004		1.995	.001	1.99500	-.00008	.050	4		
4	7494005		1.995	.002	1.99492	-.00012	.050	4		
4	7494006		1.995	.004	1.99480	-.00016	.050	8		
4	7494008		1.995	.008 AND UP	1.99460	-.00040	.050	8		
4	7494010		1.996	.001	1.99600	-.00008	.050	4		
4	7494011		1.996	.002	1.99592	-.00012	.050	4		
4	7494012		1.996	.004	1.99580	-.00016	.050	8		
4	7494014		1.996	.008 AND UP	1.99560	-.00040	.050	8		
4	7494016		1.997	.001	1.99700	-.00008	.050	4		
4	7494017		1.997	.002	1.99692	-.00012	.050	4		
4	7494018		1.997	.004	1.99680	-.00016	.050	8		
4	7494020		1.997	.008 AND UP	1.99660	-.00040	.050	8		
4	7494022		1.998	.001	1.99800	-.00008	.050	4		
4	7494023		1.998	.002	1.99792	-.00012	.050	4		
4	7494024		1.998	.004	1.99780	-.00016	.050	8		
4	7494026		1.998	.008 AND UP	1.99760	-.00040	.050	8		
4	7494028		1.999	.001	1.99900	-.00008	.050	4		
4	7494029		1.999	.002	1.99892	-.00012	.050	4		
4	7494030		1.999	.004	1.99880	-.00016	.050	8		
4	7494032		1.999	.008 AND UP	1.99860	-.00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			TOTAL COMPONENT TOLERANCE			DIAMETER			FINISH		
	RING GAGE STOCK NO.	MAXIMUM ACCEPTANCE CHECK	RING GAGE	A	B	C	D	E	F	G	H	I	J	K	L
7494034	2.000	.001		2.0000	-		.00008	.050		4					
7494035	2.000	.002		1.99992	-		.00012	.050		4					
7494036	2.000	.004		1.99980	-		.00016	.050		6					
7494038	2.000	.008 AND UP		1.99960	-		.00040	.050		6					
7494040	2.001	.001		2.00100	-		.00008	.050		4					
7494041	2.001	.002		2.00092	-		.00012	.050		4					
7494042	2.001	.004		2.00080	-		.00016	.050		6					
7494044	2.001	.008 AND UP		2.00060	-		.00040	.050		8					
7494046	2.002	.001		2.00200	-		.00008	.050		4					
7494047	2.002	.002		2.00192	-		.00012	.050		4					
7494048	2.002	.004		2.00180	-		.00016	.050		6					
7494050	2.002	.008 AND UP		2.00160	-		.00040	.050		8					
7494052	2.003	.001		2.00300	-		.00008	.050		4					
7494053	2.003	.002		2.00292	-		.00012	.050		4					
7494054	2.003	.004		2.00280	-		.00016	.050		6					
7494056	2.003	.008 AND UP		2.00260	-		.00040	.050		8					
7494058	2.004	.001		2.00400	-		.00008	.050		4					
7494059	2.004	.002		2.00392	-		.00012	.050		4					
7494060	2.004	.004		2.00380	-		.00016	.050		6					
7494062	2.004	.008 AND UP		2.00360	-		.00040	.050		8					
7494064	2.005	.001		2.00500	-		.00008	.050		4					
7494065	2.005	.002		2.00492	-		.00012	.050		4					
7494066	2.005	.004		2.00480	-		.00016	.050		6					
7494068	2.005	.008 AND UP		2.00460	-		.00040	.050		8					
7494070	2.006	.001		2.00600	-		.00008	.050		4					
7494071	2.006	.002		2.00592	-		.00012	.050		4					
7494072	2.006	.004		2.00580	-		.00016	.050		6					
7494074	2.006	.008 AND UP		2.00560	-		.00040	.050		8					

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	FIN—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
RING GAGE	ACCEPTANCE CHECK	C								
A	B									
4	7494076		2.007	.001	2.00700	-.00008	.050	4		
4	7494077		2.007	.002	2.00692	-.00012	.050	4		
4	7494078		2.007	.004	2.00680	-.00016	.050	8		
4	7494080		2.007	.008 AND UP	2.00660	-.00040	.050	8		
4	7494082		2.008	.001	2.00800	-.00008	.050	4		
4	7494083		2.008	.002	2.00792	-.00012	.050	4		
4	7494084		2.008	.004 AND UP	2.00780	-.00016	.050	8		
4	7494086		2.008	.008 AND UP	2.00760	-.00040	.050	8		
4	7494088		2.009	.001	2.00900	-.00008	.050	4		
4	7494089		2.009	.002	2.00892	-.00012	.050	4		
4	7494090		2.009	.004	2.00880	-.00016	.050	8		
4	7494092		2.009	.008 AND UP	2.00860	-.00040	.050	8		
4	7494094		2.010	.001	2.01000	-.00008	.050	4		
4	7494095		2.010	.002	2.00992	-.00012	.050	4		
4	7494096		2.010	.004	2.00980	-.00016	.050	8		
4	7494098		2.010	.008 AND UP	2.00960	-.00040	.050	8		
4	7494100		2.011	.001	2.01100	-.00008	.050	4		
4	7494101		2.011	.002	2.01092	-.00012	.050	4		
4	7494102		2.011	.004	2.01080	-.00016	.050	8		
4	7494104		2.011	.008 AND UP	2.01060	-.00040	.050	8		
4	7494106		2.012	.001	2.01200	-.00008	.050	4		
4	7494107		2.012	.002	2.01192	-.00012	.050	4		
4	7494108		2.012	.004	2.01180	-.00016	.050	8		
4	7494110		2.012	.008 AND UP	2.01160	-.00040	.050	8		
4	7494112		2.013	.001	2.01300	-.00008	.050	4		
4	7494113		2.013	.002	2.01292	-.00012	.050	4		
4	7494114		2.013	.004	2.01280	-.00016	.050	8		
4	7494116		2.013	.008 AND UP	2.01260	-.00040	.050	8		

MIL-STD-112A
December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			H.S.I.N.F.
	F.I.N.—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA.METER	CHAMFER.	
A	B	C	D	E	F	G	H
4	7494118		2.014	.001	2.01400	-.00008	.050
11	7494119		2.014	.002	2.01392	-.00012	.050
4	7494120		2.014	.004	2.01380	-.00016	.050
4	7494122		2.014	.008 AND UP	2.01360	-.00040	.050
4	7494124		2.015	.001	2.01500	-.00008	.050
11	7494125		2.015	.002	2.01492	-.00012	.050
4	7494126		2.015	.004	2.01480	-.00016	.050
4	7494128		2.015	.008 AND UP	2.01460	-.00040	.050
4	7494130		2.016	.001	2.01600	-.00008	.050
4	7494131		2.016	.002	2.01592	-.00012	.050
4	7494132		2.016	.004	2.01580	-.00016	.050
4	7494134		2.016	.008 AND UP	2.01560	-.00040	.050
4	7494136		2.017	.001	2.01700	-.00008	.050
4	7494137		2.017	.002	2.01692	-.00012	.050
4	7494138		2.017	.004	2.01680	-.00016	.050
4	7494140		2.017	.008 AND UP	2.01660	-.00040	.050
4	7494142		2.018	.001	2.01800	-.00008	.250
11	7494143		2.018	.002	2.01792	-.00012	.050
11	7494144		2.018	.004	2.01780	-.00016	.050
11	7494146		2.018	.008 AND UP	2.01760	-.00040	.050
4	7494148		2.019	.001	2.01900	-.00008	.050
4	7494149		2.019	.002	2.01892	-.00012	.050
4	7494150		2.019	.004	2.01880	-.00016	.050
4	7494152		2.019	.008 AND UP	2.01860	-.00040	.050
4	7494154		2.020	.001	2.02000	-.00008	.050
4	7494155		2.020	.002	2.01992	-.00012	.050
11	7494156		2.020	.004	2.01980	-.00016	.050
11	7494158		2.020	.008 AND UP	2.01960	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

TIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	RING GAGE ACCEPTANCE CHECK	DIA. AND UP	E	F	G	
A	B	C	D				H	
4	7494160	2.021	.001	2.02100 - .00008	.050	4		
4	7494161	2.021	.002	2.02092 - .00012	.050	4		
4	7494162	2.021	.004	2.02080 - .00016	.050	8		
4	7494164	2.021	.008 AND UP	2.02060 - .00040	.050	8		
4	7494166	2.022	.001	2.02200 - .00008	.050	4		
4	7494167	2.022	.002	2.02192 - .00012	.050	4		
4	7494168	2.022	.004	2.02180 - .00016	.050	8		
4	7494170	2.022	.008 AND UP	2.02160 - .00040	.050	8		
4	7494172	2.023	.001	2.02300 - .00008	.050	4		
4	7494173	2.023	.002	2.02292 - .00012	.050	4		
4	7494174	2.023	.004	2.02280 - .00016	.050	8		
4	7494176	2.023	.008 AND UP	2.02260 - .00040	.050	8		
4	7494178	2.024	.001	2.02400 - .00008	.050	4		
4	7494179	2.024	.002	2.02392 - .00012	.050	4		
4	7494180	2.024	.004	2.02380 - .00016	.050	8		
4	7494182	2.024	.008 AND UP	2.02360 - .00040	.050	8		
4	7494184	2.025	.001	2.02500 - .00008	.050	4		
4	7494185	2.025	.002	2.02492 - .00012	.050	4		
4	7494186	2.025	.004	2.02480 - .00016	.050	8		
4	7494188	2.025	.008 AND UP	2.02460 - .00040	.050	8		
4	7494190	2.026	.001	2.02600 - .00008	.050	4		
4	7494191	2.026	.002	2.02592 - .00012	.050	4		
4	7494192	2.026	.004 AND UP	2.02580 - .00016	.050	8		
4	7494194	2.026	.008 AND UP	2.02560 - .00040	.050	8		
4	7494196	2.027	.001	2.02700 - .00008	.050	4		
4	7494197	2.027	.002	2.02692 - .00012	.050	4		
4	7494198	2.027	.004	2.02680 - .00016	.050	8		
4	7494200	2.027	.008 AND UP	2.02660 - .00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH H
	FINN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
4	7494202		2.028	.001	2.02800	-.00008	.050
4	7494203		2.028	.002	2.02792	-.00012	.050
4	7494204		2.028	.004	2.02780	-.00016	.050
4	7494206		2.028	.008 AND UP	2.02760	-.00040	.050
4	7494208		2.029	.001	2.02900	-.00008	.050
4	7494209		2.029	.002	2.02892	-.00012	.050
4	7494210		2.029	.004	2.02880	-.00016	.050
4	7494212		2.029	.008 AND UP	2.02860	-.00040	.050
4	7494214		2.030	.001	2.03000	-.00008	.050
4	7494215		2.030	.002	2.02992	-.00012	.050
4	7494216		2.030	.004	2.02980	-.00016	.050
4	7494218		2.030	.008 AND UP	2.02960	-.00040	.050
4	7494220		2.031	.001	2.03100	-.00008	.050
4	7494221		2.031	.002	2.03092	-.00012	.050
4	7494222		2.031	.004	2.03080	-.00016	.050
4	7494224		2.031	.008 AND UP	2.03060	-.00040	.050
4	7494225		2.03125	.001 AND UP	2.03125	-.00008	.050
4	7494227		2.032	.001	2.03200	-.00008	.050
4	7494228		2.032	.002	2.03192	-.00012	.050
4	7494229		2.032	.004	2.03180	-.00016	.050
4	7494231		2.032	.008 AND UP	2.03160	-.00040	.050
4	7494233		2.033	.001	2.03300	-.00008	.050
4	7494234		2.033	.002	2.03292	-.00012	.050
4	7494235		2.033	.004	2.03280	-.00016	.050
4	7494237		2.033	.008 AND UP	2.03260	-.00040	.050
4	7494239		2.034	.001	2.03400	-.00008	.050
4	7494240		2.034	.002	2.03392	-.00012	.050
4	7494241		2.034	.004	2.03380	-.00016	.050
4	7494243		2.034	.008 AND UP	2.03360	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FIN - GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
7494245	7494246	7494247	7494249	.001 .002 .004 .008 AND UP	.03500 .03492 .03480 .03460	-.00008 -.00012 -.00016 -.00040	.050 .050 .050 .050
7494251	7494252	7494253	7494255	.001 .002 .004 AND UP	.03600 .03592 .03580 .03560	-.00008 -.00012 -.00016 -.00040	.050 .050 .050 .050
7494257	7494258	7494259	7494261	.001 .002 .004 AND UP	.03700 .03692 .03680 .03660	-.00008 -.00012 -.00016 -.00040	.050 .050 .050 .050
7494263	7494264	7494265	7494267	.001 .002 .004 AND UP	.03800 .03792 .03780 .03760	-.00008 -.00012 -.00016 -.00040	.050 .050 .050 .050
7494269	7494270	7494271	7494273	.001 .002 .004 AND UP	.03900 .03892 .03880 .03860	-.00008 -.00012 -.00016 -.00040	.050 .050 .050 .050
7494275	7494276	7494277	7494279	.001 .002 .004 AND UP	.04000 .03992 .03980 .03960	-.00008 -.00012 -.00016 -.00040	.050 .050 .050 .050
7494281	7494282	7494283	7494285	.001 .002 .004 AND UP	.04100 .04092 .04080 .04060	-.00008 -.00012 -.00016 -.00040	.050 .050 .050 .050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
A	B	C	D	E	F	G	H			
4	7494287		2.042	.001	2.04200	-.00008	.050	4		
4	7494288		2.042	.002	2.04192	-.00012	.050	4		
4	7494289		2.042	.004	2.04180	-.00016	.050	8		
4	7494291		2.042	.008 AND UP	2.04160	-.00040	.050	8		
4	7494293		2.043	.001	2.04300	-.00008	.050	4		
4	7494294		2.043	.002	2.04292	-.00012	.050	8		
4	7494295		2.043	.004	2.04280	-.00016	.050	8		
4	7494297		2.043	.008 AND UP	2.04260	-.00040	.050	8		
4	7494299		2.044	.001	2.04400	-.00008	.050	4		
4	7494300		2.044	.002	2.04392	-.00012	.050	4		
4	7494301		2.044	.004	2.04380	-.00016	.050	8		
4	7494303		2.044	.008 AND UP	2.04360	-.00040	.050	8		
4	7494305		2.045	.001	2.04500	-.00008	.050	4		
4	7494306		2.045	.002	2.04492	-.00012	.050	4		
4	7494307		2.045	.004	2.04480	-.00016	.050	8		
4	7494309		2.045	.008 AND UP	2.04460	-.00040	.050	8		
4	7494311		2.046	.001	2.04600	-.00008	.050	4		
4	7494312		2.046	.002	2.04592	-.00012	.050	4		
4	7494313		2.046	.004	2.04580	-.00016	.050	8		
4	7494315		2.046	.008 AND UP	2.04560	-.00040	.050	8		
4	7494317		2.047	.001	2.04700	-.00008	.050	4		
4	7494318		2.047	.002	2.04692	-.00012	.050	4		
4	7494319		2.047	.004	2.04680	-.00016	.050	8		
4	7494321		2.047	.008 AND UP	2.04660	-.00040	.050	8		
4	7494323		2.048	.001	2.04800	-.00008	.050	4		
4	7494324		2.048	.002	2.04792	-.00012	.050	4		
4	7494325		2.048	.004	2.04780	-.00016	.050	8		
4	7494327		2.048	.008 AND UP	2.04760	-.00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	RING GAGE	STOCK NO.	ACCEPTANCE CHECK	D	E	F	G	H	
A	B	C	D	E	F	G	H		
1	7494329			2.049	.001	2.04900 - .00008	.050	4	
1	7494330			2.049	.002	2.04892 - .00012	.050	4	
1	7494331			2.049	.004	2.04880 - .00016	.050	8	
1	7494333			2.049	.008 AND UP	2.04860 - .00040	.050	8	
4	7494335			2.050	.001	2.05000 - .00008	.050	4	
4	7494336			2.050	.002	2.04992 - .00012	.050	4	
4	7494337			2.050	.004	2.04980 - .00016	.050	8	
4	7494339			2.050	.008 AND UP	2.04960 - .00040	.050	8	
1	7494341			2.051	.001	2.05100 - .00008	.050	4	
1	7494342			2.051	.002	2.05092 - .00012	.050	4	
4	7494343			2.051	.004	2.05080 - .00016	.050	8	
4	7494345			2.051	.008 AND UP	2.05060 - .00040	.050	8	
1	7494347			2.052	.001	2.05200 - .00008	.050	4	
1	7494348			2.052	.002	2.05192 - .00012	.050	4	
1	7494349			2.052	.004	2.05180 - .00016	.050	8	
1	7494351			2.052	.008 AND UP	2.05160 - .00040	.050	8	
4	7494353			2.053	.001	2.05300 - .00008	.050	4	
4	7494354			2.053	.002	2.05292 - .00012	.050	4	
4	7494355			2.053	.004	2.05280 - .00016	.050	8	
4	7494357			2.053	.008 AND UP	2.05260 - .00040	.050	8	
1	7494359			2.054	.001	2.05400 - .00008	.050	4	
1	7494360			2.054	.002	2.05392 - .00012	.050	4	
1	7494361			2.054	.004	2.05380 - .00016	.050	8	
1	7494363			2.054	.008 AND UP	2.05360 - .00040	.050	8	
4	7494365			2.055	.001	2.05500 - .00008	.050	4	
4	7494366			2.055	.002	2.05492 - .00012	.050	4	
4	7494367			2.055	.004	2.05480 - .00016	.050	8	
4	7494369			2.055	.008 AND UP	2.05460 - .00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN—GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	
A	B	C	D	E	F	G	H	
4	7494371		2.056	.001	2.05600	-.00008	.050	4
4	7494372		2.056	.002	2.05592	-.00012	.050	4
4	7494373		2.056	.004	2.05580	-.00016	.050	4
4	7494375		2.056	.008 AND UP	2.05560	-.00040	.050	4
4	7494377		2.057	.001	2.05700	-.00008	.050	4
4	7494378		2.057	.002	2.05692	-.00012	.050	4
4	7494379		2.057	.004	2.05680	-.00016	.050	4
4	7494381		2.057	.008 AND UP	2.05660	-.00040	.050	4
4	7494383		2.058	.001	2.05800	-.00008	.050	4
4	7494384		2.058	.002	2.05792	-.00012	.050	4
4	7494385		2.058	.004	2.05780	-.00016	.050	4
4	7494387		2.058	.008 AND UP	2.05760	-.00040	.050	4
4	7494389		2.059	.001	2.05900	-.00008	.050	4
4	7494390		2.059	.002	2.05892	-.00012	.050	4
4	7494391		2.059	.004	2.05880	-.00016	.050	4
4	7494393		2.059	.008 AND UP	2.05860	-.00040	.050	4
4	7494395		2.060	.001	2.06000	-.00008	.050	4
4	7494396		2.060	.002	2.05992	-.00012	.050	4
4	7494397		2.060	.004	2.05980	-.00016	.050	4
4	7494399		2.060	.008 AND UP	2.05960	-.00040	.050	4
4	7494401		2.061	.001	2.06100	-.00008	.050	4
4	7494402		2.061	.002	2.06092	-.00012	.050	4
4	7494403		2.061	.004	2.06080	-.00016	.050	4
4	7494405		2.061	.008 AND UP	2.06060	-.00040	.050	4
4	7494407		2.062	.001	2.06200	-.00008	.050	4
4	7494408		2.062	.002	2.06192	-.00012	.050	4
4	7494409		2.062	.004	2.06180	-.00016	.050	4
4	7494411		2.062	.008 AND UP	2.06160	-.00040	.050	4

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FIN—GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	
A	B	C	D	E	F	G	H
4	7494413			2.0625	.001 AND UP	2.06250 - .00008	.050 4
4	7494414			2.063	.001	2.06300 - .00008	.050 4
4	7494415			2.063	.002	2.06292 - .00012	.050 4
4	7494416			2.063	.004 AND UP	2.06280 - .00016	.050 8
4	7494418			2.063	.008 AND UP	2.06260 - .00040	.050 8
4	7494420			2.064	.001	2.06400 - .00008	.050 4
4	7494421			2.064	.002	2.06392 - .00012	.050 4
4	7494422			2.064	.004	2.06380 - .00016	.050 8
4	7494424			2.064	.008 AND UP	2.06360 - .00040	.050 8
4	7494426			2.065	.001	2.06500 - .00008	.050 4
4	7494427			2.065	.002	2.06492 - .00012	.050 4
4	7494428			2.065	.004	2.06480 - .00016	.050 8
4	7494430			2.065	.008 AND UP	2.06460 - .00040	.050 8
4	7494432			2.066	.001	2.06600 - .00008	.050 4
4	7494433			2.066	.002	2.06592 - .00012	.050 4
4	7494434			2.066	.004	2.06580 - .00016	.050 8
4	7494436			2.066	.008 AND UP	2.06560 - .00040	.050 8
4	7494438			2.067	.001	2.06700 - .00008	.050 4
4	7494439			2.067	.002	2.06692 - .00012	.050 4
4	7494440			2.067	.004	2.06680 - .00016	.050 8
4	7494442			2.067	.008 AND UP	2.06660 - .00040	.050 8
4	7494444			2.068	.001	2.06800 - .00008	.050 4
4	7494445			2.068	.002	2.06792 - .00012	.050 4
4	7494446			2.068	.004	2.06780 - .00016	.050 8
4	7494448			2.068	.008 AND UP	2.06760 - .00040	.050 8
4	7494450			2.069	.001	2.06900 - .00008	.050 4
4	7494451			2.069	.002	2.06892 - .00012	.050 4
4	7494452			2.069	.004	2.06880 - .00016	.050 8
4	7494454			2.069	.008 AND UP	2.06860 - .00040	.050 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	RING GAGE	MARKING ON GO GAGE	RING GAGE STOCK NO.	MAXIMUM ACCEPTANCE DIMENSION		TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER	H
				A	B		C	D		
4	7494456		2.070	.001		2.07000	-	.00008	.050	4
4	7494457		2.070	.002		2.06992	-	.00012	.050	4
4	7494458		2.070	.001	AND UP	2.06980	-	.00016	.050	8
4	7494460		2.070	.008	AND UP	2.06960	-	.00040	.050	8
4	7494462		2.071	.001		2.07100	-	.00008	.050	4
4	7494463		2.071	.002		2.07092	-	.00012	.050	4
4	7494464		2.071	.004		2.07080	-	.00016	.050	8
4	7494466		2.071	.008	AND UP	2.07060	-	.00040	.050	8
4	7494468		2.072	.001		2.07200	-	.00008	.050	4
4	7494469		2.072	.002		2.07192	-	.00012	.050	4
4	7494470		2.072	.004		2.07180	-	.00016	.050	8
4	7494472		2.072	.008	AND UP	2.07160	-	.00040	.050	8
4	7494474		2.073	.001		2.07300	-	.00008	.050	4
4	7494475		2.073	.002		2.07292	-	.00012	.050	4
4	7494476		2.073	.004		2.07280	-	.00016	.050	8
4	7494478		2.073	.008	AND UP	2.07260	-	.00040	.050	8
4	7494480		2.074	.001		2.07400	-	.00008	.050	4
4	7494481		2.074	.002		2.07392	-	.00012	.050	4
4	7494482		2.074	.004		2.07380	-	.00016	.050	8
4	7494484		2.074	.008	AND UP	2.07360	-	.00040	.050	8
4	7494486		2.075	.001		2.07500	-	.00008	.050	4
4	7494487		2.075	.002		2.07492	-	.00012	.050	4
4	7494488		2.075	.004		2.07480	-	.00016	.050	8
4	7494490		2.075	.008	AND UP	2.07460	-	.00040	.050	8
4	7494492		2.076	.001		2.07600	-	.00008	.050	4
4	7494493		2.076	.002		2.07592	-	.00012	.050	4
4	7494494		2.076	.004		2.07580	-	.00016	.050	8
4	7494496		2.076	.008	AND UP	2.07560	-	.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	D	C	E	F	G	
4	7494498			2.077	.001	2.07700	-.00008	.050	4
4	7494499			2.077	.002	2.07692	-.00012	.050	4
4	7494500			2.077	.004	2.07680	-.00016	.050	8
4	7494502			2.077	.008 AND UP	2.07660	-.00040	.050	8
4	7494504			2.078	.001	2.07800	-.00008	.050	4
4	7494505			2.078	.002	2.07792	-.00012	.050	4
4	7494506			2.078	.004	2.07780	-.00016	.050	8
4	7494508			2.078	.008 AND UP	2.07760	-.00040	.050	8
4	7494510			2.079	.001	2.07900	-.00008	.050	4
4	7494511			2.079	.002	2.07892	-.00012	.050	4
4	7494512			2.079	.004	2.07880	-.00016	.050	8
4	7494514			2.079	.008 AND UP	2.07860	-.00040	.050	8
4	7494516			2.080	.001	2.08000	-.00008	.050	4
4	7494517			2.080	.002	2.07992	-.00012	.050	4
4	7494518			2.080	.004	2.07980	-.00016	.050	8
4	7494520			2.080	.008 AND UP	2.07960	-.00040	.050	8
4	7494522			2.081	.001	2.08100	-.00008	.050	4
4	7494523			2.081	.002	2.08092	-.00012	.050	4
4	7494524			2.081	.004	2.08080	-.00016	.050	8
4	7494526			2.081	.008 AND UP	2.08060	-.00040	.050	8
4	7494528			2.082	.001	2.08200	-.00008	.050	4
4	7494529			2.082	.002	2.08192	-.00012	.050	4
4	7494530			2.082	.004	2.08180	-.00016	.050	8
4	7494532			2.082	.008 AND UP	2.08160	-.00040	.050	8
4	7494534			2.083	.001	2.08300	-.00008	.050	4
4	7494535			2.083	.002	2.08292	-.00012	.050	4
4	7494536			2.083	.004	2.08280	-.00016	.050	8
4	7494538			2.083	.008 AND UP	2.08260	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FUN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C								
4	7494540			2.084	.001	2.08400	-.00008	.050	4	
4	7494541			2.084	.002	2.08392	-.00012	.050	4	
4	7494542			2.084	.004	2.08380	-.00016	.050	8	
4	7494544			2.084	.008 AND UP	2.08360	-.00040	.050	8	
4	7494546			2.085	.001	2.08500	-.00008	.050	4	
4	7494547			2.085	.002	2.08492	-.00012	.050	4	
4	7494548			2.085	.004	2.08480	-.00016	.050	8	
4	7494550			2.085	.008 AND UP	2.08460	-.00040	.050	8	
4	7494552			2.086	.001	2.08600	-.00008	.050	4	
4	7494553			2.086	.002	2.08592	-.00012	.050	4	
4	7494554			2.086	.004	2.08580	-.00016	.050	8	
4	7494556			2.086	.008 AND UP	2.08560	-.00040	.050	8	
4	7494558			2.087	.001	2.08700	-.00008	.050	4	
4	7494559			2.087	.002	2.08692	-.00012	.050	4	
4	7494560			2.087	.004	2.08680	-.00016	.050	8	
4	7494562			2.087	.008 AND UP	2.08660	-.00040	.050	8	
4	7494564			2.088	.001	2.08800	-.00008	.050	4	
4	7494565			2.088	.002	2.08792	-.00012	.050	4	
4	7494566			2.088	.004	2.08780	-.00016	.050	8	
4	7494568			2.088	.008 AND UP	2.08760	-.00040	.050	8	
4	7494570			2.089	.001	2.08900	-.00008	.050	4	
4	7494571			2.089	.002	2.08892	-.00012	.050	4	
4	7494572			2.089	.004	2.08880	-.00016	.050	8	
4	7494574			2.089	.008 AND UP	2.08860	-.00040	.050	8	
4	7494576			2.090	.001	2.09000	-.00008	.050	4	
4	7494577			2.090	.002	2.08992	-.00012	.050	4	
4	7494578			2.090	.004	2.08980	-.00016	.050	8	
4	7494580			2.090	.008 AND UP	2.08960	-.00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA. OF HOLE	THICKNESS	UPPER TOLERANCE	DIA. OF HOLE	THICKNESS	
A	B	C	D	E	F	G	H	I	
4	7494582		2.091	.001	2.09100	-.00008	.050	.050	
4	7494583		2.091	.002	2.09092	-.00012	.050	.050	
4	7494584		2.091	.004	2.09080	-.00016	.050	.050	
4	7494586		2.091	.008 AND UP	2.09060	-.00040	.050	.050	
4	7494588		2.092	.001	2.09200	-.00008	.050	.050	
4	7494589		2.092	.002	2.09192	-.00012	.050	.050	
4	7494590		2.092	.004	2.09180	-.00016	.050	.050	
4	7494592		2.092	.008 AND UP	2.09160	-.00040	.050	.050	
4	7494594		2.093	.001	2.09300	-.00008	.050	.050	
4	7494595		2.093	.002	2.09292	-.00012	.050	.050	
4	7494596		2.093	.004	2.09280	-.00016	.050	.050	
4	7494598		2.093	.008 AND UP	2.09260	-.00040	.050	.050	
4	7494600		2.09375	.001 AND UP	2.09375	-.00008	.050	.050	
4	7494601		2.094	.001	2.09400	-.00008	.050	.050	
4	7494602		2.094	.002	2.09392	-.00012	.050	.050	
4	7494603		2.094	.004	2.09380	-.00016	.050	.050	
4	7494605		2.094	.008 AND UP	2.09360	-.00040	.050	.050	
4	7494607		2.095	.001	2.09500	-.00008	.050	.050	
4	7494608		2.095	.002	2.09492	-.00012	.050	.050	
4	7494609		2.095	.004	2.09480	-.00016	.050	.050	
4	7494611		2.095	.008 AND UP	2.09460	-.00040	.050	.050	
4	7494613		2.096	.001	2.09600	-.00008	.050	.050	
4	7494614		2.096	.002	2.09592	-.00012	.050	.050	
4	7494615		2.096	.004	2.09580	-.00016	.050	.050	
4	7494617		2.096	.008 AND UP	2.09560	-.00040	.050	.050	
4	7494619		2.097	.001	2.09700	-.00008	.050	.050	
4	7494620		2.097	.002	2.09692	-.00012	.050	.050	
4	7494621		2.097	.004	2.09680	-.00016	.050	.050	
4	7494623		2.097	.008 AND UP	2.09660	-.00040	.050	.050	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	
A	B	C	D	E	F	G	H
4	7494625			2.098	.001	2.09800	.050
4	7494626			2.098	.002	2.09792	.050
4	7494627			2.098	.004 AND UP	2.09780	.050
4	7494629			2.098	.008 AND UP	2.09760	.050
4	7494631			2.099	.001	2.09900	.050
4	7494632			2.099	.002	2.09892	.050
4	7494633			2.099	.004	2.09880	.050
4	7494635			2.099	.008 AND UP	2.09860	.050
4	7494637			2.100	.001	2.10000	.050
4	7494638			2.100	.002	2.09992	.050
4	7494639			2.100	.004	2.09980	.050
4	7494641			2.100	.008 AND UP	2.09960	.050
4	7494643			2.101	.001	2.10100	.050
4	7494644			2.101	.002	2.10092	.050
4	7494645			2.101	.004	2.10080	.050
4	7494647			2.101	.008 AND UP	2.10060	.050
4	7494649			2.102	.001	2.10200	.050
4	7494650			2.102	.002	2.10192	.050
4	7494651			2.102	.004	2.10180	.050
4	7494653			2.102	.008 AND UP	2.10160	.050
4	7494655			2.103	.001	2.10300	.050
4	7494656			2.103	.002	2.10292	.050
4	7494657			2.103	.004	2.10280	.050
4	7494659			2.103	.008 AND UP	2.10260	.050
4	7494661			2.104	.001	2.10400	.050
4	7494662			2.104	.002	2.10392	.050
4	7494663			2.104	.004	2.10380	.050
4	7494665			2.104	.008 AND UP	2.10360	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Usable and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH	
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	Gauge	Chamfer
A	B	C	D							
4	7494667		2.105	.001	2.10500	-.00008	.050	4		
4	7494668		2.105	.002	2.10492	-.00012	.050	4		
4	7494669		2.105	.004	2.10480	-.00016	.050	8		
4	7494670		2.105	.008 AND UP	2.10460	-.00040	.050	8		
4	7494673		2.106	.001	2.10600	-.00008	.050	4		
4	7494674		2.106	.002	2.10592	-.00012	.050	4		
4	7494675		2.106	.004	2.10580	-.00016	.050	8		
4	7494677		2.106	.008 AND UP	2.10560	-.00040	.050	8		
4	7494679		2.107	.001	2.10700	-.00008	.050	4		
4	7494680		2.107	.002	2.10692	-.00012	.050	4		
4	7494681		2.107	.004	2.10680	-.00016	.050	8		
4	7494683		2.107	.008 AND UP	2.10660	-.00040	.050	8		
4	7494685		2.108	.001	2.10800	-.00008	.050	4		
4	7494686		2.108	.002	2.10792	-.00012	.050	4		
4	7494687		2.108	.004	2.10780	-.00016	.050	8		
4	7494689		2.108	.008 AND UP	2.10760	-.00040	.050	8		
4	7494691		2.109	.001	2.10900	-.00008	.050	4		
4	7494692		2.109	.002	2.10892	-.00012	.050	4		
4	7494693		2.109	.004	2.10880	-.00016	.050	8		
4	7494695		2.109	.008 AND UP	2.10860	-.00040	.050	8		
4	7494697		2.110	.001	2.11000	-.00008	.050	4		
4	7494703		2.110	.002	2.10992	-.00012	.050	4		
4	7494704		2.111	.002	2.10980	-.00016	.050	8		
4	7494705		2.111	.004	2.10960	-.00040	.050	8		
4	7494707		2.111	.008 AND UP	2.11060	-.00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	FINN-GAGE STOCK NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER	H
		RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F		
4	7494709			2.1112	.001	2.11200	-.00008	.050	4
4	7494710			2.1112	.002	2.11192	-.00012	.050	4
4	7494711			2.1112	.004	2.11180	-.00016	.050	6
4	7494713			2.1112	.008 AND UP	2.11160	-.00040	.050	6
4	7494715			2.1113	.001	2.11300	-.00008	.050	4
4	7494716			2.1113	.002	2.11292	-.00012	.050	4
4	7494717			2.1113	.004	2.11280	-.00016	.050	6
4	7494719			2.1113	.008 AND UP	2.11260	-.00040	.050	6
4	7494721			2.1114	.001	2.11400	-.00008	.050	4
4	7494722			2.1114	.002	2.11392	-.00012	.050	4
4	7494723			2.1114	.004	2.11380	-.00016	.050	6
4	7494725			2.1114	.008 AND UP	2.11360	-.00040	.050	6
4	7494727			2.1115	.001	2.11500	-.00008	.050	4
4	7494728			2.1115	.002	2.11492	-.00012	.050	4
4	7494729			2.1115	.004	2.11480	-.00016	.050	6
4	7494731			2.1115	.008 AND UP	2.11460	-.00040	.050	6
4	7494733			2.1116	.001	2.11600	-.00008	.050	4
4	7494734			2.1116	.002	2.11592	-.00012	.050	4
4	7494735			2.1116	.004	2.11580	-.00016	.050	6
4	7494737			2.1116	.008 AND UP	2.11560	-.00040	.050	6
4	7494739			2.1117	.001	2.11700	-.00008	.050	4
4	7494740			2.1117	.002	2.11692	-.00012	.050	4
4	7494741			2.1117	.004	2.11680	-.00016	.050	6
4	7494743			2.1117	.008 AND UP	2.11660	-.00040	.050	6
4	7494745			2.1118	.001	2.11800	-.00008	.050	4
4	7494746			2.1118	.002	2.11792	-.00012	.050	4
4	7494747			2.1118	.004	2.11780	-.00016	.050	6
4	7494749			2.1118	.008 AND UP	2.11760	-.00040	.050	6

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	FIN--GAGE RINGS GAGE	STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
7494751	2.119	.001	2.11900 - .00008	.050	4				
7494752	2.119	.002	2.11892 - .00012	.050	4				
7494753	2.119	.004	2.11880 - .00016	.050	4				
7494755	2.119	.008 AND UP	2.11860 - .00040	.050	4				
7494757	2.120	.001	2.12000 - .00008	.050	4				
7494758	2.120	.002	2.11992 - .00012	.050	4				
7494759	2.120	.004	2.11980 - .00016	.050	4				
7494761	2.120	.008 AND UP	2.11960 - .00040	.050	4				
7494763	2.121	.001	2.12100 - .00008	.050	4				
7494764	2.121	.002	2.12092 - .00012	.050	4				
7494765	2.121	.004	2.12080 - .00016	.050	4				
7494767	2.121	.008 AND UP	2.12060 - .00040	.050	4				
7494769	2.122	.001	2.12200 - .00008	.050	4				
7494770	2.122	.002	2.12192 - .00012	.050	4				
7494771	2.122	.004	2.12180 - .00016	.050	4				
7494773	2.122	.008 AND UP	2.12160 - .00040	.050	4				
7494775	2.123	.001	2.12300 - .00008	.050	4				
7494776	2.123	.002	2.12292 - .00012	.050	4				
7494777	2.123	.004	2.12280 - .00016	.050	4				
7494779	2.123	.008 AND UP	2.12260 - .00040	.050	4				
7494781	2.124	.001	2.12400 - .00008	.050	4				
7494782	2.124	.002	2.12392 - .00012	.050	4				
7494783	2.124	.004	2.12380 - .00016	.050	4				
7494785	2.124	.008 AND UP	2.12360 - .00040	.050	4				
7494787	2.125	.001	2.12500 - .00008	.050	4				
7494788	2.125	.002	2.12492 - .00012	.050	4				
7494789	2.125	.004	2.12480 - .00016	.050	4				
7494791	2.125	.008 AND UP	2.12460 - .00040	.050	4				

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	FIN—RANGE	RING GAGE STOCK NO.	MAXIMUM ACCEPTANCE DIMENSION	CHECK	COMPONENT TOLERANCE	DIA. DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H	
4	7494793	2.126	.001		2.12600	-.00008	.050	4
4	7494794	2.126	.002		2.12592	-.00012	.050	4
4	7494795	2.126	.001		2.12580	-.00016	.050	4
4	7494797	2.126	.008 AND UP		2.12560	-.00040	.050	4
4	7494799	2.127	.001		2.12700	-.00008	.050	4
4	7494800	2.127	.002		2.12692	-.00012	.050	4
4	7494801	2.127	.004		2.12680	-.00016	.050	4
4	7494803	2.127	.008 AND UP		2.12660	-.00040	.050	4
4	7494805	2.128	.001		2.12800	-.00008	.050	4
4	7494806	2.128	.002		2.12792	-.00012	.050	4
4	7494807	2.128	.004		2.12780	-.00016	.050	4
4	7494809	2.128	.008 AND UP		2.12760	-.00040	.050	4
4	7494811	2.129	.001		2.12900	-.00008	.050	4
4	7494812	2.129	.002		2.12892	-.00012	.050	4
4	7494813	2.129	.004		2.12880	-.00016	.050	4
4	7494815	2.129	.008 AND UP		2.12860	-.00040	.050	4
4	7494817	2.130	.001		2.13000	-.00008	.050	4
4	7494818	2.130	.002		2.12992	-.00012	.050	4
4	7494819	2.130	.004		2.12980	-.00016	.050	4
4	7494821	2.130	.008 AND UP		2.12960	-.00040	.050	4
4	7494823	2.131	.001		2.13100	-.00008	.050	4
4	7494824	2.131	.002		2.13092	-.00012	.050	4
4	7494825	2.131	.004		2.13080	-.00016	.050	4
4	7494827	2.131	.008 AND UP		2.13060	-.00040	.050	4
4	7494829	2.132	.001		2.13200	-.00008	.050	4
4	7494830	2.132	.002		2.13192	-.00012	.050	4
4	7494831	2.132	.004		2.13180	-.00016	.050	4
4	7494833	2.132	.008 AND UP		2.13160	-.00040	.050	4

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		RING GAGE DIMENSIONS		FINISH	
	FIN.—GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER
A	B	C	D	E	F	G
4	7494835		2.133	.001	2.13300 - .00008	.050
4	7494836		2.133	.002	2.13292 - .00012	.050
4	7494837		2.133	.004	2.13280 - .00016	.050
4	7494839		2.133	.008 AND UP	2.13260 - .00040	.050
4	7494841		2.134	.001	2.13400 - .00008	.050
4	7494842		2.134	.002	2.13392 - .00012	.050
4	7494843		2.134	.004	2.13380 - .00016	.050
4	7494845		2.134	.008 AND UP	2.13360 - .00040	.050
4	7494847		2.135	.001	2.13500 - .00008	.050
4	7494848		2.135	.002	2.13492 - .00012	.050
4	7494849		2.135	.004	2.13480 - .00016	.050
4	7494851		2.135	.008 AND UP	2.13460 - .00040	.050
4	7494853		2.136	.001	2.13600 - .00008	.050
4	7494854		2.136	.002	2.13592 - .00012	.050
4	7494855		2.136	.004	2.13580 - .00016	.050
4	7494857		2.136	.008 AND UP	2.13560 - .00040	.050
4	7494859		2.137	.001	2.13700 - .00008	.050
4	7494860		2.137	.002	2.13692 - .00012	.050
4	7494861		2.137	.004	2.13680 - .00016	.050
4	7494863		2.137	.008 AND UP	2.13660 - .00040	.050
4	7494865		2.138	.001	2.13800 - .00008	.050
4	7494866		2.138	.002	2.13792 - .00012	.050
4	7494867		2.138	.004	2.13780 - .00016	.050
4	7494869		2.138	.008 AND UP	2.13760 - .00040	.050
4	7494871		2.139	.001	2.13900 - .00008	.050
4	7494872		2.139	.002	2.13892 - .00012	.050
4	7494873		2.139	.004	2.13880 - .00016	.050
4	7494875		2.139	.008 AND UP	2.13860 - .00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	FIN.— RING GAGE	STOCK NO. ACCEPTANCE CHECK	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS			FINISH CHARTER
			A	B	C		D	E	F	
4	7494877		2.140	.001		2.14000	—	.00008	.050	4
4	7494878		2.140	.002		2.13992	—	.00012	.050	4
4	7494879		2.140	.004		2.13980	—	.00016	.050	8
4	7494881		2.140	.008 AND UP		2.13960	—	.00040	.050	8
4	7494883		2.141	.001		2.14100	—	.00008	.050	4
4	7494884		2.141	.002		2.14092	—	.00012	.050	4
4	7494885		2.141	.004		2.14080	—	.00016	.050	8
4	7494887		2.141	.008 AND UP		2.14060	—	.00040	.050	8
4	7494889		2.142	.001		2.14200	—	.00008	.050	4
4	7494890		2.142	.002		2.14192	—	.00012	.050	4
4	7494891		2.142	.004		2.14180	—	.00016	.050	8
4	7494893		2.142	.008 AND UP		2.14160	—	.00040	.050	8
4	7494895		2.143	.001		2.14300	—	.00008	.050	4
4	7494896		2.143	.002		2.14292	—	.00012	.050	4
4	7494897		2.143	.004		2.14280	—	.00016	.050	8
4	7494899		2.143	.008 AND UP		2.14260	—	.00040	.050	8
4	7494901		2.144	.001		2.14400	—	.00008	.050	4
4	7494902		2.144	.002		2.14392	—	.00012	.050	4
4	7494903		2.144	.004		2.14380	—	.00016	.050	8
4	7494905		2.144	.008 AND UP		2.14360	—	.00040	.050	8
4	7494907		2.145	.001		2.14500	—	.00008	.050	4
4	7494908		2.145	.002		2.14492	—	.00012	.050	4
4	7494909		2.145	.004		2.14480	—	.00016	.050	8
4	7494911		2.145	.008 AND UP		2.14460	—	.00040	.050	8
4	7494913		2.146	.001		2.14600	—	.00008	.050	4
4	7494914		2.146	.002		2.14592	—	.00012	.050	4
4	7494915		2.146	.004		2.14580	—	.00016	.050	8
4	7494917		2.146	.008 AND UP		2.14560	—	.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

IG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	FLN—GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	
A	B	C	D	E	F	G	H
4	7494919		2.147	.001	2.14700	-.00008	.050
4	7494920		2.147	.002	2.14692	-.00012	.050
4	7494921		2.147	.004 AND UP	2.14680	-.00016	.050
4	7494923		2.147	.008 AND UP	2.14660	-.00020	.050
4	7494925		2.148	.001	2.14800	-.00008	.050
4	7494926		2.148	.002	2.14792	-.00012	.050
4	7494927		2.148	.004	2.14780	-.00016	.050
4	7494928		2.148	.008 AND UP	2.14760	-.00040	.050
4	7494929		2.149	.001	2.14900	-.00008	.050
4	7494931		2.149	.002	2.14892	-.00012	.050
4	7494932		2.149	.004	2.14880	-.00016	.050
4	7494933		2.149	.008 AND UP	2.14860	-.00040	.050
4	7494935		2.149				
4	7494937		2.150	.001	2.15000	-.00008	.050
4	7494938		2.150	.002	2.14992	-.00012	.050
4	7494939		2.150	.004	2.14980	-.00016	.050
4	7494941		2.150	.008 AND UP	2.14960	-.00040	.050
4	7494943		2.151	.001	2.15100	-.00008	.050
4	7494944		2.151	.002	2.15092	-.00012	.050
4	7494945		2.151	.004	2.15080	-.00016	.050
4	7494947		2.151	.008 AND UP	2.15060	-.00040	.050
4	7494949		2.152	.001	2.15200	-.00008	.050
4	7494950		2.152	.002	2.15192	-.00012	.050
4	7494951		2.152	.004	2.15180	-.00016	.050
4	7494953		2.152	.008 AND UP	2.15160	-.00040	.050
4	7494955		2.153	.001	2.15300	-.00008	.050
4	7494956		2.153	.002	2.15292	-.00012	.050
4	7494957		2.153	.004	2.15280	-.00016	.050
4	7494959		2.153	.008 AND UP	2.15260	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	RING GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	DIA.	E	F	G	H		
A	B	C	D							
4	7494961		2.154	.001	2.15400	-.00008	.050	4		
4	7494962		2.154	.002	2.15392	-.00012	.050	4		
4	7494963		2.154	.004 AND TIP	2.15380	-.00016	.050	6		
4	7494965		2.154	.008 AND UP	2.15360	-.00040	.050	8		
4	7494967		2.155	.001	2.15500	-.00008	.050	4		
4	7494968		2.155	.002	2.15492	-.00012	.050	4		
4	7494969		2.155	.004	2.15480	-.00016	.050	6		
4	7494971		2.155	.008 AND UP	2.15460	-.00040	.050	8		
4	7494973		2.156	.001	2.15600	-.00008	.050	4		
4	7494974		2.156	.002	2.15592	-.00012	.050	4		
4	7494975		2.156	.004	2.15580	-.00016	.050	6		
4	7494977		2.156	.008 AND TIP	2.15560	-.00040	.050	8		
4	7494979		2.15625	.001 AND UP	2.15625	-.00008	.050	4		
4	7494980		2.157	.001	2.15700	-.00008	.050	4		
4	7494981		2.157	.002	2.15692	-.00012	.050	4		
4	7494982		2.157	.004	2.15680	-.00016	.050	6		
4	7494984		2.157	.008 AND UP	2.15660	-.00040	.050	8		
4	7494986		2.158	.001	2.15800	-.00008	.050	4		
4	7494987		2.158	.002	2.15792	-.00012	.050	4		
4	7494988		2.158	.004	2.15780	-.00016	.050	6		
4	7494990		2.158	.008 AND UP	2.15760	-.00040	.050	8		
4	7494992		2.159	.001	2.15900	-.00008	.050	4		
4	7494993		2.159	.002	2.15892	-.00012	.050	4		
4	7494994		2.159	.004	2.15880	-.00016	.050	6		
4	7494996		2.159	.008 AND UP	2.15860	-.00040	.050	8		
4	7494998		2.160	.001	2.16000	-.00008	.050	4		
4	7494999		2.160	.002	2.15992	-.00012	.050	4		
4	7495000		2.160	.004	2.15980	-.00016	.050	6		
4	7495002		2.160	.008 AND UP	2.15960	-.00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH		
	RING-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	H	G	F	E
A	B	C	D						
4	7495004	2.161	.001	2.16100	-	.00008	.050	4	
4	7495005	2.161	.002	2.16092	-	.00012	.050	4	
4	7495006	2.161	.004	2.16080	-	.00016	.050	8	
4	7495008	2.161	.008 AND UP	2.16060	-	.00040	.050	8	
4	7495010	2.162	.001	2.16200	-	.00008	.050	4	
4	7495011	2.162	.002	2.16192	-	.00012	.050	4	
4	7495012	2.162	.004	2.16180	-	.00016	.050	8	
4	7495014	2.162	.008 AND UP	2.16160	-	.00040	.050	8	
4	7495016	2.163	.001	2.16300	-	.00008	.050	4	
4	7495017	2.163	.002	2.16292	-	.00012	.050	4	
4	7495018	2.163	.004	2.16280	-	.00016	.050	8	
4	7495020	2.163	.008 AND UP	2.16260	-	.00040	.050	8	
4	7495022	2.164	.001	2.16400	-	.00008	.050	4	
4	7495023	2.164	.002	2.16392	-	.00012	.050	4	
4	7495024	2.164	.004	2.16380	-	.00016	.050	8	
4	7495026	2.164	.008 AND UP	2.16360	-	.00040	.050	8	
4	7495028	2.165	.001	2.16500	-	.00008	.050	4	
4	7495029	2.165	.002	2.16492	-	.00012	.050	4	
4	7495030	2.165	.004	2.16480	-	.00016	.050	8	
4	7495032	2.165	.008 AND UP	2.16460	-	.00040	.050	8	
4	7495034	2.166	.001	2.16600	-	.00008	.050	4	
4	7495035	2.166	.002	2.16592	-	.00012	.050	4	
4	7495036	2.166	.004	2.16580	-	.00016	.050	8	
4	7495038	2.166	.008 AND UP	2.16560	-	.00040	.050	8	
4	7495040	2.167	.001	2.16700	-	.00008	.050	4	
4	7495041	2.167	.002	2.16692	-	.00012	.050	4	
4	7495042	2.167	.004	2.16680	-	.00016	.050	8	
4	7495044	2.167	.008 AND UP	2.16660	-	.00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	RING GAGE NUMBER	MARKING ON GO GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		TOTAL COMPONENT TOLERANCE	DIAMETER	RING GAGE DIMENSIONS		FINISH
				RING GAGE	ACCEPTANCE CHECK			D	E	
A	B	C	D						F	G
4	7495046		2.168	.001		2.16800	-	.00008	.050	4
4	7495047		2.168	.002		2.16792	-	.00012	.050	4
4	7495048		2.168	.004	AND UP	2.16780	-	.00016	.050	8
4	7495050		2.168	.008	AND UP	2.16760	-	.00040	.050	8
4	7495052		2.169	.001		2.16900	-	.00008	.050	4
4	7495053		2.169	.002		2.16892	-	.00012	.050	4
4	7495054		2.169	.004		2.16880	-	.00016	.050	8
4	7495056		2.169	.008	AND UP	2.16860	-	.00040	.050	8
4	7495058		2.170	.001		2.17000	-	.00008	.050	4
4	7495059		2.170	.002		2.16992	-	.00012	.050	4
4	7495060		2.170	.004		2.16980	-	.00016	.050	8
4	7495062		2.170	.008	AND UP	2.16960	-	.00040	.050	8
4	7495064		2.171	.001		2.17100	-	.00008	.050	4
4	7495065		2.171	.002		2.17092	-	.00012	.050	4
4	7495066		2.171	.004		2.17080	-	.00016	.050	8
4	7495068		2.171	.008	AND UP	2.17060	-	.00040	.050	8
4	7495070		2.172	.001		2.17200	-	.00008	.050	4
4	7495071		2.172	.002		2.17192	-	.00012	.050	4
4	7495072		2.172	.004		2.17180	-	.00016	.050	8
4	7495074		2.172	.008	AND UP	2.17160	-	.00040	.050	8
4	7495076		2.173	.001		2.17300	-	.00008	.050	4
4	7495077		2.173	.002		2.17292	-	.00012	.050	4
4	7495078		2.173	.004		2.17280	-	.00016	.050	8
4	7495080		2.173	.008	AND UP	2.17260	-	.00040	.050	8
4	7495082		2.174	.001		2.17400	-	.00008	.050	4
4	7495083		2.174	.002		2.17392	-	.00012	.050	4
4	7495084		2.174	.004		2.17380	-	.00016	.050	8
4	7495086		2.174	.008	AND UP	2.17360	-	.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FILE NO.	MARKING ON GO GAGE				RING GAGE DIMENSIONS				FINISH
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	G	
A	B	C	D	E	F	G			
4	7495088			2.175	.001	2.1750	-	.0008	.050
4	7495089			2.175	.002	2.17492	-	.00012	.050
4	7495090			2.175	.004	2.17480	-	.00016	.050
4	7495092			2.175	.008 AND UP	2.17460	-	.00040	.050
4	7495094			2.176	.001	2.17600	-	.00008	.050
4	7495095			2.176	.002	2.17592	-	.00012	.050
4	7495096			2.176	.004	2.17580	-	.00016	.050
4	7495098			2.176	.008 AND UP	2.17560	-	.00040	.050
4	7495100			2.177	.001	2.17700	-	.00008	.050
4	7495101			2.177	.002	2.17692	-	.00012	.050
4	7495102			2.177	.004	2.17680	-	.00016	.050
4	7495104			2.177	.008 AND UP	2.17660	-	.00040	.050
4	7495106			2.178	.001	2.17800	-	.00008	.050
4	7495107			2.178	.002	2.17792	-	.00012	.050
4	7495108			2.178	.004	2.17780	-	.00016	.050
4	7495110			2.178	.008 AND UP	2.17760	-	.00040	.050
4	7495112			2.179	.001	2.17900	-	.00008	.050
4	7495113			2.179	.002	2.17892	-	.00012	.050
4	7495114			2.179	.004	2.17880	-	.00016	.050
4	7495116			2.179	.008 AND UP	2.17860	-	.00040	.050
4	7495118			2.180	.001	2.18000	-	.00008	.050
4	7495119			2.180	.002	2.17992	-	.00012	.050
4	7495120			2.180	.004	2.17980	-	.00016	.050
4	7495122			2.180	.008 AND UP	2.17960	-	.00040	.050
4	7495124			2.181	.001	2.18100	-	.00008	.050
4	7495125			2.181	.002	2.18092	-	.00012	.050
4	7495126			2.181	.004	2.18080	-	.00016	.050
4	7495128			2.181	.008 AND UP	2.18060	-	.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	FINISH RING GAGE	STOCK NO.	ACCEPTANCE CHECK	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		CHAMFER	H
				A	B		C	D		
4	7495130			2.182	.001	2.18200	-	.00008	.050	4
4	7495131			2.182	.002	2.18192	-	.00012	.050	4
4	7495132			2.182	.004	2.18180	-	.00016	.050	8
4	7495134			2.182	.008 AND UP	2.18160	-	.00040	.050	8
4	7495136			2.183	.001	2.18300	-	.00008	.050	4
4	7495137			2.183	.002	2.18292	-	.00012	.050	4
4	7495138			2.183	.004 AND UP	2.18280	-	.00016	.050	8
4	7495140			2.183	.008 AND UP	2.18260	-	.00040	.050	8
4	7495142			2.184	.001	2.18400	-	.00008	.050	4
4	7495143			2.184	.002	2.18392	-	.00012	.050	4
4	7495144			2.184	.004	2.18380	-	.00016	.050	8
4	7495146			2.184	.008 AND UP	2.18360	-	.00040	.050	8
4	7495148			2.185	.001	2.18500	-	.00008	.050	4
4	7495149			2.185	.002	2.18492	-	.00012	.050	4
4	7495150			2.185	.004	2.18480	-	.00016	.050	8
4	7495152			2.185	.008 AND UP	2.18460	-	.00040	.050	8
4	7495154			2.186	.001	2.18600	-	.00008	.050	4
4	7495155			2.186	.002	2.18592	-	.00012	.050	4
4	7495156			2.186	.004	2.18580	-	.00016	.050	8
4	7495158			2.186	.008 AND UP	2.18560	-	.00040	.050	8
4	7495160			2.187	.001	2.18700	-	.00008	.050	4
4	7495161			2.187	.002	2.18692	-	.00012	.050	4
4	7495162			2.187	.004	2.18680	-	.00016	.050	8
4	7495164			2.187	.008 AND UP	2.18660	-	.00040	.050	8
4	7495166			2.1875	.001 AND UP	2.18750	-	.00008	.050	4
4	7495167			2.188	.001	2.18800	-	.00008	.050	4
4	7495168			2.188	.002	2.18792	-	.00012	.050	4
4	7495169			2.188	.004	2.18780	-	.00016	.050	8
4	7495171			2.188	.008 AND UP	2.18760	-	.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN—GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA. E	DIA. F	DIA. G	
RINGS GAGE	ACCEPTANCE CHECK	DIMENSION D				H	
A	B	C					
4	7495173	2.189	.001	2.18900	-.00008	.050	4
4	7495174	2.189	.002	2.18892	-.00012	.050	4
4	7495175	2.189	.004	2.18880	-.00016	.050	8
4	7495177	2.189	.008 AND UP	2.18860	-.00040	.050	8
4	7495179	2.190	.001	2.19000	-.00008	.050	4
4	7495180	2.190	.002	2.18992	-.00012	.050	4
4	7495181	2.190	.004	2.18980	-.00016	.050	8
4	7495183	2.190	.008 AND UP	2.18960	-.00040	.050	8
4	7495185	2.191	.001	2.19100	-.00008	.050	4
4	7495186	2.191	.002	2.19092	-.00012	.050	4
4	7495187	2.191	.004	2.19080	-.00016	.050	8
4	7495189	2.191	.008 AND UP	2.19060	-.00040	.050	8
4	7495191	2.192	.001	2.19200	-.00008	.050	4
4	7495192	2.192	.002	2.19192	-.00012	.050	4
4	7495193	2.192	.004	2.19180	-.00016	.050	8
4	7495195	2.192	.008 AND UP	2.19160	-.00040	.050	8
4	7495197	2.193	.001	2.19300	-.00008	.050	4
4	7495198	2.193	.002	2.19292	-.00012	.050	4
4	7495199	2.193	.004	2.19280	-.00016	.050	8
4	7495201	2.193	.008 AND UP	2.19260	-.00040	.050	8
4	7495203	2.194	.001	2.19400	-.00008	.050	4
4	7495204	2.194	.002	2.19392	-.00012	.050	4
4	7495205	2.194	.004	2.19380	-.00016	.050	8
4	7495207	2.194	.008 AND UP	2.19360	-.00040	.050	8
4	7495209	2.195	.001	2.19500	-.00008	.050	4
4	7495210	2.195	.002	2.19492	-.00012	.050	4
4	7495211	2.195	.004	2.19480	-.00016	.050	8
4	7495213	2.195	.008 AND UP	2.19460	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	RING GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
4	7495215		2.196	.001	2.19600	.00008	.050
4	7495216		2.196	.002	2.19592	.00012	.050
4	7495217		2.196	.004	2.19580	.00016	.050
4	7495219		2.196	.008 AND UP	2.19560	.00040	.050
4	7495221		2.197	.001	2.19700	.00008	.050
4	7495222		2.197	.002	2.19692	.00012	.050
4	7495223		2.197	.004	2.19680	.00016	.050
4	7495225		2.197	.008 AND UP	2.19660	.00040	.050
4	7495227		2.198	.001	2.19800	.00008	.050
4	7495228		2.198	.002	2.19792	.00012	.050
4	7495229		2.198	.004	2.19780	.00016	.050
4	7495231		2.198	.008 AND UP	2.19760	.00040	.050
4	7495233		2.199	.001	2.19900	.00008	.050
4	7495234		2.199	.002	2.19892	.00012	.050
4	7495235		2.199	.004	2.19880	.00016	.050
4	7495237		2.199	.008 AND UP	2.19860	.00040	.050
4	7495239		2.200	.001	2.20000	.00008	.050
4	7495240		2.200	.002	2.19992	.00012	.050
4	7495241		2.200	.004	2.19980	.00016	.050
4	7495243		2.200	.008 AND UP	2.19960	.00040	.050
4	7495245		2.201	.001	2.20100	.00008	.050
4	7495246		2.201	.002	2.20092	.00012	.050
4	7495247		2.201	.004	2.20080	.00016	.050
4	7495249		2.201	.008 AND UP	2.20060	.00040	.050
4	7495251		2.202	.001	2.20200	.00008	.050
4	7495252		2.202	.002	2.20192	.00012	.050
4	7495253		2.202	.004	2.20180	.00016	.050
4	7495255		2.202	.008 AND UP	2.20160	.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

F15. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH		
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE			DIAMETER CHAMFER		
				B	C	D	E	F	G
7495257			2.203	.001	2.20300	-	.00008	.050	4
7495258			2.203	.002	2.20292	-	.00012	.050	4
7495259			2.203	.004	2.20280	-	.00016	.050	8
7495261			2.203	.008 AND UP	2.20260	-	.00040	.050	8
7495263			2.204	.001	2.20400	-	.00008	.050	4
7495264			2.204	.002	2.20392	-	.00012	.050	4
7495265			2.204	.004	2.20380	-	.00016	.050	8
7495267			2.204	.008 AND UP	2.20360	-	.00040	.050	8
7495269			2.205	.001	2.20500	-	.00008	.050	4
7495270			2.205	.002	2.20492	-	.00012	.050	4
7495271			2.205	.004	2.20480	-	.00016	.050	8
7495273			2.205	.008 AND UP	2.20460	-	.00040	.050	8
7495275			2.206	.001	2.20600	-	.00008	.050	4
7495276			2.206	.002	2.20592	-	.00012	.050	4
7495277			2.206	.004	2.20580	-	.00016	.050	8
7495279			2.206	.008 AND UP	2.20560	-	.00040	.050	8
7495281			2.207	.001	2.20700	-	.00008	.050	4
7495282			2.207	.002	2.20692	-	.00012	.050	4
7495283			2.207	.004	2.20680	-	.00016	.050	8
7495285			2.207	.008 AND UP	2.20660	-	.00040	.050	8
7495287			2.208	.001	2.20800	-	.00008	.050	4
7495288			2.208	.002	2.20792	-	.00012	.050	4
7495289			2.208	.004	2.20780	-	.00016	.050	8
7495291			2.208	.008 AND UP	2.20760	-	.00040	.050	8
7495293			2.209	.0C1	2.20900	-	.00008	.050	4
7495294			2.209	.0C2	2.20892	-	.00012	.050	4
7495295			2.209	.004	2.20880	-	.00016	.050	8
7495297			2.209	.008 AND UP	2.20860	-	.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING OF JO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN—GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	D	E	F	G	
A	B	C	D	E	F	G	
4	7495299		2.210	.001	2.21000	-.00008	.050
4	7495300		2.210	.002	2.20992	-.00012	.050
4	7495301		2.210	.004 AND UP	2.20980	-.00016	.050
4	7495303		2.210	.008 AND UP	2.20960	-.00040	.050
4	7495305		2.211	.001	2.21100	-.00008	.050
4	7495306		2.211	.002	2.21092	-.00012	.050
4	7495307		2.211	.004 AND UP	2.21080	-.00016	.050
4	7495309		2.211	.008 AND UP	2.21060	-.00040	.050
4	7495311		2.212	.001	2.21200	-.00008	.050
4	7495312		2.212	.002	2.21192	-.00012	.050
4	7495313		2.212	.004 AND UP	2.21180	-.00016	.050
4	7495315		2.212	.008 AND UP	2.21160	-.00040	.050
4	7495317		2.213	.001	2.21300	-.00008	.050
4	7495318		2.213	.002	2.21292	-.00012	.050
4	7495319		2.213	.004 AND UP	2.21280	-.00016	.050
4	7495321		2.213	.008 AND UP	2.21260	-.00040	.050
4	7495323		2.214	.001	2.21400	-.00008	.050
4	7495324		2.214	.002	2.21392	-.00012	.050
4	7495325		2.214	.004 AND UP	2.21380	-.00016	.050
4	7495327		2.214	.008 AND UP	2.21360	-.00040	.050
4	7495329		2.215	.001	2.21500	-.00008	.050
4	7495330		2.215	.002	2.21492	-.00012	.050
4	7495331		2.215	.004 AND UP	2.21480	-.00016	.050
4	7495333		2.215	.008 AND UP	2.21460	-.00040	.050
4	7495335		2.216	.001	2.21600	-.00008	.050
4	7495336		2.216	.002	2.21592	-.00012	.050
4	7495337		2.216	.004 AND UP	2.21580	-.00016	.050
4	7495339		2.216	.008 AND UP	2.21560	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	RING-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	ACCEPTANCE CHECK	C	D	E	F	G	
A	B							H	
7495341	2.217	.001		2.21700	—	.00008	.050	4	
7495342	2.217	.002		2.21692	—	.00012	.050	4	
7495343	2.217	.004	AND UP	2.21680	—	.00016	.050	8	
7495345	2.217	.008		2.21660	—	.00040	.050	8	
7495347	2.218	.001		2.21800	—	.00008	.050	4	
7495348	2.218	.002		2.21792	—	.00012	.050	4	
7495349	2.218	.004	AND UP	2.21780	—	.00016	.050	8	
7495351	2.218	.008		2.21760	—	.00040	.050	8	
7495353	2.21875	.001	AND UP	2.21875	—	.00008	.050	4	
7495354	2.219	.001		2.21900	—	.00008	.050	4	
7495355	2.219	.002		2.21892	—	.00012	.050	4	
7495356	2.219	.004	AND UP	2.21880	—	.00016	.050	8	
7495358	2.219	.008		2.21860	—	.00040	.050	8	
7495360	2.220	.001		2.22000	—	.00008	.050	4	
7495361	2.220	.002		2.21992	—	.00012	.050	4	
7495362	2.220	.004	AND UP	2.21980	—	.00016	.050	8	
7495364	2.220	.008		2.21960	—	.00040	.050	8	
7495366	2.221	.001		2.22100	—	.00008	.050	4	
7495367	2.221	.002		2.22092	—	.00012	.050	4	
7495368	2.221	.004	AND UP	2.22080	—	.00016	.050	8	
7495370	2.221	.008		2.22060	—	.00040	.050	8	
7495372	2.222	.001		2.22200	—	.00008	.050	4	
7495373	2.222	.002		2.22192	—	.00012	.050	4	
7495374	2.222	.004	AND UP	2.22180	—	.00016	.050	8	
7495376	2.222	.008		2.22160	—	.00040	.050	8	
7495378	2.223	.001		2.22300	—	.00008	.050	4	
7495379	2.223	.002		2.22292	—	.00012	.050	4	
7495380	2.223	.004		2.22280	—	.00016	.050	8	
7495382	2.223	.008	AND UP	2.22260	—	.00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		HSIN-LI CHAMFER
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C							
7495384	2.224	.001		2.22400	-.00008	.050	4	4	
7495385	2.224	.002		2.22392	-.00012	.050	6	6	
7495386	2.224	.004	AND UP	2.22380	-.00016	.050	8	8	
7495388	2.224	.008		2.22360	-.00040	.050			
7495390	2.225	.001		2.22500	-.00008	.050	4	4	
7495391	2.225	.002		2.22492	-.00012	.050	6	6	
7495392	2.225	.004		2.22480	-.00016	.050	8	8	
7495394	2.225	.008	AND UP	2.22460	-.00040	.050			
7495396	2.226	.001		2.22600	-.00008	.050	4	4	
7495397	2.226	.002		2.22592	-.00012	.050	6	6	
7495398	2.226	.004		2.22580	-.00016	.050	8	8	
7495400	2.226	.008	AND UP	2.22560	-.00040	.050			
7495402	2.227	.001		2.22700	-.00008	.050	4	4	
7495403	2.227	.002		2.22692	-.00012	.050	6	6	
7495404	2.227	.004		2.22680	-.00016	.050	8	8	
7495406	2.227	.008	AND UP	2.22660	-.00040	.050			
7495408	2.228	.001		2.22800	-.00008	.050	4	4	
7495409	2.228	.002		2.22792	-.00012	.050	6	6	
7495410	2.228	.004		2.22780	-.00016	.050	8	8	
7495412	2.228	.008	AND UP	2.22760	-.00040	.050			
7495414	2.229	.001		2.22900	-.00008	.050	4	4	
7495415	2.229	.002		2.22892	-.00012	.050	6	6	
7495416	2.229	.004		2.22880	-.00016	.050	8	8	
7495418	2.229	.008	AND UP	2.22860	-.00040	.050			
7495420	2.230	.001		2.23000	-.00008	.050	4	4	
7495421	2.230	.002		2.22992	-.00012	.050	6	6	
7495422	2.230	.004		2.22980	-.00016	.050	8	8	
7495424	2.230	.008	AND UP	2.22960	-.00040	.050			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		RING GAGE DIMENSIONS						FINISH
	FIN—GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	G	H	
A	B	C	D	E	F	G	H		
4	7495426		2.231	.001	2.23100	-.00008	.050	4	
4	7495427		2.231	.002	2.23092	-.00012	.050	4	
4	7495428		2.231	.004	2.23080	-.00016	.050	4	
4	7495430		2.231	.008 AND UP	2.23060	-.00040	.050	4	
4	7495432		2.232	.001	2.23200	-.00008	.050	4	
4	7495433		2.232	.002	2.23192	-.00012	.050	4	
4	7495434		2.232	.004	2.23180	-.00016	.050	4	
4	7495436		2.232	.008 AND UP	2.23160	-.00040	.050	4	
4	7495438		2.233	.001	2.23300	-.00008	.050	4	
4	7495439		2.233	.002	2.23292	-.00012	.050	4	
4	7495440		2.233	.004	2.23280	-.00016	.050	4	
4	7495442		2.233	.008 AND UP	2.23260	-.00040	.050	4	
4	7495444		2.234	.001	2.23400	-.00008	.050	4	
4	7495445		2.234	.002	2.23392	-.00012	.050	4	
4	7495446		2.234	.004	2.23380	-.00016	.050	4	
4	7495448		2.234	.008 AND UP	2.23360	-.00040	.050	4	
4	7495450		2.235	.001	2.23500	-.00008	.050	4	
4	7495451		2.235	.002	2.23492	-.00012	.050	4	
4	7495452		2.235	.004	2.23480	-.00016	.050	4	
4	7495454		2.235	.008 AND UP	2.23460	-.00040	.050	4	
4	7495456		2.236	.001	2.23600	-.00008	.050	4	
4	7495457		2.236	.002	2.23592	-.00012	.050	4	
4	7495458		2.236	.004	2.23580	-.00016	.050	4	
4	7495460		2.236	.008 AND UP	2.23560	-.00040	.050	4	
4	7495462		2.237	.001	2.23700	-.00008	.050	4	
4	7495463		2.237	.002	2.23692	-.00012	.050	4	
4	7495464		2.237	.004	2.23680	-.00016	.050	4	
4	7495466		2.237	.008 AND UP	2.23660	-.00040	.050	4	

Table I. Tabulation of Design and Identification Data (Continued)

ITEM NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER		
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA	E	F	G	H	I	J	K	L
A	B	C	D									
4	7495468		2.238	.001	2.23800	-.00008	.050	4				
4	7495469		2.238	.002	2.23792	-.00012	.050	4				
4	7495470		2.238	.004	2.23780	-.00016	.050	8				
4	7495472		2.238	.008 AND UP	2.23760	-.00040	.050	8				
4	7495474		2.239	.001	2.23900	-.00008	.050	4				
4	7495475		2.239	.002	2.23892	-.00012	.050	4				
4	7495476		2.239	.004	2.23880	-.00016	.050	8				
4	7495478		2.239	.008 AND UP	2.23860	-.00040	.050	8				
4	7495480		2.240	.001	2.24000	-.00008	.050	4				
4	7495481		2.240	.002	2.23992	-.00012	.050	4				
4	7495482		2.240	.004	2.23980	-.00016	.050	8				
4	7495484		2.240	.008 AND UP	2.23960	-.00040	.050	8				
4	7495486		2.241	.001	2.24100	-.00008	.050	4				
4	7495487		2.241	.002	2.24092	-.00012	.050	4				
4	7495488		2.241	.004	2.24080	-.00016	.050	8				
4	7495490		2.241	.008 AND UP	2.24060	-.00040	.050	8				
4	7495492		2.242	.001	2.24200	-.00008	.050	4				
4	7495493		2.242	.002	2.24192	-.00012	.050	4				
4	7495494		2.242	.004	2.24180	-.00016	.050	8				
4	7495496		2.242	.008 AND UP	2.24160	-.00040	.050	8				
4	7495498		2.243	.001	2.24300	-.00008	.050	4				
4	7495499		2.243	.002	2.24292	-.00012	.050	4				
4	7495500		2.243	.004	2.24280	-.00016	.050	8				
4	7495502		2.243	.008 AND UP	2.24260	-.00040	.050	8				
4	7495504		2.244	.001	2.24400	-.00008	.050	4				
4	7495505		2.244	.002	2.24392	-.00012	.050	4				
4	7495506		2.244	.004	2.24380	-.00016	.050	8				
4	7495508		2.244	.008 AND UP	2.24360	-.00040	.050	8				

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	RING GAGE STOCK NO.	MAXIMUM ACCEPTANCE CHECK	COMPONENT DIMENSION	D	E	F	G	H	
7495510	2.245	.001	2.24500	-.00008	.050	4			
7495511	2.245	.002	2.24492	-.00012	.050	4			
7495512	2.245	.004	2.24480	-.00016	.050	8			
7495514	2.245	.008 AND UP	2.24460	-.00040	.050	8			
7495516	2.246	.001	2.24600	-.00008	.050	4			
7495517	2.246	.002	2.24592	-.00012	.050	4			
7495518	2.246	.004	2.24580	-.00016	.050	8			
7495520	2.246	.008 AND UP	2.24560	-.00040	.050	8			
7495522	2.247	.001	2.24700	-.00008	.050	4			
7495523	2.247	.002	2.24692	-.00012	.050	4			
7495524	2.247	.004	2.24680	-.00016	.050	8			
7495526	2.247	.008 AND UP	2.24660	-.00040	.050	8			
7495528	2.248	.001	2.24800	-.00008	.050	4			
7495529	2.248	.002	2.24792	-.00012	.050	4			
7495530	2.248	.004	2.24780	-.00016	.050	8			
7495532	2.248	.008 AND UP	2.24760	-.00040	.050	8			
7495534	2.249	.001	2.24900	-.00008	.050	4			
7495535	2.249	.002	2.24892	-.00012	.050	4			
7495536	2.249	.004	2.24880	-.00016	.050	8			
7495538	2.249	.008 AND UP	2.24860	-.00040	.050	8			
7495540	2.250	.001	2.25000	-.00008	.050	4			
7495541	2.250	.002	2.24992	-.00012	.050	4			
7495542	2.250	.004	2.24980	-.00016	.050	8			
7495544	2.250	.008 AND UP	2.24960	-.00040	.050	8			
7495546	2.251	.001	2.25100	-.00008	.050	4			
7495547	2.251	.002	2.25092	-.00012	.050	4			
7495548	2.251	.004	2.25080	-.00016	.050	8			
7495550	2.251	.008 AND UP	2.25060	-.00040	.050	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	RING GAGE	MARKING ON GO GAGE	STOCK NO.	MAXIMUM ACCEPTANCE DIMENSION	COMPONENT TOLERANCE	TOTAL	RING GAGE DIMENSIONS		FINISH
							D	E	
A	B	C	D	E	F	G	H	I	J
4	7495552	2.252	.001	2.25200	-.00008	.050	4		
4	7495553	2.252	.002	2.25192	-.00012	.050	4		
4	7495554	2.252	.004	2.25180	-.00016	.050	8		
4	7495556	2.252	.008 AND UP	2.25160	-.00040	.050	8		
4	7495558	2.253	.001	2.25300	-.00008	.050	4		
4	7495559	2.253	.002	2.25292	-.00012	.050	4		
4	7495560	2.253	.004	2.25280	-.00016	.050	8		
4	7495562	2.253	.008 AND UP	2.25260	-.00040	.050	8		
4	7495564	2.254	.001	2.25400	-.00008	.050	4		
4	7495565	2.254	.002	2.25392	-.00012	.050	4		
4	7495566	2.254	.004	2.25380	-.00016	.050	8		
4	7495568	2.254	.008 AND UP	2.25360	-.00040	.050	8		
4	7495570	2.255	.001	2.25500	-.00008	.050	4		
4	7495571	2.255	.002	2.25492	-.00012	.050	4		
4	7495572	2.255	.004	2.25480	-.00016	.050	8		
4	7495574	2.255	.008 AND UP	2.25460	-.00040	.050	8		
4	7495576	2.256	.001	2.25560	-.00008	.050	4		
4	7495577	2.256	.002	2.25592	-.00012	.050	4		
4	7495578	2.256	.004	2.25580	-.00016	.050	8		
4	7495580	2.256	.008 AND UP	2.25560	-.00040	.050	8		
4	7495582	2.257	.001	2.25700	-.00008	.050	4		
4	7495583	2.257	.002	2.25692	-.00012	.050	4		
4	7495584	2.257	.004	2.25680	-.00016	.050	8		
4	7495586	2.257	.008 AND UP	2.25660	-.00040	.050	8		
4	7495588	2.258	.001	2.25800	-.00008	.050	4		
4	7495589	2.258	.002	2.25792	-.00012	.050	4		
4	7495590	2.258	.004	2.25780	-.00016	.050	8		
4	7495592	2.258	.008 AND UP	2.25760	-.00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		MAXIMUM COMPONENT DIMENSION		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER	
	RING GAGE	ACCEPTANCE CHECK	C	D	E	F	G	H	I	J
4	7495594		2.259	.001	2.25900	-.00008	.050	4		
4	7495595		2.259	.002	2.25892	-.00012	.050	4		
4	7495596		2.259	.004 AND UP	2.25880	-.00016	.050	8		
4	7495598		2.259	.008 AND UP	2.25860	-.00040	.050	8		
4	7495600		2.260	.001	2.26000	-.00008	.050	4		
4	7495601		2.260	.002	2.25992	-.00012	.050	4		
4	7495602		2.260	.004	2.25980	-.00016	.050	8		
4	7495604		2.260	.008 AND UP	2.25960	-.00040	.050	8		
4	7495606		2.261	.001	2.26100	-.00008	.050	4		
4	7495607		2.261	.002	2.26092	-.00012	.050	4		
4	7495608		2.261	.004	2.26080	-.00016	.050	8		
4	7495610		2.261	.008 AND UP	2.26060	-.00040	.050	8		
4	7495612		2.262	.001	2.26200	-.00008	.050	4		
4	7495613		2.262	.002	2.26192	-.00012	.050	4		
4	7495614		2.262	.004	2.26180	-.00016	.050	8		
4	7495616		2.262	.008 AND UP	2.26160	-.00040	.050	8		
4	7495618		2.263	.001	2.26300	-.00008	.050	4		
4	7495619		2.263	.002	2.26292	-.00012	.050	4		
4	7495620		2.263	.004	2.26280	-.00016	.050	8		
4	7495622		2.263	.008 AND UP	2.26260	-.00040	.050	8		
4	7495624		2.264	.001	2.26400	-.00008	.050	4		
4	7495625		2.264	.002	2.26392	-.00012	.050	4		
4	7495626		2.264	.004	2.26380	-.00016	.050	8		
4	7495628		2.264	.008 AND UP	2.26360	-.00040	.050	8		
4	7495630		2.265	.001	2.26500	-.00008	.050	4		
4	7495631		2.265	.002	2.26492	-.00012	.050	4		
4	7495632		2.265	.004	2.26480	-.00016	.050	8		
4	7495634		2.265	.008 AND UP	2.26460	-.00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER		
	FINN-GAGE STOCK NO.	STOCK NO.	MAXIMUM COMPONENT DIMENSION	CHECK	D	E	F	G	H	I	J	K
A	B	C	RING GAGE	ACCEPTANCE CHECK								
4	7495636		2.266	.001		2.26600	-.00008	.050	4			
4	7495637		2.266	.002		2.26592	-.00012	.050	4			
4	7495638		2.266	.004	AND UP	2.26580	-.00016	.050	4			
4	7495640		2.266	.008	AND UP	2.26560	-.00040	.050	8			
4	7495642		2.267	.001		2.26700	-.00008	.050	4			
4	7495643		2.267	.002		2.26692	-.00012	.050	4			
4	7495644		2.267	.004		2.26680	-.00016	.050	8			
4	7495646		2.267	.008	AND UP	2.26660	-.00040	.050	8			
4	7495648		2.268	.001		2.26800	-.00008	.050	4			
4	7495649		2.268	.002		2.26792	-.00012	.050	4			
4	7495650		2.268	.004		2.26780	-.00016	.050	8			
4	7495652		2.268	.008	AND UP	2.26760	-.00040	.050	8			
4	7495654		2.269	.001		2.26900	-.00008	.050	4			
4	7495655		2.269	.002		2.26892	-.00012	.050	4			
4	7495656		2.269	.004		2.26880	-.00016	.050	8			
4	7495658		2.269	.008	AND UP	2.26860	-.00040	.050	8			
4	7495660		2.270	.001		2.27000	-.00008	.050	4			
4	7495661		2.270	.002		2.26992	-.00012	.050	4			
4	7495662		2.270	.004		2.26980	-.00016	.050	8			
4	7495664		2.270	.008	AND UP	2.26960	-.00040	.050	8			
4	7495666		2.271	.001		2.27100	-.00008	.050	4			
4	7495667		2.271	.002		2.27092	-.00012	.050	4			
4	7495668		2.271	.004		2.27080	-.00016	.050	8			
4	7495670		2.271	.008	AND UP	2.27060	-.00040	.050	8			
4	7495672		2.272	.001		2.27200	-.00008	.050	4			
4	7495673		2.272	.002		2.27192	-.00012	.050	4			
4	7495674		2.272	.004		2.27180	-.00016	.050	8			
4	7495676		2.272	.008	AND UP	2.27160	-.00040	.050	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH H
	RING GAGE	RING STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
FIG. NO.	B	C	D							
4	7495678		2.273	.001	2.27300	-.00008	.050			
4	7495679		2.273	.002	2.27292	-.00012	.050			
4	7495680		2.273	.004 AND UP	2.27280	-.00016	.050			
4	7495682		2.273	.008 AND UP	2.27260	-.00040	.050			
4	7495684		2.274	.001	2.27400	-.00008	.050			
4	7495685		2.274	.002	2.27392	-.00012	.050			
4	7495686		2.274	.004 AND UP	2.27380	-.00016	.050			
4	7495688		2.274	.008 AND UP	2.27360	-.00040	.050			
4	7495690		2.275	.001	2.27500	-.00008	.050			
4	7495691		2.275	.002	2.27492	-.00012	.050			
4	7495692		2.275	.004 AND UP	2.27480	-.00016	.050			
4	7495694		2.275	.008 AND UP	2.27460	-.00040	.050			
4	7495696		2.276	.001	2.27600	-.00008	.050			
4	7495697		2.276	.002	2.27592	-.00012	.050			
4	7495698		2.276	.004 AND UP	2.27580	-.00016	.050			
4	7495700		2.276	.008 AND UP	2.27560	-.00040	.050			
4	7495702		2.277	.001	2.27700	-.00008	.050			
4	7495703		2.277	.002	2.27692	-.00012	.050			
4	7495704		2.277	.004 AND UP	2.27680	-.00016	.050			
4	7495706		2.277	.008 AND UP	2.27660	-.00040	.050			
4	7495708		2.278	.001	2.27800	-.00008	.050			
4	7495709		2.278	.002	2.27792	-.00012	.050			
4	7495710		2.278	.004 AND UP	2.27780	-.00016	.050			
4	7495712		2.278	.008 AND UP	2.27760	-.00040	.050			
4	7495714		2.279	.001	2.27900	-.00008	.050			
4	7495715		2.279	.002	2.27892	-.00012	.050			
4	7495716		2.279	.004 AND UP	2.27880	-.00016	.050			
4	7495718		2.279	.008 AND UP	2.27860	-.00040	.050			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE RING GAGE	STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION		DIA. E	F	G	
A	B	C	D	E	F	G	H	
4	7495720		2.280	.001	2.28000	-.00008	.050	4
4	7495721		2.280	.002	2.27992	-.00012	.050	4
4	7495722		2.280	.004	2.27980	-.00016	.050	8
4	7495724		2.280	.008 AND UP	2.27960	-.00040	.050	8
4	7495726		2.281	.001	2.28100	-.00008	.050	4
4	7495727		2.281	.002	2.28092	-.00012	.050	4
4	7495728		2.281	.004	2.28080	-.00016	.050	8
4	7495730		2.281	.008 AND UP	2.28060	-.00040	.050	8
4	7495732		2.28125	.001 AND UP	2.28125	-.00008	.050	4
4	7495733		2.282	.001	2.28200	-.00008	.050	4
4	7495734		2.282	.002	2.28192	-.00012	.050	4
4	7495735		2.282	.004	2.28180	-.00016	.050	8
4	7495737		2.282	.008 AND UP	2.28160	-.00040	.050	8
4	7495739		2.283	.001	2.28300	-.00008	.050	4
4	7495740		2.283	.002	2.28292	-.00012	.050	4
4	7495741		2.283	.004	2.28280	-.00016	.050	8
4	7495743		2.283	.008 AND UP	2.28260	-.00040	.050	8
4	7495745		2.284	.001	2.28400	-.00008	.050	4
4	7495746		2.284	.002	2.28392	-.00012	.050	4
4	7495747		2.284	.004	2.28380	-.00016	.050	8
4	7495749		2.284	.008 AND UP	2.28360	-.00040	.050	8
4	7495751		2.285	.001	2.28500	-.00008	.050	4
4	7495752		2.285	.002	2.28492	-.00012	.050	4
4	7495753		2.285	.004	2.28480	-.00016	.050	8
4	7495755		2.285	.008 AND UP	2.28460	-.00040	.050	8
4	7495757		2.286	.001	2.28600	-.00008	.050	4
4	7495758		2.286	.002	2.28592	-.00012	.050	4
4	7495759		2.286	.004	2.28580	-.00016	.050	8
4	7495761		2.286	.008 AND UP	2.28560	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

O. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		DIAMETER	CHAMFER	H
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		D	E			
A	B	C	D	E	F	G	H		
4	7495763		2.287	.001	2.28700	-.00008	.050		
4	7495764		2.287	.002	2.28692	-.00012	.050	4	
4	7495765		2.287	.004	2.28680	-.00016	.050	8	
4	7495767		2.287	.008 AND UP	2.28660	-.00040	.050	8	
4	7495769		2.288	.001	2.28800	-.00008	.050	4	
4	7495770		2.288	.002	2.28792	-.00012	.050	4	
4	7495771		2.288	.004	2.28780	-.00016	.050	8	
4	7495773		2.288	.008 AND UP	2.28760	-.00040	.050	8	
4	7495775		2.289	.001	2.28900	-.00008	.050	4	
4	7495776		2.289	.002	2.28892	-.00012	.050	4	
4	7495777		2.289	.004	2.28880	-.00016	.050	8	
4	7495779		2.289	.008 AND UP	2.28860	-.00040	.050	8	
4	7495781		2.290	.001	2.29000	-.00008	.050	4	
4	7495782		2.290	.002	2.28992	-.00012	.050	4	
4	7495783		2.290	.004	2.28980	-.00016	.050	8	
4	7495785		2.290	.008 AND UP	2.28960	-.00040	.050	8	
4	7495787		2.291	.001	2.29100	-.00008	.050	4	
4	7495788		2.291	.002	2.29092	-.00012	.050	4	
4	7495789		2.291	.004	2.29080	-.00016	.050	8	
4	7495791		2.291	.008 AND UP	2.29060	-.00040	.050	8	
4	7495793		2.292	.001	2.29200	-.00008	.050	4	
4	7495794		2.292	.002	2.29192	-.00012	.050	4	
4	7495795		2.292	.004	2.29180	-.00016	.050	8	
4	7495797		2.292	.008 AND UP	2.29160	-.00040	.050	8	
4	7495799		2.293	.001	2.29300	-.00008	.050	4	
4	7495800		2.293	.002	2.29292	-.00012	.050	4	
4	7495801		2.293	.004	2.29280	-.00016	.050	8	
4	7495803		2.293	.008 AND UP	2.29260	-.00040	.050	8	

MIL-STD-112A
6 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN.—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION		DIA. E	F	
FIN.— RING GAGE	ACCEPTANCE CHECK		D			H	
A	B	C	D	E	F	G	
4	7495805		2.294	.001	2.29400	-.00008	.050
4	7495806		2.294	.002	2.29392	-.00012	.050
4	7495807		2.294	.004 AND UP	2.29380	-.00016	.050
4	7495809		2.294		2.29360	-.00040	.050
4	7495811		2.295	.001	2.29500	-.00008	.050
4	7495812		2.295	.002	2.29492	-.00012	.050
4	7495813		2.295	.004 AND UP	2.29480	-.00016	.050
4	7495815		2.295		2.29460	-.00040	.050
4	7495817		2.296	.001	2.29600	-.00008	.050
4	7495818		2.296	.002	2.29592	-.00012	.050
4	7495819		2.296	.004 AND UP	2.29580	-.00016	.050
4	7495821		2.296		2.29560	-.00040	.050
4	7495823		2.297	.001	2.29700	-.00008	.050
4	7495824		2.297	.002	2.29692	-.00012	.050
4	7495825		2.297	.004 AND UP	2.29680	-.00016	.050
4	7495827		2.297		2.29660	-.00040	.050
4	7495829		2.298	.001	2.29800	-.00008	.050
4	7495830		2.298	.002	2.29792	-.00012	.050
4	7495831		2.298	.004 AND UP	2.29780	-.00016	.050
4	7495833		2.298		2.29760	-.00040	.050
4	7495835		2.299	.001	2.29900	-.00008	.050
4	7495836		2.299	.002	2.29892	-.00012	.050
4	7495837		2.299	.004 AND UP	2.29880	-.00016	.050
4	7495839		2.299		2.29860	-.00040	.050
4	7495841		2.300	.001	2.30000	-.00008	.050
4	7495842		2.300	.002	2.29992	-.00012	.050
4	7495843		2.300	.004 AND UP	2.29980	-.00016	.050
4	7495845		2.300		2.29960	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON CIR. #	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHAMFER
	RING GAGE	RING STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	G	
A	B	C	D	E	F	G	H
1	7495847	2.301	.001	2.30100 - .00008	.050	.4	
4	7495848	2.301	.002	2.30092 - .00012	.050	.4	
4	7495849	2.301	.004	2.30080 - .00016	.050	.8	
4	7495851	2.301	.008 AND UP	2.30060 - .00040	.050	.8	
1	7495853	2.302	.001	2.30200 - .00008	.050	.4	
4	7495854	2.302	.002	2.30192 - .00012	.050	.4	
4	7495855	2.302	.004	2.30180 - .00016	.050	.8	
4	7495857	2.302	.008 AND UP	2.30160 - .00040	.050	.8	
4	7495859	2.303	.001	2.30300 - .00008	.050	.4	
4	7495860	2.303	.002	2.30292 - .00012	.050	.4	
4	7495861	2.303	.004	2.30280 - .00016	.050	.8	
4	7495863	2.303	.008 AND UP	2.30260 - .00040	.050	.8	
4	7495865	2.304	.001	2.30400 - .00008	.050	.4	
4	7495866	2.304	.002	2.30392 - .00012	.050	.4	
4	7495867	2.304	.004	2.30380 - .00016	.050	.8	
4	7495869	2.304	.008 AND UP	2.30360 - .00040	.050	.8	
4	7495871	2.305	.001	2.30500 - .00008	.050	.4	
4	7495872	2.305	.002	2.30492 - .00012	.050	.4	
4	7495873	2.305	.004	2.30480 - .00016	.050	.8	
4	7495875	2.305	.008 AND UP	2.30460 - .00040	.050	.8	
4	7495877	2.306	.001	2.30600 - .00008	.050	.4	
4	7495878	2.306	.002	2.30592 - .00012	.050	.4	
4	7495879	2.306	.004	2.30580 - .00016	.050	.8	
4	7495881	2.306	.008 AND UP	2.30560 - .00040	.050	.8	
4	7495883	2.307	.001	2.30700 - .00008	.050	.4	
4	7495884	2.307	.002	2.30692 - .00012	.050	.4	
4	7495885	2.307	.004	2.30680 - .00016	.050	.8	
4	7495887	2.307	.008 AND UP	2.30660 - .00040	.050	.8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH CHAMFER	H
	FIN—GAGE RING GAGE	STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION		D	E	F	
4	7495889		2.308	.001	2.30800	-.00008	.050	4
4	7495890		2.308	.002	2.30792	-.00012	.050	4
4	7495891		2.308	.004	2.30780	-.00016	.050	8
4	7495893		2.308	.008 AND UP	2.30760	-.00040	.050	8
4	7495895		2.309	.001	2.30900	-.00008	.050	4
4	7495896		2.309	.002	2.30892	-.00012	.050	4
4	7495897		2.309	.004	2.30880	-.00016	.050	8
4	7495899		2.309	.008 AND UP	2.30860	-.00040	.050	8
4	7495901		2.310	.001	2.31000	-.00008	.050	4
4	7495902		2.310	.002	2.30992	-.00012	.050	4
4	7495903		2.310	.004	2.30980	-.00016	.050	8
4	7495905		2.310	.008 AND UP	2.30960	-.00040	.050	8
4	7495907		2.311	.001	2.31100	-.00008	.050	4
4	7495908		2.311	.002	2.31092	-.00012	.050	4
4	7495909		2.311	.004	2.31080	-.00016	.050	8
4	7495911		2.311	.008 AND UP	2.31060	-.00040	.050	8
4	7495913		2.312	.001	2.311200	-.00008	.050	4
4	7495914		2.312	.002	2.311192	-.00012	.050	4
4	7495915		2.312	.004	2.311180	-.00016	.050	8
4	7495917		2.312	.008 AND UP	2.311160	-.00040	.050	8
4	7495919		2.3125	.001 AND UP	2.31250	-.00008	.050	4
4	7495920		2.313	.001	2.31300	-.00008	.050	4
4	7495921		2.313	.002	2.31292	-.00012	.050	4
4	7495922		2.313	.004	2.31280	-.00016	.050	8
4	7495924		2.313	.008 AND UP	2.31260	-.00040	.050	8
4	7495926		2.314	.001	2.31400	-.00008	.050	4
4	7495927		2.314	.002	2.31392	-.00012	.050	4
4	7495928		2.314	.004	2.31380	-.00016	.050	8
4	7495930		2.314	.008 AND UP	2.31360	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			MAXIMUM COMPONENT DIMENSION			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	STOCK NO.	ACCEPTANCE CHECK	A	B	C	D	E	F	G	H		
4	7495932			2.315	.001		2.31500	-.00008	.050	4			
4	7495933			2.315	.002		2.31492	-.00012	.050	4			
4	7495934			2.315	.004		2.31480	-.00016	.050	8			
4	7495936			2.315	.008 AND UP		2.31460	-.00040	.050	8			
4	7495938			2.316	.001		2.31600	-.00008	.050	4			
4	7495939			2.316	.002		2.31592	-.00012	.050	4			
4	7495940			2.316	.004		2.31580	-.00016	.050	8			
4	7495942			2.316	.008 AND UP		2.31560	-.00040	.050	8			
4	7495944			2.317	.001		2.31700	-.00008	.050	4			
4	7495945			2.317	.002		2.31692	-.00012	.050	4			
4	7495946			2.317	.004		2.31680	-.00016	.050	8			
4	7495948			2.317	.008 AND UP		2.31660	-.00040	.050	8			
4	7495950			2.318	.001		2.31800	-.00008	.050	4			
4	7495951			2.318	.002		2.31792	-.00012	.050	4			
4	7495952			2.318	.004		2.31780	-.00016	.050	8			
4	7495954			2.318	.008 AND UP		2.31760	-.00040	.050	8			
4	7495956			2.319	.001		2.31900	-.00008	.050	4			
4	7495957			2.319	.002		2.31892	-.00012	.050	4			
4	7495958			2.319	.004		2.31880	-.00016	.050	8			
4	7495960			2.319	.008 AND UP		2.31860	-.00040	.050	8			
4	7495962			2.320	.001		2.32000	-.00008	.050	4			
4	7495963			2.320	.002		2.31992	-.00012	.050	4			
4	7495964			2.320	.004		2.31980	-.00016	.050	8			
4	7495966			2.320	.008 AND UP		2.31960	-.00040	.050	8			
4	7495968			2.321	.001		2.32100	-.00008	.050	4			
4	7495969			2.321	.002		2.32092	-.00012	.050	4			
4	7495970			2.321	.004		2.32080	-.00016	.050	8			
4	7495972			2.321	.008 AND UP		2.32060	-.00040	.050	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		FINISH
	FIN—GAGE RING GAGE	STOCK NO.	MAXIMUM ACCEPTANCE COMPONENT DIMENSION	DIA	E	F	G	H	
A	B	C	D						
4	7495974		2.322	.001	2.32200	-.00008	.050	4	
4	7495975		2.322	.002	2.32192	-.00012	.050	4	
4	7495976		2.322	.004	2.32180	-.00016	.050	4	
4	7495978		2.322	.008 AND UP	2.32160	-.00040	.050	8	
4	7495980		2.323	.001	2.32300	-.00008	.050	4	
4	7495981		2.323	.002	2.32292	-.00012	.050	4	
4	7495982		2.323	.004	2.32280	-.00016	.050	8	
4	7495984		2.323	.008 AND UP	2.32260	-.00040	.050	8	
4	7495986		2.324	.001	2.32400	-.00008	.050	4	
4	7495987		2.324	.002	2.32392	-.00012	.050	4	
4	7495988		2.324	.004	2.32380	-.00016	.050	8	
4	7495990		2.324	.008 AND UP	2.32360	-.00040	.050	8	
4	7495992		2.325	.001	2.32500	-.00008	.050	4	
4	7495993		2.325	.002	2.32492	-.00012	.050	4	
4	7495994		2.325	.004	2.32480	-.00016	.050	8	
4	7495996		2.325	.008 AND UP	2.32460	-.00040	.050	8	
4	7495998		2.326	.001	2.32600	-.00008	.050	4	
4	7495999		2.326	.002	2.32592	-.00012	.050	4	
4	7496000		2.326	.004	2.32580	-.00016	.050	8	
4	7496002		2.326	.008 AND UP	2.32560	-.00040	.050	8	
4	7496004		2.327	.001	2.32700	-.00008	.050	4	
4	7496005		2.327	.002	2.32692	-.00012	.050	4	
4	7496006		2.327	.004	2.32680	-.00016	.050	8	
4	7496008		2.327	.008 AND UP	2.32660	-.00040	.050	8	
4	7496010		2.328	.001	2.32800	-.00008	.050	4	
4	7496011		2.328	.002	2.32792	-.00012	.050	4	
4	7496012		2.328	.004	2.32780	-.00016	.050	8	
4	7496014		2.328	.008 AND UP	2.32760	-.00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH
	FIN - GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	DIMETER	F	G	
A	B	C	D	E	F	G	H
4	7496016		2.329	.001	2.32900	-.00008	.050
4	7496017		2.329	.002	2.32892	-.00012	.050
4	7496018		2.329	.004 AND UP	2.32880	-.00016	.050
4	7496020		2.329	.008 AND UP	2.32860	-.00040	.050
4	7496022		2.330	.001	2.33000	-.00008	.050
4	7496023		2.330	.002	2.32992	-.00012	.050
4	7496024		2.330	.004 AND UP	2.32980	-.00016	.050
4	7496026		2.330	.008 AND UP	2.32960	-.00040	.050
4	7496028		2.331	.001	2.33100	-.00008	.050
4	7496029		2.331	.002	2.33092	-.00012	.050
4	7496030		2.331	.004	2.33080	-.00016	.050
4	7496032		2.331	.008 AND UP	2.33060	-.00040	.050
4	7496034		2.332	.001	2.33200	-.00008	.050
4	7496035		2.332	.002	2.33192	-.00012	.050
4	7496036		2.332	.004	2.33180	-.00016	.050
4	7496038		2.332	.008 AND UP	2.33160	-.00040	.050
4	7496040		2.333	.001	2.33300	-.00008	.050
4	7496041		2.333	.002	2.33292	-.00012	.050
4	7496042		2.333	.004	2.33280	-.00016	.050
4	7496044		2.333	.008 AND UP	2.33260	-.00040	.050
4	7496046		2.334	.001	2.33400	-.00008	.050
4	7496047		2.334	.002	2.33392	-.00012	.050
4	7496048		2.334	.004	2.33380	-.00016	.050
4	7496050		2.334	.008 AND UP	2.33360	-.00040	.050
4	7496052		2.335	.001	2.33500	-.00008	.050
4	7496053		2.335	.002	2.33492	-.00012	.050
4	7496054		2.335	.004	2.33480	-.00016	.050
4	7496056		2.335	.008 AND UP	2.33460	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE	RING GAGE		TOTAL	RING GAGE		FINISH
		FIN. BASE STOCK NO.	MAXIMUM COMPONENT DIMENSION	COMPONENT TOLERANCE	DIMETER	CHAMFER	
A	B	C	D	E	F	G	H
7496058	7496059	7496060	7496062	2.336 .001 2.336 .002 2.336 .004 2.336 .008 AND UP	2.33600 -.00008 2.33592 -.00012 2.33580 -.00016 2.33560 -.00040	.050 .050 .050 .050	4 4 4 8
7496064	7496065	7496066	7496068	2.337 .001 2.337 .002 2.337 .004 2.337 .008 AND UP	2.33700 -.00008 2.33692 -.00012 2.33680 -.00016 2.33660 -.00040	.050 .050 .050 .050	4 4 4 8
7496070	7496071	7496072	7496074	2.338 .001 2.338 .002 2.338 .004 2.338 .008 AND UP	2.33800 -.00008 2.33792 -.00012 2.33780 -.00016 2.33760 -.00040	.050 .050 .050 .050	4 4 4 8
7496076	7496077	7496078	7496080	2.339 .001 2.339 .002 2.339 .004 2.339 .008 AND UP	2.33900 -.00008 2.33892 -.00012 2.33880 -.00016 2.33860 -.00040	.050 .050 .050 .050	4 4 4 8
7496082	7496083	7496084	7496086	2.340 .001 2.340 .002 2.340 .004 2.340 .008 AND UP	2.34000 -.00008 2.33992 -.00012 2.33980 -.00016 2.33960 -.00040	.050 .050 .050 .050	4 4 4 8
7496088	7496089	7496090	7496092	2.341 .001 2.341 .002 2.341 .004 2.341 .008 AND UP	2.34100 -.00008 2.34092 -.00012 2.34080 -.00016 2.34060 -.00040	.050 .050 .050 .050	4 4 4 8
7496094	7496095	7496096	7496098	2.342 .001 2.342 .002 2.342 .004 2.342 .008 AND UP	2.34200 -.00008 2.34192 -.00012 2.34180 -.00016 2.34160 -.00040	.050 .050 .050 .050	4 4 4 8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

NO. ON CIR.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH CHARACTER		
	FIN-GAGE RING GAGE	STOCK NO. ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	F	G	H	
A	B	C	D	E	F	G	H		
4	7496100	2.363	.001	2.34300 - .00008	.050	4			
4	7496101	2.363	.002	2.34292 - .00012	.050	4			
4	7496102	2.363	.004	2.34280 - .00016	.050	8			
4	7496104	2.363	.008 AND UP	2.34260 - .00040	.050	8			
4	7496106	2.36375	.001 AND UP	2.34375 - .00008	.050	4			
4	7496107	2.364	.001	2.34400 - .00008	.050	4			
4	7496108	2.364	.002	2.34392 - .00012	.050	4			
4	7496109	2.364	.004	2.34380 - .00016	.050	8			
4	7496111	2.364	.008 AND UP	2.34360 - .00040	.050	8			
4	7496113	2.365	.001	2.34450 - .00008	.050	4			
4	7496114	2.365	.002	2.34492 - .00012	.050	4			
4	7496115	2.365	.004	2.34480 - .00016	.050	8			
4	7496117	2.365	.008 AND 1 1/2	2.34460 - .00040	.050	8			
4	7496119	2.366	.001	2.34600 - .00008	.050	4			
4	7496120	2.366	.002	2.34592 - .00012	.050	4			
4	7496121	2.366	.004	2.34580 - .00016	.050	8			
4	7496123	2.366	.008 AND UP	2.34560 - .00040	.050	8			
4	7496125	2.367	.001	2.34700 - .00008	.050	4			
4	7496126	2.367	.002	2.34692 - .00012	.050	4			
4	7496127	2.367	.004	2.34680 - .00016	.050	8			
4	7496129	2.367	.008 AND UP	2.34660 - .00040	.050	8			
4	7496131	2.368	.001	2.34800 - .00008	.050	4			
4	7496132	2.368	.002	2.34792 - .00012	.050	4			
4	7496133	2.368	.004	2.34780 - .00016	.050	8			
4	7496135	2.368	.008 AND UP	2.34760 - .00040	.050	8			
4	7496137	2.369	.001	2.34900 - .00008	.050	4			
4	7496138	2.369	.002	2.34892 - .00012	.050	4			
4	7496139	2.369	.004	2.34880 - .00016	.050	8			
4	7496141	2.369	.008 AND UP	2.34860 - .00040	.050	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
4	7496143	2.350	.001	2.35000	-.00008	.050	4			
4	7496144	2.350	.002	2.34992	-.00012	.050	4			
4	7496145	2.350	.004 AND UP	2.34980	-.00016	.050	8			
4	7496147	2.350	.008	2.34960	-.00040	.050	8			
4	7496149	2.351	.001	2.35100	-.00008	.050	4			
4	7496150	2.351	.002	2.35092	-.00012	.050	4			
4	7496151	2.351	.004 AND UP	2.35080	-.00016	.050	8			
4	7496153	2.351	.008	2.35060	-.00040	.050	8			
4	7496155	2.352	.001	2.35200	-.00008	.050	4			
4	7496156	2.352	.002	2.35192	-.00012	.050	4			
4	7496157	2.352	.004 AND UP	2.35180	-.00016	.050	8			
4	7496159	2.352	.008	2.35160	-.00040	.050	8			
4	7496161	2.353	.001	2.35300	-.00008	.050	4			
4	7496162	2.353	.002	2.35292	-.00012	.050	4			
4	7496163	2.353	.004 AND UP	2.35280	-.00016	.050	8			
4	7496165	2.353	.008	2.35260	-.00040	.050	8			
4	7496167	2.354	.001	2.35400	-.00008	.050	4			
4	7496168	2.354	.002	2.35392	-.00012	.050	4			
4	7496169	2.354	.004 AND UP	2.35380	-.00016	.050	8			
4	7496171	2.354	.008	2.35360	-.00040	.050	8			
4	7496173	2.355	.001	2.35500	-.00008	.050	4			
4	7496174	2.355	.002	2.35492	-.00012	.050	4			
4	7496175	2.355	.004 AND UP	2.35480	-.00016	.050	8			
4	7496177	2.355	.008	2.35460	-.00040	.050	8			
4	7496179	2.356	.001	2.35600	-.00008	.050	4			
4	7496180	2.356	.002	2.35592	-.00012	.050	4			
4	7496181	2.356	.004 AND UP	2.35580	-.00016	.050	8			
4	7496183	2.356	.008	2.35560	-.00040	.050	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH DIMENSIONS		
	FLIN-GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
FIG. NO.	B	C	D	E	F	G	H		
4	7496185		2.357	.001	2.35700	-.00008	.050	4	
4	7496186		2.357	.002	2.35692	-.00012	.050	4	
4	7496187		2.357	.004 AND UP	2.35680	-.00016	.050	8	
4	7496189		2.357	.008 AND UP	2.35660	-.00040	.050	8	
4	7496191		2.358	.001	2.35800	-.00008	.050	4	
4	7496192		2.358	.002	2.35792	-.00012	.050	4	
4	7496193		2.358	.004	2.35780	-.00016	.050	8	
4	7496195		2.358	.008 AND UP	2.35760	-.00040	.050	8	
4	7496197		2.359	.001	2.35900	-.00008	.050	4	
4	7496198		2.359	.002	2.35892	-.00012	.050	4	
4	7496199		2.359	.004	2.35880	-.00016	.050	8	
4	7496201		2.359	.008 AND UP	2.35860	-.00040	.050	8	
4	7496203		2.360	.001	2.36000	-.00008	.050	4	
4	7496204		2.360	.002	2.35992	-.00012	.050	4	
4	7496205		2.360	.004	2.35980	-.00016	.050	8	
4	7496207		2.360	.008 AND UP	2.35960	-.00040	.050	8	
4	7496209		2.361	.001	2.36100	-.00008	.050	4	
4	7496210		2.361	.002	2.36092	-.00012	.050	4	
4	7496211		2.361	.004	2.36080	-.00016	.050	8	
4	7496213		2.361	.008 AND UP	2.36060	-.00040	.050	8	
4	7496215		2.362	.001	2.36200	-.00008	.050	4	
4	7496216		2.362	.002	2.36192	-.00012	.050	4	
4	7496217		2.362	.004	2.36180	-.00016	.050	8	
4	7496219		2.362	.008 AND UP	2.36160	-.00040	.050	8	
4	7496221		2.363	.001	2.36300	-.00008	.050	4	
4	7496222		2.363	.002	2.36292	-.00012	.050	4	
4	7496223		2.363	.004	2.36280	-.00016	.050	8	
4	7496225		2.363	.008 AND UP	2.36260	-.00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON. NO.	RING GAGE	MARKING ON GO GAGE		TOTAL		RING GAGE		FINISH
		FLIN-GAGE STOCK NO.	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	COMPONENT TOLERANCE	DIA METER	CHAMFER	
A	B	C	D	E	F	G	H	
7496227		2.364	.001	2.36400	-.00008	.050		4
7496228		2.364	.002	2.36392	-.00012	.050		4
7496229		2.364	.004	2.36380	-.00016	.050		4
7496231		2.364	.008 AND UP	2.36360	-.00040	.050		8
7496233		2.365	.001	2.36500	-.00008	.050		4
7496234		2.365	.002	2.36492	-.00012	.050		4
7496235		2.365	.004	2.36480	-.00016	.050		8
7496237		2.365	.008 AND UP	2.36460	-.00040	.050		8
7496239		2.366	.001	2.36600	-.00008	.050		4
7496240		2.366	.002	2.36592	-.00012	.050		4
7496241		2.366	.004	2.36580	-.00016	.050		8
7496243		2.366	.008 AND UP	2.36560	-.00040	.050		8
7496245		2.367	.001	2.36700	-.00008	.050		4
7496246		2.367	.002	2.36692	-.00012	.050		4
7496247		2.367	.004	2.36680	-.00016	.050		8
7496249		2.367	.008 AND UP	2.36660	-.00040	.050		8
7496251		2.368	.001	2.36800	-.00008	.050		4
7496252		2.368	.002	2.36792	-.00012	.050		4
7496253		2.368	.004	2.36780	-.00016	.050		8
7496255		2.368	.008 AND UP	2.36760	-.00040	.050		8
7496257		2.369	.001	2.36900	-.00008	.050		4
7496258		2.369	.002	2.36892	-.00012	.050		4
7496259		2.369	.004	2.36880	-.00016	.050		8
7496261		2.369	.008 AND UP	2.36860	-.00040	.050		8
7496263		2.370	.001	2.37000	-.00008	.050		4
7496264		2.370	.002	2.36992	-.00012	.050		4
7496265		2.370	.004	2.36980	-.00016	.050		8
7496267		2.370	.008 AND UP	2.36960	-.00040	.050		8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

TIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	
A	B	C	D							
4	7496269			2.371	.001	2.37100	-.00008	.050	4	
4	7496270			2.371	.002	2.37092	-.00012	.050	4	
4	7496271			2.371	.004 AND UP	2.37080	-.00016	.050	4	
4	7496273			2.371	.008	2.37060	-.00040	.050	4	
4	7496275			2.372	.001	2.37200	-.00008	.050	4	
4	7496276			2.372	.002	2.37192	-.00012	.050	4	
4	7496277			2.372	.004	2.37180	-.00016	.050	4	
4	7496279			2.372	.008 AND UP	2.37160	-.00040	.050	4	
4	7496281			2.373	.001	2.37300	-.00008	.050	4	
4	7496282			2.373	.002	2.37292	-.00012	.050	4	
4	7496283			2.373	.004	2.37280	-.00016	.050	4	
4	7496285			2.373	.008 A:D UP	2.37260	-.00040	.050	4	
4	7496287			2.374	.001	2.37400	-.00008	.050	4	
4	7496288			2.374	.002	2.37392	-.00012	.050	4	
4	7496289			2.374	.004	2.37380	-.00016	.050	4	
4	7496291			2.374	.008 AND UP	2.37360	-.00040	.050	4	
4	7496293			2.375	.001	2.37500	-.00008	.050	4	
4	7496294			2.375	.002	2.37492	-.00012	.050	4	
4	7496295			2.375	.004	2.37480	-.00016	.050	4	
4	7496297			2.375	.008 AND UP	2.37460	-.00040	.050	4	
4	7496299			2.376	.001	2.37600	-.00008	.050	4	
4	7496300			2.376	.002	2.37592	-.00012	.050	4	
4	7496301			2.376	.004	2.37580	-.00016	.050	4	
4	7496303			2.376	.008 AND UP	2.37560	-.00040	.050	4	
4	7496305			2.377	.001	2.37700	-.00008	.050	4	
4	7496306			2.377	.002	2.37692	-.00012	.050	4	
4	7496307			2.377	.004	2.37680	-.00016	.050	4	
4	7496309			2.377	.008 AND UP	2.37660	-.00040	.050	4	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER	H
	FIN - GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	COMPONENT TOLERANCE	DIA METER	G		
A	B	C	D	E	F	G	H	
4	7496311		2.378	.001	2.37800	-.00008	.050	4
4	7496312		2.378	.002	2.37792	-.00012	.050	4
4	7496313		2.378	.004	2.37780	-.00016	.050	8
4	7496315		2.378	.008 AND UP	2.37760	-.00040	.050	8
4	7496317		2.379	.001	2.37900	-.00008	.050	4
4	7496318		2.379	.002	2.37892	-.00012	.050	4
4	7496319		2.379	.004	2.37880	-.00016	.050	8
4	7496321		2.379	.008 AND UP	2.37860	-.00040	.050	8
4	7496323		2.380	.001	2.38000	-.00008	.050	4
4	7496324		2.380	.002	2.37992	-.00012	.050	4
4	7496325		2.380	.004	2.37980	-.00016	.050	8
4	7496327		2.380	.008 AND UP	2.37960	-.00040	.050	8
4	7496329		2.381	.001	2.38100	-.00008	.050	4
4	7496330		2.381	.002	2.38092	-.00012	.050	4
4	7496331		2.381	.004	2.38080	-.00016	.050	8
4	7496333		2.381	.008 AND UP	2.38060	-.00040	.050	8
4	7496335		2.382	.001	2.38200	-.00008	.050	4
4	7496336		2.382	.002	2.38192	-.00012	.050	4
4	7496337		2.382	.004	2.38180	-.00016	.050	8
4	7496339		2.382	.008 AND UP	2.38160	-.00040	.050	8
4	7496341		2.383	.001	2.38300	-.00008	.050	4
4	7496342		2.383	.002	2.38292	-.00012	.050	4
4	7496343		2.383	.004	2.38280	-.00016	.050	8
4	7496345		2.383	.008 AND UP	2.38260	-.00040	.050	8
4	7496347		2.384	.001	2.38400	-.00008	.050	4
4	7496348		2.384	.002	2.38392	-.00012	.050	4
4	7496349		2.384	.004	2.38380	-.00016	.050	8
4	7496351		2.384	.008 AND UP	2.38360	-.00040	.050	8

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH	
	FIN-GAGE STOCK NO.	ACCEPTANCE RING GAGE	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	G	H
A	B	C	D	E	F	G	H	
4	7496353		2.385	.001	2.38500	-.00008	.050	4
4	7496354		2.385	.002	2.38492	-.00012	.050	4
4	7496355		2.385	.004	2.38480	-.00016	.050	8
4	7496357		2.385	.008 AND UP	2.38460	-.00040	.050	8
4	7496359		2.386	.001	2.38600	-.00008	.050	4
4	7496360		2.386	.002	2.38592	-.00012	.050	8
4	7496361		2.386	.004	2.38580	-.00016	.050	8
4	7496363		2.386	.008 AND UP	2.38560	-.00040	.050	8
4	7496365		2.387	.001	2.38700	-.00008	.050	4
4	7496366		2.387	.002	2.38692	-.00012	.050	4
4	7496367		2.387	.004	2.38680	-.00016	.050	8
4	7496369		2.387	.008 AND UP	2.38660	-.00040	.050	8
4	7496371		2.388	.001	2.38800	-.00008	.050	4
4	7496372		2.388	.002	2.38792	-.00012	.050	4
4	7496373		2.388	.004	2.38780	-.00016	.050	8
4	7496375		2.388	.008 AND UP	2.38760	-.00040	.050	8
4	7496377		2.389	.001	2.38900	-.00008	.050	4
4	7496378		2.389	.002	2.38892	-.00012	.050	4
4	7496379		2.389	.004	2.38880	-.00016	.050	8
4	7496381		2.389	.008 AND UP	2.38860	-.00040	.050	8
4	7496383		2.390	.001	2.39000	-.00008	.050	4
4	7496384		2.390	.002	2.38992	-.00012	.050	4
4	7496385		2.390	.004	2.38980	-.00016	.050	8
4	7496387		2.390	.008 AND UP	2.38960	-.00040	.050	8
4	7496389		2.391	.001	2.39100	-.00008	.050	4
4	7496390		2.391	.002	2.39092	-.00012	.050	4
4	7496391		2.391	.004	2.39080	-.00016	.050	8
4	7496393		2.391	.008 AND UP	2.39060	-.00040	.050	8

MIL-STD-112A
6 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH CHAMFER
	FINN-GAGE STOCK NO.	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H		
RING GAGE	ACCEPTANCE CHECK		C	D						
A	B									
4	7496395		2.392	.001	2.39200	-.00008	.050	4		
4	7496396		2.392	.002	2.39192	-.00012	.050	4		
4	7496397		2.392	.004	2.39180	-.00016	.050	8		
4	7496399		2.392	.008 AND UP	2.39160	-.00040	.050	8		
4	7496401		2.393	.001	2.39300	-.00008	.050	4		
4	7496402		2.393	.002	2.39292	-.00012	.050	4		
4	7496403		2.393	.004	2.39280	-.00016	.050	8		
4	7496405		2.393	.008 AND UP	2.39260	-.00040	.050	8		
4	7496407		2.394	.001	2.39400	-.00008	.050	4		
4	7496408		2.394	.002	2.39392	-.00012	.050	4		
4	7496409		2.394	.004	2.39380	-.00016	.050	8		
4	7496411		2.394	.008 AND UP	2.39360	-.00040	.050	8		
4	7496413		2.395	.001	2.39500	-.00008	.050	4		
4	7496414		2.395	.002	2.39492	-.00012	.050	4		
4	7496415		2.395	.004	2.39480	-.00016	.050	8		
4	7496417		2.395	.008 AND UP	2.39460	-.00040	.050	8		
4	7496419		2.396	.001	2.39600	-.00008	.050	4		
4	7496420		2.396	.002	2.39592	-.00012	.050	4		
4	7496421		2.396	.004	2.39580	-.00016	.050	8		
4	7496423		2.396	.008 AND UP	2.39560	-.00040	.050	8		
4	7496425		2.397	.001	2.39700	-.00008	.050	4		
4	7496426		2.397	.002	2.39692	-.00012	.050	4		
4	7496427		2.397	.004	2.39680	-.00016	.050	8		
4	7496429		2.397	.008 AND UP	2.39660	-.00040	.050	8		
4	7496431		2.398	.001	2.39800	-.00008	.050	4		
4	7496432		2.398	.002	2.39792	-.00012	.050	4		
4	7496433		2.398	.004	2.39780	-.00016	.050	8		
4	7496435		2.398	.008 AND UP	2.39760	-.00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Dimension and Inspection Data (Continued)

NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	ACCEPTANCE STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	
A	B	C	D	E	F	G	H
4	7496437		2.399	.001	2.39900	-.00008	.050
4	7496438		2.399	.002	2.39892	-.00012	.050
4	7496439		2.399	.004	2.39880	-.00016	.050
4	7496441		2.399	.008 AND UP	2.39860	-.00040	.050
4	7496443		2.400	.001	2.40000	-.00008	.050
4	7496444		2.400	.002	2.39992	-.00012	.050
4	7496445		2.400	.004	2.39980	-.00016	.050
4	7496447		2.400	.008 AND UP	2.39960	-.00040	.050
4	7496449		2.401	.001	2.40100	-.00008	.050
4	7496450		2.401	.002	2.40092	-.00012	.050
4	7496451		2.401	.004	2.40080	-.00016	.050
4	7496453		2.401	.008 AND UP	2.40060	-.00040	.050
4	7496455		2.402	.001	2.40200	-.00008	.050
4	7496456		2.402	.002	2.40192	-.00012	.050
4	7496457		2.402	.004	2.40180	-.00016	.050
4	7496459		2.402	.008 AND UP	2.40160	-.00040	.050
4	7496461		2.403	.001	2.40300	-.00008	.050
4	7496462		2.403	.002	2.40292	-.00012	.050
4	7496463		2.403	.004	2.40280	-.00016	.050
4	7496465		2.403	.008 AND UP	2.40260	-.00040	.050
4	7496467		2.404	.001	2.40400	-.00008	.050
4	7496468		2.404	.002	2.40392	-.00012	.050
4	7496469		2.404	.004	2.40380	-.00016	.050
4	7496471		2.404	.008 AND UP	2.40360	-.00040	.050
4	7496473		2.405	.001	2.40500	-.00008	.050
4	7496474		2.405	.002	2.40492	-.00012	.050
4	7496475		2.405	.004	2.40480	-.00016	.050
4	7496477		2.405	.008 AND UP	2.40460	-.00040	.050

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	FINN-GAGE STOCK NO.	RING GAGE ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	COMPONENT TOLERANCE	DIA METER	G	
A	B	C	D	E	F	G	H
4	7496479		2.406	.001	2.40600	-.00008	.050
4	7496480		2.406	.002	2.40592	-.00012	.050
4	7496481		2.406	.004	2.40580	-.00016	.050
4	7496483		2.406	.008 AND UP	2.40560	-.00040	.050
4	7496485		2.40625	.001 AND UP	2.40625	-.00008	.050
4	7496486		2.407	.001	2.40700	-.00008	.050
4	7496487		2.407	.002	2.40692	-.00012	.050
4	7496488		2.407	.004	2.40680	-.00016	.050
4	7496490		2.407	.008 AND UP	2.40660	-.00040	.050
4	7496492		2.408	.001	2.40800	-.00008	.050
4	7496493		2.408	.002	2.40792	-.00012	.050
4	7496494		2.408	.004	2.40780	-.00016	.050
4	7496496		2.408	.008 AND UP	2.40760	-.00040	.050
4	7496498		2.409	.001	2.40900	-.00008	.050
4	7496499		2.409	.002	2.40892	-.00012	.050
4	7496500		2.409	.004	2.40880	-.00016	.050
4	7496502		2.409	.008 AND UP	2.40860	-.00040	.050
4	7496504		2.410	.001	2.41000	-.00008	.050
4	7496505		2.410	.002	2.40992	-.00012	.050
4	7496506		2.410	.004	2.40980	-.00016	.050
4	7496508		2.410	.008 AND UP	2.40960	-.00040	.050
4	7496510		2.411	.001	2.41100	-.00008	.050
4	7496511		2.411	.002	2.41092	-.00012	.050
4	7496512		2.411	.004	2.41080	-.00016	.050
4	7496514		2.411	.008 AND UP	2.41060	-.00040	.050
4	7496516		2.412	.001	2.41200	-.00008	.050
4	7496517		2.412	.002	2.41192	-.00012	.050
4	7496518		2.412	.004	2.41180	-.00016	.050
4	7496520		2.412	.008 AND UP	2.41160	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS		CHAMFER	HSIN-FU
	FIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	CHECK	D	E	F	G	H		
4	7496522	2.413	.001	2.41300	-.00008	.050	4			
4	7496523	2.413	.002	2.41292	-.00012	.050	4			
4	7496524	2.413	.004	2.41280	-.00016	.050	8			
4	7496526	2.413	.008 AND UP	2.41260	-.00040	.050	8			
4	7496528	2.414	.001	2.41400	-.00008	.050	4			
4	7496529	2.414	.002	2.41392	-.00012	.050	4			
4	7496530	2.414	.004	2.41380	-.00016	.050	8			
4	7496532	2.414	.008 AND UP	2.41360	-.00040	.050	8			
4	7496534	2.415	.001	2.41500	-.00008	.050	4			
4	7496535	2.415	.002	2.41492	-.00012	.050	4			
4	7496536	2.415	.004	2.41480	-.00016	.050	8			
4	7496538	2.415	.008 AND UP	2.41460	-.00040	.050	8			
4	7496540	2.416	.001	2.41600	-.00008	.050	4			
4	7496541	2.416	.002	2.41592	-.00012	.050	4			
4	7496542	2.416	.004	2.41580	-.00016	.050	8			
4	7496544	2.416	.008 AND UP	2.41560	-.00040	.050	8			
4	7496546	2.417	.001	2.41700	-.00008	.050	4			
4	7496547	2.417	.002	2.41692	-.00012	.050	4			
4	7496548	2.417	.004	2.41680	-.00016	.050	8			
4	7496550	2.417	.008 AND UP	2.41660	-.00040	.050	8			
4	7496552	2.418	.001	2.41800	-.00008	.050	4			
4	7496553	2.418	.002	2.41792	-.00012	.050	4			
4	7496554	2.418	.004	2.41780	-.00016	.050	8			
4	7496556	2.418	.008 AND UP	2.41760	-.00040	.050	8			
4	7496558	2.419	.001	2.41900	-.00008	.050	4			
4	7496559	2.419	.002	2.41892	-.00012	.050	4			
4	7496560	2.419	.004	2.41880	-.00016	.050	8			
4	7496562	2.419	.008 AND UP	2.41860	-.00040	.050	8			

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	RING-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	DIA.	E	F	G	H	I	
A	B	C	D							
4	7496564		2.420	.001	2.42000	-.00008	.050	4		
4	7496565		2.420	.002	2.41992	-.00012	.050	4		
4	7496566		2.420	.004	2.41980	-.00016	.050	8		
4	7496568		2.420	.008 AND UP	2.41960	-.00040	.050	8		
4	7496570		2.421	.001	2.42100	-.00008	.050	4		
4	7496571		2.421	.002	2.42092	-.00012	.050	4		
4	7496572		2.421	.004	2.42080	-.00016	.050	8		
4	7496574		2.421	.008 AND UP	2.42060	-.00040	.050	8		
4	7496576		2.422	.001	2.42200	-.00008	.050	4		
4	7496577		2.422	.002	2.42192	-.00012	.050	4		
4	7496578		2.422	.004	2.42180	-.00016	.050	8		
4	7496580		2.422	.008 AND UP	2.42160	-.00040	.050	8		
4	7496582		2.423	.001	2.42300	-.00008	.050	4		
4	7496583		2.423	.002	2.42292	-.00012	.050	4		
4	7496584		2.423	.004	2.42280	-.00016	.050	8		
4	7496586		2.423	.008 AND UP	2.42260	-.00040	.050	8		
4	7496588		2.424	.001	2.42400	-.00008	.050	4		
4	7496589		2.424	.002	2.42392	-.00012	.050	4		
4	7496590		2.424	.004	2.42380	-.00016	.050	8		
4	7496592		2.424	.008 AND UP	2.42360	-.00040	.050	8		
4	7496594		2.425	.001	2.42500	-.00008	.050	4		
4	7496595		2.425	.002	2.42492	-.00012	.050	4		
4	7496596		2.425	.004	2.42480	-.00016	.050	8		
4	7496598		2.425	.008 AND UP	2.42460	-.00040	.050	8		
4	7496600		2.426	.001	2.42600	-.00008	.050	4		
4	7496601		2.426	.002	2.42592	-.00012	.050	4		
4	7496602		2.426	.004	2.42580	-.00016	.050	8		
4	7496604		2.426	.008 AND UP	2.42560	-.00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		CHAMFER	FINISH
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK		MAXIMUM COMPONENT DIMENSION	DIA METER		
A	B	C	D	E	F	G	H	
4	7496606		2.427	.001	2.42700	-.00008	.050	4
4	7496607		2.427	.002	2.42692	-.00012	.050	4
4	7496608		2.427	.004	2.42680	-.00016	.050	8
4	7496610		2.427	.008 AND UP	2.42660	-.00040	.050	8
4	7496612		2.428	.001	2.42800	-.00008	.050	4
4	7496613		2.428	.002	2.42792	-.00012	.050	4
4	7496614		2.428	.004	2.42780	-.00016	.050	8
4	7496616		2.428	.008 AND UP	2.42760	-.00040	.050	8
4	7496618		2.429	.001	2.42900	-.00008	.050	4
4	7496619		2.429	.002	2.42892	-.00012	.050	4
4	7496620		2.429	.004	2.42880	-.00016	.050	8
4	7496622		2.429	.008 AND UP	2.42860	-.00040	.050	8
4	7496624		2.430	.001	2.43000	-.00008	.050	4
4	7496625		2.430	.002	2.42992	-.00012	.050	4
4	7496626		2.430	.004	2.42980	-.00016	.050	8
4	7496628		2.430	.008 AND UP	2.42960	-.00040	.050	8
4	7496630		2.431	.001	2.43100	-.00008	.050	4
4	7496631		2.431	.002	2.43092	-.00012	.050	4
4	7496632		2.431	.004	2.43080	-.00016	.050	8
4	7496634		2.431	.008 AND UP	2.43060	-.00040	.050	8
4	7496636		2.432	.001	2.43200	-.00008	.050	4
4	7496637		2.432	.002	2.43192	-.00012	.050	4
4	7496638		2.432	.004	2.43180	-.00016	.050	8
4	7496640		2.432	.008 AND UP	2.43160	-.00040	.050	8
4	7496642		2.433	.001	2.43300	-.00008	.050	4
4	7496643		2.433	.002	2.43292	-.00012	.050	4
4	7496644		2.433	.004	2.43280	-.00016	.050	8
4	7496646		2.433	.008 AND UP	2.43260	-.00040	.050	8

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER	H
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G		
A	B	C	D	E	F	G	H		
11	7496648		2.434	.001	2.43400	-.00008	.050	4	4
11	7496649		2.434	.002	2.43392	-.00012	.050	4	4
11	7496650		2.434	.004	2.43380	-.00016	.050	4	4
11	7496652		2.434	.008 AND UP	2.43360	-.00040	.050	4	4
4	7496654		2.435	.001	2.43500	-.00008	.050	4	4
4	7496655		2.435	.002	2.43492	-.00012	.050	4	4
4	7496656		2.435	.004	2.43480	-.00016	.050	4	4
4	7496658		2.435	.008 AND UP	2.43460	-.00040	.050	4	4
4	7496660		2.436	.001	2.43600	-.00008	.050	4	4
4	7496661		2.436	.002	2.43592	-.00012	.050	4	4
4	7496662		2.436	.004	2.43580	-.00016	.050	4	4
4	7496664		2.436	.008 AND UP	2.43560	-.00040	.050	4	4
4	7496666		2.437	.001	2.43700	-.00008	.050	4	4
4	7496667		2.437	.002	2.43692	-.00012	.050	4	4
4	7496668		2.437	.004	2.43680	-.00016	.050	4	4
4	7496670		2.437	.008 AND UP	2.43660	-.00040	.050	4	4
4	7496672		2.4375	.001 AND UP	2.43750	-.00008	.050	4	4
4	7496673		2.438	.001	2.43800	-.00008	.050	4	4
4	7496674		2.438	.002	2.43792	-.00012	.050	4	4
4	7496675		2.438	.004	2.43780	-.00016	.050	4	4
4	7496677		2.438	.008 AND UP	2.43760	-.00040	.050	4	4
4	7496679		2.439	.001	2.43900	-.00008	.050	4	4
4	7496680		2.439	.002	2.43892	-.00012	.050	4	4
4	7496681		2.439	.004	2.43880	-.00016	.050	4	4
4	7496683		2.439	.008 AND UP	2.43860	-.00040	.050	4	4
4	7496685		2.440	.001	2.44000	-.00008	.050	4	4
4	7496686		2.440	.002	2.43992	-.00012	.050	4	4
4	7496687		2.440	.004	2.43980	-.00016	.050	4	4
4	7496689		2.440	.008 AND UP	2.43960	-.00040	.050	4	4

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE	RING GAGE DIMENSIONS				FINISH		
		FIN - GAGE STOCK NO.	RING GAGE	MAXIMUM ACCEPTANCE CHECK	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	
A	B	C	D		E	F	G	H
4	7496691		2.441	.001	2.44100 - .00008	.050	4	
4	7496692		2.441	.002	2.44092 - .00012	.050	4	
4	7496693		2.441	.004	2.44080 - .00016	.050	8	
4	7496695		2.441	.008 AND UP	2.44060 - .00040	.050	8	
4	7496697		2.442	.001	2.44200 - .00008	.050	4	
4	7496698		2.442	.002	2.44192 - .00012	.050	8	
4	7496699		2.442	.004	2.44180 - .00016	.050	8	
4	7496701		2.442	.008 AND UP	2.44160 - .00040	.050	8	
4	7496703		2.443	.001	2.44300 - .00008	.050	4	
4	7496704		2.443	.002	2.44292 - .00012	.050	8	
4	7496705		2.443	.004	2.44280 - .00016	.050	8	
4	7496707		2.443	.008 AND UP	2.44260 - .00040	.050	8	
4	7496709		2.444	.001	2.44400 - .00008	.050	4	
4	7496710		2.444	.002	2.44392 - .00012	.050	4	
4	7496711		2.444	.004	2.44380 - .00016	.050	8	
4	7496713		2.444	.008 AND UP	2.44360 - .00040	.050	8	
4	7496715		2.445	.001	2.44500 - .00008	.050	4	
4	7496716		2.445	.002	2.44492 - .00012	.050	4	
4	7496717		2.445	.004	2.44480 - .00016	.050	8	
4	7496719		2.445	.008 AND UP	2.44460 - .00040	.050	8	
4	7496721		2.446	.001	2.44600 - .00008	.050	4	
4	7496722		2.446	.002	2.44592 - .00012	.050	4	
4	7496723		2.446	.004	2.44580 - .00016	.050	8	
4	7496725		2.446	.008 AND UP	2.44560 - .00040	.050	8	
4	7496727		2.447	.001	2.44700 - .00008	.050	4	
4	7496728		2.447	.002	2.44692 - .00012	.050	4	
4	7496729		2.447	.004	2.44680 - .00016	.050	8	
4	7496731		2.447	.008 AND UP	2.44660 - .00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAMFER
	FIN-GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	
FIG. NO.	RING GAGE	ACCEPTANCE CHECK	C	D		H	
4	7496733		2.448	.001	2.44800	-.00008	.050
4	7496734		2.448	.002	2.44792	-.00012	.050
4	7496735		2.448	.004	2.44780	-.00016	.050
4	7496737		2.448	.008 AND UP	2.44760	-.00040	.050
4	7496739		2.449	.001	2.44900	-.00008	.050
4	7496740		2.449	.002	2.44892	-.00012	.050
4	7496741		2.449	.004	2.44880	-.00016	.050
4	7496743		2.449	.008 AND UP	2.44860	-.00040	.050
4	7496745		2.450	.001	2.45000	-.00008	.050
4	7496746		2.450	.002	2.44992	-.00012	.050
4	7496747		2.450	.004	2.44980	-.00016	.050
4	7496749		2.450	.008 AND UP	2.44960	-.00040	.050
4	7496751		2.451	.001	2.45100	-.00008	.050
4	7496752		2.451	.002	2.45092	-.00012	.050
4	7496753		2.451	.004	2.45080	-.00016	.050
4	7496755		2.451	.008 AND UP	2.45060	-.00040	.050
4	7496757		2.452	.001	2.45200	-.00008	.050
4	7496758		2.452	.002	2.45192	-.00012	.050
4	7496759		2.452	.004	2.45180	-.00016	.050
4	7496761		2.452	.008 AND UP	2.45160	-.00040	.050
4	7496763		2.453	.001	2.45300	-.00008	.050
4	7496764		2.453	.002	2.45292	-.00012	.050
4	7496765		2.453	.004	2.45280	-.00016	.050
4	7496767		2.453	.008 AND UP	2.45260	-.00040	.050
4	7496769		2.454	.001	2.45400	-.00008	.050
4	7496770		2.454	.002	2.45392	-.00012	.050
4	7496771		2.454	.004	2.45380	-.00016	.050
4	7496773		2.454	.008 AND UP	2.45360	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	RING GAGE STOCK NO.	MARKING ON GO GAGE		TOTAL COMPONENT TOLERANCE		RING GAGE DIMENSIONS		FINISH CHAPTER
		B	C	D	E	F	G	
11	7496775	2.455	.001	2.45500	-.00008	.050	4	
11	7496776	2.455	.002	2.45492	-.00012	.050	4	
11	7496777	2.455	.004 AND UP	2.45480	-.00016	.050	8	
11	7496779	2.455	.008 AND UP	2.45460	-.00020	.050	8	
4	7496781	2.456	.001	2.45600	-.00008	.050	4	
4	7496782	2.456	.002	2.45592	-.00012	.050	4	
4	7496783	2.456	.004	2.45580	-.00016	.050	8	
4	7496785	2.456	.008 AND UP	2.45560	-.00040	.050	8	
4	7496787	2.457	.001	2.45700	-.00008	.050	4	
4	7496788	2.457	.002	2.45692	-.00012	.050	4	
4	7496789	2.457	.004	2.45680	-.00016	.050	8	
4	7496791	2.457	.008 AND UP	2.45660	-.00040	.050	8	
4	7496793	2.458	.001	2.45800	-.00008	.050	4	
4	7496794	2.458	.002	2.45792	-.00012	.050	4	
4	7496795	2.458	.004	2.45780	-.00016	.050	8	
4	7496797	2.458	.008 AND UP	2.45760	-.00040	.050	8	
4	7496799	2.459	.001	2.45900	-.00008	.050	4	
4	7496800	2.459	.002	2.45892	-.00012	.050	4	
4	7496801	2.459	.004	2.45880	-.00016	.050	8	
4	7496803	2.459	.008 AND UP	2.45860	-.00040	.050	8	
4	7496805	2.460	.001	2.46000	-.00008	.050	4	
4	7496806	2.460	.002	2.45992	-.00012	.050	4	
4	7496807	2.460	.004	2.45980	-.00016	.050	8	
4	7496809	2.460	.008 AND UP	2.45960	-.00040	.050	8	
4	7496811	2.461	.001	2.46100	-.00008	.050	4	
4	7496812	2.461	.002	2.46092	-.00012	.050	4	
4	7496813	2.461	.004	2.46080	-.00016	.050	8	
4	7496815	2.461	.008 AND UP	2.46060	-.00040	.050	8	

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

ON GAGE	MARKING ON GO GAGE			TOTAL		RING GAGE DIMENSIONS		FINISH
	FIN-GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	MAXIMUM COMPONENT DIMENSION	COMPONENT TOLERANCE	DIA METER	CHAMFER	
A	B	C	D	E	F	G	H	
4	7496817			2.462	.001	2.46200	-.00008	.050
4	7496818			2.462	.002	2.46192	-.00012	.050
4	7496819			2.462	.004	2.46180	-.00016	.050
4	7496821			2.462	.008 AND UP	2.46160	-.00040	.050
4	7496823			2.463	.001	2.46300	-.00008	.050
4	7496824			2.463	.002	2.46292	-.00012	.050
4	7496825			2.463	.004	2.46280	-.00016	.050
4	7496827			2.463	.008 AND UP	2.46260	-.00040	.050
4	7496829			2.464	.001	2.46400	-.00008	.050
4	7496830			2.464	.002	2.46392	-.00012	.050
4	7496831			2.464	.004	2.46380	-.00016	.050
4	7496833			2.464	.008 AND UP	2.46360	-.00040	.050
4	7496835			2.465	.001	2.46500	-.00008	.050
4	7496836			2.465	.002	2.46492	-.00012	.050
4	7496837			2.465	.004	2.46480	-.00016	.050
4	7496839			2.465	.008 AND UP	2.46460	-.00040	.050
4	7496841			2.466	.001	2.46600	-.00008	.050
4	7496842			2.466	.002	2.46592	-.00012	.050
4	7496843			2.466	.004	2.46580	-.00016	.050
4	7496845			2.466	.008 AND UP	2.46560	-.00040	.050
4	7496847			2.467	.001	2.46700	-.00008	.050
4	7496848			2.467	.002	2.46692	-.00012	.050
4	7496849			2.467	.004	2.46680	-.00016	.050
4	7496851			2.467	.008 AND UP	2.46660	-.00040	.050
4	7496853			2.468	.001	2.46800	-.00008	.050
4	7496854			2.468	.002	2.46792	-.00012	.050
4	7496855			2.468	.004	2.46780	-.00016	.050
4	7496857			2.468	.008 AND UP	2.46760	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Partion and Identification Data (Continued)

ON O.D.	RING GAGE STOCK NO.	MAXIMUM COMPONENT DIMENSION		TOTAL COMPONENT TOLERANCE	RING GAGE DIMENSIONS		FINISH
		RING GAGE	ACCEPTANCE CHECK		C	D	
A	B			E		F	G
4	7496859	2.46875	.001 AND UP	2.46875 - .00008	.050	.050	4
4	7496860	2.469	.001	2.46900 - .00008	.050	.050	4
4	7496861	2.469	.002	2.46892 - .00012	.050	.050	4
4	7496862	2.469	.004	2.46880 - .00016	.050	.050	4
4	7496864	2.469	.008 AND UP	2.46860 - .00040	.050	.050	4
4	7496866	2.470	.001	2.47000 - .00008	.050	.050	4
4	7496867	2.470	.002	2.46992 - .00012	.050	.050	4
4	7496868	2.470	.004	2.46980 - .00016	.050	.050	4
4	7496870	2.470	.008 AND UP	2.46960 - .00040	.050	.050	4
4	7496872	2.471	.001	2.47100 - .00008	.050	.050	4
4	7496873	2.471	.002	2.47092 - .00012	.050	.050	4
4	7496874	2.471	.004	2.47080 - .00016	.050	.050	4
4	7496876	2.471	.008 AND UP	2.47060 - .00040	.050	.050	4
4	7496878	2.472	.001	2.47200 - .00008	.050	.050	4
4	7496879	2.472	.002	2.47192 - .00012	.050	.050	4
4	7496880	2.472	.004	2.47180 - .00016	.050	.050	4
4	7496882	2.472	.008 AND UP	2.47160 - .00040	.050	.050	4
4	7496884	2.473	.001	2.47300 - .00008	.050	.050	4
4	7496885	2.473	.002	2.47292 - .00012	.050	.050	4
4	7496886	2.473	.004	2.47280 - .00016	.050	.050	4
4	7496888	2.473	.008 AND UP	2.47260 - .00040	.050	.050	4
4	7496890	2.474	.001	2.47400 - .00008	.050	.050	4
4	7496891	2.474	.002	2.47392 - .00012	.050	.050	4
4	7496892	2.474	.004	2.47380 - .00016	.050	.050	4
4	7496894	2.474	.008 AND UP	2.47360 - .00040	.050	.050	4
4	7496896	2.475	.001	2.47500 - .00008	.050	.050	4
4	7496897	2.475	.002	2.47492 - .00012	.050	.050	4
4	7496898	2.475	.004	2.47480 - .00016	.050	.050	4
4	7496900	2.475	.008 AND UP	2.47460 - .00040	.050	.050	4

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			MAXIMUM COMPONENT DIMENSION			RING GAGE DIMENSIONS		
	FLIN - GAGE STOCK NO.	RING GAGE	ACCEPTANCE CHECK	D	E	F	G	H	CHAMFER
4	7496902	2.476	.001	2.47600	-.00008	.050	4		
4	7496903	2.476	.002	2.47592	-.00012	.050	4		
4	7496904	2.476	.004	2.47580	-.00016	.050	8		
4	7496906	2.476	.008 AND UP	2.47560	-.00040	.050	8		
4	7496908	2.477	.001	2.47700	-.00008	.050	4		
4	7496909	2.477	.002	2.47692	-.00012	.050	4		
4	7496910	2.477	.004	2.47680	-.00016	.050	8		
4	7496912	2.477	.008 AND UP	2.47660	-.00040	.050	8		
4	7496914	2.478	.001	2.47800	-.00008	.050	4		
4	7496915	2.478	.002	2.47792	-.00012	.050	4		
4	7496916	2.478	.004	2.47780	-.00016	.050	8		
4	7496918	2.478	.008 AND UP	2.47760	-.00040	.050	8		
4	7496920	2.479	.001	2.47900	-.00008	.050	4		
4	7496921	2.479	.002	2.47892	-.00012	.050	4		
4	7496922	2.479	.004	2.47880	-.00016	.050	8		
4	7496924	2.479	.008 AND UP	2.47860	-.00040	.050	8		
4	7496926	2.480	.001	2.48000	-.00008	.050	4		
4	7496927	2.480	.002	2.47992	-.00012	.050	4		
4	7496928	2.480	.004	2.47980	-.00016	.050	8		
4	7496930	2.480	.008 AND UP	2.47960	-.00040	.050	8		
4	7496932	2.481	.001	2.48100	-.00008	.050	4		
4	7496933	2.481	.002	2.48092	-.00012	.050	4		
4	7496934	2.481	.004	2.48080	-.00016	.050	8		
4	7496936	2.481	.008 AND UP	2.48060	-.00040	.050	8		
4	7496938	2.482	.001	2.48200	-.00008	.050	4		
4	7496939	2.482	.002	2.48192	-.00012	.050	4		
4	7496940	2.482	.004	2.48180	-.00016	.050	8		
4	7496942	2.482	.008 AND UP	2.48160	-.00040	.050	8		

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH H
	FIN - GAGE RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER	
A	B	C	D	E	F	G	H
4	7496944		2.483	.001	2.48300	-.00008	.050
4	7496945		2.483	.002	2.48292	-.00012	.050
4	7496946		2.483	.004	2.48280	-.00016	.050
4	7496948		2.483	.008 AND UP	2.48260	-.00040	.050
4	7496950		2.484	.001	2.48400	-.00008	.050
4	7496951		2.484	.002	2.48392	-.00012	.050
4	7496952		2.484	.004	2.48380	-.00016	.050
4	7496954		2.484	.008 AND UP	2.48360	-.00040	.050
4	7496956		2.485	.001	2.48500	-.00008	.050
4	7496957		2.485	.002	2.48492	-.00012	.050
4	7496958		2.485	.004	2.48480	-.00016	.050
4	7496960		2.485	.008 AND UP	2.48460	-.00040	.050
4	7496962		2.486	.001	2.48600	-.00008	.050
4	7496963		2.486	.002	2.48592	-.00012	.050
4	7496964		2.486	.004	2.48580	-.00016	.050
4	7496966		2.486	.008 AND UP	2.48560	-.00040	.050
4	7496968		2.487	.001	2.48700	-.00008	.050
4	7496969		2.487	.002	2.48692	-.00012	.050
4	7496970		2.487	.004	2.48680	-.00016	.050
4	7496972		2.487	.008 AND UP	2.48660	-.00040	.050
4	7496974		2.488	.001	2.48800	-.00008	.050
4	7496975		2.488	.002	2.48792	-.00012	.050
4	7496976		2.488	.004	2.48780	-.00016	.050
4	7496978		2.488	.008 AND UP	2.48760	-.00040	.050
4	7496980		2.489	.001	2.48900	-.00008	.050
4	7496981		2.489	.002	2.48892	-.00012	.050
4	7496982		2.489	.004	2.48880	-.00016	.050
4	7496984		2.489	.008 AND UP	2.48860	-.00040	.050

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH	H
	FIN—GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIAMETER	CHAMFER		
RING GAGE	ACCEPTANCE CHECK	DIMENSION	E	F		G		
A	B	C	D					
4	74.96986		2.490	.001	2.49000	-.00008	.050	4-4888
4	74.96987		2.490	.002	2.48992	-.00012	.050	4-4888
4	74.96988		2.490	.004	2.48980	-.00016	.050	4-4888
4	74.96990		2.490	.008 AND UP	2.48960	-.00040	.050	4-4888
4	74.96992		2.491	.001	2.49100	-.00008	.050	4-4888
4	74.96993		2.491	.002	2.49092	-.00012	.050	4-4888
4	74.96994		2.491	.004	2.49080	-.00016	.050	4-4888
4	74.96996		2.491	.008 AND UP	2.49060	-.00040	.050	4-4888
4	74.96998		2.492	.001	2.49200	-.00008	.050	4-4888
4	74.96999		2.492	.002	2.49192	-.00012	.050	4-4888
4	74.97000		2.492	.004	2.49180	-.00016	.050	4-4888
4	74.97002		2.492	.008 AND UP	2.49160	-.00040	.050	4-4888
4	74.97004		2.493	.001	2.49300	-.00008	.050	4-4888
4	74.97005		2.493	.002	2.49292	-.00012	.050	4-4888
4	74.97006		2.493	.004	2.49280	-.00016	.050	4-4888
4	74.97008		2.493	.008 AND UP	2.49260	-.00040	.050	4-4888
4	74.97010		2.494	.001	2.49400	-.00008	.050	4-4888
4	74.97011		2.494	.002	2.49392	-.00012	.050	4-4888
4	74.97012		2.494	.004	2.49380	-.00016	.050	4-4888
4	74.97014		2.494	.008 AND UP	2.49360	-.00040	.050	4-4888
4	74.97016		2.495	.001	2.49500	-.00008	.050	4-4888
4	74.97017		2.495	.002	2.49492	-.00012	.050	4-4888
4	74.97018		2.495	.004	2.49480	-.00016	.050	4-4888
4	74.97020		2.495	.008 AND UP	2.49460	-.00040	.050	4-4888
4	74.97022		2.496	.001	2.49600	-.00008	.050	4-4888
4	74.97023		2.496	.002	2.49592	-.00012	.050	4-4888
4	74.97024		2.496	.004	2.49580	-.00016	.050	4-4888
4	74.97026		2.496	.008 AND UP	2.49560	-.00040	.050	4-4888

MIL-STD-112A
8 December 1955

Table I. Tabulation of Design and Identification Data (Continued)

FIG. NO.	MARKING ON GO GAGE			RING GAGE DIMENSIONS			FINISH
	RING BASE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	TOTAL COMPONENT TOLERANCE	DIA METER	CHAMFER	
A	B	C	D	E	F	G	H
7497028	2.497	.001	2.497	2.49700 - .00008	.050	.050	4
7497029	2.497	.002	2.497	2.49692 - .00012	.050	.050	4
7497030	2.497	.004	2.497	2.49680 - .00016	.050	.050	8
7497032	2.497	.008 AND UP	2.497	2.49660 - .00040	.050	.050	8
7497034	2.498	.001	2.498	2.49800 - .00008	.050	.050	4
7497035	2.498	.002	2.498	2.49792 - .00012	.050	.050	4
7497036	2.498	.004	2.498	2.49780 - .00016	.050	.050	8
7497038	2.498	.008 AND UP	2.498	2.49760 - .00040	.050	.050	8
7497040	2.499	.001	2.499	2.49900 - .00008	.050	.050	4
7497041	2.499	.002	2.499	2.49892 - .00012	.050	.050	4
7497042	2.499	.004	2.499	2.49880 - .00016	.050	.050	8
7497044	2.499	.008 AND UP	2.499	2.49860 - .00040	.050	.050	8
7497046	2.500	.001	2.500	2.50000 - .00008	.050	.050	4
7497047	2.500	.002	2.500	2.49992 - .00012	.050	.050	4
7497048	2.500	.004	2.500	2.49980 - .00016	.050	.050	8
7497050	2.500	.008 AND UP	2.500	2.49960 - .00040	.050	.050	8
7497052	2.501	.001	2.501	2.50100 - .00008	.050	.050	4
7497053	2.501	.002	2.501	2.50092 - .00012	.050	.050	4
7497054	2.501	.004	2.501	2.50080 - .00016	.050	.050	8
7497056	2.501	.008 AND UP	2.501	2.50060 - .00040	.050	.050	8
7497058	2.502	.001	2.502	2.50200 - .00008	.050	.050	4
7497059	2.502	.002	2.502	2.50192 - .00012	.050	.050	4
7497060	2.502	.004	2.502	2.50180 - .00016	.050	.050	8
7497062	2.502	.008 AND UP	2.502	2.50160 - .00040	.050	.050	8
7497064	2.503	.001	2.503	2.50300 - .00008	.050	.050	4
7497065	2.503	.002	2.503	2.50292 - .00012	.050	.050	4
7497066	2.503	.004	2.503	2.50280 - .00016	.050	.050	8
7497068	2.503	.008 AND UP	2.503	2.50260 - .00040	.050	.050	8

Table I. Tabulation of Design and Identification Data (Continued)

FIN. NO.	MARKING ON GO GAGE			TOTAL COMPONENT TOLERANCE			RING GAGE DIMENSIONS			FINISH
	RING GAGE	STOCK NO.	MAXIMUM COMPONENT DIMENSION	D	E	F	G	H	CHAMFER	
A	B	C	D	E	F	G	H			
7497070	2.504	.001	2.50400	-	.00008	.050	4			
7497071	2.504	.002	2.50392	-	.00012	.050	4			
7497072	2.504	.004	2.50380	-	.00016	.050	4			
7497074	2.504	.008 AND UP	2.50360	-	.00040	.050	4			
7497076	2.505	.001	2.50500	-	.00008	.050	4			
7497077	2.505	.002	2.50492	-	.00012	.050	4			
7497078	2.505	.004	2.50480	-	.00016	.050	4			
7497080	2.505	.008 AND UP	2.50460	-	.00040	.050	4			
7497082	2.506	.001	2.50600	-	.00008	.050	4			
7497083	2.506	.002	2.50592	-	.00012	.050	4			
7497084	2.506	.004	2.50580	-	.00016	.050	4			
7497086	2.506	.008 AND UP	2.50560	-	.00040	.050	4			
7497088	2.507	.001	2.50700	-	.00008	.050	4			
7497089	2.507	.002	2.50692	-	.00012	.050	4			
7497090	2.507	.004	2.50680	-	.00016	.050	4			
7497092	2.507	.008 AND UP	2.50660	-	.00040	.050	4			
7497094	2.508	.001	2.50800	-	.00008	.050	4			
7497095	2.508	.002	2.50792	-	.00012	.050	4			
7497096	2.508	.004	2.50780	-	.00016	.050	4			
7497098	2.508	.008 AND UP	2.50760	-	.00040	.050	4			
7497100	2.509	.001	2.50900	-	.00008	.050	4			
7497101	2.509	.002	2.50892	-	.00012	.050	4			
7497102	2.509	.004	2.50880	-	.00016	.050	4			
7497104	2.509	.008 AND UP	2.50860	-	.00040	.050	4			
7497106	2.510	.001	2.51000	-	.00008	.050	4			
7497107	2.510	.002	2.50992	-	.00012	.050	4			
7497108	2.510	.004	2.50980	-	.00016	.050	4			
7497110	2.510	.008 AND UP	2.50960	-	.00040	.050	4			

MIL-STD-112A
8 December 1955

Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.

Copies of this standard for military use may be obtained as indicated in the foreword to the Index of Military Specifications and Standards.

Copies of this standard may be obtained for other than official use by individuals, firms, and contractors from the Superintendent of Documents, U.S. Government Printing Office, Washington 25, D.C.

Both the title and the identifying symbol number should be stipulated when requesting copies of military standards.

Custodians:

Army-Ordnance Corps
Navy-Bureau of Ordnance
Air Force

Other interests:

Army-CMEQSig
Navy-ShMDSYMCACG.