

INCH-POUND

MIL-STD-648B

1 April 1994

SUPERSEDING

MIL-STD-648A

5 July 1983

MILITARY STANDARD

DESIGN GUIDELINES FOR

SPECIALIZED SHIPPING CONTAINERS



AMSC N/A

AREA PACK

DISTRIBUTION STATEMENT A: Approved for public release; distribution unlimited.

MIL-STD-648B

FOREWORD

1. This military standard is approved for use by all Departments and Agencies of the Department of Defense.
2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Indian Head Division, Naval Surface Warfare Center, Code 8420, 101 Strauss Avenue, Indian Head, MD 20640-5035, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.
3. Copies of this standard may be obtained from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.
4. This standard establishes the general design guidelines and associated tests for specialized shipping containers used by the Department of Defense.
5. A specialized container is uniquely configured to support and protect its prescribed contents while being handled, stored, shipped to, and unpacked by the user; or to protect personnel and equipment from hazardous contents. Containers of this type frequently incorporate energy absorbing systems, temperature control systems, or special features to make handling or shipment possible, easier, or safer. Engineering drawings, or equivalent, are used to define form, fit, function, materials, tolerances, and manufacturing techniques.
6. A specialized shipping container is designed for use with a specific item when general container specifications (such as those listed in MIL-STD-794) are not sufficiently detailed to assure required protection, safety, reliability, maintainability, or configuration control. The need for a specialized container may arise with any deliverable item and invariably does so with nuclear and conventional ammunition and explosives. The container may be the result of a completely original design effort or of the modification of existing, or standard, container designs.

MIL-STD-648B**CONTENTS**

<u>PARAGRAPH</u>		<u>PAGE</u>
1.	SCOPE	1
1.1	Scope.	1
2.	APPLICABLE DOCUMENTS	2
2.1	Government documents.	2
2.1.1	Specifications, standards, and handbooks	2
2.1.2	Other Government documents, drawings, and publications	5
2.2	Non-Government publications	7
2.3	Order of precedence	8
3.	DEFINITIONS	9
3.1	General	9
3.1.1	Competent authority.	9
3.1.2	Connected replenishment-at-sea (CONREP)	9
3.1.3	Cracking pressure (relief valve)	9
3.1.4	Cushion (compressive) creep.	9
3.1.5	Energy absorbing devices	9
3.1.6	Faying surfaces	9
3.1.7	Fire retardant materials	9
3.1.8	Fragility levels	9
3.1.9	Intermediate bulk container (IBC).	9
3.1.10	Minimum flow rate (relief valve)	10
3.1.11	Noncombustible materials	10
3.1.12	Reseal pressure (relief valve)	10
3.1.13	Shock response spectrum (SRS)	10
3.1.14	Specialized shipping container	10
3.1.15	Standard parts and materials	10
3.1.16	Transmissibility	10
3.1.17	Unit load	10
3.1.18	Underway replenishment at sea (UNREP)	10
3.1.19	Vertical replenishment at sea (VERTREP)	10
4.	GENERAL REQUIREMENTS	11
4.1	General	11
4.1.1	Hazardous materials and devices	11
4.2	Interfaces	11
4.2.1	Contents	11
4.2.2	Handling equipment	11
4.2.3	Distribution network	11
4.2.4	Unit load compatibility	11
4.3	Configuration	11

MIL-STD-648B**CONTENTS**

<u>PARAGRAPH</u>		<u>PAGE</u>
4.4	Transportability requirements	11
4.4.1	Sensitive materials (transportation security)	12
4.4.2	Transfer-at-sea (UNREP)	12
4.5	Cube and weight	12
4.6	Materials and manufacturing methods	12
4.6.1	Cadmium-plated hardware	12
4.6.2	Dissimilar metals	12
4.6.3	Screw threads	12
4.6.4	Rubber and synthetic rubber parts	12
4.6.5	Standard parts and materials	12
4.6.6	Material stability	12
4.6.7	Internal packaging materials	13
4.6.7.1	Materials compatibility	13
4.6.7.2	Blocking and bracing materials	13
4.6.7.3	Cushioning materials	13
4.6.7.4	Resilient mounts	14
4.6.7.5	Dynamic characteristics	14
4.6.8	Interchangeability	14
4.6.9	Support fasteners and closure devices	14
4.6.10	Wood preservation	14
4.7	Fire resistance	14
4.8	Drainage	14
4.9	Records receptacle	15
4.10	Closure devices	15
4.11	Static electricity	15
4.12	Preservation	15
4.13	Clean-room operations	15
4.14	Security seal	16
4.15	Protection of contents against corrosion and water damage	16
4.15.1	General	16
4.15.2	Closed containers without auxiliary barriers	16
4.15.2.1	Ventilation	16
4.15.2.2	Drainage	16
4.15.3	Closed containers with auxiliary barriers	16
4.15.4	Integral-barrier containers	16
4.15.4.1	Structural	16
4.15.4.2	Leakage	17
4.15.4.3	Closures (except removable head drums)	17
4.15.4.4	Desiccant storage	17
4.15.4.5	Humidity indicator	17
4.15.4.6	Pressurizing fitting	17
4.15.4.7	Leakage indicator	18

MIL-STD-648B**CONTENTS**

<u>PARAGRAPH</u>		<u>PAGE</u>
4.15.4.8	Container accessories	18
4.15.4.9	Transparent window in auxiliary barrier	18
4.15.4.10	Special requirements for non-breathing integral-barrier containers	18
4.15.4.11	Special requirements for controlled-breathing integral-barrier containers	18
4.15.4.12	Special requirements for free-breathing containers	18
4.15.4.13	Observation window	19
4.15.4.13.1	Alternate observation window location	19
4.16	Stacking and stowing	19
4.16.1	General	19
4.16.2	Stacking stability	19
4.16.3	Stackability	19
4.16.4	Distributed load	20
4.16.5	Stacking strength	20
4.17	Handling	20
4.17.1	General	20
4.17.2	Lifting	20
4.17.2.1	Handle characteristics	20
4.17.3	Hoisting	21
4.17.3.1	Hoisting provisions	21
4.17.4	Tiedown	22
4.17.5	Skids	22
4.17.6	Forklift truck compatibility	23
4.17.6.1	Forklift truck opening	23
4.17.7	Shipboard handling	23
4.17.8	Handling provision maintainability	24
4.18	Special protection devices	24
4.18.1	Temperature control	24
4.18.2	Field-force protection	24
4.18.3	Magnetic shielding	24
4.19	Protecting and identifying the container	24
4.19.1	Painting requirements	25
4.19.2	Identification and instructional markings	25
4.19.2.1	Identification marking	25
4.19.2.2	Basic instructional markings	25
4.19.2.3	Color coding	25
4.19.3	Container markings	25
4.20	Nuclear, Biological, Chemical (NBC) survivability	25
5.	DETAILED REQUIREMENTS	27
5.1	Fit and compatibility	27
5.1.1	General	27
5.1.2	Fit test	27

MIL-STD-648B

CONTENTS

<u>PARAGRAPH</u>		<u>PAGE</u>
5.2	Mechanical shock	27
5.2.1	General	27
5.2.1.1	Acceptance criteria	27
5.2.1.2	Dummy loads	28
5.2.1.3	Instrumentation	28
5.2.1.4	Temperature combined with shock	28
5.2.2	Repetitive shock test	29
5.2.2.1	Repetitive shock test (stacked)	29
5.2.3	Drop test (free-fall)	29
5.2.4	Cornerwise-drop (rotational) test	29
5.2.5	Edgewise-drop (rotational) test	29
5.2.6	Tipover test	30
5.2.7	Impact test	30
5.2.7.1	Impact test (stacked)	30
5.2.8	Transfer-at-sea shock test	30
5.2.9	Shipboard shock test	30
5.2.9.1	Shipboard shock test (eligibility)	31
5.2.10	Safety drop test	31
5.2.11	Railcar shock test for nuclear weapon containers	31
5.3	Vibration	31
5.3.1	General	31
5.3.1.1	Acceptance criteria	32
5.3.2	Resonance survey and dwell test	32
5.3.3	Sinusoidal cycling test	33
5.3.4	Random vibration	33
5.4	Shock mount aging	33
5.4.1	Salt fog test	34
5.4.2	Ozone resistance test	34
5.4.3	Air-heat aging test	34
5.5	Structural integrity	34
5.5.1	General	34
5.5.2	Pressure test	34
5.5.2.1	Test pressures	34
5.6	Leakage integrity	34
5.6.1	General	34
5.6.2	Leak test	35
5.6.2.1	Test pressures	35
5.7	Superimposed load	35
5.7.1	General	35
5.7.2	Load test (like containers)	35
5.7.3	Load test (unlike containers)	35
5.8	Hoisting fitting and tiedown attachment points	36

MIL-STD-648B**CONTENTS**

<u>PARAGRAPH</u>	<u>PAGE</u>
5.8.1 General	36
5.8.2 Acceptance criteria	36
5.8.3 Hoisting fittings strength test	36
5.8.4 Tiedown strength test	36
5.8.5 Single hoisting fitting strength test	36
5.9 Forklift truck (fully captive fork tine enclosures) compatibility test	37
5.9.1 Forklift truck (non-captive lift) compatibility test	37
5.10 Handlift truck MK 45 compatibility.	37
5.10.1 General	37
5.10.2 Static overload	37
5.10.3 Shock test	37
5.10.4 Rolling test	37
5.11 Fire test, external source	38
5.12 Measurement of magnetic fields	38
5.13 Sympathetic detonation	38
5.14 Testing sequences	38
5.14.1 Army Containers	38
5.14.2 Air Force Containers	38
6. NOTES	43
6.1 Intended use	43
6.2 Subject term (key word) listing	43
6.3 Changes from previous issue	43
TABLE I. Expected temperature extremes	29
TABLE II. Shock test for containers-at-sea	31
TABLE III. Test syllabus for reaction type test machine	33
FIGURE 1. Test sequence for containers under 150 pounds and issued to ground troops	39
FIGURE 2. Test sequence for containers 150 pounds or more and issued to ground troops	40
FIGURE 3. Air Force test sequence for containers under 150 pounds	41
FIGURE 4. Air Force test sequence for containers over 150 pounds	42
INDEX	44
CONCLUDING MATERIAL	49

**** BLANK PAGE -- viii ****

MIL-STD-648B

1. SCOPE

1.1 Scope. This standard establishes general design guidelines and associated tests for specialized shipping containers used by the Department of Defense. Definitive requirements for specific containers will be defined by the individual specification, acquisition or task order. This standard is intended to be used as the basic reference document in all specifications and standards prescribing performance requirements to be applied to a shipping container. Compliance with this intent is expected through normal application of the specification or standard preparation and revision processes.

MIL-STD-648B**2. APPLICABLE DOCUMENTS****2.1 Government documents.**

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS**FEDERAL**

TT-W-571	Wood Preservation, Treating Practices
TT-W-572	Wood Preservation, Water-Repellent
PPP-C-1752	Cushioning Material, Packaging, Polyethylene Foam

MILITARY

MIL-P-116	Preservation, Methods of
MIL-S-901	Shock Tests, (High Impact) Shipboard Machinery, Equipment and System, Requirements for
MIL-D-3464	Desiccant, Activated, Bagged, Packaging Use and Static Dehumidification
MIL-D-3716	Desiccants, Activated for Dynamic Dehumidification
MIL-S-4473	Shielding of Magnetron Tubes and Magnets for Air Shipment
MIL-D-6054	Drum, Metal, Shipping and Storage
MIL-D-6055	Drum, Metal, Reusable, Shipping and Storage (Cap. 88 to 510 Cubic Inches)
MIL-R-6855	Rubber, Synthetic, Sheets, Strips, Molded or Extruded Shapes, General Specification for
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series, General Specification for
MIL-S-8879	Screw Threads, Controlled Radius Root With Increased Minor Diameter, General Specification for

MIL-STD-648B

MIL-D-16886	Dehumidifier, Dry Desiccant Type, Automatic, Continuous Dry
MIL-I-26860	Indicator, Humidity, Plug, Color Change
MIL-V-27166	Valve, Pressure Equalizing, Gaseous Products
MIL-C-53072	Chemical Agent Resistant Coating (CARC) System Application Procedures and Quality Control Inspection
MIL-W-71125	Wood Preservatives: Waterborne or Water Reducible
MIL-I-81508	Indicator Plug, for Missile Propellants
MIL-B-81705	Barrier Materials, Flexible, Electrostatic-Free, Heat Sealable
MIL-S-81733	Sealing and Coating Compound, Corrosive Inhibitive

STANDARDS**FEDERAL**

FED-STD-101	Test Procedures for Packaging Materials
FED-STD-209	Clean Room and Work Station Requirements, Controlled Environment
FED-STD-H28	Screw Thread Standards for Federal Services

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-171	Finishing of Metal and Wood Surfaces
MIL-STD-209	Slings and Tiedown Provisions for Lifting and Tying Down Military Equipment
MIL-STD-444	Nomenclature and Definitions in the Ammunition Area
MIL-STD-709	Ammunition Color Coding
MIL-STD-731	Quality of Wood Members for Containers and Pallets

MIL-STD-648B

MIL-STD-808	Finish, Protective and Codes for Finishing Schemes for Ground and Ground Support Equipment
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-814	Requirement for Tiedown, Suspension and Extraction Provisions on Military Materiel for Airdrop
MIL-STD-889	Dissimilar Metals
MIL-STD-913	Requirement for the Certification of Externally Transported Military Equipment by Department of Defense Rotary Wing Aircraft
MIL-STD-962	Military Standards, Handbooks, and Bulletins, Preparation of
MIL-STD-970	Standards and Specifications, Order of Preference for the Selection of
MIL-STD-973	Configuration Management
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods
MIL-STD-1246	Product Cleanliness Levels and Contamination Control Program
MIL-STD-1366	Transportability Criteria
MIL-STD-1367	Packaging, Handling, Storage, and Transportability Program Requirements For Systems and Equipment
MIL-STD-1660	Design Criteria for Ammunition Unit Loads
MIL-STD-1791	Designing for Internal Aerial Delivery in Fixed Wing Aircraft
MIL-STD-1904	Design and Test Requirements for Level A Ammunition Packaging
MIL-STD-2073	Parts and Equipment, Procedures for Packaging of

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from: Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

MIL-STD-648B

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this standard to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS**NAVAL SEA SYSTEMS COMMAND (NAVSEA) (CAGE Code 10001)**

2642780	Container Compatibility with Handlift Trucks Mark 42 and Mark 45
2602910	Leak Disk Indicator
6212876	Container Handling Beam Mark 52 MOD 0

(Application for copies should be addressed to: Commanding Officer, Naval Ordnance Station, Crane Division, Naval Surface Warfare Center, Attn: Code 802, Louisville, KY 40214-5001.)

NAVAL AIR SYSTEMS COMMAND (NAVAIR) (CAGE Code 30003)

616856	Weapon Cradle Hoisting Beam HLU-216/E
616856-3	Weapon Cradle Hoisting Beam HLU-216A/E
2877628	Disk Indicator

(Application for copies should be addressed to: Commanding Officer, Naval Air Technical Services Facility, Code 3121, 700 Robbins Avenue, Philadelphia, PA 19111-5000.)

UNITED STATES ARMY (CAGE Code 97403)

13222E3855	Disk Indicator
------------	----------------

(Application for copies should be addressed to: Commander, U.S. Army Belvoir Research, Development, and Engineering Center, Attn: STRBE-TSE, Fort Belvoir, VA 22060-5606.)

PUBLICATIONS**FEDERAL**

Public Law 91-596	Occupational Safety and Health Act (OSHA)
-------------------	---

Executive Order 12191	Occupational Safety and Health Act for Federal Employees
-----------------------	--

(Copies of 49 CFR 100-180, Public Law 91-596 and Executive Order 12191 are available from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402-0001.)

MIL-STD-648B

U.S. DEPARTMENT OF DEFENSE (DOD)

**DOD 5100.76-M Physical Security of Sensitive Conventional Arms, Ammunition,
and Explosives**

(Application for copies should be addressed to: Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

(The following publication is jointly issued for the Department of Defense. Each service refers to the document using its unique numbering system. The numbers listed are for Air Force, Army, Navy, Marine Corps, and Defense Supply Agency.)

AFR 80-18 (Air Force Regulation);	DOD Engineering for Transportability
AR 70-44; OPNAVINST 4600.22;	
MCO 4610.14B (Marine Corps	
Order); DSAR 4500.25	

(Copies of the above publications are available from: Commanding Officer, Naval Publications and Forms Center, Attn: 1053, 5801 Tabor Avenue, Philadelphia, PA 19120-5094.)

(The following publication is jointly issued for the Department of Defense. Each service refers to the document using its unique numbering system. The numbers listed are for Air Force, Army, Navy Supply Systems Command, Marine Corps, and Defense Logistics Agency.)

AFMCR 800-29; AMC-R 700-103;	Policies and Procedures for Hazardous
NAVSUPINST 4030.50;	Materials Package Certification
MCO 4030.39; DLAR 4145.37	

(Copies of the above publication is available from: Commander, Naval Supply Systems Command, Attn: SUP 083, Washington, DC 20376-5000.)

AR 70-71	Nuclear, Biological, Chemical (NBC) Contamination Survivability of Army Materiel
----------	---

(Army application for publication copies should be addressed to: Army Publication Distribution Center, 2800 Eastern Boulevard, Baltimore, MD 21220-2896.)

(Navy application for copies should be addressed to: Commanding Officer, Naval Publications and Forms Center, Attn: 1053, 5801 Tabor Avenue, Philadelphia, PA 19120-5094.)

(Air Force application for publication copies should be addressed to: Army Publication Distribution Center, 2800 Eastern Boulevard, Baltimore, MD 21220-2896.)

MIL-STD-648B

TOP 8-2-111

Nuclear, Biological, Chemical (NBC) Contamination
Survivability of Small Items of Equipment

(Application for copies should be addressed to: Director, Defense Technical Information Center,
Attn: DDR, Cameron Station, Alexandria, VA 22304-6145.)

U.S. DEPARTMENT OF TRANSPORTATION (DOT)

Code of Federal Regulations

49 CFR 100-180 Transportation

(Applications for copies should be addressed to the Superintendent of Documents, US
Government Printing Office, Washington, DC 20402-0001.)

U.S. DEPARTMENT OF COMMERCE (COM)

Environmental Protection Agency (EPA)

40 CFR 261.24 Protection of Environment

(Applications for copies should be addressed to the Office of Solid Waste, 401 M St. SW,
Washington, DC 20460.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI MH10.1M Unit Load and Transport Package Sizes

(Application for copies should be addressed to the American National Standards Institute, 1430
Broadway, New York, NY 10018-1187.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B633 Standard Specification for Electrodeposited Coatings of Zinc on
Iron and Steel

ASTM D257 Standard Test Methods for D-C Resistance or Conductance of
Insulating Materials (DOD adopted)

MIL-STD-648B

ASTM D573	Standard Test Method for Rubber - Deterioration in an Air Oven (DOD adopted)
ASTM D991	Standard Test Method for Rubber Property - Volume Resistivity of Electrically Conductive and Antistatic Products (DOD adopted)
ASTM D996	Standard Terminology of Packaging and Distribution Environments
ASTM D1149	Standard Test Method for Rubber Deterioration - Surface Ozone Cracking in a Chamber (DOD adopted)
ASTM D2000	Standard Classification System for Rubber Products in Automotive Applications (DOD adopted)

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race street, Philadelphia, PA 19103-1187.)

ELECTRONIC INDUSTRIES ASSOCIATION (EIA)

EIA-541	Packaging Material Standards for EDS Sensitive Items
---------	--

(Application for copies should be addressed to the Electronics Industries Association, 2001 Eye Street, NW, Washington, DC 20006.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

MIL-STD-648B**3. DEFINITIONS**

3.1 General. The terms used throughout this standard, and their interpretation, shall be in accordance with the following definitions. Packaging terms are in accordance with ASTM D996. Hazardous materials are defined in the Code of Federal Regulations, 49 CFR 100-180, Transportation. Terms in the ammunition area are in accordance with MIL-STD-444.

3.1.1 Competent authority. The legal responsible agency or authority of the State (country) tasked with the implementation and enforcement of hazardous material packaging requirements as mandated by the International Regulatory Body (Department of Transportation (DOT) for the U.S.).

3.1.2 Connected replenishment-at-sea (CONREP). CONREP is the transfer of material from ship-to-ship at sea by cable transfer system.

3.1.3 Cracking pressure (relief valve). The pressure(s) at which the container's relief valve first opens when subjected to a pressure differential, either pressure or vacuum.

3.1.4 Cushion (compressive) creep. A permanent loss of some percentage of thickness when placed under a constant load over a period of time.

3.1.5 Energy absorbing devices. For the purpose of this specification, energy absorbing devices are defined as container components employed to provide shock and/or vibration isolation. They may be composed of elastomers bonded to metal parts (commonly referred to as elastomeric shear mounts, shock mounts, resilient mounts or sandwich mounts) cushioning (open or closed cell plastic foams), spring assemblies (usually helical), torsion bars, cable isolators (utilizing wire rope) or single use energy dissipators.

3.1.6 Faying surfaces. Surfaces which are in contact with one another, but are not continuously joined together so as to prevent water intrusion between the two surfaces.

3.1.7 Fire retardant materials. Materials that do not ignite readily or propagate flames under small to moderate fire exposures. While these materials are combustible, their fire retardant nature tends to reduce the intensity and spread of fire, smoke and toxic products of combustion.

3.1.8 Fragility levels. Fragility levels, or damage boundaries, are the limits below which damage or malfunction of the packaged item will not occur. They may be expressed by parameters such as maximum allowable shock response spectrum peak acceleration, pulse shape, and pulse duration, velocity change, bending moments, axial loads, shear loads, and surface pressure. An accurate determination of the fragility level is necessary for the design of an efficient, economical container. Whenever possible fragility levels, or the damage boundary, of the item to be packaged should be determined by test.

3.1.9 Intermediate bulk container (IBC). IBCs are rigid, semi-rigid or flexible portable packagings that have a capacity of not more than 35.3 cubic feet are designed for mechanical handling and are resistant to the stresses produced in handling and transport, as determined by tests.

MIL-STD-648B

3.1.10 Minimum flow rate (relief valve). The minimum rate of flow (expressed in standard cubic feet per minute) required to allow a sufficient exchange of air through the relief valve in order to prevent damage to the container during handling, transportation and storage (see MIL-V-27166 for calculation method).

3.1.11 Noncombustible materials. Materials known to be inherently nonflammable such as steel and aluminum.

3.1.12 Reseal pressure (relief valve). The pressure(s) at which the container's relief valve reseals after being open.

3.1.13 Shock response spectrum (SRS). A plot of the peak responses of a large number of Single-Degree-of-Freedom systems, of differing natural frequencies, to a specific input transient. It gives an indication of the maximum dynamic loads various parts of equipment will experience, as a function of their natural frequency. Damping is almost always employed in the SRS calculations to avoid unreasonably high SRS peak responses. A comparison of the packaged item's allowable shock spectra to the test SRS is often used to determine relative damage potential.

3.1.14 Specialized shipping container. Specialized shipping containers are generally the long-life variety and are uniquely configured to support and protect a specific item, or limited variety of items, during handling, storage, forward and return shipment, unpackaging by the user, or to protect personnel and equipment from hazardous contents. Containers of this type frequently incorporate energy absorbing systems, temperature control systems, or special features to make handling or shipment possible, easier or safer. Engineering drawings, or equivalent, are used to define form, fit, function, materials, tolerances and manufacturing techniques. Specialized shipping containers, internal fixtures and other fitments result from original design efforts or the redesign or modification of an existing container to meet a specific application or need.

3.1.15 Standard parts and materials. Standard parts and materials are those parts or materials identified or described by military or federal specifications or standards, or an industry standard formally adopted by DOD for general applications. Standard parts and materials shall be used to the fullest extent possible.

3.1.16 Transmissibility. The ratio of response vibration magnitude to input vibration magnitude.

$$TR = \frac{\text{Response vibration magnitude}}{\text{Input vibration magnitude}}$$

3.1.17 Unit load. An assemblage of specialized shipping containers arranged and secured to permit easy handling as a single entity by common handling equipment. A unit load can also consist of a single large container or cradle. Materials handling pallets may or may not be used.

3.1.18 Underway replenishment at sea (UNREP). Either CONREP, vertical replenishment at sea (VERTREP) or a combination of the two.

3.1.19 Vertical replenishment at sea (VERTREP). The transfer of material from ship-to-ship at sea by helicopter.

MIL-STD-648B**4. GENERAL REQUIREMENTS**

4.1 General. Specialized shipping containers shall be designed to be consistent with the maintenance concept, with the planned distribution logistics of the contents, and to provide reliable protection at lowest life cycle cost to the contents.

4.1.1 Hazardous materials and devices. Containers designed for domestic and international shipment and storage of hazardous materials shall be designed to comply with the Performance Oriented Packaging (POP) requirements of both the Department of Transportation (DOT) Regulations, 49 CFR governing the transport of hazardous materials and service design requirements as specified herein. Container designs which exceed the weight limitations of 49 CFR or differ from the type of container prescribed by 49 CFR shall be certified as equivalent in accordance with NAVSUPINST 4030.50 (AFMCR 800-29, AMC-R 700-103, MCO 4030.39, DLAR 4145.37). Container designs which differ from the packaging type specified under DOT regulations can be used provided they are proved equivalent by testing and are acceptable to the competent authority.

4.2 Interfaces. Containers shall be designed to satisfy the following interfaces as a minimum.

4.2.1 Contents. The container shall be designed to be compatible with and protect the contents when subjected to tests prescribed herein.

4.2.2 Handling equipment. The container shall be designed to be compatible with designated handling equipment used throughout the logistic system including that used to pack and unpack the container.

4.2.3 Distribution network. The container, insofar as possible, shall be designed to move without restriction, special routing, or special escort throughout the material distribution system used by the Department of Defense. Details of the container design shall comply with the criteria established as part of the logistic analysis required by the Packaging, Handling, Storage, and Transportation (PHST) Program requirements of MIL-STD-1367 whenever that standard is invoked.

4.2.4 Unit load compatibility. Specialized shipping container designs which are to be formed into unit loads as a part of the logistic distribution plan shall have features which permit ready assembly into such unit loads. Appropriate tests shall be conducted, using the unit load configuration, to validate the integrity and suitability of the design features provided to the container. Requirements for unit loads of ammunition shall be as specified in MIL-STD-1660.

4.3 Configuration. Configuration management practices shall be consistent with the invoked requirements of MIL-STD-973, MIL-STD-962 or MIL-STD-1367.

4.4 Transportability requirements. Specialized shipping container designs shall reflect consideration of techniques for truck, rail, air and ship loading to ensure that applicable Department of Transportation requirements are met, and that transportation costs are minimized consistent with safety considerations and container integrity (see MIL-STD-1366). Where military airlift is anticipated containers used as unit loads shall conform to the general design and performance requirements of MIL-STD-1791. For dimensional constraints and weight requirements see MIL-STD-1366. For the definition of a transportability problem and reporting requirements, see Joint

MIL-STD-648B

Regulation AR 70-44, (DOD Engineering for Transportability), OPNAVINST 4600.22A, AFR 80-18, MCO 4610.14B, and DSAR 4500.25.

4.4.1 Sensitive materials (transportation security). Containers shall be designed to be compatible with the requirements of DOD 5100.76-M when the container contents are "sensitive" as defined therein.

4.4.2 Transfer-at-sea (UNREP). Containers and container unit loads intended to be transferred-at-sea either by CONREP or VERTREP shall be designed to withstand the shocks of 5.2.8.

4.5 Cube and weight. Containers shall be designed for smallest cube and lightest weight consistent with protection of contents, durability, intended use, economy, safety, and ANSI MH 10.1M.

4.6 Materials and manufacturing methods. Standard commercially available materials and manufacturing processes shall be the first preference whenever feasible. However, the application of technological advancements in materials and processes is always encouraged where superior performance characteristics and economical considerations justify it. Paints, preservative treatments, coatings, additives, and so forth, shall meet or exceed the safety standards established by the Environmental Protection Agency (EPA) 40 CFR 261.24 and Occupational Safety and Health Act (OSHA) Public Law 91-596 and Executive Order 12191.

4.6.1 Cadmium-plated hardware. Cadmium plating any part developed under this standard is discouraged. Cadmium plated standard parts such as small hardware items (such as nuts and bolts), may be used until current supplies are exhausted. It is recommended that zinc plating per ASTM B633 be utilized as an alternative.

4.6.2 Dissimilar metals. Dissimilar metal combinations defined in MIL-STD-889 shall be avoided. When unavoidable, appropriate surface treatments and coatings in accordance with MIL-STD-808, and if necessary, intervening material in accordance with MIL-STD-171 shall be used.

4.6.3 Screw threads. Screw threads shall comply with FED-STD-H28 and all supplements thereto, or be in accordance with either MIL-S-8879 or MIL-S-7742.

4.6.4 Rubber and synthetic rubber parts. All rubber and synthetic rubber parts of shock mounts shall be cure dated in addition to any other required marking. Cure date must be visible when elastomeric part is installed. If it is not, the cure date shall be stamped on the top surface of the elastomer with white waterproof ink.

4.6.5 Standard parts and materials. Standard parts and materials shall be used unless they are technically or economically impractical. Standard parts and materials shall be chosen in accordance with the procedures established in MIL-STD-970.

4.6.6 Material stability. All material used shall be stable after prolonged exposure to extremes of temperature and humidity which may be reasonably encountered during the expected logistic cycle.

MIL-STD-648B

In this sense, stability shall be considered after return to room conditions and shall be construed as freedom from the following defects:

- a. Change of state of the material, (such as crystallization, hydrolytic conversion, and so forth).
- b. Permanent deformation which adversely affects serviceability under normal static load pertinent to the manner in which the material is used, (such as sagging or irreversible creep).
- c. Significant changes in physical properties, (such as degradation in modulus of elasticity).

4.6.7 Internal packaging materials.

4.6.7.1 Materials compatibility. Internal packaging materials shall not adversely affect the contents because of incompatibility of chemical and hygroscopic properties. Where packaging materials are placed in direct contact with the contents, the design shall provide adequate protection to the contact surface(s) of the contents.

4.6.7.2 Blocking and bracing materials. For those unique specialized shipping containers whose logistics requires internal wooden blocking and bracing, design guidance is specified in MIL-STD-1186. All wood used in Naval applications should be treated with fire retardant chemicals.

4.6.7.3 Cushioning materials. Wherever practical, materials conforming to Government specifications or Government-adopted industry specifications shall be used in preference over those conforming to other industry specifications. Unless justified, materials conforming solely to manufacturers specifications shall be avoided. In selecting a cushioning material for a specific application, consideration shall be given to the following:

- a. Cushion assemblies in reusable containers should be suitably located in, or attached to, the interior of the containers so that cushioning is applied at the intended areas. The attachment should not be so permanent as to prevent replacement of the cushion.
- b. Where molded shapes are used, surfaces having a skin should be in contact with the packaged article if material compatibility exists and if consistent with other objectives of the cushion.
- c. Cushion (compressive) creep should be consistent with the life or maintenance cycle of the container.
- d. The cushion's ability to absorb and retain moisture should be considered in the event that the container's logistic cycle dictates use in cold environments where any retained moisture will freeze and stiffen the cushion system. Closed cell foam systems should be used whenever possible.

MIL-STD-648B

- e. When the container's contents are susceptible to damage by electrostatic discharge, the cushioning material shall include an anti-static additive and shall conform to the electrostatic decay time and resistivity requirements of PPP-C-1752, except that testing per ASTM D257, ASTM D991 or Method 4046 of FED-STD-101 may be used in lieu of EIA 541. For foam densities not available with anti-static additives, anti-static coatings shall be included which meet or exceed the same tests. Closer attention to maintenance procedures is required when anti-static coatings are utilized.

4.6.7.4 Resilient mounts. Resilient mounts shall be designed to meet the shock and vibration requirements of 5.2 and 5.3, respectively, of this standard. The resilient materials shall be resistant to aging and deterioration and shall be capable of meeting all performance requirements following exposure to the tests of 5.4.

4.6.7.5 Dynamic characteristics. Materials for use in shock or vibration attenuation systems shall protect the contents to fragility levels established by the designer of the contents; preferably by actual fragility assessment testing. The required tests of section 5 of this standard shall be the criteria by which this requirement is satisfied.

4.6.8 Interchangeability. All parts having the same part number shall be directly and completely interchangeable with respect to installation and performance.

4.6.9 Support fasteners and closure devices. All support fasteners and closure devices shall have mechanical provisions to prevent loosening, such as self-locking nuts, safety wiring, or other suitable devices.

4.6.10 Wood preservation. Generally, a protective finish need not be applied to wood containers (boxes/crates) pallets or finished wood products, however, the wood members must be impregnated with a preservative suitable to prevent deterioration in accordance with T-W-571, TT-W-572, MIL-W-71125 or another nonhazardous preservative. If a protective finish is required, the finish shall meet the paint requirements of 4.19.1.

4.7 Fire resistance. Containers intended for use aboard Naval ships shall utilize packaging materials that are either noncombustible or fire retardant and meet the requirements of 5.11.

4.8 Drainage. To the maximum extent practical, free drainage shall be provided in the normal storage position, (for example, all pockets on the exterior of containers shall have provisions for drainage). Where containers are of such size that water cannot be conveniently poured out of the lower shell, drain plugs may be included in the design at locations where water is apt to collect. The drain plugs are not a requirement of all containers, they are only necessary when unique elements of the container's logistics cycle dictate their use. When drain plugs are employed either in sealed or controlled breathing containers, they shall maintain a seal integrity equal to or greater than the overall containers allowable leakage pressure rating. All containers shall have all faying surfaces and discontinuous welds filled with a sealing compound conforming to MIL-S-81733, in areas where water intrusion may result in damage to the container.

MIL-STD-648B

4.9 Records receptacle. When the container's contents are to be accompanied by pertinent records (such as logbooks and so forth), a suitably-sized externally accessible watertight record receptacle shall be provided. If permitted by the logistics associated with the container's contents, the receptacle may be located within, and protected by, the interior of a sealed or controlled-breathing container. Otherwise, the receptacle shall be a separate enclosure, and if additional protection is required for the records, it shall provide an environment controlled to specified limits.

4.10 Closure devices. Latches or other closure fasteners shall permit rapid packing and unpacking without the use of tools other than standard issue (such as screwdriver or wrench). All such fasteners shall be captive to the container and shall be either recessed or provided with a protective guard. The requirement for rapid packing may be waived for those containers which will not be opened frequently for maintenance or inspection and which contain materials not likely to be urgently needed. When elements of the container's logistics cycle dictate, the rapid packing and unpacking shall be accomplished while wearing arctic gloves.

4.11 Static electricity. The effect of static electricity on the contents of the container and the environment in which it will be unloaded shall be considered in the design of the container. In those instances where a potential hazard exists, the design shall prevent buildup of a static charge or provide a conducting path to ground by one or more of the following practices:

- a. Firm metal-to-metal contact shall be used to provide an acceptable ground.
- b. Items suspended in a shock-mounted cradle shall be grounded to the container structure. If the container structure is nonmetallic, a clearly identified metallic external grounding connection shall be provided. The maximum resistance of the ground path is dependent on the acceptable limits of the container's contents. If no maximum resistance is known, then the maximum resistance of the ground path shall be one ohm.
- c. Flexible barriers shall discharge to ground (a grounding connection to structure shall be provided) in 2 seconds when tested in accordance with MIL-B-81705. Only conductive flexible barriers shall be used for explosives or materials which generate flammable vapors or for devices which are sensitive to static electricity.
- d. Plastic material in contact with the contents shall be conductive or shall be surface treated to reduce static charge buildup.

4.12 Preservation. Containers shall be designed to be compatible with methods of preservation selected for the contents.

4.13 Clean-room operations. The container system shall be designed to be compatible with clean-room operations and maintain required component cleanliness during shipment and storage, whenever such requirements exist. Clean-room criteria shall be as defined in FED-STD-209 and MIL-STD-1246.

MIL-STD-648B

4.14 Security seal. The container shall be designed to enable detection of unauthorized entry.

4.15 Protection of contents against corrosion and water damage.

4.15.1 General. The nature of the contents and the expected logistic pattern determine the type of container and its closure and sealing requirements. Design criteria for the various classes of container sealing are provided in 4.15.2 through 4.15.4.

4.15.2 Closed containers without auxiliary barriers. These are conventional boxes or crates which are both unit containers and shipping containers; but the class also includes ventilated metal shipping containers. Larger containers, and containers with contents which fill the enclosed volume only partially, should incorporate provisions for ventilation and drainage as follows:

4.15.2.1 Ventilation. Ventilators shall be placed in the ends of containers but in such fashion as not to interfere with primary structural members. Louvered metal ventilators, slotted ventilators, or drilled hole ventilators shall be screened on the inside with 1/16 inch or smaller galvanized or aluminum wire cloth. Slotted ventilators (without external louvers) and drilled hole ventilators shall also be furnished with an interior baffle structure designed to trap driving rain, draining to the outside. Except for lumber sheathed crates, total surface area of ventilating openings shall be not less than 0.15 square inch per cubic foot of container volume. Maximum size of any one slot in a ventilator shall be 4 × 12 inches. For lumber sheathed crates, drilled hole ventilators, with each hole drilled upward as viewed from the outside on a 45° angle, may be used. Holes shall be 3/4 inch in diameter. The number of holes shall be not less than one hole per 20 cubic feet of the container volume. Holes may be clustered in each end or may be uniformly spaced about the periphery of the crate.

4.15.2.2 Drainage. Each low point in the container shall be furnished with a drain hole so located as to freely drain all water which might collect in the affected area. For flat bottomed containers one drain hole shall be provided in each corner of a potential water trap in the base. Satisfaction of this requirement can also be achieved by spacing lumber floor board members approximately 3/8 inch apart and cover with screen as specified in paragraph 4.15.2.1.

4.15.3 Closed containers with auxiliary barriers. Design features of these containers are essentially the same as those previously described (see 4.15.2) except that provision is incorporated for use of an auxiliary water vapor barrier of sufficiently low water vapor transmission rate (and desiccant contained therein) to provide Method II preservation as defined in MIL-P-116.

4.15.4 Integral-barrier containers. Containers of this class use the container walls to form the protective barrier. The controlled breathing type of integral barrier container is most commonly specified or chosen. One of the other two types; non-breathing or free breathing may be specified or justified based on size considerations, the expected logistics flow, or cost-effectiveness. The following features shall be provided in all integral barrier containers.

4.15.4.1 Structural. Integral-barrier containers shall be designed to meet the pressure requirements of 5.5.

MIL-STD-648B

4.15.4.2 Leakage. Integral-barrier containers shall be sufficiently leakproof to meet the requirements of 5.6.

4.15.4.3 Closures (except removable head drums). Mating surfaces shall be resistant to mechanical damage and prevent gasket overloading. Assembly guides shall be provided when appropriate to assure alignment of mating surfaces and to prevent shear action on gasket surfaces. The removable cover shall be designed such that the gasket sealing surface is protected from mechanical damage while the cover is apart from the base during container loading/unloading operations. Preformed gaskets or seals that can be readily replaced and which are retained in place by the structure shall be used. Gaskets shall conform to MIL-R-6855 or ASTM D2000, unless otherwise specified, and be of the class and grade required to be compatible with any content, service liquid lubricants, or liquid fuels shipped therewith. Molded one-piece gaskets are preferred but joints may be cemented or joined by vulcanizing, provided the joints are the same dimensions as any other place on the gasket and that all minimum tensile strength characteristics specified by the container specification are met. If no minimum is specified, a value of 40 percent shall be used. Nominal gasket compression shall be 15 to 25 percent unless specifically designed otherwise, and sufficient to meet the pressure and/or leakage requirements of 4.15.4.1 or 4.15.4.2, respectively.

4.15.4.4 Desiccant storage. Where applicable, a refillable enclosure shall be provided for bagged desiccant conforming to MIL-D-3464. The size of the enclosure shall be such that a sufficient volume exists to contain the proper quantity of desiccant required in accordance with MIL-P-116. Air enclosed in the container shall have free access to the desiccant bed. When the container's logistics dictate that the desiccant be easily removable/refillable without removing the container's cover, a desiccant port shall be supplied. The port shall have a minimum opening dimension of 3.5 inches (diameter). The port shall be positioned such that all spent desiccant bags from the enclosure may be removed through the port and subsequently refilled through the same port. When allowed by the container design, the desiccant shall not be located in the container as to come into direct contact with any accumulation of condensate (for example, on the container's walls). The desiccant port cover shall be capable of being removed and replaced by hand without the use of tools.

4.15.4.5 Humidity indicator. A humidity indicator, conforming to MIL-I-26860 or as specified by the design activity, shall be provided in all dehumidified packages. The inside of the container shall be configured to provide free access of the enclosed air to the indicator. Electrical humidity-indicating devices may be used, provided the logistic flow indicates prolonged storage in one place. The content's sensitivity to moisture shall dictate the percentage of relative humidity which is to be sensed for each specific design. If required, the humidity indicator shall be designed such that the indicator card may be replaced without removing the cover of the container. The humidity indicator shall be located apart from the desiccant storage area while remaining on the same end of the container, unless otherwise dictated by the container's maintenance logistics.

4.15.4.6 Pressurizing fitting. When required for pressure or leak testing, each container shall be provided with a 1/8-inch NPT boss for convenient installation of a pressurizing fitting. The threaded boss shall be closed with a 1/8-inch pipe plug. As an option, each container shall be provided with a standard size tire valve. The tire valve shall be corrosion resistant. When the container's logistics permit, the container's pressure equalizing valve may be removed and the resulting port be used for the installation of a pressurizing fitting of a corresponding size.

MIL-STD-648B

4.15.4.7 Leakage indicator. When the packaged items contain toxic or flammable liquids or gasses, (for example, Class A or B poisons) externally visible indicators shall be located at both ends of the shipping container to detect leakage of the packaged item into the shipping container. For mixed amine fuels and for fuming nitric acid, the indicator shall conform to MIL-I-81508. For Fuel Air Explosive Bombs containing either ethylene oxide or propylene oxide the indicator shall conform to NAVSEA Drawing 2602910, NAVAIR Drawing 2877628, or Army Drawing 13222E3855.

4.15.4.8 Container accessories. Valves (except drain valves), humidity indicators, record receptacles, pressure fittings, desiccant ports, leakage indicators, umbilical connectors and so forth, that are subject to routine inspection shall be grouped in one end of the container, unless the size of the container would warrant placement of an accessory item in more than one location or unless the logistics of the component dictate another location (for example, observation windows require either one on each end or one on each side). All container accessories (such as desiccant pot, records receptacle) possessing removable covers shall have them captive to the container by lanyards or other suitable means.

4.15.4.9 Transparent window in auxiliary barrier. Where a transparent window is used in the auxiliary barrier to permit viewing an internal indicator, either a corresponding opening with a readily-openable cover or an observation window shall be provided in the container.

4.15.4.10 Special requirements for non-breathing integral-barrier containers. Except for smaller sizes of standard drums (15 gallons or less) conforming to MIL-D-6054 or MIL-D-6055, a simple, manually-operated bleeder valve to equalize pressure before opening shall be provided.

4.15.4.11 Special requirements for controlled-breathing integral-barrier containers. Unless otherwise specified, each container shall be provided with a pressure and a vacuum relief valve in conformance with MIL-V-27166. A simple, manually-operated bleeder valve shall also be provided to equalize pressure before opening the container. This valve may be integral with any required automatic relief valve. Container designs shall be based upon the design and testing requirements of 5.5.2.1 and 5.6.2.1 unless superseded by the operational logistics requirements of the container and its contents.

4.15.4.12 Special requirements for free-breathing containers. Free breathing should be considered only for very large structures where pressure tightness, on the order of one pound per square inch gage (psig), is not a practical design solution. A refillable desiccant breather unit with each container shall be provided. The breather unit shall have the following general characteristics:

- a. The breather shall be designed to accommodate one ounce of Type I, Grade H, MIL-D-3716, desiccant per cubic foot of empty container volume.
- b. A sight glass on the container side of the desiccant bed shall be provided to determine bed exhaustion.
- c. End filters and plenum chambers to assure air flow distribution over the full face of the bed shall be provided. Filter characteristics shall be determined by cleanliness requirements of internal voids and desiccant particle size.

MIL-STD-648B

- d. Spring loaded devices, or their equivalent, shall be provided to prevent development of voids in the breather charge resulting from packing or reduction of charge particle size.
- e. Openings to ambient environment shall face downward and shall have a length-to-diameter ratio of at least 10 to 1.
- f. Minimum flow rate through breather shall be 6 percent of container volume-per-minute at design pressure.
- g. Provisions for a charge of MIL-D-3464 desiccant shall be provided to assist in initial drawdown and to compensate for sudden weather changes. The size of the charge shall be in accordance with the rigid barrier formula of MIL-P-116.

4.15.4.13 Observation window. When the container or contents' logistics so require, observation windows shall be placed in each end or each side of the container such that an unbroken light path will indicate that the container is void of its intended contents.

4.15.4.13.1 Alternate observation window location. When necessary, the location of the observation windows shall be so that both are located on the same surface, six to 24 inches apart.

4.16 Stacking and stowing.

4.16.1 General. Containers shall be capable of being stacked in warehouses or magazines and stowed in ships for prolonged periods. Open storage capability is required for all troop issue containers, for all containers which will be transferred at sea, and in other cases as specified by the design agency. For items requiring insensitive munitions protection, consideration should be given to designing the stacking features such that containers can be stacked forward to forward or forward to aft, interchangeably.

4.16.2 Stacking stability. Design features shall assure a stable stacking configuration. Stacking stability provisions shall, in general, include positive means for restricting relative displacement under impact or internal loads encountered in shipment, as a result of ship motion, during truck deceleration and/or rounding of curves or multiple package handling and shall meet the requirements of 5.2.7.1. Where the interface between like containers is wood-to-wood, fiberboard-to-fiberboard, or combinations of these two materials, the design may utilize friction and palletizing or carloading procedures in combination to achieve a stable load. Flat-surfaced metal, plastic, or fiberglass containers shall be provided with interlocking dimples, ribs, or panels to provide longitudinal and transverse (lateral) restraint. Stacking brackets (with interlocking features) and tie bars, where required, shall be furnished to provide vertical as well as longitudinal and transverse (lateral) restraint.

4.16.3 Stackability. Unless justified by logistic considerations, each container shall be designed to support a load of like containers placed thereon in orderly fashion. The total load shall be determined by the procedures of Method 5016 of FED-STD-101 except that a safety factor

MIL-STD-648B

of 1.5 shall be used for containers to be stowed or transported aboard ships for level A packs. To qualify for Performance Oriented Packaging (POP) testing, the test time shall be 24 hours and a safety factor of 1.0 shall be used.

4.16.4 Distributed load. The top structure of large flat-topped containers, such as crates, shall be designed to carry a uniformly distributed long term static load and meet the requirements of 5.7.3.

4.16.5 Stacking strength. Stacking strength for like-on-like containers shall be determined in accordance with the test of 5.7.2. If the containers are to be shipped by rail flatcar, the stacking provisions shall also meet the requirements of 5.2.7.1.

4.17 Handling.

4.17.1 General. Specialized shipping containers shall be provided with lifting, hoisting, and tiedown provisions commensurate with their weight, size and intended mode of transportation to ensure safe and efficient movement. Handling provisions for overhead lifting shall be designed as much as possible to avoid lifting through welded joints.

4.17.2 Lifting. Handles or handholds shall be provided on all containers between 70 and 150 pounds inclusive, gross weight. However, when the logistics of container dictate, handles or handholds, may be provided on lighter or heavier containers. If four handles are used, they shall be located conveniently about the center of balance of the container for two-man lifting (exceptions may permit four man lifting). If two handles are used, they shall be located on the short sides above the center of gravity. When required by the design activity, handles or handholds may be required on containers of under 70 pounds gross weight to permit convenient one-man handling. Containers may employ molded-in or structurally integral handles provided the requirements of 4.17.2.1b through 4.17.2.1e are met.

4.17.2.1 Handle characteristics. Handles shall have the following strength and design features:

- a. Handles shall swing freely down against the side of the container when not in use, while in the normal storage orientation, and stop open at approximately a 90 degree angle when in the handle's lifting position.
- b. For handle loads in excess of 40 pounds, the grip diameter shall be not less than 1/2 inch, the clear inside dimension shall be not less than 4 1/4 inches in length and 2 inches in depth. For use with arctic mittens, these dimensions shall be 5 1/4 inches in length and 3 inches in depth. When the container's shell is in a Military Standard (MS) drum, the handle opening sizes may be relaxed by the design activity if all of the container's handling logistics can still be accommodated.
- c. When handles are used to lift the loaded container, they shall meet the strength requirements of 4.17.3.

MIL-STD-648B

- d. Handles used to lift empty containers or covers shall be clearly labeled to avoid misuse. They shall meet the strength requirements of 4.17.3 except that three times the weight of the object to be lifted shall be used.
- e. Handles used as tiedown provisions shall meet the strength requirements of 4.17.4.
- f. Handles intended for use with two hands shall be a minimum of 9½ inches in length and 3 inches in depth.

4.17.3 Hoisting. Means shall be provided for hoisting all specialized shipping containers weighing more than 150 pounds gross weight. Hoisting provisions shall result in safe and stable handling compatible with the intended logistic cycle (for example, containers intended for airdrop shall meet the requirements of MIL-STD-814 and MIL-STD-1791, containers intended for transfer-at-sea shall be compatible with the transfer system, and containers intended for shipboard use shall have provisions to make them compatible with common shipboard handling equipment used in limited-access stowage areas). Unless otherwise specified, containers which are to be transported via VERTREP shall be certified for external air transport (EAT) by rotary wing aircraft. The hoisting provisions of these containers shall conform to the requirements of MIL-STD-209.

4.17.3.1 Hoisting provisions. Hoisting provisions shall have characteristics and be located as follows:

- a. Hoisting provisions shall meet the minimum hoisting strength requirements of 5.8. The tests require that each hoisting point be capable of lifting the total gross weight of the container, or unit load if it is to be so shipped, by single-point suspension.
- b. Hoisting provisions which are to be used as tiedown provisions shall meet the strength requirements of 5.8.
- c. Where containers are to be assembled into unit loads without pallets, the set of hoisting provisions shall be capable of supporting five times the total gross weight of the unit load.
- d. When practical, hoisting provisions shall be placed as far from the loaded center of balance as practical to provide the greatest handling stability. Consideration should be given to specific hoisting sling configurations which may be used so that the spacing of the hoisting provisions will not result in sling leg angles with the horizontal of less than 30 degrees, 45 degrees preferred.
- e. Unless the configuration of the hoisting sling is known, strength of the fittings and supporting structure shall be based on sling leg angles of 30 degrees to the horizontal.
- f. Hoisting provisions shall not protrude beyond the container envelope when not in use.
- g. When practical, hoisting provisions shall not be placed at locations which require the container closure fittings to carry the lifting loads (for example, containers having a removable top section or cover shall not have the hoisting provisions located on the

MIL-STD-648B

cover). However, when cover weights approach or exceed the weight limitation for a two man lift, hoisting provisions, clearly labeled "COVER LIFT ONLY" may be utilized in the cover design.

- h. The hoisting fittings shall have a clear inside opening large enough to accommodate all handling equipment which will be employed through it's logistics cycle. If the container's logistics are not known, the hoisting fittings shall have a clear inside opening of at least 2½ inches.
- i. Unless specifically permitted otherwise, wire rope or other materials which are capable of fraying shall not be used for the construction of hoisting fittings.
- j. Hoisting fittings shall be replaceable without damaging, or requiring alteration of any other part of the container.

4.17.4 Tiedown. A minimum of four tiedown provisions shall be provided on all containers for nuclear weapons. Tiedown provisions shall also be provided on all specialized shipping containers having a gross weight of 1,000 pounds or more. Containers designed to be handled only by fork lift trucks and shipped in limited transport modes do not require tiedown provisions. If the container's design permits, the hoisting fittings may also be utilized as a provision for tiedown. Tiedown attachment design shall be guided by the following:

- a. Tiedown provisions for containers to be shipped by air shall meet the general design and performance requirements of MIL-STD-1791 and the test requirements of 5.8. They shall be compatible with the attachment points on aircraft floors which, in general, have a capacity of 5,000 pounds or greater and are placed on 20 inch centers.
- b. The strength of each fitting shall be such that, when they are used according to normal practice, the set of fittings will restrain the container when subjected to the acceleration loads given by MIL-STD-1791 or the loads incident to the intended logistic cycle of the container, whichever is the greater.
- c. Where tiedown provisions are required, not less than two on each of the longest sides shall be used.
- d. Tiedown provisions shall be located as high on the container structure as practical to provide optimum balance of restraint vectors.
- e. Clear inside diameter of the tiedown provisions shall be the same as that required for the hoisting provisions (see 4.17.3.1h).

4.17.5 Skids. Skids or rubbing strips shall be provided on all containers over 40 inches in the longest dimension and exceeding 150 pounds gross weight. They shall be arranged to permit handling by forklift trucks and shall permit easy blocking and bracing in carloading and truckloading. Preferred orientation of skids is parallel to the long dimension of the container base, if consistent with meeting forklift capability requirements. Any ramping of skid ends to accommodate skidding of

MIL-STD-648B

containers shall be kept to a minimum (15 degrees ramp angle is recommended with a maximum ramp rise of 3/4 inch) to minimize blocking and bracing problems. Additionally, the protrusion of skid ends beyond the end of the container shall be limited to the minimum length necessary for protecting the container surface and accessories. The design activity may incorporate inseparable skids into the container's shell or frame. For containers whose unique logistics dictate the use of wooden skids, the wooden members shall be fabricated from Group II, III, or IV woods of MIL-STD-731 and impregnated with a preservative suitable to prevent deterioration in accordance with TT-W-571, TT-W-572, MIL-W-71125 or another nonhazardous preservative suitable to prevent deterioration. Skid attachments shall meet the shock test and the forklift truck compatibility test of 5.2.7 and 5.9, respectively.

4.17.6 Forklift truck compatibility. Containers of over 40 inches in the longest dimension or over 150 pounds gross weight shall be capable of being handled safely from at least two sides (four-way entry is preferred) by forklift trucks of rated capacity appropriate to the gross weight and geometry of the container. When unique logistics of the container so require, smaller containers shall be designed to permit forklift handling. In such cases, the dimensions and spacing of forklift openings may be compromised as necessary; a vertical clearance of 1.5 to 3.0 inches, with no enclosure features, may be adequate.

4.17.6.1 Forklift truck opening. Provisions shall be provided to permit access and handling by forklift truck. Containers having a length greater than 8 feet which are handled aboard ship or as dictated by the container's logistics, shall have completely enclosed fork tine pockets which straddle the center of balance. Completely enclosed fork tine pockets are defined as pockets that will completely encompass the fork tine for the entire length of the pocket (for example, width of the container). The need for completely enclosed fork tine pockets on other containers shall be determined by a design analysis or by the performance of the applicable forklift truck compatibility test of 5.9. Both the empty and loaded conditions shall be considered. Unless unique logistics of the container dictate, the minimum inside dimensions of each pocket shall be 3 by 10 inches, (3 x 15 inches for containers intended for use on ships or in other areas having restricted movement areas). Unless unique logistics of the container dictate, the openings shall be spaced 30 inches apart on centers with the center of gravity located between forklift pockets. If the container fork pockets are to be used for unitizing or tiedown, special consideration should be given to the loads and forces which are involved. If the fork pockets are to be used for creating a unit load by use of steel strapping through the fork pockets, then the top and bottom edge of each opening of the fork pockets must be either beveled or rounded to prevent sharp creasing of the strapping during tensioning. The maximum inside-to-inside dimensions shall be 20 inches. Wooden or wood-reinforced containers may have a single opening 40 inches wide or more to provide forklift access.

4.17.7 Shipboard handling. Fully reusable containers of over 300 pounds gross weight or 3 feet long, or longer, which are intended to be end handled by mechanical means aboard combatant or auxiliary Naval ships shall have special provisions for handling and storage in confined and limited-access stowage areas as follows:

- a. A metallic fitting shall be provided at each end of the container to permit handling with the Handlift Truck, MK 45. Each container fitting shall be capable of supporting three times the maximum weight, including fleet issue unit loads if applicable, that it is

MIL-STD-648B

required to support. The fittings shall be located as shown on NAVSEA Drawing 2642780. The container structure shall be sufficiently stiff to permit a minimum clearance of 3 inches between the bottom of the container and a level deck, along the container's entire length, with the Handlift Truck in its fully elevated position and when tested in the configuration in which it will be used (for example, with or without cover applied). The fitting and container structure shall meet the strength requirements of the tests described in 5.10.

- b. Where appropriate, containers handled and stored on aircraft carriers shall have provisions to permit overhead handling of a loaded container at the center of balance by utilizing the HLU-216/E Beam shown on NAVAIR Drawing 616856, HLU-216A/E Beam shown on NAVAIR Drawing 616856-3, or the MK 52 MOD 0 Beam shown on NAVSEA Drawing 6212876. The provisions, or "lift arms", shall be designed to be capable of supporting three times the maximum weight that it is required to support. Fleet issue unit loads are not to be lifted by the HLU-216/E, HLU-216A/E or MK 52 MOD 0. Only single containers are to be handled by these handling beams. The lift arms shall not protrude beyond the container's side envelope when not in use. Provisions shall be made to allow for stacking of like containers in both the forward-to-forward or forward-to-aft configurations with the lift arms in their up position, unless the lift arms are designed to slide vertically into the cover's wall while remaining recessed and accessible without the use of tools. Unless specified otherwise, wire rope or other materials which are capable of fraying shall not be used for the construction of lift arms.

4.17.8 Handling provision maintainability. Handling provisions shall be designed as much as possible to be readily repairable/replaceable.

4.18 Special protection devices.

4.18.1 Temperature control. Special provisions for controlling or limiting the extremes of temperature within a container shall be avoided. In those cases where such provisions may be justified and specifically required by the design activity, they shall be as simple and as lightweight as possible and meet all the performance requirements of this standard. Detailed design requirements shall be established on a case by case basis by the design activity by consideration of the thermal properties of the item to be protected and the temperature environment in which it must survive.

4.18.2 Field-force protection. When the contained item is susceptible to damage from electrostatic, electromagnetic, magnetic, microwave, radio frequency, or radioactive forces during handling, shipment and storage, the container shall be designed to provide the required protection from the appropriate field-force as specified by the design activity.

4.18.3 Magnetic shielding. Containers for items which are considered magnetic in accordance with the provisions of MIL-S-4473 and which may be shipped by air shall be provided with appropriate shielding. Adequacy of shielding shall be determined in accordance with 5.12.

MIL-STD-648B**4.19 Protecting and identifying the container.**

4.19.1 Painting requirements. Painting, when required, shall be as specified by the design agent and shall meet Occupational Safety and Health Administration (OSHA) and Environmental Protection Agency (EPA) guidelines. Painting shall be primarily required for Nuclear, Biological, and Chemical (NBC) survivability, corrosion prevention, or to provide camouflage. Interior surfaces of closed painted containers need be painted with primer only. Where the contents incorporate cadmium-plated hardware (see 4.6.1), the primer shall be of a synthetic type known to be compatible with cadmium plating. The specific color and paint grade, required for exterior top coats, shall be as indicated by the design activity. Chemical Agent Resistant Coating (CARC) requirements will be defined by the using agency.

4.19.2 Identification and instructional markings.

4.19.2.1 Identification marking. Fully reusable containers shall be identified in accordance with MIL-STD-130 unless otherwise specified by the design activity. When the name of the contents is classified, the permanent identification shall include only the approved nomenclature (for example, MK and MOD number, Container Numerical Unit (CNU) number) and National Stock Number of the container.

4.19.2.2 Basic instructional markings. Markings on shipping containers shall include all basic instructional and operating caution markings required for safe, expeditious handling and use of the container. Markings shall include, as applicable: center of balance, forklift and stacking points, identification of any special sling needed, records receptacle, desiccant receptacle, pressure relief valve(s), humidity indicator, hoisting and tiedown attachment points, warning notes, and instructions for opening, closing and repressurizing the container.

4.19.2.3 Color coding. Space shall be reserved (5 by 8 inches, if possible) on each end of ammunition containers (except for small arms ammunition containers) for applying color coding and identification markings in accordance with MIL-STD-709 unless otherwise specified.

4.19.3 Container markings. Provisions shall be incorporated for applying container markings and bar codings in accordance with MIL-STD-129 unless otherwise specified.

4.20 Nuclear, Biological, Chemical (NBC) survivability. Containers used to package mission-essential items that may encounter an NBC environment shall be designed of materials that meet the following criteria:

- a. Selection of non-metallic materials used in the construction/fabrication of containers shall be chemical agent decontaminable to acceptable levels as specified in the U.S. Army Nuclear and Chemical Agency (USANCA) criteria and AR 70-71 when tested in accordance with TOP 8-2-111.

NOTE: The USANCA criteria and any questions pertaining therein may be addressed to the Mission Sustainment and Survivability Division, ATTN: SMCCA-OP, at the U.S.

MIL-STD-648B

Army Chemical Research, Development and Engineering Center, Aberdeen Proving Grounds, MD 21010-5423.

- b. For metallic materials, application of a CARC shall be applied in accordance with MIL-C-53072.
- c. Container design shall be such that overall configuration will minimize contamination to NBC agents and facilitate effective decontamination to the maximum possible extent in view of the container's specific cost and functional restrictions imposed.

MIL-STD-648B**5. DETAILED REQUIREMENTS****5.1 Fit and compatibility.**

5.1.1 General. The container shall be designed to be compatible with the contained item. It shall permit easy loading, movement, and unloading. It shall be compatible with the normal logistic patterns for its contents as well as with any special requirements which are specified design constraints. The container shall be designed so that the intended load will fit securely but without interference or binding. It shall support and restrain the item at points and by methods which are not likely to result in damage due to careless manipulation or handling. Loading and unloading shall be a simple process by the normal handling equipment intended to be available at the points of use.

5.1.2 Fit test. This test shall be conducted by bringing together the container and the intended load. The load shall be placed in position in the container and the container shall be assembled in its normal shipping condition by fitting the cover, fastening all restraining devices, placing desiccant, and otherwise completely securing the container for shipment. The container is then unloaded. Only the normal handling equipment likely to be available at points of loading and unloading may be used. Care shall be exercised to assure that both the container and the load are representative of the final configuration and that normal dimensional variations are considered. A lack of "fit" or extreme awkwardness during the necessary loading and unloading process is cause for rejection. Loading and unloading times shall be recorded if such times are a specified design constraint. Not meeting specified loading or unloading times with the specified number of appropriately qualified personnel shall be cause for rejection.

5.2 Mechanical shock.

5.2.1 General. Containers shall be designed to protect the contents from damage resulting from exposure to applicable shock tests described herein. Tests shall be selected from 5.2.2 through 5.2.10 as applicable or as specified by the design activity. Where reference is made to FED-STD-101, shock tests shall be at the level A severity unless otherwise specified.

5.2.1.1 Acceptance criteria. The function of a container shall not be significantly impaired by the shock tests, except as specifically noted. Significant evidence of one or more of the following shall be cause for rejection:

- a. Damage to the contents. Such damage may be established by either functional tests or other specific evidence of sensitivity to the test conditions.
- b. Failure of the containers' energy absorbing devices to protect the contents to the fragility level established as a design constraint by the equipment designer.

NOTE: In the absence of specific frequency information it is assumed that only those frequency components under 10 times the natural frequency of the shock isolation system are damaging. Unless otherwise specified, shock spectrum analysis shall be performed with a damping factor of 0.05.

MIL-STD-648B

- c. Failure of a water vapor or water proof container to prevent water vapor transmission or water leakage within the specified limits given in 5.6.2.1.
- d. Failure of the container to retain the contents.
- e. Failure of the container to permit continued safe handling.
- f. Loosening of restraining material or devices which may permit the contents to be damaged if further handling is experienced.
- g. Permanent deformation of any portion of the container that affects its functional performance throughout the anticipated logistic cycle.
- h. Evidence of the contents striking the container walls, unless it can be shown that such contact does not degrade performance of the item being packaged.

NOTE: Weld cracks in other than principal load paths which do not result in rejection as stipulated above, and are repairable, shall not be cause for rejection.

5.2.1.2 Dummy loads. Inert operational shapes (IOSs) are the ideal load to be used during the container development and evaluation phase. Dummy loads may be used during container development and evaluation when proper and operable articles are not available. The following IOS or dummy load characteristics shall be identical to those of the object being simulated (within the tolerance envelope of the real end article):

- a. Envelope dimensions including external features, such as safing pins, antennas and lanyards, which may have a bearing on the package design.
- b. Mounting points or external hard area geometry and strength.
- c. Weight, center of gravity, and radii of gyration in the three principal axes.
- d. Internal shock mounts identical to the represented item, when applicable.

5.2.1.3 Instrumentation. When required, the contained item shall be suitably instrumented and data shall be collected during testing to assure that established fragility levels are not exceeded. Unless otherwise specified, shock spectra in the major directions shall be recorded at the center of gravity, at the extremities of the dummy load or at points at which the fragility is clearly defined. For uniquely configured or irregularly-shaped items, and in cases where known fragility points have not been established, engineering judgment shall be used in selecting instrumentation locations.

5.2.1.4 Temperature combined with shock. Container designs using materials which may be affected by temperature variations shall be subjected to the shock tests of this section, except as noted, at the extreme temperatures which may be expected in service. Table I contains a guideline for expected temperature extremes.

MIL-STD-648B**TABLE I. Expected temperature extremes.**

Minimum extremes for all containers	Typical extremes for ground troop usage
$-20 \pm 5^{\circ}\text{F}$	$-65 \pm 5^{\circ}\text{F}$
$+140 \pm 5^{\circ}\text{F}$	$+160 \pm 5^{\circ}\text{F}$

At the discretion of the design activity, a single container may be required to survive tests at the required temperature extremes. In such cases, wherever possible, the impact points shall be at locations not previously impacted. Each test is considered to be a unique individual event. When required by the design activity, ambient testing shall be performed at $70 \pm 5^{\circ}\text{F}$.

5.2.2 Repetitive shock test. This test shall be conducted in accordance with Method 5019 of FED-STD-101, except that, if circular input motion is used, table frequency shall be adjusted to assure that one edge of the container leaves the table not less than 3/16 inch on each cycle. This test is normally conducted at an ambient temperature of $70 \pm 20^{\circ}\text{F}$. The temperature of the resilient mounts should not be allowed to exceed the safe operating temperature of the elastomer. Munition containers issued to ground troops shall be tested in accordance with 6.13 of MIL-STD-1904 at the three temperatures (-65 , 70 , and 160°F) specified in 5.2.1.4.

5.2.2.1 Repetitive shock test (stacked). This test shall be conducted as specified in 5.2.2 except for the following:

- a. The containers shall be tested two layers high.
- b. The distance the upper container lifts from the lower container shall be measured.

5.2.3 Drop test (free-fall). This test shall be conducted in accordance with Method 5007 of FED-STD-101. Procedure A shall be used for cylindrical containers. Procedure G shall be used for rectangular containers. Munition containers issued to ground troops shall be seven-foot free fall drop tested in accordance with 6.4 of MIL-STD-1904 at the 3 temperatures (-65 , 70 , and 160°F) specified in 5.2.1.4.

5.2.4 Cornerwise-drop (rotational) test. This test shall be conducted in accordance with Method 5005 of FED-STD-101. At the option of the design agency, a more severe drop test, which duplicates the maximum potential drop expected for a special shipping container during its normal service life, may be substituted. When symmetry permits, these tests should be conducted on diagonally opposite corners to prevent generation of redundant data. Munition containers issued to ground troops shall be tested in accordance with 6.6 of MIL-STD-1904 at the 3 temperatures (-65 , 70 , and 160°F) specified in 5.2.1.4.

5.2.5 Edgewise-drop (rotational) test. This test shall be conducted in accordance with Method 5008 of FED-STD-101. At the option of the design agency, a more severe drop test, which duplicates the maximum potential drop expected for a specialized shipping container during its normal

MIL-STD-648B

service life, may be substituted. Munition containers issued to ground troops shall be tested in accordance with 6.5 of MIL-STD-1904 at the 3 temperatures (-65 , 70 , and 160°F) specified in 5.2.1.4.

5.2.6 Tipover test. The tipover test, Method 5018 of FED-STD-101 shall be performed if the container and content weight and balance are such that the container will tip over when an edge or corner is raised sufficiently for the base to form a 20° angle with the floor. At the option of the design activity, the rollover test, Method 5014 of FED-STD-101, may be substituted for this test. Munition containers issued to ground troops shall be tested in accordance with 6.7 of MIL-STD-1904 at the 3 temperatures (-65 , 70 , and 160°F) specified in 5.2.1.4.

5.2.7 Impact test. This test shall be conducted in accordance with either the procedures of Method 5023 (incline-impact test) or Method 5012 (pendulum-impact test) of FED-STD-101. Impact velocity shall be 7 ft/sec . Munition containers issued to ground troops shall be tested in accordance with 6.8 of MIL-STD-1904 at the 3 temperatures (-65 , 70 , and 160°F) specified in 5.2.1.4.

5.2.7.1 Impact test (stacked). Containers likely to be unitized, stacked and shipped by railcars shall be designed to survive humping operations. The test shall be identical to the impact test of 5.2.7 except that the normal number of containers shall be unitized in the shipping configuration. One impact shall be made on each end of the bottom container at 7 ft/sec . All containers likely to be stacked and shipped by flatbed trailers only shall be designed to pass one impact on each end of the bottom container at 5 ft/sec . For all containers likely to be shipped by both rail and truck the test shall be limited to the 7 ft/sec velocity. Dummy contents may be used. Evidence of failure of the connecting structures which would permit any of the containers to become unattached shall be cause for rejection. In lieu of the stacked impact test, and at the option of the design agency, a rail impact test may be conducted in accordance with the requirements of the Association of American Railroads (AAR), Bureau of Explosives (BOE).

5.2.8 Transfer-at-sea shock test. Containers and container unit loads planned for transfer-at-sea shall be designed to withstand the shocks associated with the appropriate mode of transfer as shown in table II. Where CONREP can be confined to the use of the Standard Tension Replenishment Alongside Method (STREAM) strongback and sliding padeye, impact velocity may be reduced to 10 ft/sec , and the 18 inch flat drop may be deleted. For VERTREP, the container shall be subjected to an 18 inch flat bottom drop and one impact on each of four sides at 7 ft/sec . Following the tests, the container shall continue to protect the contents and shall not be damaged in any way that would prevent its use and continued safe handling.

5.2.9 Shipboard shock test. When the loaded container is to be used aboard Naval ships and contains an item which must survive the near-miss environment, the loaded container shall be designed to pass the shock tests of MIL-S-901. Unless otherwise specified, such shock testing shall demonstrate that there is no loss of contents and that the contents sustain no functional impairment. Damage to the container is permissible provided it is possible to remove the contents without special tools and provided the container can be handled in a conventional manner. The loaded container shall be arranged and secured during shock tests in a similar manner as it is intended to be arranged and secured aboard ship. Ambient temperature shall be $70 \pm 20^{\circ}\text{F}$.

MIL-STD-648B**TABLE II. Shock test for containers-at-sea.**

Test	Connected replenishment (CONREP)	Vertical replenishment (VERTREP)	Dock side only
Impact velocity ¹	7.0 ft/second	7.0 ft/sec	5.0 ft/sec
Flat bottom drop	None required	18.0 inches	18.0 inches

¹ Impact velocity testing shall be performed on ends and sides.

5.2.9.1 Shipboard shock test (eligibility). When specified, the container in its shipping condition shall be subjected to a drop test (free-fall) by raising it vertically from its normal storage position and then allowing it to fall freely onto a rigid surface from a height of 18 inches.

NOTE: This test is not a substitute for the shipboard shock test of MIL-S-901 but may be regarded as a preliminary test to establish eligibility.

5.2.10 Safety drop test. Specialized containers, when specified by the design activity, shall be designed to survive a 40-foot drop test without the creation of unsafe conditions. The test shall be conducted by allowing a completely assembled container to fall onto a rigid surface from a height of 40 feet. The impact surface shall be that which is the most critical with respect to safety. The container may be completely destroyed, but the contents shall be safe for subsequent handling for disposal. Ambient temperature shall be $70 \pm 20^{\circ}\text{F}$ or as otherwise specified. Munition containers issued to ground troops shall be tested in accordance with 6.12 of MIL-STD-1904 at the 3 temperatures (-65 , 70 , and 160°F) specified in 5.2.1.4.

5.2.11 Railcar shock test for nuclear weapon containers. When specifically required for nuclear weapon containers, the loaded container shall be securely restrained through the container tiedown provisions (blocking and bracing of skids is acceptable if container tiedown points cannot be used) to an appropriate shock machine. Unless otherwise specified, the test platform shall then be subjected to a one-half sine wave acceleration input pulse of 47 g of 17 milliseconds duration. This test shall be repeated in all directions in which the container is likely to be shipped by rail.

5.3 Vibration.

5.3.1 General. Containers which employ special energy-absorbing devices for shock isolation purposes, or which have sufficient structural flexibility that resonances below 50 Hertz (Hz) may be created, shall be designed to satisfactorily survive exposure to the appropriate vibration test. The nature of the contents and the expected logistic pattern shall determine both the type of vibration testing to be utilized (for example, random, sine, et cetera) and the temperature of the container and contents. Dummy loads, as defined in 5.2.1.2, may be used. The container and associated isolation system shall meet the requirements of 5.2 and the following:

- a. Unless otherwise specified, peak transmissibility across the isolators in the major translational modes of vibration (as measured during resonance search portion of the test

MIL-STD-648B

of 5.3.2) shall not exceed 5.0 if the resonant frequency is less than 15 Hz, 8.0 if the resonant frequency is between 15 and 25 Hz, and 10.0 from 25 to 50 Hz.

- b. If consistent with the shock requirements of 5.2 and other design considerations, the resonant frequency in the major translational modes of vibration should be above 7.5 Hz.

5.3.1.1 Acceptance criteria. The container and the isolation system shall continue to perform their functions following vibration tests. Evidence of the following shall be cause for rejection:

- a. Damage to the contents. Such damage may be established by either functional tests or other specific evidence of sensitivity to the test conditions.
- b. Permanent deformation of any portion of the container that affects its functional performance throughout the anticipated logistic cycle.
- c. Structural failure of the isolation system.
- d. Failure of the isolation system to meet the transmissibility or resonant frequency requirements of 5.3.1.
- e. Loosening of the restraining material or devices which may permit the contents to be damaged if further handling is experienced.
- f. Evidence of the contents striking the container walls, unless it can be shown that such contact does not degrade performance of the item being packaged or the container.
- g. Leakage in excess of the criteria given in 5.6.2.1, if the container is intended to be leak-proof.
- h. Excessive rotation or shifting of the contents which could cause damage or prohibits removal of the contents by the intended means.

NOTE: Weld cracks in other than principal load paths which do not result in rejection as stipulated above, and are repairable, shall not be cause for rejection.

5.3.2 Resonance survey and dwell test. The container, in its normal position, shall be rigidly attached to a vibration exciter. Suitable instrumentation shall be used to obtain transmissibility data at the points of interest. A search for resonance shall be conducted by applying sinusoidal vibration excitation in the vertical direction. Transmissibility data shall be obtained for the fundamental translational vibration mode over a frequency range of 5 to 50 Hz. Input vibration should follow a schedule level associated with the intended logistic cycle as defined by the design activity. Sweep rate shall be approximately one half octave per minute and the total sweep time shall be 7.5 minutes. A dwell test of 30 minutes total duration (the test may be interrupted if necessary to prevent excessive temperature rise of resilient materials) shall be conducted at the predominant resonance. The input excitation for the dwell test shall be equal to that used during the sweep test at that frequency. Adjustment in frequency may be necessary during the course of test to compensate for shifts in

MIL-STD-648B

resonant frequency due to temperature rise of the elastomer. If the logistic environment is undefined, the input vibration for the search and dwell tests shall be 0.125 inch double amplitude or 1.0 g (0 to peak) whichever is the lesser value, or, for reaction type test machines, the syllabus of table III can be used for the resonance survey. If table III is used and resonance occurs above 12.5 Hz, the test shall be repeated with the input amplitude adjusted to produce 1 g at resonance. When specified by the design activity, the test shall be repeated with vibration excitation applied in the transverse and longitudinal directions with the container in its normal shipping position. A new container of the same design may be used for each test direction. Ambient temperature shall be $70 \pm 20^{\circ}\text{F}$ unless otherwise specified. The temperature of resilient materials should not be allowed to exceed the safe operating temperature of the elastomer.

TABLE III. Test syllabus for reaction type test machine.

Frequency band (Hz)	Input double (amplitude) (inches)	Minimum sweep time in band (minutes)
5-15	0.125	3.5
16-25	0.040	1.5
26-35	0.020	1.5
36-50	0.010	1.0

5.3.3 Sinusoidal cycling test. When specified, a cycling vibration test shall be performed in accordance with Method 5020 of FED-STD-101. If this test is specified in addition to the test of 5.3.2, the dwell test at resonance of Method 5020 shall be deleted. Variations in frequencies and amplitude may be made by the design activity.

5.3.4 Random vibration. When specified, random vibration testing in accordance with MIL-STD-810, (Method 514, Category I, Basic Transportation), shall be conducted in the vertical direction using common carrier input. When specified by the design activity, the test shall be conducted with vibration excitation applied in the transverse and longitudinal directions with the container in its normal shipping position. A new container of the same design may be used for each test direction. Munition containers issued to ground troops, shall be tested in accordance with 6.3 of MIL-STD-1904 at the 3 temperatures (-65 , 70 , and 160°F) specified in 5.2.1.4. The test shall be conducted (preferably before) on the same container used in the mechanical shock tests of 5.2, utilized for the ground troop testing.

5.4 Shock mount aging. Shock mounts exposed to the atmosphere, such as in open or free-breathing containers, shall be qualified to be capable of meeting all performance requirements following exposure to the tests of 5.4.1 thru 5.4.3. Shock mounts for non-breathing and controlled-breathing containers shall be qualified to meet the performance requirements following exposure to the test of 5.4.3.

MIL-STD-648B

5.4.1 Salt fog test. The mount under 20 percent strain shall be tested in accordance with MIL-STD-810, Method 509, for a period of 50 hours.

5.4.2 Ozone resistance test. The mount under 20 percent strain shall be tested in accordance with ASTM D1149. The mount shall be subjected to an ozone concentration of 50 parts per hundred million at 104°F. The period of the test shall be 168 hours.

5.4.3 Air-heat aging test. The mount under 20 percent strain shall be tested in accordance with ASTM D573. The mount shall be subjected to this test at an operating temperature of $176 \pm 2^\circ\text{F}$ for an aging interval of 7 days.

5.5 Structural integrity.

5.5.1 General. Containers with integral barrier (non-breathing, controlled-breathing or free-breathing) shall be designed to withstand internal pressures or vacuum as specified in 5.5.2.1.

5.5.2 Pressure test. The container shall be prepared for test by sealing all breathing devices and inserting suitable pressurizing fittings and gages. However, if so desired, the breathing device(s) may be removed and replaced by the pressurizing fittings and gages through the breathing port. The container shall be closed and sealed as it would be in service. The test shall be conducted by raising or lowering the internal pressure so that the desired test pressure is obtained. The failure of latches, fasteners, or any part of the container structure in such a way that any unsafe condition could exist shall be cause for rejection. Permanent deformation of the container structure sufficient to prevent the safe removal of the contents shall also be cause for rejection. Leakage is not a consideration.

WARNING: Container may explode or fasteners may fail during this test! Use protective barriers to avoid injury to personnel.

5.5.2.1 Test pressures. The test for structural integrity shall be accomplished after all other testing of the container (being qualified) is complete, and shall adhere to the following criteria:

- a. Non-breathing containers. The test pressures shall be set as follows: 15.00 ± 0.25 psig and -3.00 ± 0.25 psig.
- b. Controlled-breathing containers. The test pressures shall be set as follows: 1.50 ± 0.25 psig above the required positive reseal pressure and 1.50 ± 0.25 psig below the required vacuum reseal pressure. For containers issued to ground troops, the positive and vacuum cracking pressure shall be $3.00^{+0.50}_{-0.00}$ psig and $-3.00^{+0.00}_{-0.50}$ psig, respectively.
- c. Free-breathing containers. No pressure test is required.

5.6 Leakage integrity.

5.6.1 General. Internal barrier containers shall be designed to prevent leakage from the inside of the container in excess of the pressure drop criteria indicated in 5.6.2.1. Leakage requirements

MIL-STD-648B

apply before and after all testing except 7-foot free-fall drops and safety drop test (40 foot) unless specified by the design activity.

5.6.2 Leak test. The container shall be prepared for testing by sealing all breathing devices and inserting suitable pressurizing fittings and gages. However, if so desired, the breathing device(s) may be removed and replaced by the pressurizing fittings and gages through the breathing port. The container shall be closed and sealed by the same procedures used in service. The pneumatic-pressure technique and or vacuum retention Method 5009 of FED-STD-101 shall be used to detect leakage.

5.6.2.1 Test pressures. The test for leakage integrity shall be accomplished following each series of shock, vibration and handling tests, and shall adhere to the following criteria:

- a. Non-breathing containers. The test pressures shall be set as follows: 3.50 ± 0.50 psig and -3.00 ± 0.25 psig. The continuous formation of bubbles or intrusion of fluid into the containers, using either the immersion or soap solution test method, shall be unacceptable. For munition containers issued to ground troops, a flow rate which exceeds 0.3 cubic inches per minute shall be unacceptable.
- b. Controlled-breathing containers. The test pressure shall be $1.50^{+0.25}_{-0.00}$ psig above the required positive reseal pressure and $1.00^{+0.00}_{-0.25}$ psig below the required vacuum reseal pressure. A drop in pressure magnitude in excess of 0.10 psig per hour, corrected for variations in air temperature and ambient pressure shall be unacceptable. For munition containers issued to ground troops, the positive and vacuum cracking pressure shall be $3.00^{+0.50}_{-0.00}$ psig and $-3.00^{+0.00}_{-0.50}$ psig, respectively. A flow rate which exceeds 0.3 cubic inches per minute shall be unacceptable.
- c. Free-breathing containers. No pressure testing is required.

5.7 Superimposed load.

5.7.1 General. Containers shall be designed to permit the stacking of like containers, or to support other lading, without structural failure of the stacking features or damage to the contents. Deformation sufficient to result in any unsafe stacking configuration or condition shall be cause for rejection.

5.7.2 Load test (like containers). Proof of adequate stacking strength shall be determined by testing in accordance with the procedure of Method 5016 of FED-STD-101. If the principal support structure is a plastic or other nonmetallic material or deteriorate when exposed to elevated temperatures or very humid conditions, the test shall be conducted at a temperature of $120 \pm 5^{\circ}\text{F}$ and 90 percent relative humidity for a period of 168 hours. In this latter case the constant "s" of Method 5016 used to calculate the load shall be 1.0.

5.7.3 Load test (unlike containers). Containers required to support loading different than like containers shall be tested in accordance with Method 5017 of FED-STD-101.

5.8 Hoisting fitting and tiedown attachment points.

MIL-STD-648B

5.8.1 General. Containers shall be designed to permit handling by a set of hoisting fittings and shall be equipped, unless otherwise justified by logistic considerations, with tiedown attachment points. If the container's design allows for it, the hoisting fittings may also be utilized as a provision for tiedown.

5.8.2 Acceptance criteria. Each tiedown attachment point, hoisting fitting and set of hoisting fittings shall be identified and shall be capable of safely supporting the required test load. Evidence that the set of hoisting fittings or tiedown attachment show the following conditions shall be cause for rejection. Further, any single hoisting fitting showing evidence of the following specific conditions (5.8.2a and 5.8.2b) shall be cause for rejection.

- a. Failure of any part of the hoisting or tiedown structure.
- b. Significant permanent deformation of any part of the structure supporting or attachment point which renders the container unsafe or unsuitable for continued handling.

5.8.3 Hoisting fittings strength test. The container shall be loaded to 5 times the gross weight of the container. If the container is to be assembled into a unit load and if the hoisting fittings can be used to handle the unit load, the total test load shall be equal to 5 times the gross weight of the unit load. A sling, lifting beam, or other device representing normal procedure shall be attached to the hoisting provisions and the container lifted until it is free of the support. It shall be allowed to hang for 5 minutes prior to examination for damage. Hoisting fittings on containers intended for external air transport shall be tested in accordance with the requirements of MIL-STD-209 and MIL-STD-913. If any part of the hoisting provision or container structure is a plastic or non-metallic material, the test duration shall be 1 hour each at -65 and $+160^{\circ}\text{F}$.

5.8.4 Tiedown strength test. A load shall be applied to each tiedown provision in the same way that it would be applied in service. In the absence of clearly identified tiedown procedures, the load shall be applied at an angle of 45° downward from the horizontal and simultaneously 45° outboard from the container surface. The test load shall be equal to that which would be applied if the loaded container were subjected to the restraint loads required in MIL-STD-1791. The load shall be applied in each of the directions which may reasonably result from shipment. The duration of the test shall be 1 minute in each of the test directions. If any part of the tiedown provision or container structure is a plastic or non-metallic material, the test duration shall be 1 hour each at -65 and $+160^{\circ}\text{F}$. For nuclear weapons containers, a test load shall be applied in accordance with the individual service regulations.

5.8.5 Single hoisting fitting strength test. Each hoisting provision on the container or unit load shall be individually tested by hoisting the loaded container or loaded unit load into the air and keeping it suspended for a period of 5 minutes. If any part of the hoisting structure is a plastic or nonmetallic material, the test duration shall be 1 hour each at -65 and $+160^{\circ}\text{F}$. As an alternate procedure, the container may be suitably restrained and the hoisting loads applied to the container in a manner which simulates the conditions given above.

5.9 Forklift truck (fully captive fork tine enclosures) compatibility test. This test shall be conducted in accordance with the "lifting and transporting by forklift truck" portion of Method 5011

MIL-STD-648B

of FED-STD-101. In addition, the "pushing" and "towing" portions of Method 5011 of FED-STD-101 shall be conducted. When the container is more than 45 inches wide or more than 91 inches long, the pushing and towing tests shall be repeated with one end of the container lifted off the ground about 6 inches by the tips of the forks inserted between the skids. The strength of the container structure, as well as the skids, shall survive the tests without failure or permanent deformation. The handling provisions shall be convenient to use and shall create no unsafe condition or practice.

5.9.1 Forklift truck (non-captive lift) compatibility test. The test shall be conducted in accordance with "lifting and transporting by forklift truck" portion of Method 5011 of FED-STD-101. Except, conduct the first pass with the tines in the full back tilt position. The first pair of boards shall be nominal 2" x 4", instead of the 1-inch boards required in the test. After the first pass is completed over the required 100 foot course, turn around, maintaining the required speed, and proceed with a second pass in the opposite direction with fork tines in the level position. In addition, the "pushing" and "towing" portions of Method 5011 of FED-STD-101 shall be conducted. When the container is more than 45 inches wide or more than 91 inches long, the pushing and towing tests shall be repeated with one end of the container lifted off the ground about 6 inches by the tips of the forks inserted between the skids. The strength of the container structure, as well as the skids, shall survive the tests without failure or permanent deformation. The handling provisions shall be convenient to use and shall create no unsafe condition or practice.

5.10 Handlift truck MK 45 compatibility.

5.10.1 General. Containers and containers assembled into a unit load which are to be used and stowed aboard Naval ships must have fittings which permit the Handlift Truck MK 45 to be used. The following tests define the required strength of the fittings and container structure.

5.10.2 Static overload. Each end lift fitting shall be loaded to 3 times the actual load (but not to exceed 3 times the handlift truck capacity) that it is required to support for a period of not less than 5 minutes. The supporting device may be either a Handlift Truck MK 45 or a test fixture which simulates the loading conditions. The end lift fittings shall not show any permanent structural deformation. For containers stowed aboard ship the test shall be run 3 times. Once each in the level position and once at a 15 degree angle along its length and end.

5.10.3 Shock test. The container or containers assembled into a unit load, weighted to its maximum normal load, shall be supported by a Handlift Truck, MK 45 (or test fixture which simulates the loading conditions) and raised to a height of 3 inches above ground level. It shall then be moved longitudinally at a speed of not less than 2 feet per second up a 30° ramp to a height of 1 inch and then allowed to fall abruptly onto a rigid surface. The entire container shall be tested 6 times in this manner. Three times with the forward end first, then three 3 times with the aft end first. The end lift fittings shall not show any permanent structural deformation.

5.10.4 Rolling test. Move the weighted container or containers assembled into a unit load at a speed of not less than 4 feet per second on a dry, smooth level concrete surface or a surface on which the wheel of the end lift fitting test fixture will have a coefficient of sliding friction of 0.6. After 20 feet of movement, engage brakes of the trailing end lift fitting test fixture only. The container end

MIL-STD-648B

lift fittings shall not show any sign of deformation or structural degradation. In addition, the test shall be repeated during both right and left hand sharp turns (approximately 45 degrees) with the brakes being abruptly applied during each turn.

5.11 Fire test, external source. When specified, a minimum of 2 containers shall be placed in the stacked configuration (minimum height of 24 inches) under simulated environmental conditions (for example, as they would be stowed aboard Naval ships). The test area shall be a simulated magazine or other similar confined space, with sufficient air available to furnish oxygen for combustion. The stacking configuration and contents shall be simulated. An acetylene flame source shall be used as an ignition source. The hottest portion of the torch flame shall be applied to those locations on the lower container which are likely to produce a self-sustaining fire. Withdraw flame source after 5 minutes at each location. The containers shall be acceptable for stowage and use aboard Naval ships if sufficient flames are not generated by lower containers to ignite upper containers; flames, if any, generated by the lower container self extinguish after removal of the ignition source; and, toxic fumes are not emitted from either the upper or lower container during application of the torch.

5.12 Measurement of magnetic fields. Tests shall be conducted in accordance with the provisions of MIL-S-4473. The container with all the intended contents packed as ready for normal shipment shall meet all the requirements stated in MIL-S-4473.


5.13 Sympathetic detonation. For containers whose contents pose a threat of sympathetic detonation, and whose intended handling logistics dictate, provisions shall be included to assist in the prevention of sympathetic detonation. As required, the prevention shall be accomplished between like containers stowed vertically, side-by-side or in a diagonal stack configuration. In addition, if the logistics dictate, the protection shall be increased to protect the contents of the container from itself when 2 or more explosive items are contained within the same container.

5.14 Testing sequences.

5.14.1 Army Containers. The sequence of testing shall be as shown on figures 1 and 2. These tests are normally conducted at each of 3 temperatures, -65 , ambient, and $+160^{\circ}\text{F}$.

5.14.2 Air Force Containers. The sequence of testing shall be as shown on figures 3 and 4. These tests are normally conducted at each of the temperatures, $-20 \pm_{10}^0$ $^{\circ}\text{F}$ and $140 \pm_{0}^{+10}$ $^{\circ}\text{F}$.


MIL-STD-648B

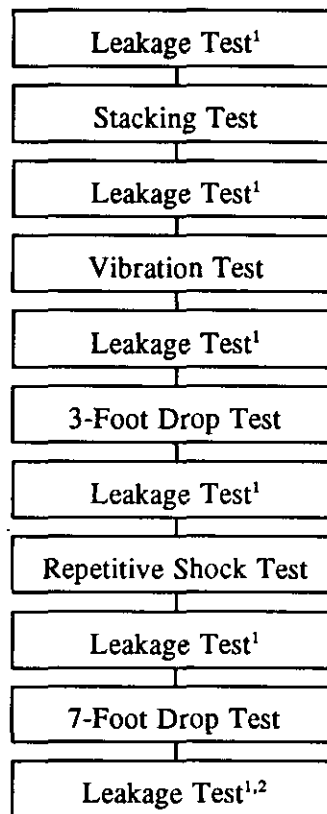

¹ Leakage retention test should be conducted at ambient temperature unless otherwise specified.

² Leakage test shall be conducted for information only.


FIGURE 1. Test sequence for containers under 150 pounds and issued to ground troops.

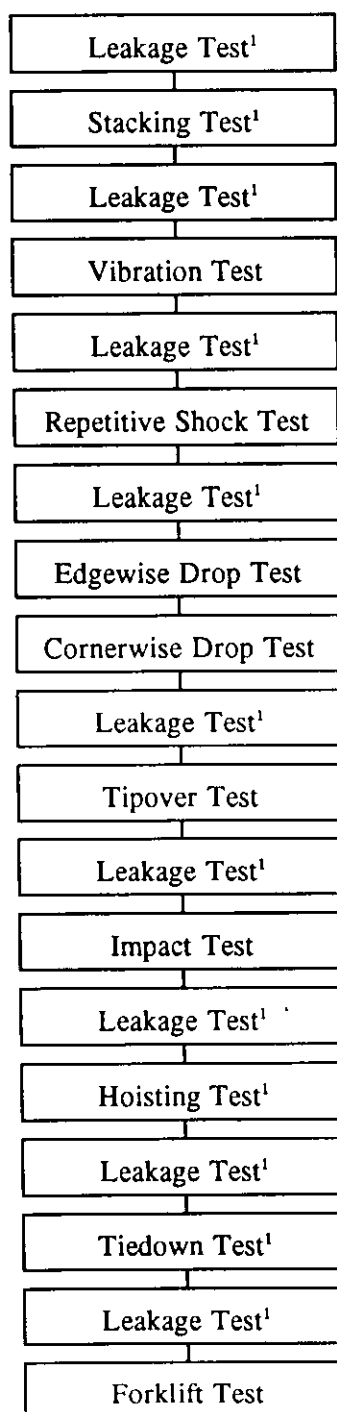MIL-STD-648B

¹ Test should be conducted at ambient temperature only unless otherwise specified.


FIGURE 2. Test sequence for containers 150 pounds or more and issued to ground troops.

MIL-STD-648B

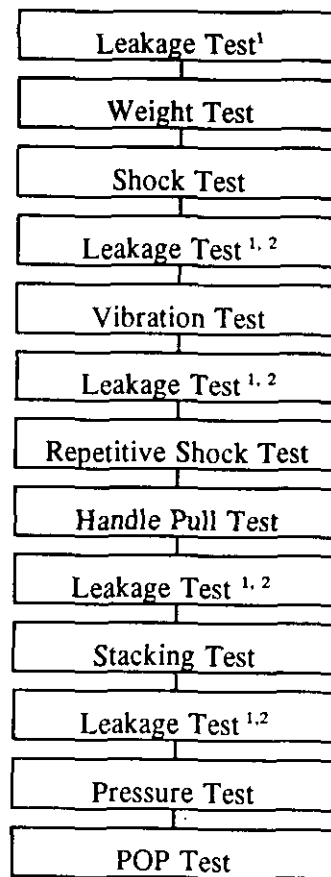

- ¹ Leakage retention test should be conducted at ambient temperature unless otherwise specified.
² Leakage test shall be conducted for information only.

FIGURE 3. Air Force test sequence for containers under 150 pounds.

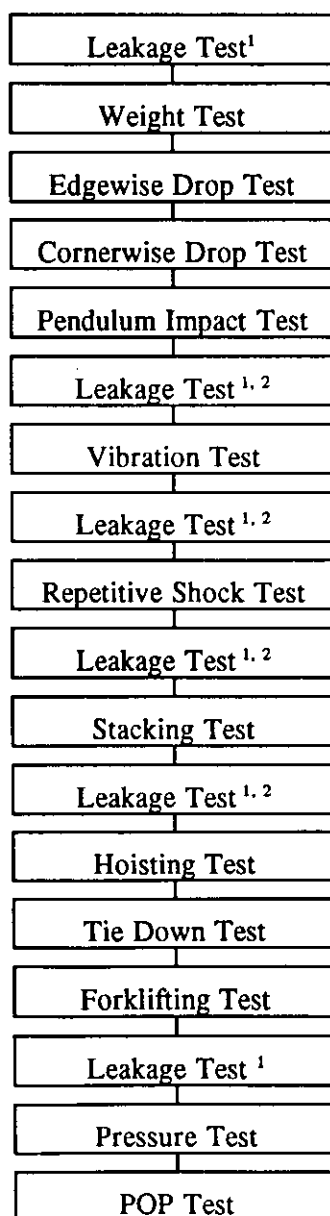MIL-STD-648B

¹ Leakage retention test should be conducted at ambient temperature unless otherwise specified.

² Leakage test shall be conducted for information only.

FIGURE 4. Air Force test sequence for containers over 150 pounds.

MIL-STD-648B**6. NOTES**

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. This standard is intended to be used as a guide in preparing development specification, or equivalent, to establish the interface constraints and performance requirements of shipping containers for specific items of equipment. It is not intended that all of the requirements, or tests, contained herein shall be invoked in any particular case. Instead, the development specification should contain only appropriate requirements from this document along with any other requirements which may be dictated by unique operational, logistic, international shipment or safety considerations.

6.2 Subject term (key word) listing.

CONREP
Development specification
Development specification, preparing
Energy absorbing
Equipment
Handling provisions
Interface constraints
International shipment
Logistic
NBC survivability
Noncombustible materials
Operational
Performance requirements
Safety
Special indicators
Specific items
Unique
UNREP
VERTREP
Vibration

6.3 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

MIL-STD-648B**INDEX**

	<u>PARAGRAPH</u>	<u>PAGE</u>
Accessories, container	4.15.4.8	18
Air-heat aging test	5.4.3	34
Applicable documents	2.	2
Beneficial comments statement	2.	ii
Cadmium-plated hardware	4.6.1	12
Changes from previous issue	6.3	43
Characteristics, dynamic	4.6.7.5	14
Chemical Agent Resistant Coating (CARC)	4.19.1	25
Classified contents	4.19.2.1	25
Clean-room operations	4.13	15
Closed containers with auxiliary barriers	4.15.3	16
Closed containers without auxiliary barriers	4.15.2	16
Closure devices	4.6.9/4.10	14/15
Color coding	4.19.2.3	25
Compatibility test, forklift truck	5.9	37
Compatibility, handlift truck MK 45	5.10	37
Competent authority	3.1.1	9
Concluding material	-----	49
Configuration	4.3	11
CONREP	3.1.2	9
Container accessories	4.15.4.8	18
Contents	4.2.1	11
Cornerwise-drop (rotational) test	5.2.4	29
Cube and weight	4.5	12
Cushion (compressive) creep	3.1.4	9
Definitions	3.	9
Desiccant storage	4.15.4.4	17
Detailed requirements	5.	27
Dissimilar metals	4.6.2	12
Distributed load	4.16.4	20
Distribution network	4.2.3	11
Documents, applicable	2.	2
DOT	3.1.1	9
Drainage	4.8/4.15.2.2	14/16
Drawings	2.1.2	5
Drop test (free-fall)	5.2.3	29
Drop test (safety)	5.2.10	31
Dummy loads	5.2.1.2	28

MIL-STD-648B

INDEX

	<u>PARAGRAPH</u>	<u>PAGE</u>
Dynamic characteristics	4.6.7.5	14
Edgewise-drop (rotational) test	5.2.5	29
Energy absorbing devices	3.1.5	9
Environmental Protection Agency (EPA)	4.6/4.19.1	12/25
Fasteners, support	4.6.9	14
Faying surfaces	3.1.6	9
Field-force protection	4.18.2	24
Fire resistance	4.7	14
Fire retardant materials	3.1.7	9
Fire test, external source	5.11	38
Fit and compatibility	5.1	27
Fit test	5.1.2	27
Flow rate, (relief valve)	3.1.10	10
Foreword	-----	ii
Forklift truck compatibility	4.17.6	23
Forklift truck (fully captive fork tine enclosures) compatibility test	5.9	37
Forklift truck (non-captive lift) compatibility test	5.9.1	37
Forklift truck opening	4.17.6.1	23
Fragility level	3.1.8	9
Handle characteristics	4.17.2.1	20
Handlift truck MK 45 compatibility	5.10	37
Handling	4.17	20
Handling equipment	4.2.2	11
Hazardous materials and devices	4.1.1	11
HLU-216/E and HLU-216A/E	4.17.7	24
Hoisting	4.17.3	21
Hoisting fitting and tiedown attachment points	5.8	36
Hoisting fittings strength test	5.8.3	36
Hoisting fitting strength test, single	5.8.5	36
Hoisting provisions	4.17.3.1	21
Humidity indicator	4.15.4.5	17
Identification marking	4.19.2.1	25
Impact test	5.2.7	30
Impact test (stacked)	5.2.7.1	30
Inert operational shapes (IOSs)	5.2.1.2	28
Instructional markings, basic	4.19.2.2	25
Instrumentation	5.2.1.3	28
Integral barrier containers	4.15.4	16

MIL-STD-648B

INDEX

	<u>PARAGRAPH</u>	<u>PAGE</u>
Interchangeability	4.6.8	14
Interfaces	4.2	11
Intermediate bulk container (IBC)	3.1.9	9
Leak test	5.6.2	35
Leakage	4.15.4.2	17
Leakage indicator	4.15.4.7	18
Leakage integrity	5.6	34
Lifting	4.17.2	20
Load test (like containers)	5.7.2	35
Load test (unlike containers)	5.7.3	35
Magnetic fields, measurement of	5.12	38
Magnetic shielding	4.18.3	24
Markings, container	4.19.3	25
Material stability	4.6.6	12
Materials and manufacturing methods	4.6	12
Materials, blocking and bracing	4.6.7.2	13
Materials compatibility	4.6.7.1	13
Materials, cushioning	4.6.7.3	13
Materials, fire retardant	3.1.7	9
Materials, internal packaging	4.6.7	13
Materials, sensitive (transportation security)	4.4.1	12
MK 45 Handlift Trucks	4.17.7a	23
MK 52 MOD 0 Beam, container handling	4.17.7b	24
Naval Air Systems Command (NAVAIR)	2.1.2	5
Naval Sea Systems Command (NAVSEA)	2.1.2	5
Noncombustible materials	3.1.11	10
Non-Government publications	2.2	7
Nuclear, biological, chemical (NBC) survivability	4.20	25
Occupational Safety and Health Administration (OSHA)	4.6/4.19.1	12/24
Ozone resistance test	5.4.2	34
Packaging materials, internal	4.6.7	13
Painting requirements	4.19.1	25
Performance Oriented Packaging (POP) testing	4.16.3	19
Preservation	4.12	15
Pressure	3.1.3	9
Pressure test	5.5.2	34
Pressure, cracking (relief valve)	3.1.3	9

MIL-STD-648B

INDEX

	<u>PARAGRAPH</u>	<u>PAGE</u>
Pressure, reseal	3.1.12	10
Pressurizing fitting	4.15.4.6	17
Protecting and identifying container	4.19	25
Protection devices, special	4.18	24
Publications	2.1.2	5
Records receptacle	4.9	15
Repetitive shock test	5.2.2	29
Requirements, for controlled-breathing integral-barrier containers	4.15.4.11	18
Requirements, for free-breathing containers	4.15.4.12	18
Requirements, general	4.	11
Requirements, non-breathing integral-barrier containers	4.15.4.10	18
Requirements, transportability	4.4	11
Resilient mounts	4.6.7.4	14
Resonance survey and dwell test	5.3.2	32
Rolling test	5.10.4	37
Rubber and synthetic rubber parts	4.6.4	12
Safety drop test	5.2.10	31
Salt fog test	5.4.1	34
Scope	1.	1
Security seal	4.14	16
Shipboard handling	4.17.7	23
Shock mount aging	5.4	33
Shock response spectrum	3.1.13	10
Shock test (MK 45 handlift truck)	5.10.3	37
Shock test, railcar for nuclear weapon containers	5.2.11	31
Shock test, repetitive	5.2.2	29
Shock test, repetitive (stacked)	5.2.2.1	29
Shock test, shipboard	5.2.9	30
Shock test, shipboard (eligibility)	5.2.9.1	31
Shock test, transfer-at-sea	5.2.8	30
Sinusoidal cycling test	5.3.3	33
Skids	4.17.5	22
Specifications	2.1.1	2
Special protection devices	4.18	24
Specialized shipping container	3.1.14	10
Stackability	4.16.3	19
Stacking and stowing	4.16	19
Stacking stability	4.16.2	19
Stacking strength	4.16.5	20
Standard parts and materials	3.1.15/4.6.5	10/12

MIL-STD-648B

INDEX

	<u>PARAGRAPH</u>	<u>PAGE</u>
Standards	2.1.1	2
Static electricity	4.11	15
Static overload (MK 45 handlift truck)	5.10.2	37
STREAM	5.2.8	30
Superimposed loads	5.7	35
Sympathetic detonation	5.13	38
Temperature combined with shock	5.2.1.4	28
Temperature control	4.18.1	24
Test pressures	5.5.2.1/5.6.2.1	34/35
Testing sequences	5.14	38
Threads, screw	4.6.3	12
Tiedown	4.17.4	22
Tiedown attachment points	5.8	36
Tiedown strength test	5.8.4	36
Tipover test	5.2.6	30
Transfer-at-sea (UNREP)	4.4.2	12
Transfer-at-sea shock test	5.2.8	30
Transmissibility	3.1.16	10
Unit load	3.1.17	10
Unit load compatibility	4.2.4	11
United States Army	2.1.2	5
UNREP	3.1.18/4.4.2	10/12
Ventilation	4.15.2.1	16
VERTREP	3.1.19	10
Vibration	5.3	31
Vibration, random	5.3.4	33
Window, alternate observation	4.15.4.13.1	19
Window in auxiliary barrier, transparent	4.15.4.9	18
Window, observation	4.15.4.13	19

MIL-STD-648B

CONCLUDING MATERIAL

Custodians:

Navy - OS
Army - SM
Air Force - 69

Preparing activity:

Navy - OS
(Project No. PACK-0963)

Review Activities:

Army - AV, GL, AR, MI, TE
Navy - AS, MC, SA, SH, YD
Air Force - 10, 11, 13, 15, 16, 17, 18, 19, 99

User Activities:

Army - AT, SC

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:

1. DOCUMENT NUMBER
MIL-STD-648B

2. DOCUMENT DATE (YYMMDD)
1994 APRIL 1

3. DOCUMENT TITLE

DESIGN GUIDELINES FOR SPECIALIZED SHIPPING CONTAINERS

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)

b. ORGANIZATION

c. ADDRESS (Include Zip Code)

d. TELEPHONE (Include Area Code)

7. DATE SUBMITTED
(YYMMDD)

(1) Commercial
(2) AUTOVON
(if applicable)

8. PREPARING ACTIVITY

a. NAME

COMMANDER
INDIAN HEAD DIVISION, NSWC

b. TELEPHONE (Include Area Code)

(1) Commercial

(2) AUTOVON

301-743-4358/4253

354-4358/4253

c. ADDRESS (Include Zip Code)

101 STRAUSS AVENUE
CODE 8420
INDIAN HEAD, MD 20640-5035

IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:
Defense Quality and Standardization Office
5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466
Telephone (703) 756-2340 AUTOVON 289-2340