

MIL-STD-810B  
NOTICE 2(USAF)

29 September 1969

MILITARY STANDARD  
ENVIRONMENTAL TEST METHODS

## TO ALL HOLDERS OF MIL-STD-810B:

1. The following new method is to be added:

## NEW METHOD

## DATE

T519

Gunfire Vibration, Aircraft

29 September 1969

2. This U.S. Air Force Notice forms a part of MIL-STD-810B dated 15 June 1967. The general requirements of MIL-STD-810B shall apply to any application of this notice.

3. THIS NOTICE IS NONCUMULATIVE, RETAIN AND INSERT BEFORE THE TABLE OF CONTENTS.

4. Holders of MIL-STD-810B will verify above addition has been entered. This issuance, together with appended pages is a separate publication. Each notice is to be retained by stocking points until the Military Standard is completely revised or cancelled.

Custodian:

Air Force - 11

Preparing activity:

Air Force - 11

(Project No. MISC-F650)

FSC MISC

This tentative test method has been approved by the Department of the Air Force. It is optional for use by all activities.

## METHOD T519

### GUNFIRE VIBRATION, AIRCRAFT

1. Purpose. The gunfire vibration test is conducted to simulate the relatively brief but very intense vibration fields resulting from blast pressure fields generated by repetitive firing guns mounted in, on, or near the aircraft structure.
2. Apparatus. Vibration equipment with required instrumentation.
3. Criteria for application. The most severe vibration field results from blast pressure pulses coupling to the aircraft structure and inducing vibration fields that are of maximum intensity near the gun muzzle region. This field, designated by curve A on figure 519-1, decreases in an inverse relationship to the distance as viewed in a forward direction from the gun muzzle. The vibration field, designated by curve B on figure 519-1, decays similar to the primary field beginning at the gun muzzle and extending in the aft direction. This field, beyond the near field region of the muzzle, is of lower intensity. In no case should this test method be substituted for conventional vibration tests. Guns, physical locations, and ballistic parameters should be carefully and accurately identified prior to application of this test method. If the maximum test spectrum level of the gunfire configuration is equal to or less than  $.04 \text{ g}^2/\text{Hz}$ , the gunfire method need not be conducted.
  - 3.1 Sensitive equipment. Equipment found most susceptible to gunfire are those equipments that are usually located within a 3-foot radius of the gun muzzle and are mounted on the structural surface exposed to the gun blast. Prime examples are UHF antennas of the blade, V, and the flush-mounted configurations, including their bracketry, coaxial connectors, and lines. Next in order of failure susceptibility is equipment mounted on drop-down doors and access panels, equipment mounted in cavities adjacent to the aircraft surface, and finally, equipment located in the interior of the vehicle structure. Typical vulnerable equipment in these latter categories are auxiliary hydraulic and power units (including mounting bracketry), switches, relays, IR, photographic, communication and navigation equipment and radar systems, including items either shock or hard mounted.
  - 3.2 Determination of test levels
    - 3.2.1 Selection of the maximum test level. The maximum gunfire vibration level is defined by the following equation:

$$G_{\max} = E_1/E_0(G_0/r_0n_0) (80/W_E) (r_1n_1); \text{ in PSD units } (g^2/\text{Hz})$$

MIL-STD-810B  
15 June 1967

where:  $80/W_E = 1$ , for equipment weight  $W_E \leq 80$  pounds

and:  $80/W_E = 1/4$  for equipment weight  $W_E \geq 160$  pounds

The test level ( $G_{\max}$ ) is obtained from the basic normalized level ( $G_o/r_o n_o$ ) which is adjusted to the muzzle energy ( $E_1$ ), the firing rate ( $r_1$ ), and the number of guns ( $n_1$ ) of the particular gun(s) under consideration. The normalizing energy ( $E_o$ ) is equal to 39,600 foot-pounds. The last term ( $80/W_E$ ) represents a mass adjustment factor and permits the reduction of  $G_{\max}$  when the equipment weight is greater than 80 pounds.

Table 519-1 designates the muzzle energies, the energy adjustment factors, and the nominal firing rates of commonly used gun configurations. Figure 519-1 provides  $G_o/r_o n_o$  as a function of the distance parameter (D). The mass adjustment factor is determined from figure 519-2.

**3.2.2 Determination of the distance parameter (D).** The distance parameter represents the vector distance, measured (or estimated) from the gun muzzle to the mean distance between equipment support points. Where equipment support points are indeterminate, the equipment center of gravity shall represent the terminal point of D. The vector D is usually generated from the orthogonal distances referenced to the fuselage station, the water, and the butt line data. The D vector and the computation is shown on figure 519-3.

**3.2.3 Multiple guns.** For configurations involving multiple guns, the origin of D is determined from the centroidal point of the gun muzzles. Figure 519-4 shows the origin location for a typical four-gun staggered array.

Example No. 1 - A 2-pound UHF antenna, is to be flush mounted to the under-surface of the aircraft and located forward of the muzzle of four M-61 type cannons. The expected firing rate is 25 Hz ( $r_1 = 25$ ). (If the firing rate is unknown, the maximum specified rate shall be used). Since, in this configuration, each barrel fires independently and the number of guns is equal to four, then  $n_1 = 4$  (see 1).

#### Steps

- The antenna location determined from the aircraft spatial coordinates (see figure 519-3) is found to be 39 inches or  $D = 39$  inches
- Refer to Figure 519-1. Select curve A and obtain the ordinate value of  $G_o/r_o n_o$  for  $D = 39$  inches. In this case  $G_o/r_o n_o = 3.0 \times 10^{-2}$
- From table 519-I, select  $E_1/E_o$  for the M-61 gun (see 2). Here,  $E_1/E_o = 1$

- d. Since the antenna weight is less than 80 pounds, the mass adjustment factor becomes unity and a reduction of  $G_{\max}$  is not allowed (see figure 519-2)
- e. Determine the normalized level,  $G_1/r_1 n_1$ , by adjusting  $G_o/r_o n_o$  by  $E_1/E_o$  as follows:  $G_1/r_1 n_1 = E_1/E_o (G_o/r_o n_o)$  or  $G_1/r_1 n_1 = (1) 3.0 \times 10^{-2}$
- f. Multiply  $G_1/r_1 n_1$  by  $n_1 r_1$  to obtain the maximum test level,  $G_{\max}$ :
 
$$G_{\max} = G_1/r_1 n_1 (r_1 n_1)$$

$$G_{\max} = 3.0 \times 10^{-2} (10^2)$$

$$G_{\max} = 3.0 \text{ g}^2/\text{Hz}$$
- g. Apply  $G_{\max}$  to figure 519-5 to obtain the test spectrum.

Example No. 2 - An electronic equipment weighing 102 pounds is located in the aircraft nose section forward of the gun muzzle. The distance (D) is 45 inches. The firing rate of the revolving barrels of the cannon totals 100 Hz with  $n_1 = 1$ . The muzzle energy ( $E_1$ ) is 83,000 foot-pounds.

Steps:

- a. Repeating steps (a) and (b) as before:  
 $G_o/r_o n_o = 1.9 \times 10^{-2}$
- b. From note 2, divide  $E_1/E_o$ :  
 $83 \times 10^3 / 39.6 \times 10^3 = 2.1$
- c. Adjusting for  $E_1/E_o$ :  
 $G_1/r_1 n_1 = (2.1) (1.9 \times 10^{-2})$   
 or  $G_1/r_1 n_1 = 4.0 \times 10^{-2}$
- d. Obtain  $G_{\max}$  as before:  
 $G_{\max} = 4.0 \times 10^{-2} (10^2) (1) = 4.0 \text{ g}^2/\text{Hz}$
- e. Noting from 3.2.1 that  $W_E > 80$  pounds and referring to figure 519-2, where the derated value ( $G'_{\max}$ ) is found to be 2 dB down (-2 dB) from  $4.0 \text{ g}^2/\text{Hz}$

MIL-STD-810B  
15 June 1967

From dB power tables:

$$-2 \text{ dB} = \text{LOG}_{10} G'_{\text{max}}/4.0$$

$$\text{or } G'_{\text{max}} = 2.5 \text{ g}^2/\text{Hz}$$

f. Apply  $G'_{\text{max}}$  to figure 519-5 to obtain the test spectrum.

1/ Some M-61 gun configurations (see MK-IV, gun pod, table 519-I) feature two barrels per pod; firing simultaneously. In such a case,  $n_1 = 2$  per pod.

2/ If  $E_1$  is unknown, determine  $E_1$  from ballistic data using  $E_1 = m_1 v_1^2/2$  where:  $m_1$  = the projectile mass and  $v_1$  = muzzle velocity. Divide by  $E_0$  (see table 519-I) and proceed as in step (e).

4. Test procedures. Test procedures used shall be as specified in the equipment specification or test plan.

4.1 Test item operation. Unless otherwise specified, the test item shall be operated during application of vibration so that functional effects caused by these tests may be evaluated. When a test item performance test is required during vibration and the time required for the performance is greater than the duration of the vibration test, the performance test shall be abbreviated accordingly. At the conclusion of the test, the test item shall be operated and the results compared with the data obtained in accordance with section 3, General Requirements, paragraph 3.2.1. The test item then shall be inspected in accordance with section 3, General Requirements, paragraph 3.2.4.

4.2 Mounting techniques. In accordance with section 3, General Requirements, paragraph 3.2.2, the test item shall be attached to the vibration exciter table by its normal mounting means or by means of a rigid fixture capable of transmitting the vibration conditions specified herein. Precautions shall be taken in the establishment of mechanical interfaces to minimize the introduction of undesirable responses in the test setup. Whenever possible, the test load shall be distributed uniformly on the vibration exciter table in order to minimize effects of unbalanced loads. Vibration amplitudes and frequencies shall be measured by techniques that will not significantly affect the test item input control or response. The input control accelerometer(s) shall be rigidly attached to the vibration table or to the intermediate structure, if used, at or as near as possible to the attachment point(s) of the test item.

## 5. Test procedures

5.1 Procedure I, Random vibration test. The test item shall be subjected to random vibration along each mutually perpendicular axis. Test times shall be in accordance with time schedule I from table 519-II. The instantaneous peaks of the random



vibration acceleration may be limited to 2.5 times the rms acceleration level. The power spectral density of the test level control signal shall not deviate from the specified requirements by more than +40 -30 percent ( $\pm 1.5$  dB) below 500 Hz and +100 -50 percent ( $\pm 3.0$  dB) between 500 and 2,000 Hz, except that deviations as large as +300 -75 percent ( $\pm 6$  dB) shall be allowed over a cumulative bandwidth of 100 Hz between 1,000 and 2,000 Hz for equipment items whose weight is equal to or less than 60 pounds. For items weighing more than 60 pounds, the same deviation shall be allowed over the extended range from 500 to 2,000 Hz provided the cumulative bandwidth deviation does not apply to the swept bandwidth of noise as detailed in 5.3.1.2.

5.2 Procedure II, Single direction test. If the equipment item is mounted with the base peripherally attached to and in the plane of the aircraft skin, then the test direction may be restricted to the direction normal to the aircraft skin (see figure 519-6). The total test time in this case shall be as stated in time schedule II of table 519-II.

5.3 Procedure III, Composite or alternate test. For locations near the gun muzzle and for equipment weighing in the region of 60 pounds, the test levels may exceed the force capabilities of all but the largest shaker systems. For such cases, the following test method may be substituted provided the following criteria are met:

$$\text{when: } G_{\max} \geq 3.0 \text{ g}^2/\text{Hz} \geq 8.6 \times 10^{-4} (F_r/W_T)^2$$

$$\text{where: } W_E \geq 55 \text{ pounds and: } W_J \leq 1.2 W_E$$

$F_r$  = Maximum RMS shaker force output - pounds

$$W_T = W_E + W_A + W_J$$

$W_E$  = Equipment weight - pounds

$W_A$  = Armature weight - pounds

$W_J$  = Test jig weight - pounds

5.3.1 Selection of composite elements. A broad band, random vibration test level  $G_B$  shall be selected equal to  $G_{\max}/4$  (6 dB down). A random noise signal of 100 Hz bandwidth (3 dB down points) shall be superposed on  $G_B$  having a  $G_{\max}$  equal to the original determined value. The composite spectrum is shown on figure 519-7.

5.3.1.2 Test procedure. The test shall be conducted in accordance with 5.1, except the narrow band noise shall be swept from 300 to 1,000 Hz, referenced to the narrow band center frequency. The sweep time shall be in accordance with time schedule III in table 519-II.

MIL-STD-810B


15 June 1967

6. Test level overall rms. The overall rms test level shall be no less than the area enclosed by the solid curve of figure 519-5, -21 percent (-2 dB). The overall rms is defined by the following equation.

$$\text{OAR} = (1163 G_{\text{max}})^{1/2}.$$

7. Summary. The following details shall be specified in the equipment specification or test plan:

- a. Procedure number (see 5)
- b. Pretest data required (section 3, General Requirements, paragraph 3.2.1)
- c. Nonoperation of equipment during test, if desired (see 4.1)
- d. Unique or special test considerations.

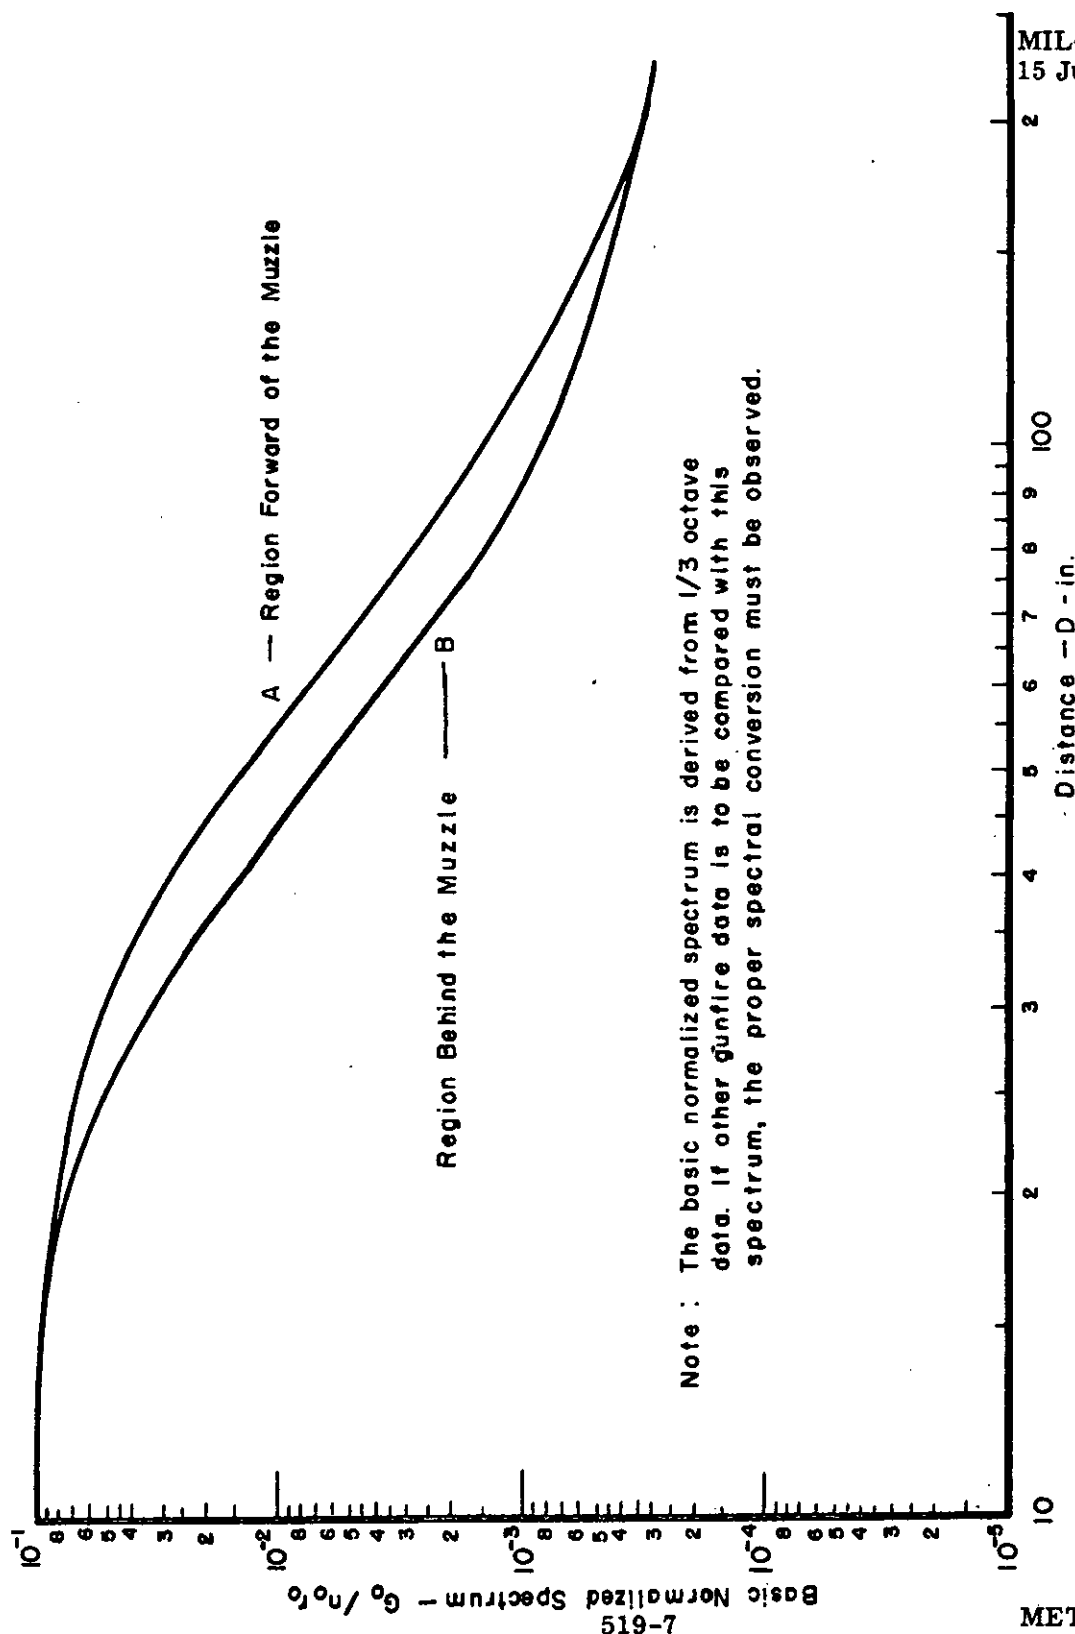

Note : The basic normalized spectrum is derived from 1/3 octave data. If other gunfire data is to be compared with this spectrum, the proper spectral conversion must be observed.

MIL-STD-810B  
15 June 1967

FIGURE 519-1.  $G_0/n_0$  vs.  $D$

METHOD 519



MIL-STD-810B  
15 June 1967


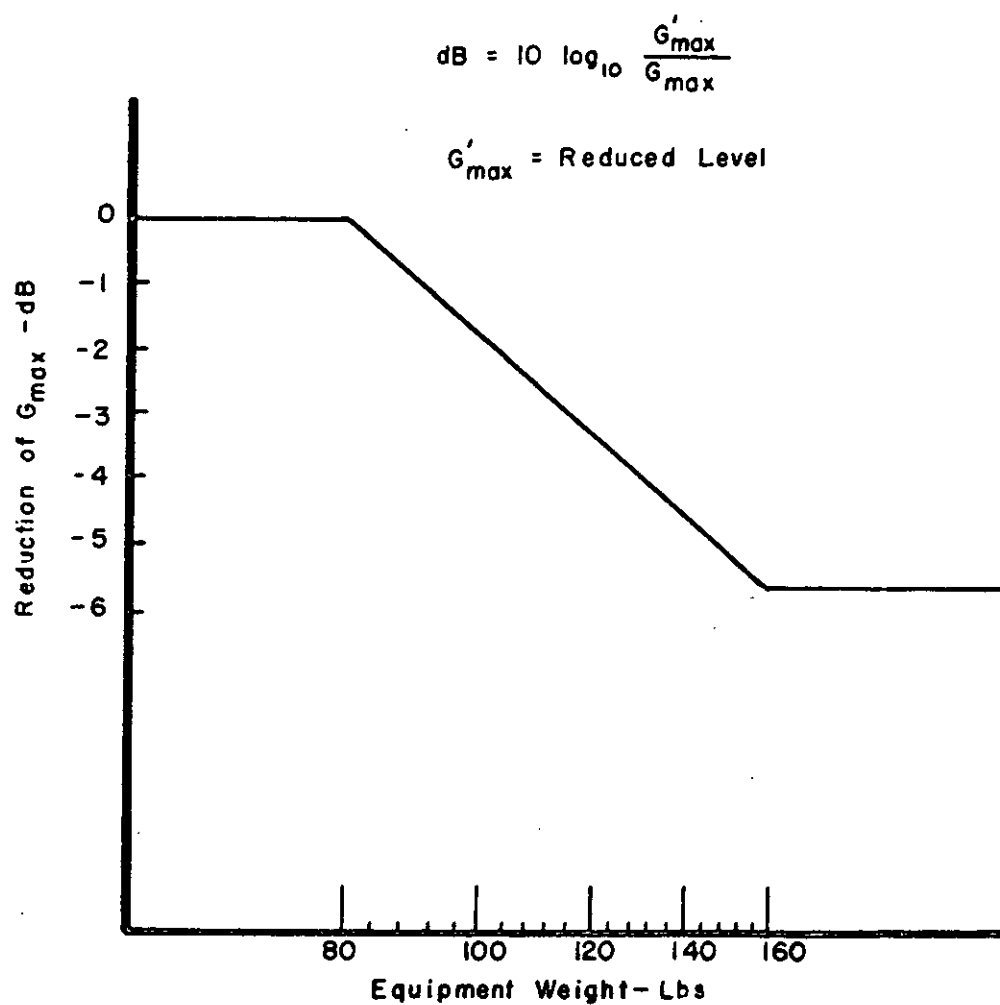


FIGURE 519-2. Reduction Factor for Mass Loading

METHOD 519

519-8

MIL-STD-810B  
15 June 1967

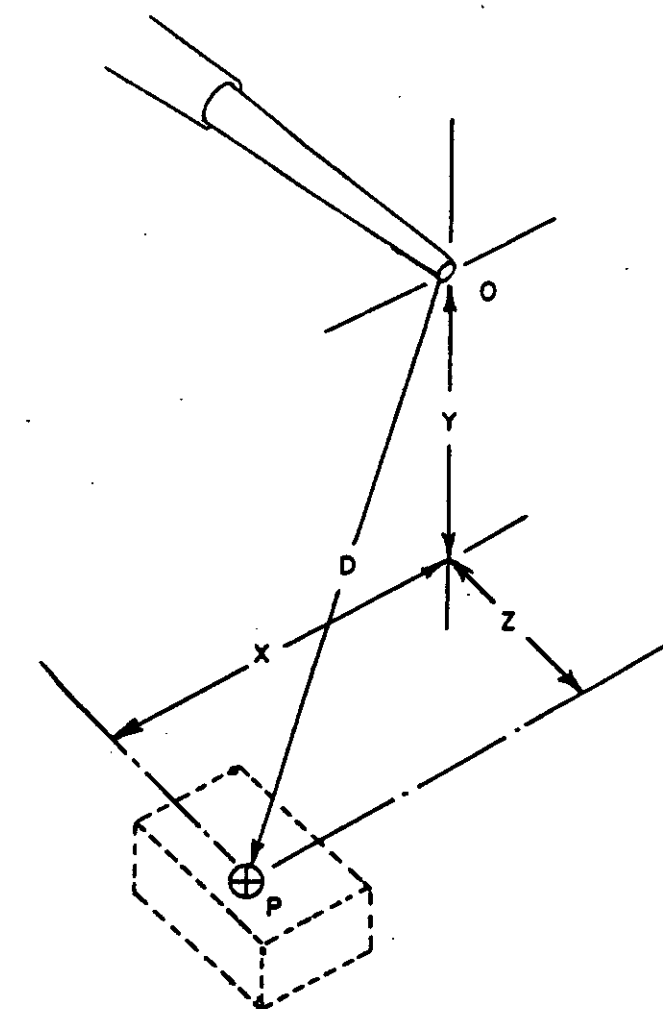

$$D = \overline{OP} = (X^2 + Y^2 + Z^2)^{1/2}$$

FIGURE 519-3. Determination of the D Vector

MIL-STD-810B  
15 June 1967

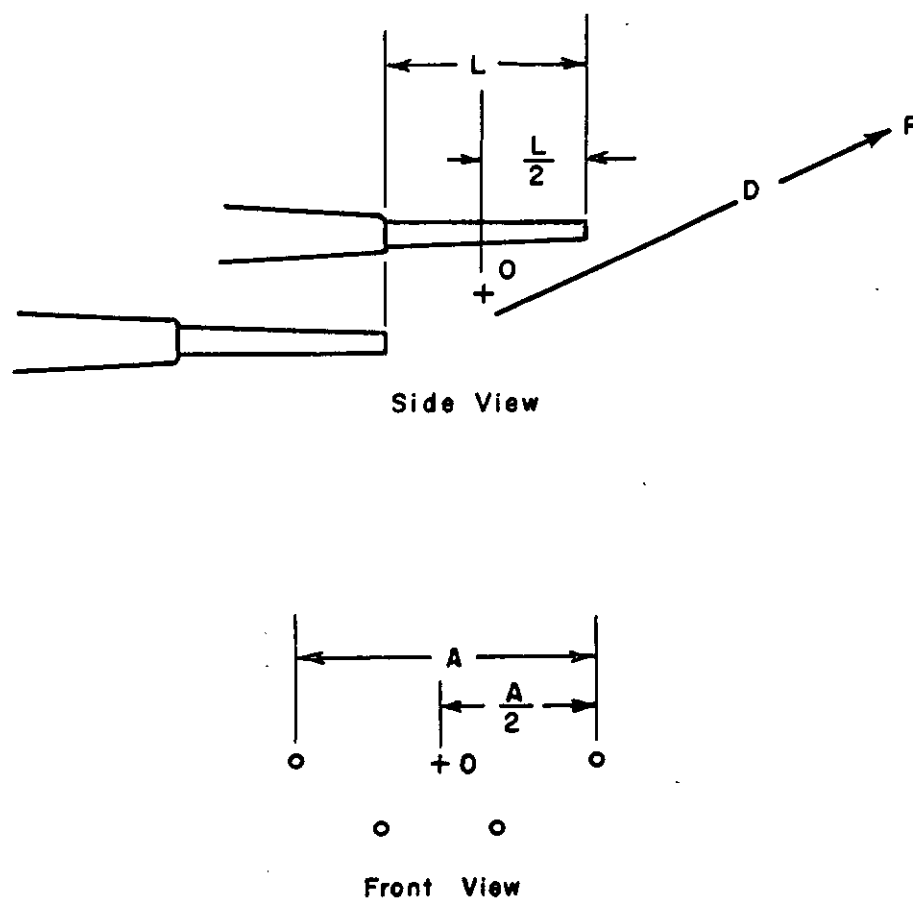


FIGURE 519-4. Origin of the D Vector for Multigun, Staggered Array

METHOD 519

519-10

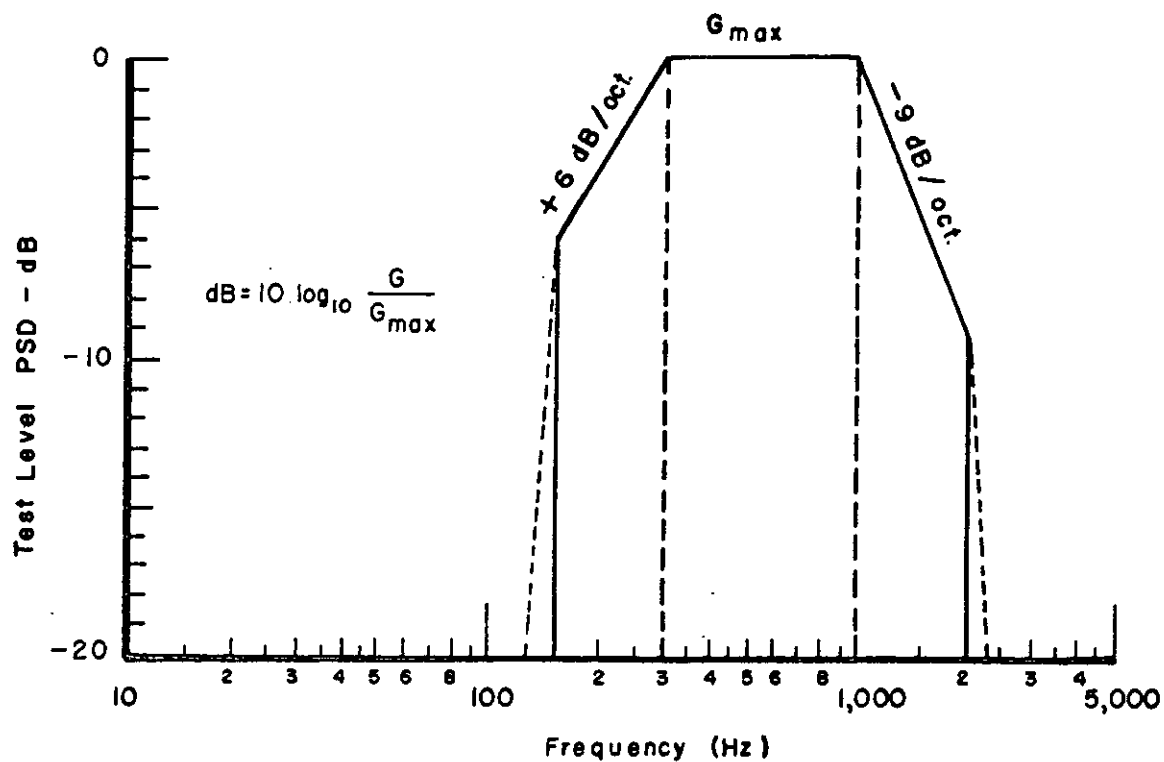


FIGURE 519-5. Random Vibration Test Curve

MIL-STD-810B  
15 June 1967

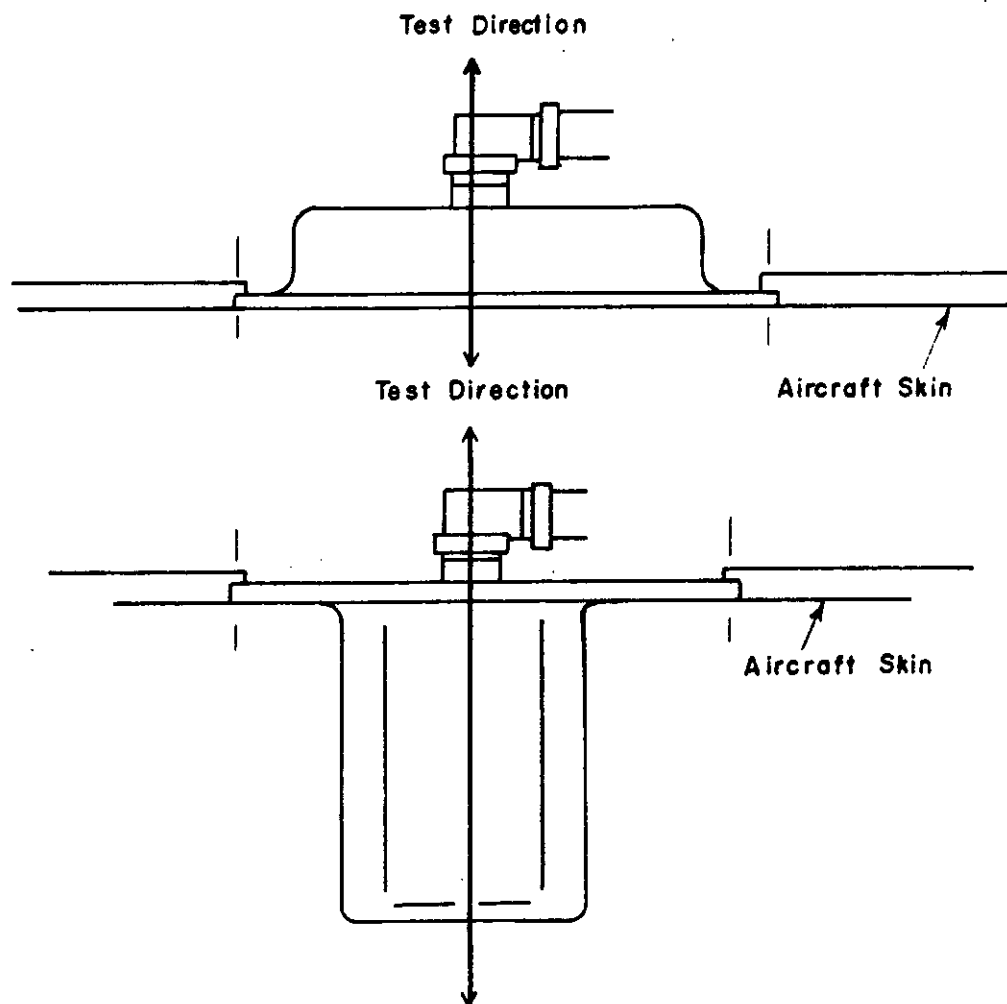


FIGURE 519-6. Peripherally Mounted Item

METHOD 519

519-12

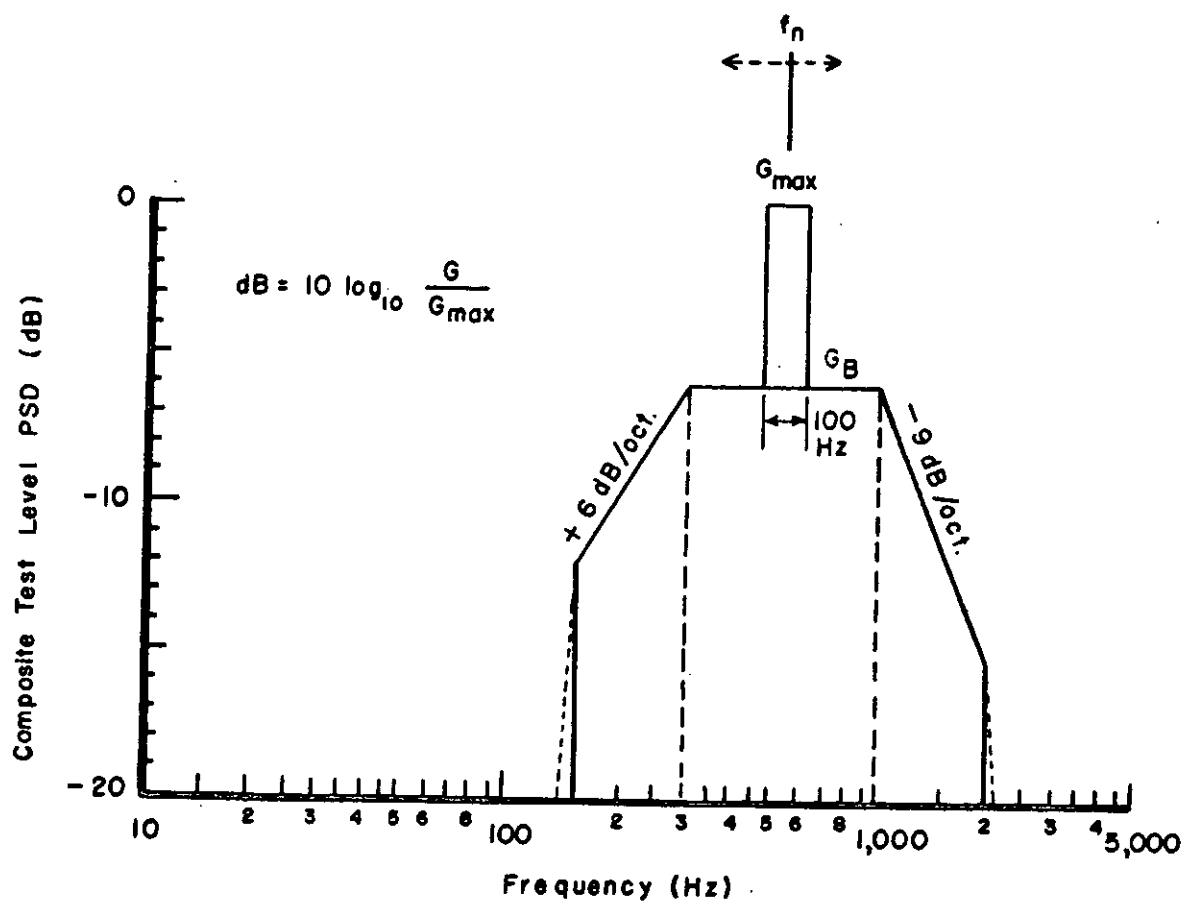


FIGURE 519-7. Swept Random Vibration Test Curve



MIL-STD-810B  
15 June 1967

TABLE 519-I. Ballistic Table

Gun Config- uration	Aircraft	Installation (Typical)	Gun Caliber (mm)	Projectile weight (Gr)	Firing Rate ( $r_1$ )		Muzzle Velocity ( $V_1$ ) (ft/sec)	Muzzle Energy ( $E_1$ ) (ft-lbs)	Muzzle Energy of M-61 ( $E_0$ ) (ft-lbs)	Energy Adjust- ment factor ( $E/E_0$ )
					Rds/min	Rds/sec				
M61	F-104 F-105 F-111 F-4 F-100 B-58 B-52 A-7	Various Fixed (For- ward Bomb Bay) SUU-16, on racks, tail turrets	20	.79	1560 (avg)	.223 (avg)	6000 (nom)	100 (max)	3380 (nom)	39,600
M39	F-5 F-100 F-101 B-57 B-52	2 or 4 in nose or back of nose or tail turret	20	.79	1560 (avg)	.223 (avg)	1500	25	3380 (nom)	39,600
MK11	A-4 F-4 A-7 A-6	MK4 C.L. POD inboard wing, etc.	20	.79	1700	.243 (avg)	2500 (nom)	42	36,300	.918

METHOD 519

519-14

TABLE 519-I. Ballistic Table (Continued)

MK12	A-4	1 at each wing root	20	.79	1700	.243	1000	16.68	3300	41,200		1.04
M3	A-1E	2 each wing	20	.79	2000	.286	800	13.33	2700	33,400		.844
M24	B-52 F-86	Tail turret 4 or 6 nose	20	.79	2000	.286	800	13.33	2700	33,400		.844
M2		obsolete	12.7	.50	800	.114	750	12	2800	13,900		.351
M3	B-52 B-26 B-57 F-86 HH-53 A-1	Tail turret up to 6 in nose	12.7	.50	709	.114	1200 (nom)	20	2810	12,430		.314
GAU-2B/A	AC-47 AC-130 A-37 UH-1 CH-3	side- looking, nose, and up to 8 PODS	7.62	.30	150	.021	6000 (nom) 1500 (min)	100 25 (min)	2750	2,520		.0636

519-15

MIL-STD-810B  
15 June 1967

METHOD 519

MIL-STD-810B  
15 June 1967

TABLE 519-II Random Vibration Test Time

TIME SCHEDULE	CYCLING TIME PER AXIS <u>1/</u>  (MIN)	RANDOM TIME PER AXIS <u>1/</u>  (MIN)	SWEEP TIME (MIN) <u>1/</u>
			300-1,000-300 (Hz)
I	—	15	—
II	—	30	—
III	90	—	5

1/ The total test period may be subdivided into sequential vibration bursts - between which cooling intervals are allowed. The burst time shall be no less than 60 seconds.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-433-697/9213

METHOD 519

519-16