

MIL-STD-1251A
15 Sep 1981

SUPERSEDING
MIL-STD-1251
10 June 1975

MILITARY STANDARD

**SCREWS AND BOLTS
PREFERRED FOR DESIGN,
LISTING OF**



FSC 5305
FSC 5306

MIL-STD-1251A

DEPARTMENT OF DEFENSE
Washington, DC 20301

Screws and Bolts Preferred for Design, Listing of

MIL-STD-1251A

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, ATTN: DRDAR-TST-S, Dover, NJ 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FOREWORD

1. The purpose of this bookform standard is to provide a commodity type parts document on screws and bolts to aid military equipment designers and engineers in the selection of preferred screws and bolts.

2. This document consists of an index of preferred standardization documents and a listing of preferred parts within these documents that have been selected with respect to configuration, sizes, lengths, materials, and finishes for screws and bolts.

3. The selection of preferred documents listed in this standard and the selection of part numbers within the preferred documents were made as follows:

a. Selection of Documents

- (1) Documents listed or scheduled for listing in the Department of Defense Index of Specifications and Standards (DODISS).
- (2) Documents which are active for design.
- (3) Documents specifying part numbers (dash numbers) which designate specific sizes, materials and finishes.

b. Selection of Part Numbers

- (1) By conducting a thorough search and evaluation of existing DOD procurement information.
- (2) By evaluation of preferred parts listed in recent weapon system contracts.
- (3) By evaluation of preferred parts lists obtained from industry.

4. To increase the scope and versatility of this screws and bolts standard, periodic revisions will be developed. Results from Standardization studies, MILITARY PARTS CONTROL ADVISORY GROUP (MPCAG) evaluations, evaluation of a new family of screws and bolts and recommendations from interested activities will form the basis for these revisions.

MIL-STD-1251A

5. The following issued military standards cover other preferred for design standard parts:

- MIL-STD-1598 - Studs, Preferred for Design, Listing of
- MIL-STD-1754 - Fastening Devices, Preferred for Design, Listing of
- MIL-STD-1755 - Keys and Pins, Preferred for Design, Listing of
- MIL-STD-1756 - Rings, Retaining, Preferred for Design, Listing of
- MIL-STD-1759 - Rivets and Rivet Type Fasteners, Preferred for Design, Listing of
- MIL-STD-1758 - Inserts, Screw Thread, Preferred for Design, Listing of
- MIL-STD-1762 - Bearings and Bushings, Plain, Preferred for Design, Listing of
- MIL-STD-1764 - Washers, Preferred for Design, Listing of

MIL-STD-1251A

CONTENTS

| | | <u>PAGE</u> |
|--------------|-----------------------------|-------------|
| Paragraph 1. | SCOPE ----- | 1 |
| 2. | REFERENCED DOCUMENTS ----- | 3 |
| 3. | DEFINITIONS ----- | 20 |
| 4. | GENERAL STATEMENTS ----- | 26 |
| 5. | DETAILED REQUIREMENTS ----- | 26 |
| 6. | NOTES ----- | 26 |

SECTIONS

| | | |
|--------------------|---|-------|
| Section <u>100</u> | <u>BOLT, CLEVIS</u> | |
| 101 | Bolts, Clevis ----- | 101.1 |
| <u>200</u> | <u>BOLT, CLOSE TOLERANCE</u> | |
| 201 | Bolts, Close Tolerance ----- | 201.1 |
| 202 | Bolts, Close Tolerance, Self-Retaining, Impedance Type ----- | 202.1 |
| 203 | Bolts, Close Tolerance, Self-Retaining, Positive Locking ----- | 203.1 |
| <u>300</u> | <u>BOLT, EYE</u> | |
| 301 | Bolts, Eye, Flat ----- | 301.1 |
| 302 | Bolts, Eye, Round ----- | 302.1 |
| <u>400</u> | <u>BOLT, HOOK</u> | |
| 401 | Bolts, Hook ----- | 401.1 |
| <u>500</u> | <u>BOLT, INTERNAL WRENCHING</u> | |
| 501 | Bolts, Internal Wrenching ----- | 501.1 |
| <u>600</u> | <u>BOLT, LAG</u> | |

SECTIONS - Continued

| | <u>PAGE</u> |
|---|-------------|
| Section 601 Bolts, Screw, Lag ----- | 601.1 |
| <u>700 BOLT, MACHINE</u> | |
| 701 Bolts, Machine, Hexagon Head ----- | 701.1 |
| 702 Bolts, Machine, Hexagon Head, Full Shank, Long Thread, Drilled Head, One Hole ----- | 702.1 |
| 703 Bolts, Machine, Hexagon Head, Full Shank, Long Thread, Drilled Head, Three Holes ----- | 703.1 |
| 704 Bolts, Machine, Hexagon Head, Full Shank, Long Thread, Undrilled ----- | 704.1 |
| 705 Bolts, Machine, Hexagon Head, Full Shank, Short Thread ----- | 705.1 |
| 706 Bolts, Machine, Hexagon Head, PD Shank, Long Thread, Drilled Head, One Hole ----- | 706.1 |
| 707 Bolts, Machine, Hexagon Head, PD Shank, Long Thread, Drilled Head, Three Holes ----- | 707.1 |
| 708 Bolts, Machine, Hexagon Head, PD Shank, Long Thread, Undrilled ----- | 708.1 |
| 709 Bolts, Machine, Square Head ----- | 709.1 |
| <u>800 BOLT, SELF-LOCKING</u> | |
| 801 Bolts, Self-Locking, Long Thread, Drilled ----- | 801.1 |
| 802 Bolts, Self-Locking, Long Thread, Undrilled ----- | 802.1 |
| 803 Bolts, Self-Locking, Short Thread ----- | 803.1 |
| <u>900 BOLT, SHEAR</u> | |
| 901 Bolts, Shear, Hexagon Head ----- | 901.1 |
| 902 Bolts, Shear, Hexagon Head, Self-Locking ----- | 902.1 |

MIL-STD-1251A

SECTIONS - Continued

| | | <u>PAGE</u> |
|-------------|---|-------------|
| Section 903 | Bolts, Shear, Hexagon Head, Self-Locking and Non-Locking ----- | 903.1 |
| 904 | Bolts, Shear, Spline Drive ----- | 904.1 |
| <u>1000</u> | <u>BOLT, SHOULDER</u> | |
| 1001 | Bolts, Shoulder ----- | 1001.1 |
| <u>1100</u> | <u>BOLT, SQUARE NECK</u> | |
| 1101 | Bolts, Square Neck ----- | 1101.1 |
| <u>1200</u> | <u>BOLT, TEE HEAD</u> | |
| 1201 | Bolts, Tee Head ----- | 1201.1 |
| 1202 | Bolts, Tee Head, Chamfered ----- | 1202.1 |
| <u>1300</u> | <u>BOLT, U</u> | |
| 1301 | Bolts, U ----- | 1301.1 |
| <u>1400</u> | <u>SCREW, CAP, HEXAGON HEAD</u> | |
| 1401 | Screws, Cap, Hexagon Head, Drilled Head, One Hole --- | 1401.1 |
| 1402 | Screws, Cap, Hexagon Head, Drilled Shank ----- | 1402.1 |
| 1403 | Screws, Cap, Hexagon Head, Undrilled ----- | 1403.1 |
| <u>1500</u> | <u>SCREW, CAP SOCKET HEAD</u> | |
| 1501 | Screws, Cap, Socket Head, Drilled and Undrilled ----- | 1501.1 |
| 1502 | Screws, Cap, Socket Head, Undrilled, Shoulder ----- | 1502.1 |
| <u>1600</u> | <u>SCREW, CLOSE TOLERANCE</u> | |
| 1601 | Screws, Close Tolerance, Brazier Head ----- | 1601.1 |
| 1602 | Screws, Close Tolerance, Fillister Head ----- | 1602.1 |
| 1603 | Screws, Close Tolerance, Flat Head ----- | 1603.1 |

SECTIONS - Continued

| | <u>PAGE</u> |
|---|-------------|
| Section 1604 Screws, Close Tolerance, Flat Head, Self-Locking ---- | 1604.1 |
| 1605 Screws, Close Tolerance, Pan Head ----- | 1605.1 |
| <u>1700 SCREW, DRIVE</u> | |
| 1701 Screws, Drive ----- | 1701.1 |
| <u>1800 SCREW, EYE</u> | |
| 1801 Screws, Eye ----- | 1801.1 |
| <u>1900 SCREW, INSTRUMENT</u> | |
| 1901 Screws, Instrument ----- | 1901.1 |
| <u>2000 SCREW, MACHINE</u> | |
| 2001 Screws, Machine, Fillister Head ----- | 2001.1 |
| 2002 Screws, Machine, Flat Head, 82°, Full Thread ----- | 2002.1 |
| 2003 Screws, Machine, Flat Head, 82°, Long Thread ----- | 2003.1 |
| 2004 Screws, Machine, Flat Head, 100°, Full Thread ----- | 2004.1 |
| 2005 Screws, Machine, Flat Head, 100°, Long Thread ----- | 2005.1 |
| 2006 Screws, Machine, Flat Head, 100°, Short Thread ----- | 2006.1 |
| 2007 Screws, Machine, Hexagon Head, Full Shank, Drilled -- | 2007.1 |
| 2008 Screws, Machine, Hexagon Head, Full Shank, Un- drilled ----- | 2008.1 |
| 2009 Screws, Machine, Hexagon Head, Full Thread ----- | 2009.1 |
| 2010 Screws, Machine, Hexagon Head, PD Shank, Drilled Head ----- | 2010.1 |
| 2011 Screws, Machine, Hexagon Head, PD Shank, Un- drilled ----- | 2011.1 |

MIL-STD-12514

SECTIONS - Continued

| | | <u>PAGE</u> |
|--------------|--|-------------|
| Section 2012 | Screws, Machine, Self-Sealing, Pan Head, Full Thread ----- | 2012.1 |
| 2013 | Screws, Machine, Pan Head, Long Thread ----- | 2013.1 |
| 2014 | Screws, Machine, Pan Head, Short Thread ----- | 2014.1 |
| <u>2100</u> | <u>SCREW, SELF-LOCKING</u> | |
| 2101 | Screws, Self-Locking, Cap, Socket Head ----- | 2101.1 |
| 2102 | Screws, Self-Locking, Fillister Head ----- | 2102.1 |
| 2103 | Screws, Self-Locking, Flat Head, 82° ----- | 2103.1 |
| 2104 | Screws, Self-Locking, Flat Head, 100°, Full Thread -- | 2104.1 |
| 2105 | Screws, Self-Locking, Flat Head, 100°, Long Thread -- | 2105.1 |
| 2106 | Screws, Self-Locking, Flat Head, 100°, Short Thread -- | 2106.1 |
| 2107 | Screws, Self-Locking, Hexagon Head ----- | 2107.1 |
| 2108 | Screws, Self-Locking, Pan Head, Full Thread ----- | 2108.1 |
| 2109 | Screws, Self-Locking, Pan Head, Long Thread ----- | 2109.1 |
| 2110 | Screws, Self-Locking, Pan Head, Short Thread ----- | 2110.1 |
| <u>2200</u> | <u>SCREW, SHOULDER</u> | |
| 2201 | Screws, Shoulder, Brazier Head ----- | 2201.1 |
| 2202 | Screws, Shoulder, Flat Head ----- | 2202.1 |
| 2203 | Screws, Shoulder, Hexagon Head ----- | 2203.1 |
| <u>2300</u> | <u>SCREW, TAPPING, THREAD CUTTING</u> | |
| 2301 | Screws, Tapping, Thread Cutting, Flat Head ----- | 2301.1 |
| 2302 | Screws, Tapping, Thread Cutting, Hexagon Head ----- | 2302.1 |
| 2303 | Screws, Tapping, Thread Cutting, Pan Head ----- | 2303.1 |

SECTIONS - Continued

| | | <u>PAGE</u> |
|--------------|---|-------------|
| Section 2400 | <u>SCREW, TAPPING, THREAD FORMING</u> | |
| 2401 | Screws, Tapping, Thread Forming, Flat Head ----- | 2401.1 |
| 2402 | Screws, Tapping, Thread Forming, Hexagon Head ----- | 2402.1 |
| 2403 | Screws, Tapping, Thread Forming, Pan Head ----- | 2403.1 |
| 2500 | <u>SCREW, WOOD</u> | |
| 2501 | Screws, Wood, Flat Head ----- | 2501.1 |
| 2600 | <u>SETSCREW</u> | |
| 2601 | Setscrews, Cone Point ----- | 2601.1 |
| 2602 | Setscrews, Cup Point ----- | 2602.1 |
| 2603 | Setscrews, Flat Point ----- | 2603.1 |
| 2604 | Setscrews, Half-Dog Point ----- | 2604.1 |
| 2605 | Setscrews, Oval Point ----- | 2605.1 |
| 2700 | <u>THUMBSCREW</u> | |
| 2701 | Thumb screws ----- | 2701.1 |

1. SCOPE

1.1 Scope. This standard provides a listing of preferred screws and bolts encompassing the following characteristics.

- a. Configuration
- b. Size
- c. Materials
- d. Protective Coatings and Finishes

1.2 Purpose. The purpose of this standard is as follows:

- a. Provide the designer with a listing of preferred screws and bolts to promote their use in design of weapon systems and equipment.
- b. Control and minimize the variety of screws and bolts and in military equipment thereby facilitating logistic support of the equipment during its life cycle.

1.3 Application. To minimize the proliferation of screws and bolts, only the preferred part numbers listed herein are authorized for use in new design. All other part numbers, even though shown on current Military Specification Sheets, Military Standards (MS), National Aerospace Standards (NAS), Aeronautical Standards (AS), and Air Force Navy Aeronautical Standards (AN), are not approved for use in new design unless approved by cognizant Government procuring activity.

1.4 Intended use. Implement this standard by including one of the following options in the standard:

- a. Require this standard as a supplement to an end use type standard such as MIL-STD-1471 or MIL-STD-1515. When thus required, only the screws and bolts listed in both the end use type and this standard are acceptable. Use of other screws and bolts requires approval of the Government procuring activity.
- b. Require this standard as a guide to be used with an end use type standard such as MIL-STD-1471 or MIL-STD-1515. When thus required, the screws and bolts listed in the end use type standard and this standard are acceptable. The designer must assure himself the screws and bolts listed in both the end use type standard and this standard are not adequate for his requirements before using screws and bolts not listed herein. Use of screws and bolts not listed in the end use type standard requires approval of the Government procuring activity.

MIL-STD-1251A

- c. Require this standard and indicate exceptions to it. When thus required, only the screws and bolts listed in this standard and not excluded by the exceptions are acceptable. Use of other screws and bolts requires the approval of the Government procuring activity.
- d. Require this standard as a guide. When thus required, the designer must assure himself the screws and bolts listed in this standard are not adequate for the requirement before using other screws and bolts.

2. REFERENCED DOCUMENTS

2.1 Issues of Documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this standard to the extent specified herein.

STANDARDS

FEDERAL

FED-STD-H28 - Screw-Thread Standards for Federal Services

MILITARY

SECTION

| | | |
|--------|---|-----------|
| MS3212 | - Screw, Machine, Pan Head, Cross-Recessed, Self-Sealing, Integral Silicone O-Ring, Plain and Self-Locking ----- | 2012/2108 |
| MS3213 | - Screws, Machine, Pan Head, Cross-Recessed, Self-Sealing, Integral Fluorosilicone O-Ring, Plain and Self-Locking ----- | 2012/2108 |
| MS3369 | - Bolt, Self-Retaining, Positive Locking, CRES, 90KSI FSU, Hexagon Slotted Head, 450°F & 650°F ----- | 203 |
| MS9283 | - Bolt, Machine-Steel AMS 6322, Black Oxide, Hexagon Head, .190-32 UNJF-3A ----- | 708 |
| MS9284 | - Bolt, Machine-Steel AMS 6322, Black Oxide, Hexagon Head, .250-28 UNJF-3A ----- | 708 |
| MS9285 | - Bolt, Machine-Steel AMS 6322, Black Oxide, Hexagon Head, .3125-24 UNJF-3A ----- | 708 |
| MS9286 | - Bolt, Machine-Steel AMS 6322, Black Oxide, Hexagon Head, .375-24 UNJF-3A ----- | 708 |
| MS9292 | - Screw, Machine-Steel AMS 6322, Black Oxide, Drilled, 1 Hole, Hexagon Head, .138-40 UNJF-3A ----- | 2010 |
| MS9294 | - Bolt, Machine-Steel AMS 6322, Black Oxide, Drilled, 1 Hole, Hexagon Head, .190-32 UNJF-3A ----- | 706 |
| MS9295 | - Bolt, Machine-Steel AMS 6322, Black Oxide, Drilled, 1 Hole, Hexagon Head, .250-28 UNJF-3A ----- | 706 |
| MS9296 | - Bolt, Machine-Steel AMS 6322, Black Oxide, Drilled, 1 Hole, Hexagon Head, .3125-24 UNJF-3A ----- | 706 |
| MS9297 | - Bolt, Machine-Steel AMS 6322, Black Oxide, Drilled, 1 Hole, Hexagon Head, .375-24 UNJF-3A ----- | 706 |
| MS9397 | - Bolt, Tee Head-AMS 6322, Chamfered, .190-32 UNJF-3A, Cadmium Plate ----- | 1202 |

MIL-STD-1251A

| | | <u>SECTION</u> |
|--------|--|----------------|
| MS9398 | - Bolt, Tee Head-AMS 6322, Chamfered, .250-28 UNJF-3A, Cadmium Plate ----- | 1202 |
| MS9399 | - Bolt, Tee Head-AMS 6322, Chamfered, .3125-24 UNJF-3A, Cadmium Plate ----- | 1202 |
| MS9400 | - Bolt, Tee Head-AMS 6322, Chamfered, .375-24 UNJF-3A, Cadmium Plate ----- | 1202 |
| MS9402 | - Bolt, Tee Head-AMS 6322, Chamfered, .500-20 UNJF-3A, Cadmium Plate ----- | 1202 |
| MS9432 | - Bolt, Tee Head-AMS 5735, Chamfered, .190-32 UNJF-3A ----- | 1202 |
| MS9433 | - Bolt, Tee Head-AMS 5735, Chamfered, .250-28 UNJF-3A ----- | 1202 |
| MS9434 | - Bolt, Tee Head-AMS 5735, Chamfered, .3125-24 UNJF-3A ----- | 1202 |
| MS9435 | - Bolt, Tee Head-AMS 5735, Chamfered, .375-24 UNJF-3A ----- | 1202 |
| MS9437 | - Bolt, Tee Head-AMS 5735, Chamfered, .500-20 UNJF-3A ----- | 1202 |
| MS9440 | - Bolt, Machine-Steel AMS 6304, Diffused Nickel- Cadmium Plated, Hexagon Head, Drilled, .190-32 UNJF-3A ----- | 707 |
| MS9441 | - Bolt, Machine-Steel AMS 6304, Diffused Nickel- Cadmium Plated, Hexagon Head, Drilled, .250-28 UNJF-3A ----- | 707 |
| MS9442 | - Bolt, Machine-Steel AMS 6304, Diffused Nickel- Cadmium Plated, Hexagon Head, Drilled, .3125-24 UNJF-3A ----- | 707 |
| MS9443 | - Bolt, Machine-Steel, AMS 6304, Diffused Nickel- Cadmium Plated, Hexagon Head, Drilled, .375-24 UNJF-3A ----- | 707 |
| MS9445 | - Bolt, Machine-Steel AMS 6304, Diffused Nickel- Cadmium Plated, Hexagon Head, Drilled, .500-20 UNJF-3A ----- | 707 |
| MS9447 | - Bolt, Machine-Steel AMS 6304, Diffused Nickel- Cadmium Plated, Hexagon Head, Drilled, .625-18 UNJF-3A ----- | 707 |
| MS9448 | - Bolt, Machine-Steel AMS 6304, Diffused Nickel- Cadmium Plated, Hexagon Head, Drilled, .750-16 UNJF-3A ----- | 707 |
| MS9449 | - Screw, Machine-Steel AMS 6304, Diffused Nickel- Cadmium Plated, Hexagon Head, .138-40 UNJF-3A - | 2011 |
| MS9450 | - Screw, Machine-Steel AMS 6304, Diffused Nickel- Cadmium Plated, Hexagon Head, .164-36 UNJF-3A ----- | 2011 |

| | | <u>SECTION</u> |
|--------|--|----------------|
| MS9451 | - Bolt, Machine-Steel AMS 6304, Diffused Nickel-Cadmium Plated, Hexagon Head, .190-32 UNJF-3A --- | 708 |
| MS9452 | - Bolt, Machine-Steel AMS 6304, Diffused Nickel-Cadmium Plated, Hexagon Head, .250-28 UNJF-3A --- | 708 |
| MS9453 | - Bolt, Machine-Steel AMS 6304, Diffused Nickel-Cadmium Plated, Hexagon Head, .3125-24 UNJF-3A ----- | 708 |
| MS9454 | - Bolt, Machine-Steel AMS 6304, Diffused Nickel-Cadmium Plated Hexagon Head, .375-24 UNJF-3A ----- | 708 |
| MS9456 | - Bolt, Machine-Steel AMS 6304, Diffused Nickel-Cadmium Plated, Hexagon Head, .500-20 UNJF-3A ----- | 708 |
| MS9458 | - Bolt, Machine-Steel AMS 6304, Diffused Nickel-Cadmium Plated, Hexagon Head, .625-18 UNJF-3A ----- | 708 |
| MS9459 | - Bolt, Machine-Steel AMS 6304, Diffused Nickel-Cadmium Plated, Hexagon Head, .750-16 UNJF-3A ----- | 708 |
| MS9487 | - Screw, Machine - Hexagon Head, Full Shank, AMS 5731, .138-40 UNJF-3A ----- | 2008 |
| MS9488 | - Screw, Machine - Hexagon Head, Full Shank, AMS 5731, .164-30 UNJF-3A ----- | 2008 |
| MS9489 | - Bolt, Machine - Hexagon Head, Full Shank, AMS 5731, .190-32 UNJF-3A ----- | 704 |
| MS9490 | - Bolt, Machine - Hexagon Head, Full Shank, AMS 5731, .250-28 UNJF-3A ----- | 704 |
| MS9491 | - Bolt, Machine - Hexagon Head, Full Shank, AMS 5731, .3125-24 UNJF-3A ----- | 704 |
| MS9492 | - Bolt, Machine - Hexagon Head, Full Shank, AMS 5731, .375-24 UNJF-3A ----- | 704 |
| MS9494 | - Bolt, Machine - Hexagon Head, Full Shank, AMS 5731, .500-20 UNJF-3A ----- | 704 |
| MS9496 | - Bolt, Machine - Hexagon Head, Full Shank, AMS 5731, .625-18 UNJF-3A ----- | 704 |
| MS9497 | - Bolt, Machine - Hexagon Head, Full Shank, AMS 5731, .750-16 UNJF-3A ----- | 704 |
| MS9498 | - Screw, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5731, .138-40 UNJF-3A ----- | 2007 |
| MS9499 | - Screw, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5731, .164-36 UNJF-3A ----- | 2007 |
| MS9500 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5731, .190-32 UNJF-3A ----- | 702 |
| MS9501 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5731, .250-28 UNJF-3A ----- | 702 |

MIL-STD-1251A

| | | <u>SECTION</u> |
|--------|---|----------------|
| MS9502 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5731, .3125-24 UNJF-3A ----- | 702 |
| MS9503 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5731, .375-24 UNJF-3A ----- | 702 |
| MS9505 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5731, .500-20 UNJF-3A ----- | 702 |
| MS9507 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5731, .625-18 UNJF-3A ----- | 702 |
| MS9508 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5731, .750-16 UNJF-3A ----- | 702 |
| MS9516 | - Screw, Machine-Steel, AMS 6322, Cadmium Plate, Hexagon Head, .138-40 UNJF-3A ----- | 2011 |
| MS9517 | - Screw, Machine-Steel, AMS 6322, Cadmium Plate, Hexagon Head, .164-36 UNJF-3A ----- | 2011 |
| MS9518 | - Bolt, Machine-Steel, AMS 6322, Cadmium Plate, Hexagon Head, .190-32 UNJF-3A ----- | 708 |
| MS9519 | - Bolt, Machine-Steel, AMS 6322, Cadmium Plate, Hexagon Head, .250-28 UNJF-3A ----- | 708 |
| MS9520 | - Bolt, Machine-Steel, AMS 6322, Cadmium Plate, Hexagon Head, .3125-24 UNJF-3A ----- | 708 |
| MS9521 | - Bolt, Machine-Steel, AMS 6322, Cadmium Plate, Hexagon Head, .375-24 UNJF-3A ----- | 708 |
| MS9523 | - Bolt, Machine-Steel, AMS 6322, Cadmium Plate, Hexagon Head, .500-20 UNJF-3A ----- | 708 |
| MS9525 | - Bolt, Machine-Steel, AMS 6322, Cadmium Plate, Hexagon Head, .625-18 UNJF-3A ----- | 708 |
| MS9526 | - Bolt, Machine-Steel, AMS 6322, Cadmium Plate, Hexagon Head, .750-16 UNJF-3A ----- | 708 |
| MS9527 | - Screw, Machine-Steel, AMS 6322, Cadmium Plate, Drilled, 1 Hole, Hexagon Head, .138-40 UNJF-3A ----- | 2010 |
| MS9528 | - Screw, Machine-Steel, AMS 6322, Cadmium Plate, Drilled, 1 Hole, Hexagon Head, .164-36 UNJF-3A ----- | 2010 |
| MS9529 | - Bolt, Machine-Steel, AMS 6322, Cadmium Plate, Drilled, 1 Hole, Hexagon Head, .190-32 UNJF-3A ----- | 706 |
| MS9530 | - Bolt, Machine-Steel, AMS 6322, Cadmium Plate, Drilled, 1 Hole, Hexagon Head, .250-28 UNJF-3A ----- | 706 |
| MS9531 | - Bolt, Machine-Steel, AMS 6322, Cadmium Plate, Drilled, 1 Hole, Hexagon Head, .3125-24 UNJF-3A ----- | 706 |

| | | <u>SECTION</u> |
|--------|---|----------------|
| MS9532 | - Bolt, Machine-Steel, AMS 6322, Cadmium Plate, Drilled, 1 Hole, Hexagon Head, .375-24 UNJF-3A ----- | 706 |
| MS9534 | - Bolt, Machine-Steel, AMS 6322, Cadmium Plate, Drilled, 1 Hole, Hexagon Head, .500-20 UNJF-3A ----- | 706 |
| MS9536 | - Bolt, Machine-Steel, AMS 6322, Cadmium Plate, Drilled, 1 Hole, Hexagon Head, .625-18 UNJF-3A ----- | 706 |
| MS9537 | - Bolt, Machine-Steel, AMS 6322, Cadmium Plate, Drilled, 1 Hole, Hexagon Head, .750-16 UNJF-3A ----- | 706 |
| MS9583 | - Bolt, Machine - Hexagon Head, Drilled, 6 Holes, Full Shank, AMS 5731, .190-32 UNJF-3A ----- | 703 |
| MS9584 | - Bolt, Machine - Hexagon Head, Drilled, 6 Holes, Full Shank, AMS 5731, .250-28 UNJF-3A ----- | 703 |
| MS9585 | - Bolt, Machine - Hexagon Head, Drilled, 6 Holes, Full Shank, AMS 5731, .3125-24 UNJF-3A ----- | 703 |
| MS9586 | - Bolt, Machine - Hexagon Head, Drilled, 6 Holes, Full Shank, AMS 5731, .375-24 UNJF-3A ----- | 703 |
| MS9588 | - Bolt, Machine - Hexagon Head, Drilled, 6 Holes, Full Shank, AMS 5731, .500-20 UNJF-3A ----- | 703 |
| MS9590 | - Bolt, Machine - Hexagon Head, Drilled, 6 Holes, Full Shank, AMS 5731, .625-18 UNJF-3A ----- | 703 |
| MS9591 | - Bolt, Machine - Hexagon Head, Drilled, 6 Holes, Full Shank, AMS 5731, .750-16 UNJF-3A ----- | 703 |
| MS9622 | - Screw, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, Titanium AMS 4967, .138-40 UNJF-3A ----- | 2010 |
| MS9623 | - Screw, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, Titanium AMS 4967, .164-36 UNJF-3A ----- | 2010 |
| MS9624 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, Titanium AMS 4967, .190-32 UNJF-3A ----- | 706 |
| MS9625 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, Titanium AMS 4967, .250-28 UNJF-3A ----- | 706 |

MIL-STD-1251A

| | | <u>SECTION</u> |
|--------|--|----------------|
| MS9626 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, Titanium AMS 4967, .3125-24 UNJF-3A ----- | 706 |
| MS9627 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, Titanium AMS 4967, .375-24 UNJF-3A ----- | 706 |
| MS9629 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, Titanium AMS 4967, .500-20 UNJF-3A ----- | 706 |
| MS9631 | - Screw, Machine - Hexagon Head, PD Shank, Titanium AMS 4967, .138-40 UNJF-3A ----- | 2011 |
| MS9633 | - Bolt, Machine - Hexagon Head, PD Shank, Titanium AMS 4967, .190-32 UNJF-3A ----- | 708 |
| MS9634 | - Bolt, Machine - Hexagon Head, PD Shank, Titanium AMS 4967, .250-28 UNJF-3A ----- | 708 |
| MS9635 | - Bolt, Machine - Hexagon Head, PD Shank, Titanium AMS 4967, .3125-24 UNJF-3A ----- | 708 |
| MS9636 | - Bolt, Machine - Hexagon Head, PD Shank, Titanium AMS 4967, .375-24 UNJF-3A ----- | 708 |
| MS9638 | - Bolt, Machine - Hexagon Head, PD Shank, Titanium AMS 4967, .500-20 UNJF-3A ----- | 708 |
| MS9640 | - Screw, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, Titanium AMS 4967, .138-40 UNJF-3A ----- | 2007 |
| MS9641 | - Screw, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, Titanium AMS 4967, .164-36 UNJF-3A ----- | 2007 |
| MS9642 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, Titanium AMS 4967, .190-32 UNJF-3A ----- | 702 |
| MS9643 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, Titanium AMS 4967, .250-28 UNJF-3A ----- | 702 |
| MS9644 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, Titanium AMS 4967, .3125-24 UNJF-3A ----- | 702 |
| MS9645 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, Titanium AMS 4967, .375-24 UNJF-3A ----- | 702 |
| MS9647 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, Titanium AMS 4967, .500-20 UNJF-3A ----- | 702 |
| MS9649 | - Screw, Machine - Hexagon Head, Full Shank, Titanium, AMS 4967, .138-40 UNJF-3A ----- | 2008 |
| MS9650 | - Screw, Machine - Hexagon Head, Full Shank, Titanium, AMS 4967, .164-36 UNJF-3A ----- | 2008 |

| | | <u>SECTION</u> |
|--------|--|----------------|
| MS9651 | - Bolt, Machine - Hexagon Head, Full Shank, Titanium, AMS 4967, .190-32 UNJF-3A ----- | 704 |
| MS9652 | - Bolt, Machine - Hexagon Head, Full Shank, Titanium, AMS 4967, .250-28 UNJF-3A ----- | 704 |
| MS9653 | - Bolt, Machine - Hexagon Head, Full Shank, Titanium, AMS 4967, .3125-24 UNJF-3A ----- | 704 |
| MS9654 | - Bolt, Machine - Hexagon Head, Full Shank, Titanium, AMS 4967, .375-24 UNJF-3A ----- | 704 |
| MS9656 | - Bolt, Machine - Hexagon Head, Full Shank, Titanium, AMS 4967, .500-20 UNJF-3A ----- | 704 |
| MS9685 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, Steel AMS 6304, Diffused Nickel Cadmium Plate, .190-32 UNJF-3A ----- | 706 |
| MS9686 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, Steel AMS 6304, Diffused Nickel Cadmium Plate, .250-28 UNJF-3A ----- | 706 |
| MS9687 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, Steel AMS 6304, Diffused Nickel Cadmium Plate, .3125-24 UNJF-3A ----- | 706 |
| MS9688 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, Steel AMS 6304, Diffused Nickel Cadmium Plate, .375-24 UNJF-3A ----- | 706 |
| MS9690 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, Steel AMS 6304, Diffused Nickel Cadmium Plate, .500-20 UNJF-3A ----- | 706 |
| MS9692 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, Steel AMS 6304, Diffused Nickel Cadmium Plate, .625-18 UNJF-3A ----- | 706 |
| MS9693 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, Steel AMS 6304, Diffused Nickel Cadmium Plate, .750-16 UNJF-3A ----- | 706 |
| MS9781 | - Screw, Machine - Hexagon Head, Full Shank, AMS 5643, .138-40 UNJF-3A ----- | 2008 |
| MS9782 | - Screw, Machine - Hexagon Head, Full Shank, AMS 5643, .164-36 UNJF-3A ----- | 2008 |
| MS9783 | - Bolt, Machine - Hexagon Head, Full Shank, AMS 5643, .190-32 UNJF-3A ----- | 704 |
| MS9784 | - Bolt, Machine - Hexagon Head, Full Shank, AMS 5643, .250-28 UNJF-3A ----- | 704 |
| MS9785 | - Bolt, Machine - Hexagon Head, Full Shank, AMS 5643, .3125-24 UNJF-3A ----- | 704 |
| MS9786 | - Bolt, Machine - Hexagon Head, Full Shank, AMS 5643, .375-24 UNJF-3A ----- | 704 |
| MS9788 | - Bolt, Machine - Hexagon Head, Full Shank, AMS 5643, .500-20 UNJF-3A ----- | 704 |

MIL-STD-1251A

| | | <u>SECTION</u> |
|--------|--|----------------|
| MS9790 | - Bolt, Machine - Hexagon Head, Full Shank, AMS 5643, .625-18 UNJF-3A ----- | 704 |
| MS9791 | - Bolt, Machine - Hexagon Head, Full Shank, AMS 5643, .750-16 UNJF-3A ----- | 704 |
| MS9792 | - Screw, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5643, .138-40 UNJF-3A ----- | 2007 |
| MS9793 | - Screw, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5643, .164-36 UNJF-3A ----- | 2007 |
| MS9794 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5643, .190-32 UNJF-3A ----- | 702 |
| MS9795 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5643, .250-28 UNJF-3A ----- | 702 |
| MS9796 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5643, .3125-24 UNJF-3A ----- | 702 |
| MS9797 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5643, .375-24 UNJF-3A ----- | 702 |
| MS9799 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5643, .500-20 UNJF-3A ----- | 702 |
| MS9801 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5643, .625-18 UNJF-3A ----- | 702 |
| MS9802 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, Full Shank, AMS 5643, .750-16 UNJF-3A ----- | 702 |
| MS9803 | - Screw, Machine - Hexagon Head, PD Shank, AMS 5643, .138-40 UNJF-3A ----- | 2011 |
| MS9804 | - Screw, Machine - Hexagon Head, PD Shank, AMS 5643, .164-36 UNJF-3A ----- | 2011 |
| MS9805 | - Bolt, Machine - Hexagon Head, PD Shank, AMS 5643, .190-32 UNJF-3A ----- | 708 |
| MS9806 | - Bolt, Machine - Hexagon Head, PD Shank, AMS 5643, .250-28 UNJF-3A ----- | 708 |
| MS9807 | - Bolt, Machine - Hexagon Head, PD Shank, AMS 5643, .3125-24 UNJF-3A ----- | 708 |
| MS9808 | - Bolt, Machine - Hexagon Head, PD Shank, AMS 5643, .375-24 UNJF-3A ----- | 708 |
| MS9810 | - Bolt, Machine - Hexagon Head, PD Shank, AMS 5643, .500-20 UNJF-3A ----- | 708 |
| MS9812 | - Bolt, Machine - Hexagon Head, PD Shank, AMS 5643, .625-18 UNJF-3A ----- | 708 |
| MS9813 | - Bolt, Machine - Hexagon Head, PD Shank, AMS 5643, .750-16 UNJF-3A ----- | 708 |
| MS9814 | - Screw, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, AMS 5643, .138-40 UNJF-3A ----- | 2010 |
| MS9815 | - Screw, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, AMS 5643, .164-36 UNJF-3A ----- | 2010 |

| | | <u>SECTION</u> |
|---------|--|----------------|
| MS9816 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, AMS 5643, .190-32 UNJF-3A ----- | 706 |
| MS9817 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, AMS 5643, .250-28 UNJF-3A ----- | 706 |
| MS9818 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, AMS 5643, .3125-24 UNJF-3A ----- | 706 |
| MS9819 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, AMS 5643, .375-24 UNJF-3A ----- | 706 |
| MS9821 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, AMS 5643, .500-20 UNJF-3A ----- | 706 |
| MS9823 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, AMS 5643, .625-18 UNJF-3A ----- | 706 |
| MS9824 | - Bolt, Machine - Hexagon Head, Drilled, 1 Hole, PD Shank, AMS 5643, .750-16 UNJF-3A ----- | 706 |
| MS9957 | - Bolt, Machine - Hexagon Head, Drilled, 6 Hole, PD Shank, Steel AMS 6322, Cadmium Plated, .190-32 UNJF-3A ----- | 707 |
| MS9958 | - Bolt, Machine, Hexagon Head, Drilled, 6 Hole, PD Shank, Steel AMS 6322, Cadmium Plated, .250-28 UNJF-3A ----- | 707 |
| MS9959 | - Bolt, Machine, Hexagon Head, Drilled, 6 Hole, PD Shank, Steel AMS 6322, Cadmium Plated, .3125-24 UNJF-3A ----- | 707 |
| MS9960 | - Bolt, Machine, Hexagon Head, Drilled, 6 Hole, PD Shank, Steel AMS 6322, Cadmium Plated, .375-24 UNJF-3A ----- | 707 |
| MS9962 | - Bolt, Machine, Hexagon Head, Drilled, 6 Hole, PD Shank, Steel AMS 6322, Cadmium Plated, .500-20 UNJF-3A ----- | 707 |
| MS9964 | - Bolt, Machine, Hexagon Head, Drilled, 6 Hole, PD Shank, Steel AMS 6322, Cadmium Plated, .625-18 UNJF-3A ----- | 707 |
| MS9965 | - Bolt, Machine, Hexagon Head, Drilled, 6 Hole, PD Shank, Steel AMS 6322, Cadmium Plated, .750-16 UNJF-3A ----- | 707 |
| MS16992 | - Bolt, (Screw), Lag, Hex Head, Gimlet Point ----- | 601 |
| MS18153 | - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Head Drilled for Locking Wire, Alloy Steel, Grade 8 Cadmium Plated, UNF-2A, Plain and Self-Locking ----- | 801/1401 |
| MS18154 | - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Head Drilled for Locking Wire, Alloy Steel, Grade 8, Cadmium Plated, UNC-2A, Plain and Self-Locking ----- | 801/1401 |

MIL-STD-1251A

| | | <u>SECTION</u> |
|------------------------------------|---|----------------|
| MS18211 | - Screw, Machine - 80° and 100°, Flat Countersunk Head, Slotted, Plastic, (Nylon) ----- | 2002/2004 |
| MS18212 | - Screw, Machine - Pan Head, Slotted, Plastic (Nylon), UNC-2A ----- | 2013 |
| MS20004 thru MS20024 | - Bolts, Internal Wrenching, 160 ksi Ftu and 96 ksi Fsu ----- | 501 |
| MS20033 thru MS20046 MS20073 | - Bolt, Machine, Hexagon Head, 1200°F ----- | 705 |
| | - Bolt, Machine, Aircraft, Drilled Head, Fine Thread ----- | 705 |
| MS20074 | - Bolt, Machine, Aircraft, Drilled Head, Coarse Thread ----- | 705 |
| MS21090 | - Screw, Self-Locking, 250°F, Steel 55 ksi Ftu, Pan Head, Cross Recessed ----- | 2109 |
| MS21091 | - Bolt, Self-Locking, 250°F, Steel, 75 ksi Fsu, 125 ksi Ftu, 100° Flush Head, Cross Recessed --- | 2106 |
| MS21092 | - Bolt, Self-Locking, 250°F, CRES, 48 ksi Fsu, 80 ksi Ftu, 100° Flush Head Cross Recessed ----- | 2106 |
| MS21093 | - Screw, Self-Locking, 250°F, Steel, 55 ksi Ftu, 100° Flat Head, Cross Recessed ----- | 2105 |
| MS21094 | - Bolt, Self-Locking, 250°F, Steel, 75 ksi Fsu, 125 ksi Ftu, Hex Head ----- | 803 |
| MS21095 | - Bolt, Self-Locking, 250°F, CRES, 48 ksi Fsu, 80 ksi Ftu, Hex Head ----- | 803/2107 |
| MS21096 | - Bolt, Self-Locking, 250°F, Steel 75 ksi Fsu, 125 ksi Ftu, Pan Head, Cross Recessed ----- | 2110 |
| MS21097 | - Bolt, Self-Locking, 250°F, CRES, 48 ksi Fsu, 80 ksi Ftu, Pan Head, Cross Recessed ----- | 2110 |
| MS21125 | - Bolt, Self-Retaining, Positive Locking, CRES, 90 ksi Fsu, Pan Head, 450°F & 650°F ----- | 203 |
| MS21130 | - Bolt, Self-Retaining, Positive Locking, CRES, 90 ksi Fsu, 100° Flush Head, 450°F & 650°F ----- | 203 |
| MS21134 | - Bolt, Tension, Steel 180 ksi Ftu, 450°F., External Wrenching, Spline Drive, Flanged Head ----- | 904 |
| MS21296 | - Bolt, Tension, Steel, 260 ksi Ftu, 450°F., External Wrenching, Spline Drive, Flanged Head ----- | 904 |
| MS21297 | - Bolt, Tension, Steel, 220 ksi Ftu, 450°F., External Wrenching, Spline Drive, Flanged Head ----- | 904 |
| MS21316 | - Thumbscrew (Shouldered), Flat Point, Carbon Steel, Cadmium Plated, UNC-2A ----- | 2701 |
| MS21318 | - Screw, Drive, Round Head, Type U, Steel, Carbon, Cadmium Plated ----- | 1701 |

| | | <u>SECTION</u> |
|---------|--|----------------|
| MS24625 | - Screw, Tapping-Thread Cutting, Type BF or BT, Pan Head, Cross Recessed, Carbon Steel ----- | 2303 |
| MS24627 | - Screw, Tapping-Thread Cutting, Types D, F, G, or T, Flat 82° Countersunk Head, Cross Recessed, Carbon Steel ----- | 2301 |
| MS24628 | - Screw, Tapping-Thread Cutting, Types D, F, G, or T, Flat 82° Countersunk Head, Cross Recessed, Corrosion-Resisting Steel ----- | 2301 |
| MS24629 | - Screw, Tapping-Thread Cutting, Types D, F, G, or T Pan Head, Cross Recessed, Steel, Carbon Cadmium Plated ----- | 2303 |
| MS24630 | - Screw, Tapping-Thread Cutting, Types D, F, G, or T Pan Head, Cross Recessed, Corrosion Resisting Steel ----- | 2303 |
| MS24667 | - Screw, Cap-Socket Head, Flat Countersunk, 82°, Alloy Steel, UNC-3A ----- | 2003/2103 |
| MS24671 | - Screw, Cap, Socket-Head - Flat Countersunk, 82° Corrosion-Resisting Steel, UNC-3A ----- | 2003 |
| MS24693 | - Screw, Machine, Flat Countersunk Head, 100°, Cross Recessed, UNC-2A and UNF-2A (IN./MM) ----- | 2005 |
| MS24694 | - Screw, Machine, Flat Countersunk Head, 100°, Structural, Cross Recessed, UNC-3A and UNF-3A -- | 2006 |
| MS27039 | - Screw, Machine - Pan Head, Structural, Cross Recessed ----- | 2014 |
| MS27576 | - Bolt, Self-Retaining, Impedance Type, 95 ksi Fsu, Hex Head, 450°F ----- | 202 |
| MS27577 | - Bolt, Self-Retaining, Impedance Type, 95 ksi Fsu, 100° Flush Head, 450°F ----- | 202 |
| MS35190 | - Screw, Machine - 82° Flat Countersunk Head, Cross-Recessed, Carbon Steel, Cadmium Plated, UNC-2A ----- | 2003/2103 |
| MS35191 | - Screw, Machine - 82° Flat Countersunk Head, Cross-Recessed, Carbon Steel, Cadmium Plated, UNF-2A ----- | 2003/2103 |
| MS35198 | - Screw, Machine - Flat Countersunk Head, 82°, Cross-Recessed, Brass, Black Chemical Finish, UNC-2A ----- | 2003 |
| MS35199 | - Screw, Machine - Flat Countersunk Head, 82°, Cross-Recessed, Brass, Black Chemical Finish, UNF-2A ----- | 2003 |
| MS35202 | - Screw, Machine - Flat Countersunk Head, 82°, Cross Recessed, Aluminum Alloy, Anodic Coated, UNC-2A ----- | 2003 |
| MS35203 | - Screw, Machine - Flat Countersunk Head, 82°, Cross-Recessed, Aluminum Alloy, Anodic Coated, UNF-2A ----- | 2003 |

MIL-STD-1251A

| | <u>SECTION</u> |
|---------|---|
| MS35206 | - Screw, Machine - Pan Head, Cross-Recessed, Carbon Steel, Cadmium Plated, UNC-2A (IN./MM) --- 2013 |
| MS35207 | - Screw, Machine, Pan Head, Cross-Recessed, Carbon Steel, Cadmium Plated, UNF-2A (IN./MM) --- 2013 |
| MS35214 | - Screw, Machine - Pan Head, Cross-Recessed, Brass, UNC-2A ----- 2013 |
| MS35215 | - Screw, Machine - Pan Head, Cross-Recessed, Brass, UNF-2A ----- 2013 |
| MS35218 | - Screw, Machine - Pan Head, Cross-Recessed, Aluminum Alloy, UNC-2A ----- 2013 |
| MS35219 | - Screw, Machine - Pan Head, Cross-Recessed, Aluminum Alloy, UNF 2A ----- 2013 |
| MS35265 | - Screw, Machine - Drilled Fillister Head, Slotted, Carbon Steel, UNC-2A ----- 2001 |
| MS35266 | - Screw, Machine - Drilled Fillister Head, Slotted, Carbon Steel, UNF-2A ----- 2001 |
| MS35273 | - Screw, Machine - Drilled Fillister Head, Slotted, Brass, Black Chemical Finish, UNC-2A ----- 2001 |
| MS35274 | - Screw, Machine - Drilled Fillister Head, Slotted, Brass, Black Chemical Finish, UNF-2A ----- 2001 |
| MS35275 | - Screw, Machine - Drilled Fillister Head, Slotted, Corrosion Resisting Steel, Passivated, UNC-2A --- 2001 |
| MS35276 | - Screw, Machine - Drilled Fillister Head, Slotted, Corrosion Resisting Steel, Passivated, UNF-2A --- 2001 |
| MS35277 | - Screw, Machine - Drilled Fillister Head, Slotted, Aluminum Alloy, UNC-2A ----- 2001 |
| MS35278 | - Screw, Machine - Drilled Fillister Head, Slotted, Aluminum Alloy, UNF-2A ----- 2001 |
| MS35307 | - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Steel, Corrosion Resisting, Passivated, UNC-2A -- 1403 |
| MS35308 | - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Steel, Corrosion Resisting, Passivated, UNF-2A -- 1403 |
| MS35309 | - Screw, Cap, Hexagon Head - Naval Brass, Plain Finish, UNC-2A ----- 1403 |
| MS35310 | - Screw, Cap, Hexagon Head - Naval Brass, Plain Finish, UNF-2A ----- 1403 |
| MS35355 | - Bolt, Machine, Square Head, Steel, Cadmium or Zinc Plated, UNC-2A ----- 709 |
| MS35492 | - Screw, Wood, Flat Head, Cross-Recessed, Steel and Brass ----- 2501 |
| MS35494 | - Screw, Wood, Flat Head, Slotted, Steel and Brass ----- 2501 |
| MS35646 | - Screw, Eye - Steel or Brass ----- 1801 |
| MS35751 | - Bolt, Square Neck, Round Head, (Carriage), Steel, Cadmium or Zinc Plated, UNC-2A ----- 1101 |

| | <u>SECTION</u> |
|---------|--|
| MS51021 | - Setscrew - Hexagon Socket, Cup Point, Corrosion-Resisting Steel, Passivated, UNC-3A, Plain and Self-Locking ----- 2602 |
| MS51023 | - Setscrew - Hexagon Socket, Cup Point, Corrosion-Resisting Steel, Passivated, UNF-3A, Plain and Self-Locking ----- 2602 |
| MS51029 | - Setscrew - Hexagon Socket, Flat Point, Corrosion-Resisting Steel, Passivated, UNC-3A, Plain and Self-Locking ----- 2603 |
| MS51031 | - Setscrew - Hexagon Socket, Flat Point, Corrosion-Resisting Steel, Passivated, UNF-3A, Plain and Self-Locking ----- 2603 |
| MS51038 | - Setscrew - Hexagon Socket, Cone Point, Corrosion-Resisting Steel, Passivated, UNC-3A and UNF-3A, Plain and Self-Locking ----- 2601 |
| MS51099 | - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Head Drilled for Locking Wire, Steel, Corrosion-Resisting, Passivated, UNC-2A ----- 1401 |
| MS51100 | - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Head Drilled for Locking Wire, Steel, Corrosion-Resisting, Passivated, UNF-2A ----- 1401 |
| MS51105 | - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Shank Drilled for Cotter Pin, Steel, Grade 5, Cadmium Plated, UNC-2A ----- 1402 |
| MS51106 | - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Shank Drilled for Cotter Pin, Steel, Grade 5, Cadmium Plated, UNF-2A ----- 1402 |
| MS51109 | - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Shank Drilled for Cotter Pin, Steel Corrosion-Resisting, Passivated, UNC-2A ----- 1402 |
| MS51110 | - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Shank Drilled for Cotter Pin, Steel, Corrosion-Resisting, Passivated, UNF-2A ----- 1402 |
| MS51849 | - Screw, Machine-Steel, Hexagon Head, Slotted, UNF-2A and UNC-2A ----- 2009 |
| MS51850 | - Screw, Tapping-Thread Forming, Type AB, Hexagon Head, Slotted ----- 2402 |
| MS51861 | - Screw, Tapping-Thread Forming, Type AB, Pan Head, Cross-Recessed ----- 2403 |
| MS51862 | - Screw, Tapping-Thread Forming, Type AB, Flat 82° Countersunk Head, Cross-Recessed ----- 2401 |
| MS51863 | - Screw, Tapping - High Performance, Thread Rolling, Types SF, SW and TT, Pan Head, Cross-Recessed ----- 2303 |
| MS51869 | - Screw, Tapping - High Performance, Thread Rolling, Types SF, SW and TT, Hexagon Washer Head 2302 |

MIL-STD-1251A

| | <u>SECTION</u> |
|---------|--|
| MS51870 | - Screw, Tapping-High Performance, Thread Rolling, Types SF, SW and TT, Flat Countersunk Head, Cross-Recessed ----- 2301 |
| MS51871 | - Screw, Tapping-High Performance, Zone Hardened Structural Thread Rolling, Hexagon Washer Head ----- 2402 |
| MS51937 | - Bolt, Eye - Shoulder ----- 302 |
| MS51957 | - Screw, Machine - Pan Head, Cross-Recessed, Corrosion Resisting Steel, UNC-2A ----- 2013 |
| MS51958 | - Screw, Machine - Pan Head, Cross-Recessed, Corrosion Resisting Steel, UNF-2A ----- 2013 |
| MS51959 | - Screw, Machine - Flat Countersunk Head, 82°, Cross-Recessed, Corrosion Resisting Steel, UNC-2A ----- 2003 |
| MS51960 | - Screw, Machine-Flat Countersunk Head, 82°, Cross-Recessed, Corrosion Resisting Steel, UNF-2A ----- 2003 |
| MS51963 | - Setscrew - Hexagon Socket, Cup Point, Alloy Steel, Cadmium Plated, UNC-3A, Plain and Self-Locking ----- 2602 |
| MS51964 | - Setscrew - Hexagon Socket, Cup Point, Alloy Steel, Cadmium Plated, UNF-3A, Plain and Self-Locking ----- 2602 |
| MS51965 | - Setscrew - Hexagon Socket, Flat Point, Alloy Steel, Cadmium Plated, UNC-3A, Plain and Self-Locking ----- 2603 |
| MS51966 | - Setscrew - Hexagon Socket, Flat Point, Alloy Steel, Cadmium Plated, UNF-3A, Plain and Self-Locking ----- 2603 |
| MS51973 | - Setscrew - Hexagon Socket, Cone Point, Alloy Steel, Cadmium Plated, UNC-3A, Plain and Self-Locking ----- 2601 |
| MS51974 | - Setscrew - Hexagon Socket, Cone Point, Alloy Steel, Cadmium Plated, UNF-3A, Plain and Self-Locking ----- 2601 |
| MS51975 | - Screw, Shoulder-Socket Head, Hexagon, Alloy Steel, Cadmium Plated, UNC-3A ----- 1504 |
| MS51977 | - Setscrew - Hexagon Socket, Half-Dog Point, Alloy Steel, Cadmium Plated, UNC-3A ----- 2604 |
| MS51981 | - Setscrew - Hexagon Socket, Oval Point, Alloy Steel, Cadmium Plated, UNC-3A ----- 2605 |
| MS90727 | - Screw, Cap, Hexagon Head, (Finished Hexagon Bolt), Alloy Steel, Grade 8, Cadmium Plated, UNF-2A, Plain and Self-Locking ----- 802/1403 |

| | <u>SECTION</u> |
|---|----------------|
| MS90728 - Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Alloy Steel, Grade 8, Cadmium Plated, UNC-2A Plain and Self-Locking ----- | 802/1403 |
| AIR FORCE - NAVY AERONAUTICAL | |
| AN3 thru - Bolt, Machine, Aircraft ----- | 705 |
| AN20 | |
| AN21 thru - Bolt, Clevis ----- | 101 |
| AN37 | |
| AN42 thru - Bolt, Eye ----- | 301 |
| AN49 | |
| AN173 thru - Bolt, Machine, Close Tolerance, Aircraft ----- | 201 |
| AN186 | |

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal apply.

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. (AIA)

| NATIONAL AEROSPACE STANDARDS | <u>SECTION</u> |
|--|----------------|
| NAS28 - Bolt - Tee Head ----- | 1201 |
| NAS144 thru - Bolt - Internal Wrenching Steel, 1/4-28 thru | |
| NAS158 1-1/8-12 ----- | 501 |
| NAS172 - Bolt - Internal Wrenching, Steel, 1.2500-12 -- | 501 |
| NAS176 - Bolt - Internal Wrenching, Steel, 1.5000-12 -- | 501 |
| NAS333 thru - Bolt - 100°, Close Tolerance, High Strength -- | 1603 |
| NAS340 | |
| NAS428 - Bolt - Machine-Crowned Hexagon Head, Adjusting ----- | 701 |
| NAS501 - Bolt - Stabilized-Non-Magnetic Corr Res Steel ----- | 705 |
| NAS514 - Screw - Machine, 100°, Flat Head, Full Threaded, Alloy Steel ----- | 2005 |
| NAS517 - Screw - 100° Close Tolerance Flat Head 160,000 PSI ----- | 2006 |
| NAS560 - Screw - Machine, Non-Magnetic High Temperature, Structural, 100° Flush Head ----- | 2006 |
| NAS563 thru - Bolt - Full Threaded, 160 ksi Steel, Drilled | |
| NAS572 Head ----- | 701 |

MIL-STD-1251A

| | | <u>SECTION</u> |
|--------------|--|----------------|
| NAS583 thru | - Bolt - 100° Flush Tension Head, "Hi-Torque" | |
| NAS590 | Recess, Alloy Steel, 160,000 PSI ----- | 1603 |
| NAS600 thru | - Screw - Machine-Aircraft, Pan Head, Phillips | |
| NAS606 | Recess Full Threaded, Alloy Steel ----- | 2013 |
| NAS623 | - Screw - Machine, Aircraft, Pan Head, Phillips | |
| | Recess, Short Thread, 60,000 PSI Alloy Steel -- | 2014 |
| NAS653 thru | - Bolt - Close Tolerance - Hexagon Head, Titanium, | |
| NAS658 | Short Thread, .190 to .500 ----- | 201 |
| NAS662 | - Screw, Machine, Flathead, 100° Plain and | |
| | Self-Locking ----- | 2004/2104 |
| NAS673 thru | - Bolt - Close Tolerance-Hexagon Head, Titanium, | |
| NAS678 | .190 to .500 ----- | 201 |
| NAS721 | - Screw, Miniature, Fillister Head ----- | 1901 |
| NAS722 | - Screw, Miniature, Pan Head ----- | 1901 |
| NAS723 | - Screw, Miniature 100°, Flat Head ----- | 1901 |
| NAS724 | - Screw, Miniature, Binding Head ----- | 1901 |
| NAS1003 thru | - Bolt, Machine, Hexagon Head, Non-Magnetic, | |
| NAS1020 | & Heat Resistant ----- | 705 |
| NAS1096 | - Screw, Hex Head, Recessed, Full Thread ----- | 2009 |
| NAS1100 | - Screw, Machine, Pan Head, Full Thread, | |
| | Torq-Set ----- | 2013 |
| NAS1101 | - Screw, Machine-Flat Fillister Head, Full Thread, | |
| | Torq-Set ----- | 2001 |
| NAS1102 | - Screw, Machine-Flat 100° Head, Full Thread, | |
| | Torq-Set ----- | 2005 |
| NAS1121 thru | - Screw, Machine-Flat Fillister Head, Close Tol, | |
| NAS1128 | Short Thd, Torq-Set ----- | 1602 |
| NAS1131 thru | - Screw, Machine, Pan Head, Close Tol, Short | |
| NAS1138 | Thd, Torq-Set ----- | 1605 |
| NAS1141 thru | - Screw, Machine, Pan Head, Modified Close Tol, | |
| NAS1148 | Short Thd, Torq-Set ----- | 1605 |
| NAS1151 thru | - Screw, Machine, Flat 100° Head, Close Tol, | |
| NAS1158 | Short Thd, Torq-Set ----- | 1603 |
| NAS1161 thru | - Screw, Self-Locking-Flat 100° Head, Shear, | |
| NAS1168 | Torq-Set ----- | 1604 |
| NAS1171 thru | - Screw, Self-Locking-Pan Head, Shear, Torq- | |
| NAS1178 | Set ----- | 1605 |
| NAS1181 thru | - Screw, Self-Locking-Flat Fillister Head, Close | |
| NAS1188 | Tol, Torq-Set ----- | 1602 |
| NAS1189 | - Screw, Self-Locking-Flat 100° Head, Full | |
| | Thread ----- | 2105 |
| NAS1190 | - Screw, Self-Locking, Pan Head, Full Thread ---- | 2109 |
| NAS1191 | - Screw, Self-Locking-Flat Fillister Head, Full | |
| | Thread ----- | 2102 |
| NAS1202 thru | - Bolt, 100° Close Tolerance Head and Shank, | |
| NAS1210 | 160,000 PSI Short Thread ----- | 1603 |

MIL-STD-1251A

| | | <u>SECTION</u> |
|------------------------------------|---|----------------|
| NAS1216 | - Bolt, Flat Pan Head, "Hi-Torque" Recess, Full Thread ----- | 2012 |
| NAS1219 | - Bolt, 100° Flush, Tension Head, "Hi-Torque" Recess, Full Thread ----- | 2004 |
| NAS1221 | - Bolt, 100° Flush Tension Head, "Hi-Torque" Recess, Long Thread ----- | 2006/2106 |
| NAS1223 thru NAS1235 | - Bolt, Shear-Hexagon Head, Self-Locking ----- | 201/902 |
| NAS1261 thru NAS1265 | - Bolt, Hex Head, Close Tolerance, Short Thread, Titanium Alloy ----- | 201 |
| NAS1266 thru NAS1270 | - Bolt, Hex Head, Close Tolerance, Titanium Alloy ----- | 201 |
| NAS1297 | - Bolt, Shoulder, Hexagon Head ----- | 1001/2203 |
| NAS1298 | - Screw, Brazier Head, Shoulder ----- | 2201 |
| NAS1299 | - Screw 100° Flat Head, Shoulder ----- | 2202 |
| NAS1303 thru NAS1320 NAS1351 | - Bolt, Shear-Hexagon Head ----- | 901 |
| NAS1352 | - Screw, Cap, Socket Head-Undrilled and Drilled, Plain and Self-Locking, Alloy Steel and Corrosion Resisting Steel, UNRF-3A ----- | 1502/2101 |
| NAS1402 thru NAS1406 | - Screw, Cap, Socket Head-Undrilled and Drilled, Plain and Self-Locking, Alloy Steel and Corrosion Resisting Steel, UNRC-3A ----- | 1502/2101 |
| NAS1406 | - Screw, Machine, Aircraft, Pan Head, Phillips Recess 160,000 PSI Tensile ----- | 2014 |
| NAS1578 | - Bolt, Flat, Pan Head ----- | 1605 |
| NAS1580 | - Bolt, 100° Flush Tension Head ----- | 1603 |
| NAS1581 | - Bolt, 100° Flush Shear Head ----- | 1603 |
| NAS1588 | - Bolt, Shear, Hex Head, 1200°F. ----- | 901 |
| NAS1620 thru NAS1628 | - Screw, Machine-Flat 100° Head, Short Thread, Torq-Set ----- | 2006 |
| NAS1630 thru NAS1634 | - Screw, Machine-Pan Head, Short Thread, Torq-Set ----- | 2014 |
| NAS1635 | - Screw, Machine-Pan Head, Cross Recessed, Full Thread ----- | 2013/2109 |
| NAS1790 | - Bolt, 100° Flush Head, Hi-Torque Recess, 160,000 PSI UTS ----- | 1604 |
| NAS1801 | - Screw, Hex Head, Phillips Recess, Full Thread, Alloy Steel, 160,000 PSI Tensile ----- | 2009 |
| NAS1802 | - Screw, Hex Head, Phillips Recess, Full Thread, A-286 CRES, 160,000 PSI Tensile ----- | 2009 |
| NAS1953 thru NAS1970 | - Bolt, Shear, Hexagon Head, 180 ksi ----- | 901 |
| NAS1972 thru NAS1980 | - Bolt, Flat 100° Head, Torq-Set and Hi-Torque, 180 ksi----- | 1603 |

MIL-STD-1251A

| | <u>SECTION</u> |
|--|----------------|
| NAS1982 thru - Bolt, Brazier Head, Torq-Set and Hi-Torque NAS1990 180 ksi ----- | 1601 |
| NAS1992 thru - Bolt, Flat, 100° Reduced Head, Torq-Set and NAS2000 Hi-Torque, 180 ksi Shear ----- | 1603 |
| NAS2803 thru - Bolt, 100° Head, "Torq-Set", Close Tolerance, NAS2810 180,000 PSI ----- | 1603 |
| NAS3103 thru - Bolt, U ----- | 1301 |
| NAS3110 | |
| NAS3203 thru - Bolt, Hook ----- | 401 |
| NAS3210 | |
| NAS3303 thru - Bolt, U, Strap Type ----- | 1301 |
| NAS3305 | |
| NAS6203 thru - Bolt, Hex Head, Close Tolerance, Alloy Steel, NAS6220 Short Thread, Self-Locking & Non-Locking ----- | 903 |
| NAS6303 thru - Bolt, Hex Head, Close Tolerance, A-286, Short NAS6320 Thread, Self-Locking & Non-Locking ----- | 903 |
| NAS6403 thru - Bolt, Hex Head, Close Tolerance, 6AL-4V NAS6420 Titanium, Alloy, Short Thread, Self-Locking & Non-Locking ----- | 903 |
| NAS6604 thru - Bolt, Hex Head, Close Tolerance, Alloy Steel, NAS6620 Long Thread, Self-Locking & Non-Locking ----- | 903 |
| NAS6704 thru - Bolt, Hex Head, Close Tolerance, A286 CRES, NAS6720 Long Threads, Self-Locking & Non-Locking ----- | 903 |
| NAS6803 thru - Bolt, Hex Head, Close Tolerance, 6AL-4V NAS6820 Titanium Alloy, Long Thread, Self-Locking & Non-Locking ----- | 903 |

(Application for copies should be addressed to the Aerospace Industries Association of America, Inc., 1725 DeSales Street, Washington, DC 20036.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies).

3. DEFINITIONS

3.1 Adopted Industry Standards. Any Industry Specification or Standard which is listed in this Standard/The Department of Defense Index of Specifications and Standards. (DODISS).

3.2 Commodity Type Document. A document which lists preferred parts within a Federal Supply Classification class or Item Name. This document is to be used for selecting preferred parts for a new design when the document is invoked as a contractual requirement in conjunction with a parts control requirement.

3.3 End Use Type Document. A document that lists preferred documents and establishes parts requirements which are contractually binding for the design and construction/manufacture of a weapon system or an established equipment category such as MIL-STD-1515.

3.4 Military Parts Control Advisory Group (MPCAG). A Department of Defense organization which provides advice to the Military Departments and military contractors on the selection of parts in assigned commodity classes, and collects data on nonstandard parts for developing or updating military specifications and standards.

3.5 Approved Item Names. Approved item names used in this standard are defined in the following paragraphs corresponding to the section numbers:

(100) BOLT, CLEVIS. An externally threaded fastener whose threaded and unthreaded portions are of one nominal diameter and are separated by a narrow circumferential groove. The head has a recess for holding or driving.

(200) BOLT, CLOSE TOLERANCE. An externally threaded fastener whose unthreaded portion is of a specified grip length and is machined to a tolerance of .001 inch or less. Items over 1.000 inch in diameter shall have a tolerance of .0015 inch or less. The nominal major diameter of the threads shall be at least .001 inch below the minimum shank diameter, but not below the minimum major diameter for applicable class of fit, as shown in FED-STD-H28. The head is designed for external wrenching. The minimum tensile strength shall be less than 160,000 pounds per square inch.

(300) BOLT, EYE. An externally threaded device whose threaded portion is of one nominal diameter, without a head, but with the unthreaded end either bent more than 225 degrees or cast, forged, or punched to resemble an eye.

(400) BOLT, HOOK. An externally threaded device whose threaded portion is of one nominal diameter, without a head but with the unthreaded end bent not over 225 degrees.

(500) BOLT, INTERNAL WRENCHING. An externally threaded fastener whose threaded portion is of one nominal diameter. The head is beveled (conical) in shape and has an internal socket for internal wrenching.

(600) BOLT, LAG. An externally threaded fastener having a square or hexagon head and with a continuous thread (wood screw type or fether drive type) extending from a gimlet or cone point for a distance of slightly more than one-half the length of the bolt.

MIL-STD-1251A

(700) BOLT, MACHINE. An externally threaded fastener whose threaded and unthreaded portions are each of one nominal diameter, .190 inch or larger. The length of the unthreaded portion (of hexagon head fasteners) is controlled and is machined to a tolerance greater than that specified for BOLT, CLOSE TOLERANCE. The head is designed for external wrenching only. If head also contains recess, slot or socket, use SCREW, MACHINE.

(800) BOLT, SELF-LOCKING. A BOLT, MACHINE or SCREW, CAP, HEXAGON HEAD with the added characteristic of a locking feature incorporated in the design of the head or in the threads.

(900) BOLT, SHEAR. A BOLT, CLOSE TOLERANCE except that item is fabricated from material having a minimum tensile strength of 160,000 pounds per square inch or greater.

(1000) BOLT, SHOULDER. A BOLT, MACHINE or SCREW, CAP HEXAGON HEAD that has a round unthreaded neck or shank, all or part of which is of greater diameter than the threaded portion.

(1100) BOLT, SQUARE NECK. A headed externally threaded fastener whose threaded portion is of one nominal diameter, with a square neck directly beneath the head.

(1200) BOLT, TEE HEAD. An externally threaded fastener whose threaded portion is of one nominal diameter and with a head specifically designed to fit in a slot and hold against turning.

(1300) BOLT, U. An externally threaded fastener bent approximately 180 degrees in the shape of the letter U and with both ends threaded.

(1400) SCREW, CAP, HEXAGON HEAD. A BOLT, MACHINE, HEXAGON HEAD except that the length of the unthreaded portion is not controlled.

(1500) SCREW, CAP, SOCKET HEAD. An externally threaded fastener whose threaded portion is of one nominal diameter. The head is cylindrical in shape and has an internal socket or multiple spline for use with an inserted driver. Excludes items with bevel (conical) heads.

(1600) SCREW, CLOSE TOLERANCE. A BOLT, CLOSE TOLERANCE except that the head has an internal socket, recess, or slot and the minimum tensile strength may be any value.

(1700) SCREW, DRIVE. A hardened cylindrical fastener with multiple spiral flutes on its shank. It also has an end smaller in diameter than the outside diameter of the spiral flutes, which acts as a pilot when driven into a drilled hole.

(1800) SCREW, EYE. A fastening device with one end formed in the shape of an eye and the other end threaded with a lag or wood screw type of thread.

(1900) SCREW, INSTRUMENT. A SCREW, MACHINE except that the thread diameter is less than .060 inch.

(2000) SCREW, MACHINE. An externally threaded fastener whose threaded portion is of one nominal diameter. The unthreaded portion has a tolerance greater than that specified for BOLT, CLOSE TOLERANCE. For thread sizes .060 thru .164 inch, any head may be used except SCREW, CAP, SOCKET HEAD or BOLT, INTERNAL WRENCHING. For thread sizes .190 and larger, any recess, slot or socket (except SCREW, CAP, SOCKET HEAD, or BOLT, INTERNAL WRENCHING) head may be used.

(2100) SCREW, SELF-LOCKING. A SCREW, MACHINE or SCREW, CAP, SOCKET HEAD with the added characteristic of a locking feature incorporated in the design of the head or in the threads.

(2200) SCREW, SHOULDER. A SCREW, MACHINE except that it has a round unthreaded neck or shank, all or part of which is of greater diameter than the threaded portion.

(2300) SCREW, TAPPING, THREAD CUTTING. A hardened externally threaded fastener whose thread extends from a tapered end to the bearing surface of the head and is interrupted by flutes or slots to permit cutting its own mating thread.

(2400) SCREW, TAPPING THREAD FORMING. A hardened externally threaded fastener whose thread usually extends from a gimlet or dog type point to the bearing surface of the head and designed to form its own mating thread.

(2500) SCREW, WOOD. A unhardened externally threaded fastener whose continuous thread extends from a gimlet point for a distance of approximately two-thirds of the length of the screw and which is designed to be driven with an inserted driver.

(2600) SETSCREW. An externally threaded device whose threaded portion is one of nominal diameter with or without a head and having a cup, cone or other type of machined point designed to prevent or restrict relative movement of parts and designed to be driven with either a wrench or inserted driver.

(2700) THUMBSCREW. An externally threaded fastener whose threaded portion is of one nominal diameter. It may have an unthreaded portion with a diameter less than, equal to, or greater than the diameter of the threaded portion. It has either a vertically flattened, circular knurled, or wing type head, all of which are designed for rotation by the thumb and fingers. For items having wrenching facilities such as socket recess, multiple spline, or slot heads, use SCREW (as modified) or BOLT (as modified).

MIL-STD-1251A

3.6 Modifiers. Modifiers added to the approved item names used in this standard are as follows:

a. FULL SHANK. The diameter of the unthreaded portion is nominally the same as the major diameter of the thread.

b. PD SHANK. The diameter of the unthreaded portion is nominally the same as the pitch diameter of the thread.

c. FULL THREAD. Fastener is threaded as close to the head as practicable for all lengths.

d. LONG THREAD. Minimum thread length is twice the diameter plus .25 inch or greater, but not fully threaded for all lengths.

e. SHORT THREAD. Minimum thread length is less than twice the diameter plus .25 inch.

f. NON-LOCKING. As used in this standard is interchangeable with plain.

3.7 Overlapping definitions. Due to the overlapping definitions for screws and bolts, table I may be used as a guide when searching for a particular item.

TABLE I. Essential differences between overlapping approved item names for screws and bolts.

| Head styles | Shank dia tolerance | Tensile strength (ksi) min | Thread dia nom | Grip length of hexagon head fasteners | Approved item name | Section number |
|---|---------------------|----------------------------|----------------|---------------------------------------|--|----------------|
| Recess, slot, or socket | .001 or < | AV | All | | Screw, Close Tolerance | 1600 |
| | | < 160 160 or > | | | | |
| External wrenching (only) | | AV | .190 or > | Controlled | Bolt, Machine <u>1/</u> , <u>2/</u> | 700 |
| | | AV | | | | |
| Any head | > .001 | AV | .060 thru .164 | | Screw, Machine <u>3/</u> , <u>4/</u> | 2000 |
| Recess, slot, or socket (except those listed below) | | AV | | | | |
| Hexagon | | AV | .190 or > | Not Controlled | Screw, Cap, Hexagon Head <u>1/</u> , <u>2/</u> | 1400 |
| | | AV | | | | |
| Cylindrical containing a socket | | AV | All | | Screw, Cap, Socket Head <u>3/</u> | 150 |
| | | AV | | | | |
| Conical containing a socket | | | | | Bolt, Internal Wrenching | 500 |

For notes 1/, 2/, 3/, 4/ and Symbols, see page 26

MIL-STD-1251A

- 1/ If part contains locking feature, use "Bolt, Self-Locking" (Section 800).
- 2/ If part contains shoulder, use "Bolt, Shoulder" (Section 1000).
- 3/ If part contains locking feature, use "Screw; Self-Locking" (Section 2100).
- 4/ If part contains shoulder, use "Screw, Shoulder" (Section 2200).

Symbols:

\gt Greater than
 \lt Less than
 AV Any value

4. GENERAL STATEMENTS

4.1 Selection procedure.

4.1.1 Document selection. The applicable section shall be selected after reviewing the definitions in 3.5 thru 3.7 and the table of contents.

4.1.2 Part number selection (preliminary). A preliminary selection of the applicable part number shall be made after reviewing the nominal parameters (sizes, materials, shear and tensile strength) listed in the sections.

4.1.3 Part number selection (final). A final selection of the applicable part number shall be made after reviewing the detailed requirements specified in the referenced documents for suitability in the particular military equipment being designed (considering the application and environmental conditions).

5. DETAILED REQUIREMENTS

5.1 The detailed requirements for preferred screws and bolts are contained in the applicable screws and bolts document and associated procurement specification. If there is disagreement between the nominal parameters listed in this standard and the parameters specified in the applicable screws and bolts document or associated procurement specification, the parameters specified in the applicable screws and bolts document or associated procurement specification shall prevail.

6. NOTES

6.1 Dimensions. Dimensions shown in the sections contained herein are in inches.

6.2 Unified standard screw threads used in this standard are listed in table II.

TABLE II. Unified standard screw threads.

| Nominal size (inches) - (threads per inch) | Series designation | Nominal size (inches) - (threads per inch) | Series designation |
|--|-----------------------|--|-----------------------|
| .060-80 or No. 0-80 | UNF | .4375-14 or 7/16-14 .4375-20 or 7/16-20 | UNC UNF |
| .086-56 or No. 2-56 | UNC | .500-13 or 1/2-13 | UNC |
| .086-64 or No. 2-64 | UNF | .500-20 or 1/2-20 | UNF |
| .112-40 or No. 4-40 | UNC | .625-11 or 5/8-11 | UNC |
| .112-48 or No. 4-48 | UNF | .625-18 or 5/8-18 | UNF |
| .138-32 or No. 6-32 | UNC | .750-10 or 3/4-10 | UNC |
| .138-40 or No. 6-40 | UNF | .750-16 or 3/4-16 | UNF |
| .164-32 or No. 8-32 | UNC | .875-9 or 7/8-9 | UNC |
| .164-36 or No. 8-36 | UNF | .875-14 or 7/8-14 | UNF |
| .190-24 or No. 10-24 | UNC | 1.000-9 | UNC |
| .190-32 or No. 10-32 | UNF | 1.000-12 | UNF |
| .250-20 or 1/4-20 | UNC | 1.250-7 | UNC |
| .250-28 or 1/4-28 | UNF | 1.250-12 | UNF |
| .3125-18 or 5/16-18 | UNC | 1.500-6 | UNC |
| .3125-24 or 5/16-24 | UNF | 1.500-12 | UNF |
| .375-16 or 3/8-16 | UNC | | |
| .375-24 or 3/8-24 | UNF | | |

MIL-STD-1251A

6.3 Unified miniature screw threads used in this standard are listed in table III.

TABLE III. Unified miniature screw threads (UNM).

| Thread size (mm) | Threads per inch | Basic major diameter (inches) |
|------------------|------------------|-------------------------------|
| .30 UNM | 318 | .0118 |
| .40 UNM | 254 | .0157 |
| .50 UNM | 203 | .0197 |
| .60 UNM | 169 | .0236 |
| .80 UNM | 127 | .0315 |
| 1.00 UNM | 102 | .0394 |
| 1.20 UNM | 102 | .0472 |

6.4 Decimal equivalents rounded to three decimal places used in this standard to specify dimensions.

TABLE IV. Decimal equivalents (except for thread sizes).

| | |
|---------------|----------------|
| 1/64---.016 | 17/64---.266 |
| 1/32-----.031 | 9/32-----.281 |
| 3/64---.047 | 19/64---.297 |
| 1/16-----.062 | 5/16-----.312 |
| 5/64---.078 | 21/64---.328 |
| 3/32-----.094 | 11/32-----.344 |
| 7/64---.109 | 23/64---.359 |
| 1/8-----.125 | 3/8-----.375 |
| 9/64---.141 | 25/64---.391 |
| 5/32-----.156 | 13/32-----.406 |
| 11/64---.172 | 27/64---.422 |
| 3/16-----.188 | 7/16-----.438 |
| 13/64---.203 | 29/64---.453 |
| 7/32-----.219 | 15/32-----.469 |
| 15/64---.234 | 31/64---.484 |
| 1/4-----.250 | 1/2-----.500 |

TABLE IV. Decimal equivalents (except for thread sizes). (Cont'd)

| | | | |
|------------|--------------|------------|--------------|
| | 33/64---.516 | | 49/64---.766 |
| 17/32----- | .531 | 25/32----- | .781 |
| | 35/64---.547 | | 51/64---.797 |
| 9/16----- | .562 | 13/16----- | .812 |
| | 37/64---.578 | | 53/64---.828 |
| 19/32----- | .594 | 27/32----- | .844 |
| | 39/64---.609 | | 55/64---.859 |
| 5/8----- | .625 | 7/8----- | .875 |
| | 41/64---.641 | | 57/64---.891 |
| 21/32----- | .656 | 29/32----- | .906 |
| | 43/64---.672 | | 59/64---.922 |
| 11/16----- | .688 | 15/16----- | .938 |
| | 45/64---.703 | | 61/64---.953 |
| 23/32----- | .719 | 31/32----- | .969 |
| | 47/64---.734 | | 63/64---.984 |
| 3/4----- | .750 | | |

6.5 Code letters. Generally code letters used in this standard to indicate material are placed as prefix of dash number (in place of first dash), and all other codes are placed as suffix of dash numbers.

6.5.1 When multiple code letters are used as suffix, they are arranged in alphabetical order.

6.6 Tensile strength. Tensile strength as used in this standard is ultimate tensile strength. Figure 1 may be used to determine approximate tensile strength when tensile loads are listed for various threaded fastener sizes.

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

MIL-STD-1251A

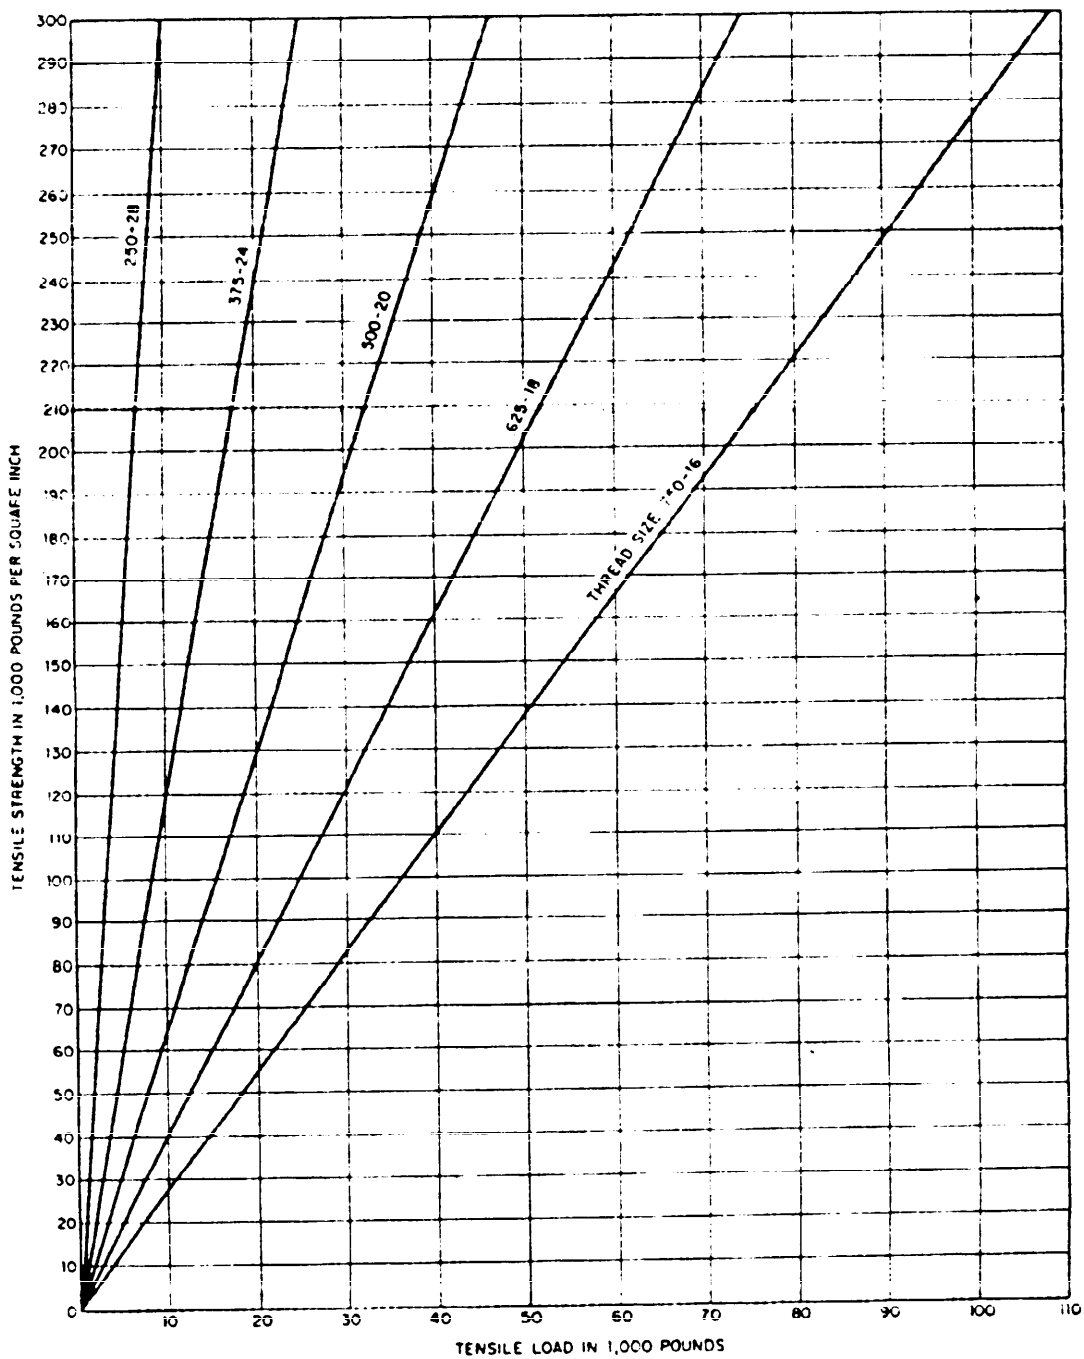


Figure 1. Tensile strength vs. Tensile Load for various threaded fastener sizes

MIL-STD-1251A

Custodians:

Army - AR
Navy - OS

Review activities:

Army - AT, AV, ER, EA
DLA - IS

User activities:

Army - ME
Navy - MC, SH

Preparing activity:


Army - AR

Agent:

DLA - IS
(Project 53GP-0089)

MIL-STD-1251A

SECTION 101
 BOLTS, CLEVIS
 APPLICABLE DOCUMENTS: AN21-17

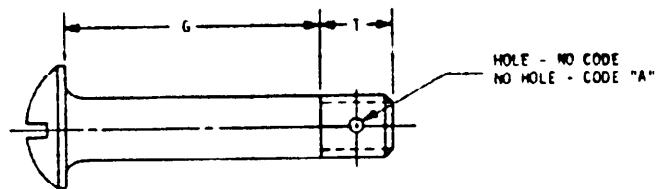TABLE I. Material.

| Material | Protective finish | Shear strength (psi) min |
|----------|-------------------|--------------------------|
| Non-CRES | Cadmium plate | 75,000 1/ |

1/ Bolt, Clevis is to be used as Bolt, Shear.

MIL-STD-1251A

TABLE II. Dash numbers.

| Thread designation (UNF-3A) | .138-40 | .164-36 | .190-32 | .250-23 | .3125-24 | .375-24 | .4375-20 | .500-20 | .625-18 | .750-16 | .875-14 | 1.000-12 |
|-----------------------------|---------|---------|---------|---------|----------|---------|----------|---------|---------|---------|---------|----------|
| T ref | .281 | .281 | .344 | .344 | .359 | .359 | .422 | .422 | .500 | .562 | .641 | .703 |
| Basic part no. | AN21 | AN22 | AN23 | AN24 | AN25 | AN26 | AN27 | AN28 | AN30 | AN32 | AN34 | AN37 |
| Grip dash no. | 5 | | | | | | | | | | | |
| -5 | .062 | .062 | | | | | | | | | | |
| -6 | .125 | .125 | | | | | | | | | | |
| -7 | .188 | .188 | | | | | | | | | | |
| -8 | .250 | .250 | .188 | .188 | -- | -- | | | | | | |
| -9 | .312 | .312 | .250 | .250 | .250 | .250 | | | | | | |
| -10 | .375 | .375 | .312 | .312 | .312 | .312 | | | | | | |
| -11 | .438 | .438 | .375 | .375 | .375 | .375 | | | | | | |
| -12 | .500 | .500 | .438 | .438 | .438 | .438 | .375 | .375 | | | | |
| -13 | -- | -- | -- | -- | -- | -- | -- | .438 | | | | |
| -14 | .625 | .625 | .562 | .562 | .562 | .562 | .500 | .500 | .438 | | | |
| -16 | .750 | .750 | .688 | .688 | .688 | .688 | .625 | .625 | .562 | .500 | | |
| -18 | .875 | .875 | .812 | .812 | .812 | .812 | .750 | .750 | .688 | .625 | .562 | |
| -20 | 1.000 | 1.000 | .938 | .938 | .938 | .938 | .875 | .875 | .812 | .750 | .688 | .625 |
| -22 | -- | -- | -- | -- | -- | -- | -- | 1.000 | .938 | .875 | .812 | .750 |
| -24 | 1.250 | 1.250 | 1.188 | 1.188 | 1.188 | 1.188 | 1.125 | -- | -- | -- | -- | -- |
| -26 | -- | -- | -- | -- | -- | -- | -- | 1.250 | 1.188 | 1.125 | 1.062 | 1.000 |
| -28 | 1.500 | 1.500 | 1.438 | 1.438 | 1.438 | 1.438 | 1.375 | -- | -- | -- | -- | -- |
| -30 | -- | -- | -- | -- | -- | -- | -- | 1.500 | 1.438 | 1.375 | 1.312 | 1.250 |
| -32 | 1.750 | 1.750 | 1.688 | 1.688 | 1.688 | 1.688 | 1.625 | -- | -- | -- | -- | -- |
| -34 | -- | -- | -- | -- | -- | -- | -- | 1.750 | 1.688 | 1.625 | 1.562 | 1.500 |
| -36 | -- | -- | 1.938 | 1.938 | 1.938 | 1.938 | 1.875 | -- | -- | -- | -- | -- |
| -38 | -- | -- | -- | -- | -- | -- | -- | 2.000 | 1.938 | 1.875 | 1.812 | 1.750 |
| -40 | -- | -- | 2.188 | 2.188 | 2.188 | 2.188 | 2.125 | -- | -- | -- | -- | -- |
| -42 | -- | -- | -- | -- | -- | -- | -- | 2.250 | 2.188 | 2.125 | 2.062 | 2.000 |
| -44 | -- | -- | 2.438 | 2.438 | 2.438 | 2.438 | 2.375 | -- | -- | -- | -- | -- |
| -46 | -- | -- | -- | -- | -- | -- | -- | 2.500 | 2.438 | 2.375 | 2.312 | 2.250 |
| -48 | -- | -- | 2.688 | 2.688 | 2.688 | 2.688 | 2.625 | -- | -- | -- | -- | -- |
| -50 | -- | -- | -- | -- | -- | -- | -- | 2.750 | 2.688 | 2.625 | 2.562 | 2.500 |
| -52 | -- | -- | 2.938 | 2.938 | 2.938 | 2.938 | 2.875 | -- | -- | -- | -- | -- |
| -54 | -- | -- | -- | -- | -- | -- | -- | 3.000 | 2.938 | 2.875 | 2.812 | 2.750 |
| -56 | -- | -- | 3.188 | 3.188 | 3.188 | 3.188 | 3.125 | -- | -- | -- | -- | -- |
| -58 | -- | -- | -- | -- | -- | -- | -- | 3.250 | 3.188 | 3.125 | 3.062 | 3.000 |
| -60 | -- | -- | 3.438 | 3.438 | 3.438 | 3.438 | 3.375 | -- | -- | -- | -- | -- |
| -62 | -- | -- | -- | -- | -- | -- | -- | 3.500 | 3.438 | 3.375 | 3.312 | 3.250 |
| -64 | -- | -- | 3.688 | 3.688 | 3.688 | 3.688 | 3.625 | -- | -- | -- | -- | -- |
| -66 | -- | -- | -- | -- | -- | -- | -- | 3.750 | 3.688 | 3.625 | 3.562 | 3.500 |
| -68 | -- | -- | -- | 3.938 | -- | -- | 3.875 | -- | -- | -- | -- | -- |
| -70 | -- | -- | -- | -- | -- | -- | -- | 4.000 | 3.938 | 3.875 | 3.812 | 3.750 |
| -72 | -- | -- | -- | 4.188 | -- | -- | 4.125 | -- | -- | -- | -- | -- |
| -74 | -- | -- | -- | -- | -- | -- | -- | 4.250 | 4.188 | 4.125 | 4.062 | 4.000 |
| -76 | -- | -- | -- | 4.438 | -- | -- | 4.375 | -- | -- | -- | -- | -- |
| -78 | -- | -- | -- | -- | -- | -- | -- | 4.500 | 4.438 | 4.375 | 4.312 | 4.250 |
| -80 | -- | -- | -- | 4.688 | -- | -- | 4.625 | -- | -- | -- | -- | -- |
| -82 | -- | -- | -- | -- | -- | -- | -- | 4.750 | -- | 4.625 | 4.562 | 4.500 |
| -84 | -- | -- | -- | 4.938 | -- | -- | 4.875 | -- | -- | -- | -- | -- |
| -86 | -- | -- | -- | -- | -- | -- | -- | 5.000 | -- | 4.875 | 4.812 | 4.750 |
| -88 | -- | -- | -- | -- | -- | -- | 5.125 | -- | -- | -- | -- | -- |
| -90 | -- | -- | -- | -- | -- | -- | -- | 5.250 | -- | 5.125 | 5.062 | 5.000 |
| -92 | -- | -- | -- | -- | -- | -- | 5.375 | -- | -- | -- | -- | -- |
| -94 | -- | -- | -- | -- | -- | -- | -- | -- | 5.375 | -- | 5.312 | 5.250 |
| -98 | -- | -- | -- | -- | -- | -- | -- | -- | -- | 5.562 | 5.500 | 5.500 |
| -102 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | 5.812 | 5.750 |
| -106 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | 6.062 | 6.000 |
| -110 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | 6.250 |

SECTION 201
 POINTS, CLOSE TOLERANCE
 APPLICABLE DOCUMENTS: AN173-186, NAS653-658, NAS673-678, NAS1223-1235, 1261-1265, 1266-1270

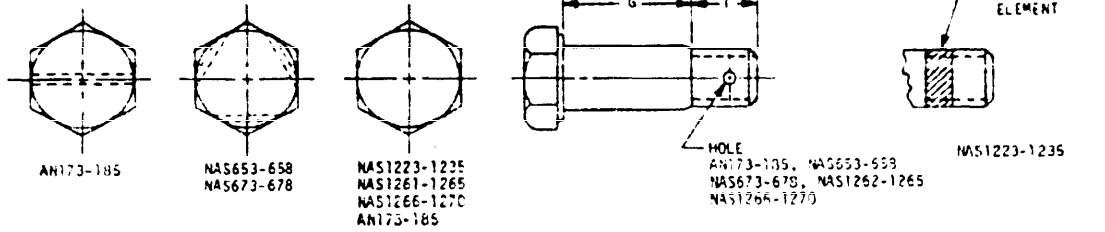


TABLE I. Materials and basic part numbers.

| Material | Titanium | CRES 1/ | Non-CRES | | |
|-----------------------------|--------------------|--------------|--------------------|----------------|----------|
| Protective finish | None | None | Cd. plate | | |
| Tensile strength (psi) min. | 140,000 | 140,000 | 125,000 | | |
| Thread size | Thread designation | T ref | Basic part number | | |
| .190-32 (-3A) | UNJF | .276 .338 | NAS653V NAS673V | -- NAS1223C | |
| | UNF | .406 | | | AN173 |
| .250-28 (-3A) | UNJF | .316 .425 | NAS654V NAS674V | -- NAS1224C | |
| | UNF | .469 | | | AN174 |
| .3125-24 (-3A) | UNJF | .375 .465 | NAS655V NAS675V | -- NAS1225C | |
| | UNF | .531 | | | AN175 |
| .375-24 (-3A) | UNJF | .391 .578 | NAS656V NAS676V | -- NAS1226C | |
| | UNF | .641 | | | AN176 |
| .4375-20 (-3A) | UNJF | .453 .594 | NAS657V NAS677V | -- NAS1227C | |
| | UNF | .656 | | | AN177 |
| .500-20 (-3A) | UNJF | .453 .735 | NAS658V NAS678V | -- NAS1228C | |
| | UNF | .781 | | | AN178 |
| .625-18 (-3A) | UNF | .543 | NAS1262 | -- | |
| | UNJF | .902 | NAS1267 | -- | NAS1230C |
| | UNF | .953 | | | AN130 |
| .750-16 (-3A) | UNF | .572 | NAS1263 | -- | |
| | UNJF | 1.041 | NAS1268 | -- | NAS1231C |
| | UNF | 1.094 | | | AN132 |
| .875-14 (-3A) | UNF | .652 | NAS1264 | -- | |
| | UNJF | 1.184 | NAS1269 | -- | NAS1232C |
| | UNF | 1.250 | | | AN184 |
| 1.00-12 (-3A) | UNF | .770 | NAS1265 | -- | |
| | UNJF | 1.309 | NAS1270 | -- | NAS1233C |
| | UNF | 1.375 | | | AN185 |
| 1.250-12 (-3A) | UNJF | 1.646 | | | NAS1235C |

1/ For alloy steel bolts listed on NAS1223-1235 see section 902.

TABLE II. Code letters.

| Option | Code | Applicable documents |
|-----------------------------|------|---|
| Undrilled head and shank | A | AN173-186 |
| Drilled head | H | NAS653, 658, NAS673, 678 |
| | H,A | AN173-186 |
| | -- | AN173-186 |
| Drilled shank | D | NAS653-658, NAS673-678, NAS1262-1265, 1266-1270 |
| Drilled head and shank | H | AN173-186 |
| Button type locking element | W | NAS1223-1235 |

TABLE III. Grip dash numbers (Titanium and CRES).

| Document number | NAS673-678 | NAS653-658, NAS1223-1235, NAS1262-1265, NAS1267-1270 | |
|-----------------|---------------------|--|--------------------|
| | | Range | Increments |
| Thread size | Grip dash number 1/ | Range | Increments |
| | | 1 thru 8 10 thru 16 20 thru 72 | One Two Four |

1/ Grip dash number equals "G" dimension times 16

MIL-STD-1251A

TABLE IV. Grip dash numbers (Non-CRES).

| Thread designation (UNF 3A) | 150-20 | 250-20 | 3125-24 | 375-24 | 4375-20 | 500-20 | 615-16 | 750-16 | 875-14 | 1000-12 |
|-----------------------------|--------|--------|---------|--------|---------|--------|--------|--------|--------|---------|
| Basic part no. | AN173 | AN174 | AN175 | AN176 | AN177 | AN178 | AN179 | AN180 | AN181 | AN182 |
| Grip dash no. | G | | | | | | | | | |
| -3 | .062 | .062 | -- | -- | -- | -- | -- | -- | -- | -- |
| -4 | .125 | .062 | .062 | -- | -- | -- | -- | -- | -- | -- |
| -5 | .250 | .188 | .166 | .062 | .062 | -- | -- | -- | -- | -- |
| -6 | .375 | .312 | .312 | .188 | .188 | .062 | -- | -- | -- | -- |
| -7 | .500 | .438 | .438 | .312 | .312 | .188 | .062 | -- | -- | -- |
| -10 | .625 | .562 | .562 | .438 | .438 | .312 | .188 | .062 | -- | -- |
| -11 | .750 | .688 | .688 | .562 | .562 | .438 | .312 | .188 | .062 | -- |
| -12 | .875 | .812 | .812 | .688 | .688 | .562 | .438 | .312 | .188 | .125 |
| -13 | 1.000 | .938 | .938 | .812 | .812 | .688 | .562 | .438 | .312 | .250 |
| -14 | -- | -- | -- | -- | -- | -- | .633 | .562 | .438 | .375 |
| -15 | 1.250 | 1.188 | 1.188 | 1.062 | 1.062 | .938 | .812 | .688 | .562 | .500 |
| -16 | -- | -- | -- | -- | -- | -- | .938 | .812 | .688 | .625 |
| -17 | 1.500 | 1.438 | 1.438 | 1.312 | 1.312 | 1.188 | -- | -- | -- | -- |
| -20 | -- | -- | -- | -- | -- | -- | 1.133 | 1.062 | .938 | .875 |
| -21 | 1.750 | 1.688 | 1.688 | 1.562 | 1.562 | 1.438 | -- | -- | -- | -- |
| -22 | -- | -- | -- | -- | -- | -- | 1.617 | 1.562 | 1.438 | 1.125 |
| -23 | 2.000 | 1.938 | 1.938 | 1.812 | 1.812 | 1.688 | -- | -- | -- | -- |
| -24 | -- | -- | -- | -- | -- | -- | 1.688 | 1.562 | 1.438 | 1.375 |
| -25 | 2.250 | 2.188 | 2.188 | 2.062 | 2.062 | 1.938 | -- | -- | -- | -- |
| -26 | -- | -- | -- | -- | -- | -- | 1.938 | 1.812 | 1.688 | 1.625 |
| -27 | 2.500 | 2.438 | 2.438 | 2.312 | 2.312 | 2.188 | -- | -- | -- | -- |
| -30 | -- | -- | -- | -- | -- | -- | 2.133 | 2.062 | 1.938 | 1.875 |
| -31 | 2.750 | 2.688 | 2.688 | 2.562 | 2.562 | 2.438 | -- | -- | -- | -- |
| -32 | -- | -- | -- | -- | -- | -- | 2.438 | 2.312 | 2.188 | 2.125 |
| -33 | 3.000 | 2.938 | 2.938 | 2.812 | 2.812 | 2.688 | -- | -- | -- | -- |
| -34 | -- | -- | -- | -- | -- | -- | 2.688 | 2.562 | 2.438 | 2.375 |
| -35 | 3.250 | 3.188 | 3.188 | 3.062 | 3.062 | 2.938 | -- | -- | -- | -- |
| -36 | -- | -- | -- | -- | -- | -- | 2.938 | 2.812 | 2.688 | 2.625 |
| -37 | 3.500 | 3.438 | 3.438 | 3.312 | 3.312 | 3.188 | -- | -- | -- | -- |
| -40 | -- | -- | -- | -- | -- | -- | 3.188 | 3.062 | 2.938 | 2.875 |
| -41 | 3.750 | 3.688 | 3.688 | 3.562 | 3.562 | 3.438 | -- | -- | -- | -- |
| -42 | -- | -- | -- | -- | -- | -- | 3.438 | 3.312 | 3.188 | 3.125 |
| -43 | 4.000 | 3.938 | 3.938 | 3.812 | 3.812 | 3.688 | -- | -- | -- | -- |
| -44 | -- | -- | -- | -- | -- | -- | 3.688 | 3.562 | 3.438 | 3.375 |
| -45 | 4.250 | 4.188 | 4.188 | 4.062 | 4.062 | 3.938 | -- | -- | -- | -- |
| -46 | -- | -- | -- | -- | -- | -- | 3.938 | 3.812 | 3.688 | 3.625 |
| -47 | 4.500 | 4.438 | 4.438 | 4.312 | 4.312 | 4.188 | -- | -- | -- | -- |
| -50 | -- | -- | -- | -- | -- | -- | 4.188 | 4.062 | 3.938 | 3.875 |
| -51 | 4.750 | 4.688 | 4.688 | 4.562 | 4.562 | 4.438 | -- | -- | -- | -- |
| -52 | -- | -- | -- | -- | -- | -- | 4.438 | 4.312 | 4.188 | 4.125 |
| -53 | 5.000 | 4.938 | 4.938 | 4.812 | 4.812 | 4.688 | -- | -- | -- | -- |
| -54 | -- | -- | -- | -- | -- | -- | 4.688 | 4.562 | 4.438 | 4.375 |
| -55 | 5.250 | 5.188 | 5.188 | 5.062 | 5.062 | 4.938 | -- | -- | -- | -- |
| -56 | -- | -- | -- | -- | -- | -- | 4.938 | 4.812 | 4.688 | 4.625 |
| -57 | 5.500 | 5.438 | 5.438 | 5.312 | 5.312 | 5.188 | -- | -- | -- | -- |
| -60 | -- | -- | -- | -- | -- | -- | 5.188 | 5.062 | 4.938 | 4.875 |
| -61 | 5.750 | 5.688 | 5.688 | 5.562 | 5.562 | 5.438 | -- | -- | -- | -- |
| -62 | -- | -- | -- | -- | -- | -- | 5.438 | 5.312 | 5.188 | 5.125 |
| -63 | 6.000 | 5.938 | 5.938 | 5.812 | 5.812 | 5.688 | -- | -- | -- | -- |
| -64 | -- | -- | -- | -- | -- | -- | 5.688 | 5.562 | 5.438 | 5.375 |
| -65 | 6.250 | 6.188 | 6.188 | 6.062 | 6.062 | 5.938 | -- | -- | -- | -- |
| -66 | -- | -- | -- | -- | -- | -- | 5.938 | 5.812 | 5.688 | 5.625 |
| -67 | 6.500 | 6.438 | 6.438 | 6.312 | 6.312 | 6.188 | -- | -- | -- | -- |
| -70 | -- | -- | -- | -- | -- | -- | 6.188 | 6.062 | 5.938 | 5.875 |
| -71 | 6.750 | 6.688 | 6.688 | 6.562 | 6.562 | 6.438 | -- | -- | -- | -- |
| -74 | -- | -- | -- | -- | -- | -- | 6.438 | 6.312 | 6.188 | 6.125 |
| -73 | 7.000 | 6.938 | 6.938 | 6.812 | 6.812 | 6.688 | -- | -- | -- | -- |
| -74 | -- | -- | -- | -- | -- | -- | 6.688 | 6.562 | 6.438 | 6.375 |
| -75 | 7.250 | 7.188 | 7.188 | 7.062 | 7.062 | 6.938 | -- | -- | -- | -- |
| -76 | -- | -- | -- | -- | -- | -- | 6.938 | 6.812 | 6.688 | 6.625 |
| -77 | 7.500 | 7.438 | 7.438 | 7.312 | 7.312 | 7.188 | -- | -- | -- | -- |
| -80 | -- | -- | -- | -- | -- | -- | 7.188 | 7.062 | 6.938 | 6.875 |
| -81 | -- | -- | 7.688 | -- | -- | 7.438 | -- | -- | -- | -- |
| -82 | -- | -- | -- | -- | -- | -- | -- | -- | -- | 7.125 |
| -83 | -- | -- | -- | -- | 7.688 | -- | -- | -- | -- | -- |
| -85 | -- | -- | 3.062 | -- | 7.938 | -- | -- | -- | -- | -- |
| -87 | -- | -- | -- | -- | 8.188 | -- | -- | -- | -- | -- |

SECTION 202
 BOLTS, CLOSE TOLERANCE, SELF RETAINING, IMPEDANCE TYPE
 APPLICABLE ENVIRONMENT: MS27576, MS27577

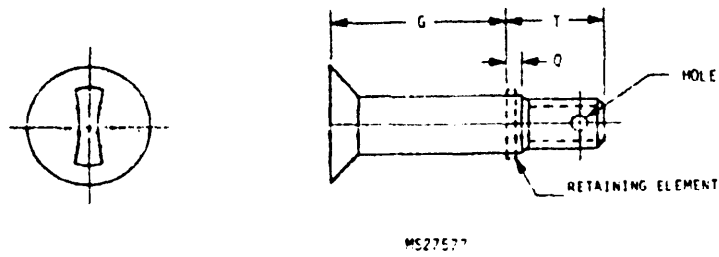
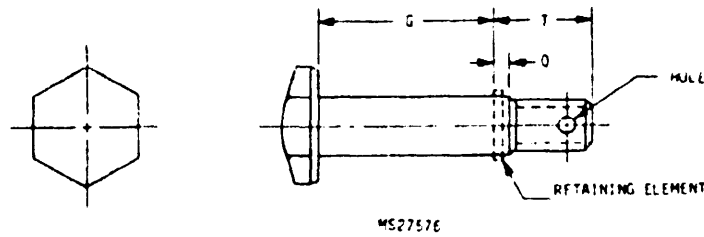


TABLE I. Materials.

| Material | Code | Protective finish | Tensile strength (psi) min |
|-------------|------|-------------------|----------------------------|
| Alloy steel | - | Cadmium plate | 140,000 |
| CRES | C | Passivate | 140,000 |

TABLE II. MS27576 dash numbers.

| Thread designation (UNJF-3A) | Q | T ref | First dash number | Grip dash number 1/ |
|------------------------------|------|-------|-------------------|---------------------|
| .190-32 | .120 | .382 | -3 | -03 thru -124 |
| .250-28 | .120 | .428 | -4 | -03 thru -124 |
| .3125-24 | .151 | .489 | -5 | -04 thru -124 |
| .375-24 | .166 | .549 | -6 | -04 thru -124 |
| .4375-20 | .197 | .593 | -7 | -06 thru -124 |
| .500-20 | .229 | .656 | -8 | -06 thru -124 |
| .625-18 | .287 | .859 | -10 | -07 thru -124 |
| .750-16 | .320 | 1.023 | -12 | -08 thru -124 |
| .875-14 | .352 | 1.130 | -14 | -08 thru -124 |
| 1.000-12 | .383 | 1.242 | -16 | -08 thru -124 |

1/ Grip dash number equals "G" dimension times 16
 Increments of one (-03 thru -08), two (-10 thru -16) and
 four (-20 thru -124).

TABLE III. MS27577 dash numbers.


| Thread designation (UNJF-3A) | Q | T ref | First dash number | Grip dash number 1/ |
|------------------------------|------|-------|-------------------|---------------------|
| .190-32 | .120 | .382 | -3 | -03 thru -124 |
| .250-28 | .120 | .428 | -4 | -03 thru -124 |
| .3125-24 | .151 | .488 | -5 | -04 thru -124 |
| .375-24 | .166 | .549 | -6 | -04 thru -124 |
| .4375-20 | .197 | .593 | -7 | -06 thru -124 |
| .500-20 | .229 | .656 | -8 | -06 thru -124 |

1/ Grip dash number equals "G" dimension times 16
 Increments of one (-03 thru -08), two (-10 thru -16) and
 four (-20 thru -124).


SECTION 203

BOLTS, CLOSE TOLERANCE, SELF-RETAINING,
POSITIVE LOCKING


APPLICABLE DOCUMENTS: MS 3369, MS 21125, MS 21130

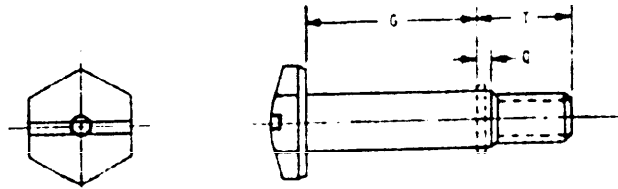

MS 3369

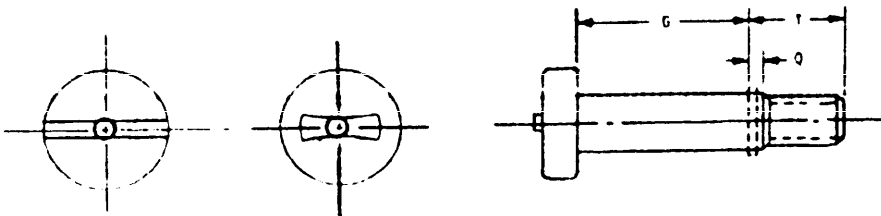

MS 21125

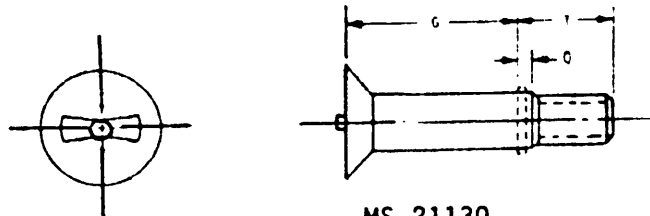

MS 21130

TABLE I. Materials

| Material | Protective finish | Tensile strength (PSI) min |
|----------|-------------------|----------------------------|
| CRES | Passivate | 140,000 |

TABLE II. MS 3369 dash numbers

| Thread designation (UNJF-3A) | Q | T ref | First dash number | Grip dash number |
|------------------------------|------|-------|-------------------|------------------|
| .1900-32 | .094 | .382 | -3 | -03 thru -86 |
| .2500-28 | .125 | .428 | -4 | -03 thru -97 |
| .3125-24 | .156 | .488 | -5 | -04 thru -87 |
| .3750-24 | .171 | .549 | -6 | -04 thru -86 |
| .4375-20 | .202 | .593 | -7 | -06 thru -86 |
| .5000-20 | .234 | .656 | -8 | -06 thru -86 |
| .6250-18 | .305 | .927 | -10 | -20 thru -40 |
| .7500-16 | .343 | 1.013 | -12 | -24 thru -48 |

MIL-STD-1251A

TABLE III. MS 21125 & MS 21130 dash numbers

| Thread designation (UNJF-3A) | Q | T ref | First dash number | Grip dash number |
|------------------------------|------|-------|-------------------|------------------|
| .1900-32 | .094 | .382 | -3 | -03 thru -86 |
| .2500-28 | .125 | .428 | -4 | -03 thru -86 |
| .3125-24 | .156 | .488 | -5 | -04 thru -86 |
| .3750-24 | .171 | .549 | -6 | -04 thru -86 |
| .4375-20 | .202 | .593 | -7 | -06 thru -86 |
| .5000-18 | .234 | .656 | -8 | -06 thru -86 |

SECTION 307
BOLTS, FIVE FLAT
APPLICABLE ELEMENTS: AN42-44

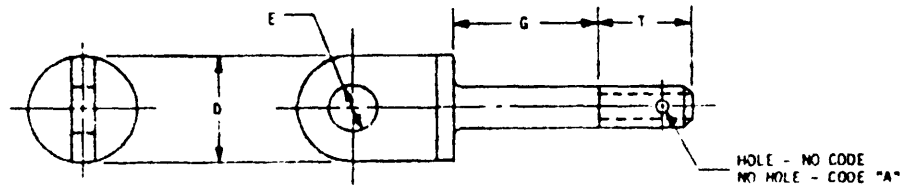


TABLE I. Materials.

| Material | Code | Protective finish | Tensile strength (psi) min |
|----------|----------|-------------------|----------------------------|
| | Non-CRES | | |
| CRES | C | Passivate | |

TABLE II. Dash numbers.

| Thread designation (UNF-3A) | .190-32 | .250-28 | .3125-24 | | .375-24 | .475-20 | 500-20 |
|-----------------------------|---------|---------|----------|-------|---------|---------|--------|
| T min | .406 | .469 | .531 | | .641 | .656 | .781 |
| E min | .190 | .190 | .250 | .313 | .375 | .375 | .438 |
| D nom | .438 | .500 | .625 | .688 | .750 | .875 | 1.000 |
| Basic part no. | AN42B | AN43B | AN44 | AN45 | AN46 | AN47 | AN48 |
| Grip dash no. | G | | | | | | |
| -3 | .062 | -- | -- | -- | -- | -- | -- |
| -4 | .125 | .062 | .062 | .062 | -- | -- | -- |
| -5 | .250 | .188 | .188 | .188 | .062 | .062 | -- |
| -6 | .375 | .312 | .312 | .312 | .188 | .188 | .062 |
| -7 | .500 | .438 | .438 | .438 | .312 | .312 | .188 |
| -10 | .625 | .562 | .562 | .562 | .438 | .438 | .312 |
| -11 | .750 | .688 | .688 | .688 | .562 | .562 | .438 |
| -12 | .875 | .812 | .812 | .812 | .688 | .688 | .562 |
| -13 | 1.000 | .938 | .938 | .938 | .812 | .812 | .688 |
| -15 | 1.250 | 1.188 | 1.188 | 1.188 | 1.062 | 1.062 | .938 |
| -17 | 1.500 | 1.438 | 1.438 | 1.438 | 1.312 | 1.312 | 1.188 |
| -21 | 1.750 | 1.688 | 1.688 | 1.688 | 1.562 | 1.562 | 1.438 |
| -23 | 2.000 | 1.938 | 1.938 | 1.938 | 1.812 | 1.812 | 1.688 |
| -25 | 2.250 | 2.188 | 2.188 | 2.188 | 2.062 | 2.062 | 1.938 |
| -27 | 2.500 | 2.438 | 2.438 | 2.438 | 2.312 | 2.312 | 2.188 |
| -31 | 2.750 | 2.688 | 2.688 | 2.688 | 2.562 | 2.562 | 2.438 |
| -33 | 3.000 | 2.938 | 2.938 | 2.938 | 2.812 | 2.812 | 2.688 |
| -35 | 3.250 | 3.188 | 3.188 | 3.188 | 3.062 | 3.062 | 2.938 |
| -37 | 3.500 | 3.438 | 3.438 | 3.438 | 3.312 | 3.312 | 3.188 |
| -41 | 3.750 | 3.688 | 3.688 | 3.688 | 3.562 | 3.562 | 3.438 |
| -43 | 4.000 | 3.938 | 3.938 | 3.938 | 3.812 | 3.812 | 3.688 |
| -45 | 4.250 | 4.188 | 4.188 | 4.188 | 4.062 | 4.062 | 3.938 |
| -47 | 4.500 | 4.438 | 4.438 | 4.438 | 4.312 | 4.312 | 4.188 |
| -51 | 4.750 | 4.688 | 4.688 | 4.688 | 4.562 | 4.562 | 4.438 |
| -53 | 5.000 | 4.938 | 4.938 | 4.938 | 4.812 | 4.812 | 4.688 |
| -55 | 5.250 | 5.188 | 5.188 | 5.188 | 5.062 | 5.062 | 4.938 |
| -57 | 5.500 | 5.438 | 5.438 | 5.438 | 5.312 | 5.312 | 5.188 |
| -61 | 5.750 | 5.688 | 5.688 | 5.688 | 5.562 | 5.562 | 5.438 |
| -63 | 6.000 | 5.938 | 5.938 | 5.938 | 5.812 | 5.812 | 5.688 |
| -65 | 6.250 | 6.188 | 6.188 | 6.188 | 6.062 | 6.062 | 5.938 |
| -67 | 6.500 | 6.438 | 6.438 | 6.438 | 6.312 | 6.312 | 6.188 |
| -71 | 6.750 | 6.688 | 6.688 | 6.688 | 6.562 | 6.562 | 6.438 |
| -73 | 7.000 | 6.938 | 6.938 | 6.938 | 6.812 | 6.812 | 6.688 |
| -75 | 7.250 | 7.188 | 7.188 | 7.188 | 7.062 | 7.062 | 6.938 |
| -77 | 7.500 | 7.438 | 7.438 | 7.438 | 7.312 | 7.312 | 7.188 |
| -85 | -- | -- | -- | -- | 8.062 | -- | -- |

MIL-STD-1251A

SECTION 302
 BOLTS, EYE, ROUND
 APPLICABLE DOCUMENT: MSS1937

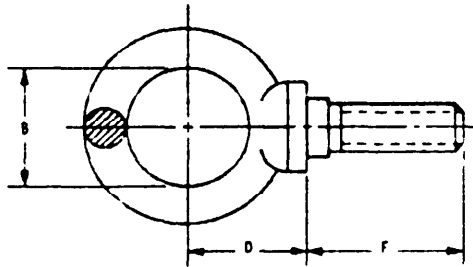


TABLE I. Material and part numbers.

| Material | | | | Carbon steel |
|--------------------------------|----------|----------|----------|----------------------|
| Protective finish | | | | Uncoated |
| Thread designation (UNC-2A) | B min | D min | F min | MSS1937+ dash no. |
| .250-20 | .69 | .69 | 1.00 | -1 |
| .3125-18 | .81 | .88 | 1.12 | -2 |
| .375-16 | .94 | 1.06 | 1.25 | -3 |
| .4375-14 | 1.00 | 1.19 | 1.38 | -4 |
| .500-13 | 1.12 | 1.31 | 1.50 | -5 |
| .625-11 | 1.31 | 1.59 | 1.75 | -7 |
| .750-10 | 1.44 | 1.72 | 2.00 | -8 |
| .875-9 | 1.56 | 2.03 | 2.25 | -9 |
| 1.000-8 | 1.69 | 2.22 | 2.50 | -10 |
| 1.250-7 | 2.12 | 2.84 | 3.00 | -12 |
| 1.500-6 | 2.44 | 3.19 | 3.50 | -13 |
| 1.750-5 | 2.75 | 3.88 | 3.75 | -14 |
| 2.000-4.5 | 3.06 | 4.25 | 4.00 | -15 |

SECTION 401
 BOLTS, NUTS,
 APPLICABLE DOCUMENTS: NAS3203-3210




TABLE I. Materials.

| Material | Code | Protective finish | Tensile strength (psi) min |
|------------------|------|-------------------|----------------------------|
| Low carbon steel | - | Cadmium plate | 55,000 |
| CRES | E | Passivate | |

TABLE II. Dash numbers.

| Thread designation (UNF-2A) | .190-32 | .250-28 | .3125-24 | .375-24 | 500-20 | .625-18 |
|-----------------------------|--------------------------|---------|--------------|---------|--------------|---------|
| T min. | .500 | .625 | .750 | .750 | 1.250 | 1.250 |
| basic part no. | NAS3203 | NAS3204 | NAS3205 | NAS3206 | NAS3208 | NAS3210 |
| First dash no. 1/ | Second dash no. range 2/ | | | | | |
| -4 | -6 thru -24 | -- | -- | -- | -- | -- |
| -5 | -8 thru -24 | -- | -- | -- | -- | -- |
| -6 | -8 thru -24 | -- | -10 thru -32 | -- | -- | -- |
| -7 | -8 thru -24 | -- | -10 thru -32 | -- | -14 thru -40 | -- |
| -8 | -8 thru -24 | -- | -10 thru -32 | -- | -16 thru -40 | -- |
| -10 | -10 thru -28 | -- | -12 thru -36 | -- | -16 thru -48 | -- |
| -12 | -10 thru -32 | -- | -12 thru -40 | -- | -18 thru -44 | -- |
| -14 | -12 thru -32 | -- | -14 thru -40 | -- | -18 thru -48 | -- |
| -16 | -12 thru -32 | -- | -14 thru -40 | -- | -20 thru -48 | -- |
| -18 | -14 thru -32 | -- | -16 thru -40 | -- | -20 thru -48 | -- |
| -20 | -14 thru -32 | -- | -16 thru -40 | -- | -22 thru -48 | -- |
| -22 | -16 thru -32 | -- | -18 thru -40 | -- | -24 thru -48 | -- |
| -24 | -16 thru -32 | -- | -18 thru -40 | -- | -24 thru -48 | -- |
| -28 | -- | -- | -20 thru -40 | -- | -28 thru -48 | -- |
| -32 | -- | -- | -22 thru -40 | -- | -28 thru -48 | -- |
| -36 | -- | -- | -- | -- | -32 thru -48 | -- |
| -40 | -- | -- | -- | -- | -32 thru -48 | -- |
| -44 | -- | -- | -- | -- | -32 thru -48 | -- |
| -48 | -- | -- | -- | -- | -36 thru -48 | -- |

1/ First dash no. equals "A" dimension times 8.

2/ Second dash no. equals "L" dimension times 8.
 Increments of two (-6 thru -24) and four (-28 thru -48).

MIL-STD-1251A

SECTION 501
BOLTS, INTERNAL WRENCHING
APPLICABLE DOCUMENTS: *S20004-20024, *NAS144-156, 172, 176

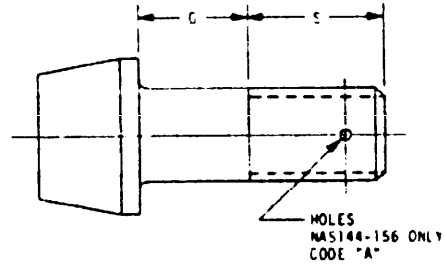




TABLE I. Material and document numbers.

| Material | | Steel | |
|----------------------------|-------|----------------|---------|
| Protective finish | | Cadmium plate | |
| Tensile strength (psi) min | | 160,000 | |
| Thread designation | | UNF-3A | UNJF-3A |
| Thread size | S ref | Basic part no. | |
| .250-28 | .500 | MS20004 | NAS144 |
| .3125-24 | .562 | MS20005 | NAS145 |
| .375-24 | .688 | MS20006 | NAS146 |
| .4375-20 | .812 | MS20007 | NAS147 |
| .500-20 | .812 | MS20008 | NAS148 |
| .625-18 | .938 | MS20010 | NAS150 |
| .750-16 | 1.062 | MS20012 | NAS152 |
| .875-14 | 1.188 | MS20014 | NAS154 |
| 1.000-14 | 1.312 | -- | NAS156 |
| 1.000-12 | 1.312 | MS20017 | |
| 1.250-12 | 1.625 | MS20020 | |
| 1.500-12 | 1.875 | MS20024 | |


TABLE II. Grip dash numbers.

| Document no. | MS20004-20024 1/ | NAS144-156 1/ | NAS172 2/ | NAS176 3/ |
|--------------|------------------------|---------------|---------------|---------------|
| Thread size | Grip dash no. range 4/ | | | |
| .250-28 | -4 thru -96 | -9 thru -128 | | |
| .3125-24 | -6 thru -96 | -10 thru -128 | | |
| .375-24 | -6 thru -96 | -12 thru -128 | | |
| .4375-20 | -8 thru -96 | -14 thru -128 | | |
| .500-20 | -8 thru -96 | -14 thru -128 | | |
| .625-18 | -10 thru -112 | -16 thru -128 | | |
| .750-16 | -12 thru -112 | -18 thru -128 | | |
| .875-14 | -14 thru -112 | -20 thru -128 | | |
| 1.000-14 | -16 thru -112 | -22 thru -128 | | |
| 1.000-12 | -16 thru -112 | | -- | -- |
| 1.250-12 | -20 thru -128 | | -28 thru -128 | -- |
| 1.500-12 | -24 thru -128 | | -- | -32 thru -128 |

1/ Grip dash number equals "G" dimension times 16
 2/ Grip dash number equals "G" dimension times 16 plus 26.
 3/ Grip dash number equals "G" dimension times 16 plus 32.
 4/ Increments of two (-4 thru -16) and four (-20 thru -128).

SECTION 601
BOLTS, SCREW, LAG
APPLICABLE DOCUMENT: MS16992

MIL-STD-1251A

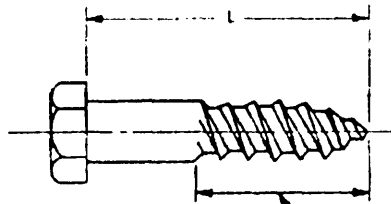

MINIMUM THREAD LENGTH EQUALS 1/2 OF THE LENGTH PLUS 0.50 INCH OR 6 INCHES, WHICHEVER IS SHORTER.
BOLTS TOO SHORT TO APPLY THIS FORMULA ARE THREADED AS CLOSE TO THE HEAD AS PRACTICABLE

TABLE I. Material and part numbers.

| Material | Steel | | | | | | |
|------------------------------|-----------------------|--------|--------|--------|----------|------|------|
| Protective finish | Zinc coated | | | | | | |
| Thread designation | .250-10 | .375-7 | .500-6 | .625-5 | .750-4.5 | | |
| L | MS16992 + dash number | | | | | | |
| 1.000 | -501 | -520 | -- | -- | | | |
| 1.250 | -502 | -521 | -540 | | | | |
| 1.500 | -503 | -522 | -541 | -560 | | | |
| 1.750 | -504 | -523 | -542 | -561 | -580 | -- | -- |
| 2.000 | -505 | -524 | -543 | -562 | -581 | -600 | -- |
| 2.500 | -506 | -525 | -544 | -563 | -582 | -601 | -620 |
| 3.000 | -507 | -526 | -545 | -564 | -583 | -602 | -621 |
| 3.500 | -508 | -527 | -546 | -565 | -584 | -603 | -622 |
| 4.000 | -509 | -528 | -547 | -566 | -585 | -604 | -623 |
| 4.500 | -510 | -529 | -548 | -567 | -586 | -605 | -624 |
| 5.000 | -511 | -530 | -549 | -568 | -587 | -606 | -625 |
| 5.500 | -512 | -531 | -550 | -569 | -588 | -607 | -626 |
| 6.000 | -513 | -532 | -551 | -570 | -589 | -608 | -627 |
| 7.000 | -- | -533 | -552 | -571 | -590 | -609 | -628 |
| 8.000 | -- | -- | -553 | -572 | -591 | -610 | -629 |
| 9.000 | | | | -573 | -592 | -611 | -630 |
| 10.000 | | | | -- | -593 | -612 | -631 |
| 11.000 | | | | -- | -- | -613 | -632 |
| 12.000 | | | | | | | -633 |
| 14.000 | | | | | | | -- |

TABLE II. Material and part numbers.

| Material | CRES | | | | |
|------------------------------|-----------------------|--------|--------|--------|----------|
| Protective finish | Passivate | | | | |
| Thread designation | .250-10 | .375-7 | .500-6 | .625-5 | .750-4.5 |
| L | MS16992 + dash number | | | | |
| 1.000 | -688 | -- | -- | | |
| 1.250 | -- | -- | -- | | |
| 1.500 | -689 | -697 | -708 | | |
| 1.750 | -- | -- | -- | -- | -- |
| 2.000 | -690 | -698 | -709 | -720 | -- |
| 2.500 | -691 | -699 | -710 | -721 | -733 |
| 3.000 | -692 | -700 | -711 | -722 | -734 |
| 3.500 | -693 | -701 | -712 | -723 | -735 |
| 4.000 | -694 | -702 | -713 | -724 | -736 |
| 4.500 | -695 | -703 | -714 | -725 | -737 |
| 5.000 | -696 | -704 | -715 | -726 | -738 |
| 5.500 | -- | -- | -- | -- | -- |
| 6.000 | | -705 | -716 | -727 | -739 |
| 7.000 | | -706 | -717 | -728 | -740 |
| 8.000 | | -707 | -718 | -729 | -741 |
| 9.000 | | | -719 | -730 | -742 |
| 10.000 | | | -- | -731 | -743 |
| 11.000 | | | -- | -732 | -744 |
| 12.000 | | | | | -745 |
| 14.000 | | | | | -746 |

TABLE III. Material and part numbers.

| Material | Copper-silicon alloy | | | | |
|------------------------------|-----------------------|--------|--------|--------|----------|
| Protective finish | -- | | | | |
| Thread designation | .250-10 | .375-7 | .500-6 | .625-5 | .750-4.5 |
| L | MS16992 + dash number | | | | |
| 1.000 | -634 | -- | -- | | |
| 1.250 | -- | -- | -- | | |
| 1.500 | -635 | -641 | -651 | | |
| 1.750 | -- | -- | -- | -- | -- |
| 2.000 | -636 | -642 | -652 | -- | -- |
| 2.500 | -637 | -643 | -653 | -663 | -675 |
| 3.000 | -638 | -644 | -654 | -664 | -676 |
| 3.500 | -639 | -645 | -655 | -665 | -677 |
| 4.000 | -640 | -646 | -656 | -666 | -678 |
| 4.500 | | -647 | -657 | -667 | -679 |
| 5.000 | | -648 | -658 | -668 | -680 |
| 5.500 | | -- | -- | -- | -- |
| 6.000 | | -649 | -659 | -669 | -681 |
| 7.000 | | -650 | -660 | -670 | -682 |
| 8.000 | | -- | -661 | -671 | -683 |
| 9.000 | | | -662 | -672 | -684 |
| 10.000 | | | -- | -673 | -685 |
| 11.000 | | | -- | -674 | -686 |
| 12.000 | | | | | -687 |
| 14.000 | | | | | -- |

SECTION 701
BOLTS, MACHINE, HEXAGON HEAD
APPLICABLE DOCUMENTS: NAS428, 563-572

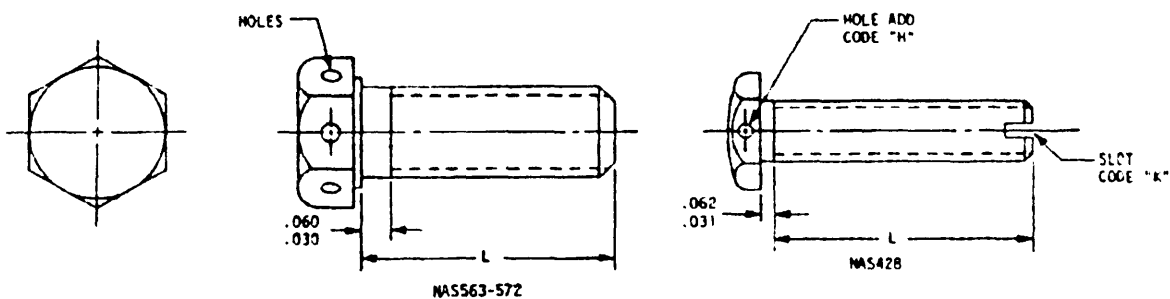


TABLE I. Materials.

| Material | Code | Protective finish | Tensile strength (psi) min | Applicable documents |
|--------------|------|-------------------|----------------------------|----------------------|
| Alloy steel. | - | Cadmium plate | 160,000 | NAS563-572 |
| | | | - | NAS428 |
| CRES | C | Passivate | 160,000 | NAS563-572 |

TABLE II. NAS428 dash numbers.

| Thread (UNF-3A) | .190-32 | .250-28 | .3125-24 | .375-24 |
|-----------------|--------------------|---------|----------|---------|
| First dash no. | -3 | -4 | -5 | -6 |
| L | Second dash number | | | |
| .500 | -4 | -4 | -- | -- |
| .625 | -5 | -5 | -- | -- |
| .750 | -6 | -6 | -6 | -- |
| .875 | -7 | -7 | -7 | -- |
| 1.000 | -10 | -10 | -10 | -- |
| 1.250 | -12 | -12 | -12 | -12 |
| 1.500 | -14 | -14 | -14 | -14 |
| 1.750 | -16 | -16 | -16 | -16 |
| 2.000 | -20 | -20 | -20 | -20 |
| 2.250 | -22 | -22 | -22 | -22 |
| 2.500 | -24 | -24 | -24 | -24 |
| 2.750 | -26 | -26 | -26 | -26 |
| 3.000 | -30 | -30 | -30 | -30 |
| 3.250 | -- | -32 | -32 | -32 |
| 3.500 | -- | -34 | -34 | -34 |
| 3.750 | | -36 | -36 | -36 |
| 4.000 | | -40 | -40 | -40 |
| 4.250 | | -42 | -42 | -42 |
| 4.500 | | -44 | -44 | -44 |
| 4.750 | | -46 | -46 | -46 |
| 5.000 | | -- | -- | -50 |
| 5.500 | | | | -52 |
| 6.000 | | | | -60 |

MIL-STD-1251A

TABLE 110 NAS 553-572 dash numbers.

| Thread designation (UNJF-3A) | .190-22 | .250-28 | .3125-24 | .375-24 | .4375-20 | .500-20 | .625-18 | .750-16 |
|---------------------------------|--------------------|---------|----------|---------|----------|---------|---------|---------|
| Basic part no. | NAS563 | NAS564 | NAS565 | NAS566 | NAS567 | NAS568 | NAS570 | NAS572 |
| L | Length dash number | | | | | | | |
| .344 | -11 | -- | | | | | | |
| .406 | -13 | -- | | | | | | |
| .469 | -15 | -15 | | | | | | |
| .594 | -19 | -19 | -- | -- | -- | | | |
| .719 | -23 | -23 | -23 | -23 | -- | | | |
| .844 | -27 | -27 | -27 | -27 | -27 | | | |
| 0.969 | -31 | -31 | -31 | -31 | -31 | -- | | |
| 1.219 | -39 | -39 | -39 | -39 | -39 | -39 | | |
| 1.469 | -47 | -47 | -47 | -47 | -47 | -47 | | |
| 1.719 | -55 | -55 | -55 | -55 | -55 | -55 | -55 | -- |
| 1.969 | -63 | -63 | -63 | -63 | -63 | -63 | -63 | -63 |
| 2.219 | -71 | -71 | -71 | -71 | -71 | -71 | -71 | -71 |
| 2.469 | -79 | -79 | -79 | -79 | -79 | -79 | -79 | -79 |
| 2.719 | -87 | -87 | -87 | -87 | -87 | -87 | -87 | -87 |
| 2.969 | -95 | -95 | -95 | -95 | -95 | -95 | -95 | -95 |
| 3.219 | -103 | -103 | -103 | -103 | -103 | -103 | -103 | -103 |

MIL-STD-1251A

SECTION 702
 BOLTS, MACHINE, HEXAGON HEAD, FULL SHANK, LONG THREAD, DRILLED HEAD, ONE HOLE
 APPLICABLE DOCUMENTS: MS9500, 9501, 9502, 9503, 9505, 9507, 9509,
 MS9642, 9643, 9644, 9645, 9647, 9794, 9795, 9796, 9797, 9799, 9801, 9802

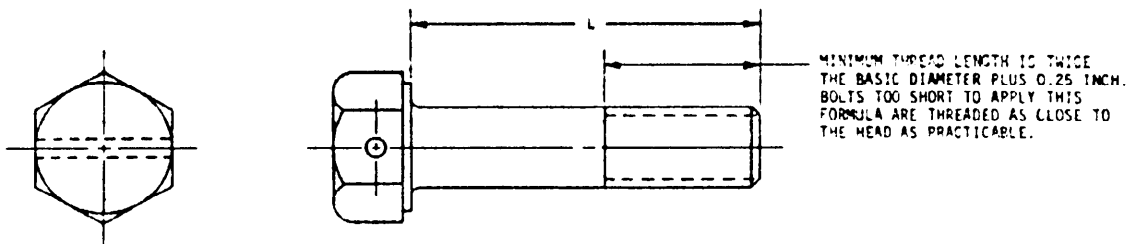


TABLE I. Material and part numbers.

| Material | | Corrosion and heat resistant steel | | Titanium |
|---------------------------------|-------|------------------------------------|---------|----------|
| | | AMS5731 | AMS5643 | |
| Protective finish | | Passivate | | -- |
| Hardness-Rockwell | | -- | C32-38 | C36-42 |
| Thread designation (UNJF-3A) | L | Part number | | |
| .190-32 | .375 | -04 | | |
| | .438 | -05 | | |
| | .500 | -06 | | |
| | .625 | -08 | -- | -- |
| | .750 | -10 | -- | -- |
| | .875 | -12 | -12 | -12 |
| | 1.000 | -14 | -14 | -14 |
| | 1.250 | -18 | -18 | -18 |
| | 1.500 | -22 | -22 | -22 |
| | 1.750 | -26 | -26 | -26 |
| | 2.000 | -28 | -30 | -30 |
| | 2.250 | -30 | -32 | -32 |
| | 2.500 | -32 | -34 | -34 |
| | 2.750 | -34 | -36 | -36 |
| | 3.000 | -36 | -38 | -38 |
| | 3.250 | -38 | -40 | -40 |
| | 3.500 | -40 | -42 | -42 |
| | 3.750 | -42 | -44 | -44 |
| .250-28 | .375 | -04 | | |
| | .438 | -05 | | |
| | .500 | -06 | | |
| | .625 | -08 | | |
| | .750 | -10 | | |
| | .875 | -12 | | |
| | 1.000 | -14 | -14 | -14 |
| | 1.250 | -18 | -18 | -18 |
| | 1.500 | -22 | -22 | -22 |
| | 1.750 | -26 | -26 | -26 |
| | 2.000 | -28 | -30 | -30 |
| | 2.250 | -30 | -32 | -32 |
| | 2.500 | -32 | -34 | -34 |
| | 2.750 | -34 | -36 | -36 |
| | 3.000 | -36 | -38 | -38 |
| | 3.250 | -38 | -40 | -40 |
| | 3.500 | -40 | -42 | -42 |
| | 3.750 | -42 | -44 | -44 |
| | 4.000 | -44 | -46 | -46 |
| | 4.250 | -46 | -48 | -48 |
| | 4.500 | -48 | -50 | -50 |
| 4.750 | -50 | -52 | -52 | |
| 5.000 | -52 | -54 | -54 | |
| 5.250 | -54 | -56 | -56 | |
| 5.500 | -56 | -58 | -58 | |
| 5.750 | -58 | -60 | -60 | |
| 6.000 | -60 | -62 | -62 | |

MIL-STD-1251A

Table 1. Material and part numbers. - Cont. recd.

| Material | | Corrosion and heat resistant steel | | Titanium | Material | | Corrosion and heat resistant steel | | |
|------------------------------|-------|------------------------------------|---------|----------|------------------------------|-------|------------------------------------|---------|-----|
| | | AMS5731 | AMS5643 | | | | AMS5731 | AMS5643 | |
| Protective finish | | Passivate | | | Protective finish | | Passivate | | |
| Hardness-Rockwell | | -- | C32-32 | C36-42 | Hardness-Rockwell | | -- | C32-38 | |
| Thread designation (UNJF-3A) | L | Part number | | | Thread designation (UNJF-3A) | L | Part number | | |
| .3125-24 | .500 | -04 | | | .625-18 | 1.000 | -04 | | |
| | .625 | -06 | | | | 1.250 | -08 | | |
| | .750 | -08 | | | | 1.500 | -12 | | |
| | .875 | -10 | -- | -- | | 1.750 | -16 | | -16 |
| | 1.000 | -10 | -- | -- | | 2.000 | -19 | | -20 |
| | 1.250 | -16 | -16 | -16 | | 2.250 | -21 | | -22 |
| | 1.500 | -20 | -20 | -20 | | 2.500 | -23 | | -24 |
| | 1.750 | -24 | -24 | -24 | | 2.750 | -25 | | -26 |
| | 2.000 | -26 | -26 | -28 | | 3.000 | -27 | | -28 |
| | 2.250 | -28 | -30 | -30 | | 3.250 | -29 | | -30 |
| | 2.500 | -30 | -32 | -32 | | 3.500 | -31 | | -32 |
| | 2.750 | -32 | -34 | -34 | | 3.750 | -33 | | -34 |
| | 3.000 | -34 | -36 | -36 | | 4.000 | -35 | | -36 |
| | 3.250 | -36 | -38 | -38 | | 4.250 | -37 | | -38 |
| | 3.500 | -38 | -40 | -40 | | 4.500 | -39 | | -40 |
| | 3.750 | -40 | -42 | -42 | | 4.750 | -41 | | -42 |
| | 4.000 | -42 | -44 | -44 | | 5.000 | -43 | | -44 |
| | 4.250 | -44 | -46 | -46 | | 5.250 | -45 | | -46 |
| | 4.500 | -46 | -48 | -48 | | 5.500 | -47 | | -48 |
| | 4.750 | -48 | -50 | -50 | | 5.750 | -49 | | -50 |
| 5.000 | -50 | -52 | -52 | 6.000 | -51 | | -52 | | |
| 5.250 | -52 | -54 | -54 | .750-16 | 1.250 | -06 | | | |
| 5.500 | -54 | -56 | -56 | | 1.500 | -10 | | | |
| 5.750 | -56 | -58 | -58 | | 1.750 | -14 | | | |
| 6.000 | -58 | -60 | -60 | | 2.000 | -18 | | -18 | |
| .375-24 | .625 | -04 | | | | 2.250 | -20 | | -20 |
| | .750 | -06 | | | | 2.500 | -22 | | -22 |
| | .875 | -08 | | | | 2.750 | -24 | | -24 |
| | 1.000 | -10 | -- | | -- | 3.000 | -26 | | -26 |
| | 1.250 | -14 | -14 | | -14 | 3.250 | -28 | | -28 |
| | 1.500 | -18 | -18 | | -18 | 3.500 | -30 | | -30 |
| | 1.750 | -22 | -22 | -22 | 3.750 | -32 | | -32 | |
| | 2.000 | -24 | -26 | -26 | 4.000 | -34 | | -34 | |
| | 2.250 | -26 | -28 | -28 | 4.250 | -36 | | -36 | |
| | 2.500 | -28 | -30 | -30 | 4.500 | -38 | | -38 | |
| 2.750 | -30 | -32 | -32 | 4.750 | -40 | | -40 | | |
| 3.000 | -32 | -34 | -34 | 5.000 | -42 | | -42 | | |
| 3.250 | -34 | -36 | -36 | 5.250 | -44 | | -44 | | |
| 3.500 | -36 | -38 | -38 | 5.500 | -46 | | -46 | | |
| 3.750 | -38 | -40 | -40 | 5.750 | -48 | | -48 | | |
| 4.000 | -40 | -42 | -42 | 6.000 | -50 | | -50 | | |
| 4.250 | -42 | -44 | -44 | .500-20 | 1.500 | -15 | | -15 | |
| 4.500 | -44 | -46 | -46 | | 1.750 | -19 | | -19 | |
| 4.750 | -46 | -48 | -48 | | 2.000 | -23 | | -23 | |
| 5.000 | -48 | -50 | -50 | | 2.250 | -25 | | -25 | |
| 5.250 | -50 | -52 | -52 | | 2.500 | -27 | | -27 | |
| 5.500 | -52 | -54 | -54 | | 2.750 | -29 | | -29 | |
| 5.750 | -54 | -56 | -56 | | 3.000 | -29 | | -29 | |
| 6.000 | -56 | -58 | -58 | | 3.250 | -31 | | -31 | |
| .500-20 | .875 | -05 | | | | 3.500 | -33 | | -33 |
| | 1.000 | -07 | | | | 3.750 | -35 | | -35 |
| | 1.250 | -11 | | | 4.000 | -37 | | -37 | |
| | 1.500 | -15 | -15 | -15 | 4.250 | -39 | | -39 | |
| | 1.750 | -19 | -19 | -19 | 4.500 | -41 | | -41 | |
| | 2.000 | -21 | -22 | -22 | 4.750 | -43 | | -43 | |
| | 2.250 | -23 | -25 | -25 | 5.000 | -45 | | -45 | |
| | 2.500 | -25 | -27 | -27 | 5.250 | -47 | | -47 | |
| | 2.750 | -27 | -29 | -29 | 5.500 | -49 | | -49 | |
| | 3.000 | -29 | -31 | -31 | 5.750 | -51 | | -51 | |
| 3.250 | -31 | -33 | -33 | 6.000 | -53 | | -53 | | |
| 3.500 | -33 | -35 | -35 | | | | | | |
| 3.750 | -35 | -37 | -37 | | | | | | |
| 4.000 | -37 | -39 | -39 | | | | | | |
| 4.250 | -39 | -41 | -41 | | | | | | |
| 4.500 | -41 | -43 | -43 | | | | | | |
| 4.750 | -43 | -45 | -45 | | | | | | |
| 5.000 | -45 | -47 | -47 | | | | | | |
| 5.250 | -47 | -49 | -49 | | | | | | |
| 5.500 | -49 | -51 | -51 | | | | | | |
| 5.750 | -51 | -53 | -53 | | | | | | |
| 6.000 | -53 | -55 | -55 | | | | | | |

SECTION 703
 BOLTS, MACHINE, HEXAGON HEAD, FULL SHANK, LONG THREAD, DRILLED HEAD, THREE HOLES
 APPLICABLE DOCUMENTS: MS9583, 9584, 9585, 9586, 9588, 9590, 9591

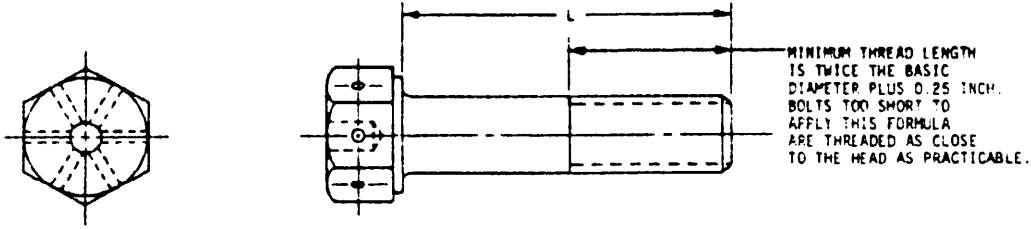


TABLE I. Material and part numbers.

| Material Thread designation (UNJF-3A) | Corrosion and heat resistant steel | | | | | | |
|---|------------------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| | .190-32 | .250-28 | .3125-24 | .375-24 | .500-20 | .625-18 | .750-16 |
| L | MS9583 +dash no. | MS9584 +dash no. | MS9585 +dash no. | MS9586 +dash no. | MS9588 +dash no. | MS9590 +dash no. | MS9591 +dash no. |
| .375 | -04 | -04 | -- | | | | |
| .438 | -05 | -05 | -- | | | | |
| .500 | -06 | -06 | -04 | | | | |
| .625 | -08 | -08 | -06 | -04 | -- | | |
| .750 | -10 | -10 | -08 | -06 | -- | | |
| .875 | -12 | -12 | -10 | -08 | -05 | | |
| 1.000 | -14 | -14 | -12 | -10 | -07 | -04 | -- |
| 1.250 | -18 | -18 | -16 | -14 | -11 | -08 | -06 |
| 1.500 | -22 | -22 | -20 | -18 | -15 | -12 | -10 |
| 1.750 | -26 | -26 | -24 | -22 | -19 | -16 | -14 |
| 2.000 | -28 | -28 | -26 | -24 | -21 | -19 | -18 |
| 2.250 | -30 | -30 | -28 | -26 | -23 | -21 | -20 |
| 2.500 | -32 | -32 | -30 | -28 | -25 | -23 | -22 |
| 2.750 | -34 | -34 | -32 | -30 | -27 | -25 | -24 |
| 3.000 | -36 | -36 | -34 | -32 | -29 | -27 | -26 |
| 3.250 | -38 | -38 | -36 | -34 | -31 | -29 | -28 |
| 3.500 | -40 | -40 | -38 | -36 | -33 | -31 | -30 |
| 3.750 | -42 | -42 | -40 | -38 | -35 | -33 | -32 |
| 4.000 | | -44 | -42 | -40 | -37 | -35 | -34 |
| 4.250 | | -46 | -44 | -42 | -39 | -37 | -36 |
| 4.500 | | -48 | -46 | -44 | -41 | -39 | -38 |
| 4.750 | | -50 | -48 | -46 | -43 | -41 | -40 |
| 5.000 | | -52 | -50 | -48 | -45 | -43 | -42 |
| 5.250 | | -54 | -52 | -50 | -47 | -45 | -44 |
| 5.500 | | -56 | -54 | -52 | -49 | -47 | -46 |
| 5.750 | | -58 | -56 | -54 | -51 | -49 | -48 |
| 6.000 | | -60 | -58 | -56 | -53 | -51 | -50 |

SECTION 704
 BOLTS, MACHINE, HEXAGON HEAD, FULL SHANK, LONG THREAD, UNDRILLED
 APPLICATION DOCUMENTS: MS9485, 9490, 9491, 9492, 9494, 9496, 9497,
 MS9651, 9652, 9653, 9654, 9656, 9783, 9784, 9785, 9786, 9788, 9790, 9791

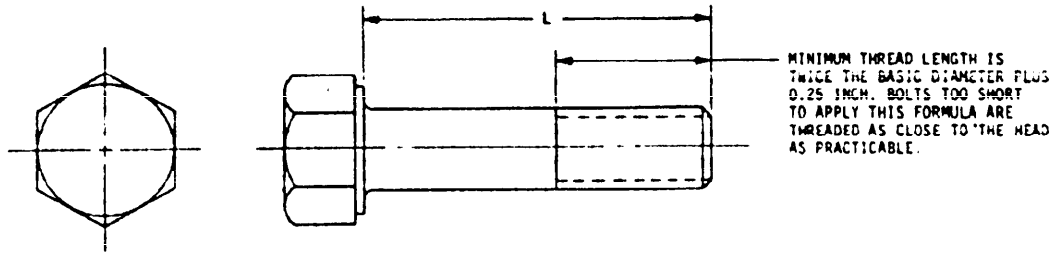


TABLE I. Materials and part numbers.

| Material | | CRES | | Titanium |
|-------------------------------|-------|-------------|---------|----------|
| | | AMS5731 | AMS5643 | |
| Protective finish | | Passivate | | -- |
| Hardness - Rockwell | | -- | C32-33 | C36-42 |
| Thread designation (UNJF-3A) | L | Part number | | |
| .190-32 | .375 | -04 | | |
| | .438 | -05 | | |
| | .500 | -06 | | |
| | .625 | -08 | -- | -- |
| | .750 | -10 | -- | -- |
| | .875 | -12 | -12 | -12 |
| | 1.000 | -14 | -14 | -14 |
| | 1.250 | -18 | -18 | -18 |
| | 1.500 | -22 | -22 | -22 |
| | 1.750 | -26 | -26 | -26 |
| | 2.000 | -28 | -30 | -30 |
| | 2.250 | -30 | -32 | -32 |
| | 2.500 | -32 | -34 | -34 |
| | 2.750 | -34 | -36 | -36 |
| | 3.000 | -36 | -38 | -38 |
| | 3.250 | -38 | -40 | -40 |
| | 3.500 | -40 | -42 | -42 |
| | 3.750 | -42 | -44 | -44 |
| .250-28 | .375 | -04 | | |
| | .438 | -05 | | |
| | .500 | -06 | | |
| | .625 | -08 | | |
| | .750 | -10 | | |
| | .875 | -12 | | |
| | 1.000 | -14 | -14 | -14 |
| | 1.250 | -18 | -18 | -18 |
| | 1.500 | -22 | -22 | -22 |
| | 1.750 | -26 | -26 | -26 |
| | 2.000 | -28 | -30 | -30 |
| | 2.250 | -30 | -32 | -32 |
| | 2.500 | -32 | -34 | -34 |
| | 2.750 | -34 | -36 | -36 |
| | 3.000 | -36 | -38 | -38 |
| | 3.250 | -38 | -40 | -40 |
| | 3.500 | -40 | -42 | -42 |
| | 3.750 | -42 | -44 | -44 |
| | 4.000 | -44 | -46 | -46 |
| | 4.250 | -46 | -48 | -48 |
| | 4.500 | -48 | -50 | -50 |
| | 4.750 | -50 | -52 | -52 |
| | 5.000 | -52 | -54 | -54 |
| | 5.250 | -54 | -56 | -56 |
| 5.500 | -56 | -58 | -58 | |
| 5.750 | -58 | -60 | -60 | |
| 6.000 | -60 | -62 | -62 | |

MIL-STD-1251A


TABLE 1. Materials and part numbers. - Continued

| Material | CREG | | Titanium | |
|---------------------------------|-----------|-------------|----------|-----|
| | AMS5731 | AMS5643 | | |
| Protective finish | Passivate | | -- | |
| Hardness - Rockwell | -- | C32-38 | C36-42 | |
| Thread designation (UNJF-3A) | L | Part number | | |
| .3125-24 | .500 | -04 | | |
| | .625 | -06 | | |
| | .750 | -08 | | |
| | .875 | -10 | -- | -- |
| | 1.000 | -12 | -- | -- |
| | 1.250 | -16 | -16 | -16 |
| | 1.500 | -20 | -20 | -20 |
| | 1.750 | -24 | -24 | -24 |
| | 2.000 | -26 | -28 | -28 |
| | 2.250 | -28 | -30 | -30 |
| | 2.500 | -30 | -32 | -32 |
| | 2.750 | -32 | -34 | -34 |
| | 3.000 | -34 | -36 | -36 |
| | 3.250 | -36 | -38 | -38 |
| | 3.500 | -38 | -40 | -40 |
| | 3.750 | -40 | -42 | -42 |
| | 4.000 | -42 | -44 | -44 |
| | 4.250 | -44 | -46 | -46 |
| | 4.500 | -46 | -48 | -48 |
| | 4.750 | -48 | -50 | -50 |
| 5.000 | -50 | -52 | -52 | |
| 5.250 | -52 | -54 | -54 | |
| 5.500 | -54 | -56 | -56 | |
| 5.750 | -56 | -58 | -58 | |
| 6.000 | -58 | -60 | -60 | |
| .375-24 | .625 | -04 | | |
| | .750 | -06 | | |
| | .875 | -08 | | |
| | 1.000 | -10 | -- | -- |
| | 1.250 | -14 | -14 | -14 |
| | 1.500 | -18 | -18 | -18 |
| | 1.750 | -22 | -22 | -22 |
| | 2.000 | -24 | -26 | -26 |
| | 2.250 | -26 | -28 | -28 |
| | 2.500 | -28 | -30 | -30 |
| | 2.750 | -30 | -32 | -32 |
| | 3.000 | -32 | -34 | -34 |
| | 3.250 | -34 | -36 | -36 |
| | 3.500 | -36 | -38 | -38 |
| | 3.750 | -38 | -40 | -40 |
| | 4.000 | -40 | -42 | -42 |
| | 4.250 | -42 | -44 | -44 |
| | 4.500 | -44 | -46 | -46 |
| | 4.750 | -46 | -48 | -48 |
| | 5.000 | -48 | -50 | -50 |
| 5.250 | -50 | -52 | -52 | |
| 5.500 | -52 | -54 | -54 | |
| 5.750 | -54 | -56 | -56 | |
| 6.000 | -56 | -58 | -58 | |
| .500-20 | .875 | -05 | | |
| | 1.000 | -07 | | |
| | 1.250 | -11 | | |
| | 1.500 | -15 | -15 | -15 |
| | 1.750 | -19 | -19 | -19 |
| | 2.000 | -21 | -23 | -23 |
| | 2.250 | -23 | -25 | -25 |
| | 2.500 | -25 | -27 | -27 |
| | 2.750 | -27 | -29 | -29 |
| | 3.000 | -29 | -31 | -31 |
| | 3.250 | -31 | -33 | -33 |
| | 3.500 | -33 | -35 | -35 |
| | 3.750 | -35 | -37 | -37 |
| | 4.000 | -37 | -39 | -39 |
| | 4.250 | -39 | -41 | -41 |
| | 4.500 | -41 | -43 | -43 |
| | 4.750 | -43 | -45 | -45 |
| | 5.000 | -45 | -47 | -47 |
| | 5.250 | -47 | -49 | -49 |
| | 5.500 | -49 | -51 | -51 |
| 5.750 | -51 | -53 | -53 | |
| 6.000 | -53 | -55 | -55 | |


| Material | CREG | | |
|---------------------------------|-----------|-------------|--|
| | AMS5731 | AMS5643 | |
| Protective finish | Passivate | | |
| Hardness - Rockwell | -- | C32-38 | |
| Thread designation (UNJF-3A) | L | Part number | |
| .625-18 | 1.000 | -04 | |
| | 1.250 | -08 | |
| | 1.500 | -12 | |
| | 1.750 | -16 | |
| | 2.000 | -19 | |
| | 2.250 | -21 | |
| | 2.500 | -23 | |
| | 2.750 | -25 | |
| | 3.000 | -27 | |
| | 3.250 | -29 | |
| | 3.500 | -31 | |
| | 3.750 | -33 | |
| | 4.000 | -35 | |
| | 4.250 | -37 | |
| | 4.500 | -39 | |
| | 4.750 | -41 | |
| | 5.000 | -43 | |
| | 5.250 | -45 | |
| | 5.500 | -47 | |
| | 5.750 | -49 | |
| 6.000 | -51 | | |
| .750-16 | 1.250 | -06 | |
| | 1.500 | -10 | |
| | 1.750 | -14 | |
| | 2.000 | -18 | |
| | 2.250 | -20 | |
| | 2.500 | -22 | |
| | 2.750 | -24 | |
| | 3.000 | -26 | |
| | 3.250 | -28 | |
| | 3.500 | -30 | |
| | 3.750 | -32 | |
| | 4.000 | -34 | |
| | 4.250 | -36 | |
| | 4.500 | -38 | |
| | 4.750 | -40 | |
| | 5.000 | -42 | |
| | 5.250 | -44 | |
| | 5.500 | -46 | |
| | 5.750 | -48 | |
| | 6.000 | -50 | |

MIL-STD-1251A


SECTION 705
 BOLTS, MACHINE, HEXAGON HEAD, FULL SHANK, SHORT THREAD
 APPLICABLE DOCUMENTS: MS20033-20046, 20073, 20074, AN3-20, NAS501, 1023-1020




MS20033-20046



THREE HOLES
 MS20073, 20074



ONE HOLE
 AN3-20 NAS501
 NAS1003-1020

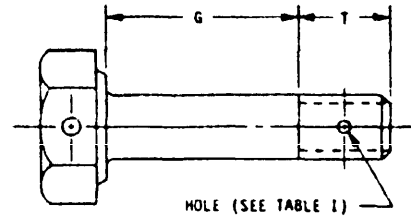

HOLE (SEE TABLE I)

TABLE I. Materials.

| Material | Code | Protective finish | Tensile strength (psi) min | Applicable documents |
|------------------------------------|------|-------------------|----------------------------|----------------------|
| Non-CRES | - | Cadmium plate | 125,000 | AN3-20 |
| Corrosion and heat resistant steel | - | Passivate | 140,000 | MS20033-20046 |
| CRES | - | Passivate | 90,000 | NAS501 |
| | - | | 140,000 | NAS1003-1020 |
| | C | | -- | AN3-20 |
| Steel | - | Cadmium plate | 125,000 | MS20073 MS20074 |
| Aluminum alloy | DD | Anodize | 62,000 | AN3-20 |

TABLE II. Drilling codes.

| Hole option | Code | Applicable documents |
|--------------------------|------|--------------------------------|
| Undrilled | A | AN3-20, NAS501 NAS1003-1020 |
| Undrilled head and shank | -- | MS20032-20046 |
| Drilled head only | H,A | AN3-20, NAS501 |
| | H | NAS1003-1020 |
| Drilled shank only | -- | NAS1003-1020 |
| Drilled head and shank | H | AN3-20 |

TABLE III. Dash numbers.

| Thread designation (UNJF-3A) | .190-32 | .250-28 | .3125-24 | .375-24 | .4375-20 | .500-20 | .625-18 | .750-16 | .875-14 | 1.000-12 |
|------------------------------|-------------|---------|----------|---------|----------|---------|---------|---------|---------|----------|
| T ref. | .422 | .516 | .562 | .672 | .688 | .828 | 1.000 | 1.125 | 1.281 | 1.406 |
| Basic part no. | MS20033 | MS20034 | MS20035 | MS20036 | MS20037 | MS20038 | MS20040 | MS20042 | MS20044 | MS20045 |
| G | Dash number | | | | | | | | | |
| .125 | -1 | | | | | | | | | |
| .250 | -2 | | | | | | | | | |
| .375 | -3 | | | | | | | | | |
| .500 | -4 | | | | | | | | | |
| .625 | -5 | | | | | | | | | |
| .750 | -6 | | | | | | | | | |
| .875 | -7 | | | | | | | | | |
| 1.000 | -10 | | | | | | | | | |
| 1.250 | -12 | | | | | | | | | |
| 1.500 | -14 | | | | | | | | | |
| 1.750 | -16 | | | | | | | | | |
| 2.000 | -20 | | | | | | | | | |
| 2.250 | -22 | | | | | | | | | |
| 2.500 | -24 | | | | | | | | | |
| 2.750 | -26 | | | | | | | | | |
| 3.000 | -30 | | | | | | | | | |
| 3.250 | -32 | | | | | | | | | |
| 3.500 | -34 | | | | | | | | | |
| 3.750 | -36 | | | | | | | | | |
| 4.000 | -40 | | | | | | | | | |
| 4.250 | -42 | | | | | | | | | |
| 4.500 | -44 | | | | | | | | | |
| 4.750 | -46 | | | | | | | | | |
| 5.000 | -50 | | | | | | | | | |

MIL-STD-1251A

TABLE 1. MS20073, 20074 dash numbers.

| Thread size . . . | .190 | .250 | .3125 | .375 | .4375 | .500 | .625 | .750 |
|--------------------------------------|--------------------|------|-------|------|-------|------|------|-------|
| Threads per inch (UNF-3A) MS20073 | 32 | 28 | 24 | 24 | 20 | 20 | 18 | 16 |
| Threads per inch (UNC-3A) MS20074 | 24 | 20 | 18 | 16 | 14 | 13 | 11 | 10 |
| T min. | .500 | .500 | .515 | .640 | .703 | .765 | .968 | 1.030 |
| First dash no. . | -03 | -04 | -05 | -06 | -07 | -08 | -10 | -12 |
| G | Second dash number | | | | | | | |
| .062 | -04 | | -05 | -06 | | | | |
| .125 | -05 | | -06 | -- | | | | |
| .188 | -- | | -- | -07 | | | | |
| .250 | -06 | | -07 | -- | -10 | | | |
| .312 | -- | | -- | -10 | -- | | | |
| .375 | -07 | | -10 | -- | -11 | | | |
| .438 | -- | | -- | -11 | -- | -- | | |
| .500 | -10 | | -11 | -- | -12 | | | |
| .562 | -- | | -- | -12 | -- | -14 | | |
| .625 | -11 | | -12 | -- | -13 | -- | -- | |
| .688 | -- | | -- | -13 | -- | -15 | | |
| .750 | -12 | | -13 | -- | -14 | -- | -16 | |
| .812 | -- | | -- | -14 | -- | -16 | -- | |
| .875 | -13 | | -14 | -- | -15 | -- | -- | |
| 1.000 | -14 | | -- | -- | -16 | -- | -20 | |
| 1.062 | -- | | -- | -16 | -- | -20 | -- | |
| 1.125 | -- | | -16 | -- | -20 | -- | -- | |
| 1.250 | -16 | | -- | -- | -- | -- | -22 | |
| 1.312 | -- | | -- | -20 | -- | -22 | -- | |
| 1.375 | -- | | -20 | -- | -- | -- | -- | |
| 1.500 | -20 | | -- | -- | -22 | -- | -24 | |
| 1.562 | -- | | -- | -22 | -- | -24 | -- | |
| 1.625 | -- | | -22 | -- | -- | -- | -- | |
| 1.750 | -22 | | -- | -- | -24 | -- | -26 | |
| 1.812 | -- | | -- | -24 | -- | -26 | -- | |
| 1.875 | -- | | -24 | -- | -- | -- | -- | |
| 2.000 | -24 | | -- | -- | -26 | -- | -30 | |
| 2.062 | -- | | -- | -26 | -- | -30 | -- | |
| 2.125 | -- | | -26 | -- | -- | -- | -- | |
| 2.250 | -26 | | -- | -- | -30 | -- | -32 | |
| 2.312 | -- | | -- | -30 | -- | -32 | -- | |
| 2.375 | -- | | -30 | -- | -- | -- | -- | |
| 2.500 | -30 | | -- | -- | -32 | -- | -34 | |
| 2.562 | -- | | -- | -32 | -- | -34 | -- | |
| 2.625 | -- | | -32 | -- | -- | -- | -- | |
| 2.750 | -32 | | -- | -- | -34 | -- | -36 | |
| 2.812 | -- | | -- | -34 | -- | -36 | -- | |
| 2.875 | -- | | -34 | -- | -- | -- | -- | |
| 3.000 | -34 | | -- | -- | -36 | -- | -40 | |
| 3.062 | -- | | -- | -36 | -- | -40 | -- | |
| 3.125 | -- | | -36 | -- | -- | -- | -- | |
| 3.250 | -36 | | -- | -- | -40 | -- | -42 | |
| 3.312 | -- | | -- | -40 | -- | -42 | -- | |
| 3.375 | -- | | -40 | -- | -- | -- | -- | |
| 3.500 | -40 | | -- | -- | -42 | -- | -44 | |
| 3.562 | -- | | -- | -42 | -- | -44 | -- | |
| 3.625 | -- | | -42 | -- | -- | -- | -- | |
| 3.750 | -42 | | -- | -- | -44 | -- | -46 | |
| 3.812 | -- | | -- | -44 | -- | -46 | -- | |
| 3.875 | -- | | -44 | -- | -- | -- | -- | |
| 4.000 | -44 | | -- | -- | -46 | -- | -50 | |
| 4.062 | -- | | -- | -46 | -- | -50 | -- | |
| 4.125 | -- | | -46 | -- | -- | -- | -- | |
| 4.250 | -46 | | -- | -- | -50 | -- | -52 | |
| 4.312 | -- | | -- | -50 | -- | -52 | -- | |
| 4.375 | -- | | -50 | -- | -- | -- | -- | |
| 4.500 | -50 | | -- | -- | -52 | -- | -54 | |
| 4.562 | -- | | -- | -52 | -- | -54 | -- | |
| 4.625 | -- | | -52 | -- | -- | -- | -- | |
| 4.750 | -52 | | -- | -- | -54 | -- | -56 | |
| 4.812 | -- | | -- | -54 | -- | -56 | -- | |
| 4.875 | -- | | -54 | -- | -- | -- | -- | |
| 5.000 | -54 | | -- | -- | -56 | -- | -60 | |
| 5.062 | -- | | -- | -56 | -- | -60 | -- | |
| 5.125 | -- | | -56 | -- | -- | -- | -- | |
| 5.250 | -56 | | -- | -- | -60 | -- | -- | |
| 5.312 | -- | | -- | -60 | -- | -- | -- | |
| 5.375 | -- | | -60 | -- | -- | -- | -- | |
| 5.500 | -60 | | -- | -- | -- | -- | -- | |

TABLE V. AN3-20, NAS501 dash numbers.

| Thread designation (UNF-3A) | .190-32 | .250-28 | .3125-24 | .375-24 | .4375-20 | .500-20 | .625-18 | .750-16 | .875-14 | 1.250-12 |
|-----------------------------|--------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|-------------------|-------------------|
| T ref | .406 | .469 | .531 | .641 | .656 | .791 | .953 | 1.094 | 1.250 | 1.688 |
| First dash no. | AN3 or NAS501-3 | AN4 or NAS501-4 | AN5 or NAS501-5 | AN6 or NAS501-6 | AN7 or NAS501-7 | AN8 or NAS501-8 | AN10 or NAS501-10 | AN12 or NAS501-12 | AN14 or NAS501-14 | AN20 or NAS501-20 |
| 6 | Second dash number | | | | | | | | | |
| .062 | -3 | -4 | -4 | -5 | -5 | -6 | -7 | -10 | -11 | -- |
| .125 | -4 | -- | -- | -- | -- | -- | -- | -- | -- | -15 |
| .188 | -- | -5 | -5 | -6 | -6 | -7 | -10 | -11 | -12 | -- |
| .250 | -5 | -- | -- | -- | -- | -- | -- | -- | -- | -16 |
| .312 | -- | -6 | -6 | -7 | -7 | -10 | -11 | -12 | -13 | -- |
| .375 | -6 | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| .438 | -- | -7 | -7 | -10 | -10 | -11 | -12 | -13 | -14 | -- |
| .500 | -7 | -- | -- | -- | -- | -- | -- | -- | -- | -20 |
| .562 | -- | -10 | -10 | -11 | -11 | -12 | -13 | -14 | -15 | -- |
| .625 | -10 | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| .688 | -- | -11 | -11 | -12 | -12 | -13 | -14 | -15 | -16 | -- |
| .750 | -11 | -- | -- | -- | -- | -- | -- | -- | -- | -22 |
| .812 | -- | -12 | -12 | -13 | -13 | -- | -15 | -16 | -- | -- |
| .875 | -12 | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| .938 | -- | -13 | -13 | -- | -- | -15 | -16 | -- | -20 | -- |
| 1.000 | -13 | -- | -- | -- | -- | -- | -- | -- | -- | -24 |
| 1.062 | -- | -- | -- | -15 | -15 | -- | -- | -20 | -- | -- |
| 1.188 | -- | -15 | -15 | -- | -- | -17 | -20 | -- | -22 | -- |
| 1.250 | -15 | -- | -- | -- | -- | -- | -- | -- | -- | -26 |
| 1.312 | -- | -- | -- | -17 | -17 | -- | -- | -22 | -- | -- |
| 1.438 | -- | -17 | -17 | -- | -- | -21 | -22 | -- | -24 | -- |
| 1.500 | -17 | -- | -- | -- | -- | -- | -- | -- | -- | -30 |
| 1.562 | -- | -- | -- | -21 | -21 | -- | -- | -24 | -- | -- |
| 1.688 | -- | -21 | -21 | -- | -- | -23 | -24 | -- | -26 | -- |
| 1.750 | -21 | -- | -- | -- | -- | -- | -- | -- | -- | -32 |
| 1.812 | -- | -- | -- | -23 | -23 | -- | -- | -26 | -- | -- |
| 1.938 | -- | -23 | -23 | -- | -- | -25 | -26 | -- | -30 | -- |
| 2.000 | -23 | -- | -- | -- | -- | -- | -- | -- | -- | -34 |
| 2.062 | -- | -- | -- | -25 | -25 | -- | -- | -30 | -- | -- |
| 2.188 | -- | -25 | -25 | -- | -- | -27 | -30 | -- | -32 | -- |
| 2.250 | -25 | -- | -- | -- | -- | -- | -- | -- | -- | -36 |
| 2.312 | -- | -- | -- | -27 | -27 | -- | -- | -32 | -- | -- |
| 2.438 | -- | -27 | -27 | -- | -- | -31 | -32 | -- | -34 | -- |
| 2.500 | -27 | -- | -- | -- | -- | -- | -- | -- | -- | -40 |
| 2.562 | -- | -- | -- | -31 | -31 | -- | -- | -34 | -- | -- |
| 2.688 | -- | -31 | -31 | -- | -- | -33 | -34 | -- | -36 | -- |
| 2.750 | -31 | -- | -- | -- | -- | -- | -- | -- | -- | -42 |
| 2.812 | -- | -- | -- | -33 | -33 | -- | -- | -36 | -- | -- |
| 2.938 | -- | -33 | -33 | -- | -- | -35 | -36 | -- | -40 | -- |
| 3.000 | -33 | -- | -- | -- | -- | -- | -- | -- | -- | -44 |
| 3.062 | -- | -- | -- | -35 | -35 | -- | -- | -40 | -- | -- |
| 3.188 | -- | -35 | -35 | -- | -- | -37 | -40 | -- | -42 | -- |
| 3.250 | -35 | -- | -- | -- | -- | -- | -- | -- | -- | -46 |
| 3.312 | -- | -- | -- | -37 | -37 | -- | -- | -42 | -- | -- |
| 3.438 | -- | -37 | -37 | -- | -- | -41 | -42 | -- | -44 | -- |
| 3.500 | -37 | -- | -- | -- | -- | -- | -- | -- | -- | -50 |
| 3.562 | -- | -- | -- | -41 | -41 | -- | -- | -44 | -- | -- |
| 3.688 | -- | -41 | -41 | -- | -- | -43 | -43 | -- | -46 | -- |

MIL-STD-1251A

TABLE V. AN3-20, NAS501 dash numbers - Continued

| Thread designation (UNF-3A) | .190-32 | .250-28 | .3125-24 | .375-24 | .4375-20 | .500-20 | .625-18 | .750-16 | .875-14 | 1.250-12 |
|-----------------------------|--------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|--------------------|-------------------|-------------------|
| T ref | .406 | .469 | .531 | .641 | .656 | .781 | .953 | 1.094 | 1.250 | 1.688 |
| First dash no. | AN3 or NAS501-3 | AN4 or NAS501-4 | AN5 or NAS501-5 | AN6 or NAS501-6 | AN7 or NAS501-7 | AN8 or NAS501-8 | AN10 or NAS501-10 | AN 12 or NAS501-12 | AN14 or NAS501-14 | AN20 or NAS501-20 |
| G | Second dash number | | | | | | | | | |
| 3.750 | -41 | -- | -- | -- | -- | -- | -- | -- | -- | -52 |
| 3.812 | -- | -- | -- | -43 | -43 | -- | -- | -46 | -- | -- |
| 3.938 | -- | -43 | -43 | -- | -- | -45 | -46 | -- | -50 | -- |
| 4.000 | -43 | -- | -- | -- | -- | -- | -- | -- | -- | -54 |
| 4.062 | -- | -- | -- | -45 | -45 | -- | -- | -50 | -- | -- |
| 4.125 | -- | -45 | -45 | -- | -- | -47 | -50 | -- | -52 | -- |
| 4.250 | -45 | -- | -- | -- | -- | -- | -- | -- | -- | -56 |
| 4.312 | -- | -- | -- | -47 | -47 | -- | -- | -52 | -- | -- |
| 4.438 | -- | -47 | -47 | -- | -- | -51 | -52 | -- | -54 | -- |
| 4.500 | -47 | -- | -- | -- | -- | -- | -- | -- | -- | -60 |
| 4.562 | -- | -- | -- | -51 | -51 | -- | -- | -54 | -- | -- |
| 4.688 | -- | -51 | -51 | -- | -- | -53 | -54 | -- | -56 | -- |
| 4.750 | -51 | -- | -- | -- | -- | -- | -- | -- | -- | -62 |
| 4.812 | -- | -- | -- | -53 | -53 | -- | -- | -56 | -- | -- |
| 4.938 | -- | -53 | -53 | -- | -- | -55 | -56 | -- | -60 | -- |
| 5.000 | -53 | -- | -- | -- | -- | -- | -- | -- | -- | -64 |
| 5.062 | -- | -- | -- | -55 | -55 | -- | -- | -60 | -- | -- |
| 5.125 | -- | -55 | -55 | -- | -- | -57 | -60 | -- | -62 | -- |
| 5.250 | -55 | -- | -- | -- | -- | -- | -- | -- | -- | -66 |
| 5.312 | -- | -- | -- | -57 | -57 | -- | -- | -62 | -- | -- |
| 5.438 | -- | -57 | -57 | -- | -- | -61 | -62 | -- | -64 | -- |
| 5.500 | -57 | -- | -- | -- | -- | -- | -- | -- | -- | -70 |
| 5.562 | -- | -- | -- | -61 | -61 | -- | -- | -64 | -- | -- |
| 5.688 | -- | -61 | -61 | -- | -- | -63 | -64 | -- | -66 | -- |
| 5.750 | -61 | -- | -- | -- | -- | -- | -- | -- | -- | -72 |
| 5.812 | -- | -- | -- | -63 | -63 | -- | -- | -66 | -- | -- |
| 5.938 | -- | -63 | -63 | -- | -- | -65 | -66 | -- | -70 | -- |
| 6.000 | -63 | -- | -- | -- | -- | -- | -- | -- | -- | -74 |
| 6.062 | -- | -- | -- | -65 | -65 | -- | -- | -70 | -- | -- |
| 6.188 | -- | -65 | -65 | -- | -- | -67 | -70 | -- | -72 | -- |
| 6.250 | -65 | -- | -- | -- | -- | -- | -- | -- | -- | -76 |
| 6.312 | -- | -- | -- | -67 | -67 | -- | -- | -72 | -- | -- |
| 6.438 | -- | -67 | -67 | -- | -- | -71 | -72 | -- | -74 | -- |
| 6.500 | -67 | -- | -- | -- | -- | -- | -- | -- | -- | -80 |
| 6.562 | -- | -- | -- | -71 | -71 | -- | -- | -74 | -- | -- |
| 6.688 | -- | -71 | -71 | -- | -- | -73 | -74 | -- | -76 | -- |
| 6.750 | -71 | -- | -- | -- | -- | -- | -- | -- | -- | -80 |
| 6.812 | -- | -- | -- | -73 | -73 | -- | -- | -76 | -- | -- |
| 6.938 | -- | -73 | -73 | -- | -- | -75 | -76 | -- | -80 | -- |
| 7.000 | -73 | -- | -- | -- | -- | -- | -- | -- | -- | -80 |
| 7.062 | -- | -- | -- | -75 | -75 | -- | -- | -80 | -- | -- |
| 7.188 | -- | -75 | -75 | -- | -- | -77 | -80 | -- | -- | -- |
| 7.250 | -75 | -- | -- | -- | -- | -- | -- | -- | -- | -80 |
| 7.312 | -- | -- | -- | -77 | -77 | -- | -- | -- | -- | -- |
| 7.438 | -- | -77 | -77 | -- | -- | -81 | -- | -- | -- | -- |
| 7.500 | -77 | -- | -- | -- | -- | -- | -- | -- | -- | -80 |
| 7.688 | -- | -- | -81 | -- | -- | -- | -83 | -- | -- | -- |
| 7.938 | -- | -- | -- | -- | -- | -85 | -- | -- | -- | -- |
| 8.062 | -- | -- | -- | -85 | -- | -- | -- | -- | -- | -- |
| 8.188 | -- | -- | -- | -- | -- | -87 | -- | -- | -- | -- |

TABLE VI. NAS1003-1020 dash numbers.

| Thread designation (UNF-3A) | T ref | Basic part number | Grid dash number 1/ | |
|-----------------------------|-------|-------------------|---------------------|------------|
| | | | Range | Increments |
| .190-32 | .481 | NAS1003 | | |
| .250-28 | .544 | NAS1004 | | |
| .3125-24 | .632 | NAS1005 | | |
| .375-24 | .663 | NAS1006 | -1 thru -8 | One |
| .4375-20 | .745 | NAS1007 | | |
| .500-20 | .842 | NAS1008 | | |
| .625-18 | 1.042 | NAS1010 | -10 thru -16 | Two |
| .750-16 | 1.189 | NAS1012 | | |
| .875-14 | 1.256 | NAS1014 | | |
| 1.000-14 | 1.481 | NAS1016 | -20 thru -96 | Four |
| 1.250-12 | 1.646 | NAS1020 | | |

1/ Grid dash number equals "G" dimension times 16

SECTION 706
 BOLTS, MACHINE, HEXAGON HEAD, PD SHANK, LONG THREAD, DRILLED HEAD, ONE HOLE
 APPLICABLE DOCUMENTS: MS9294, 9295, 9296, 9297, 9529, 9530, 9531, 9532, 9534, 9536, 9537, 9624
 MS9625, 9626, 9627, 9629, 9685, 9686, 9687, 9688, 9690, 9692, 9693, 9816, 9817, 9818, 9819, 9821, 9823, 9824

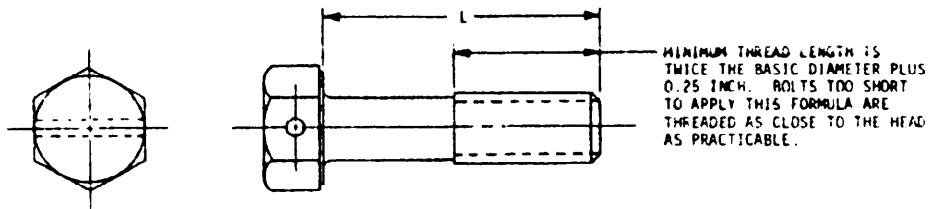


TABLE I. Material and part numbers.

| Material | | CRES | Steel | Titanium | | |
|---------------------------------|-------|-------------|----------------------------------|------------------------------|----------|-----|
| | | AMS-5643 | AMS-6304 | AMS-6322 | AMS-4967 | |
| Protective finish | | -- | Diffused nickel cadmium plate | Black oxide Cadmium plate | -- | |
| Hardness - Rockwell | | C32-38 | C42-46 | C26-32 | C36-42 | |
| Thread designation (UNJF-3A) | L | Part number | | | | |
| .190-32 | .312 | -03 | -03 | -- | -- | -03 |
| | .375 | -04 | -04 | -04 | -04 | -04 |
| | .438 | -05 | -05 | -05 | -05 | -05 |
| | .500 | -06 | -06 | -06 | -06 | -06 |
| | .625 | -08 | -08 | -08 | -08 | -08 |
| | .750 | -10 | -10 | -10 | -10 | -10 |
| | .875 | -12 | -12 | -12 | -12 | -12 |
| | 1.000 | -14 | -14 | -14 | -14 | -14 |
| | 1.250 | -18 | -18 | -18 | -18 | -18 |
| | 1.500 | -22 | -22 | -22 | -22 | -22 |
| | 1.750 | -26 | -26 | -26 | -26 | -26 |
| | 2.000 | -30 | -30 | -28 | -28 | -30 |
| | 2.250 | -32 | -32 | -30 | -30 | -32 |
| | 2.500 | -34 | -34 | -32 | -32 | -34 |
| | 2.750 | -36 | -36 | -34 | -34 | -36 |
| | 3.000 | -38 | -38 | -36 | -36 | -38 |
| | 3.250 | -40 | -40 | -38 | -38 | -40 |
| 3.500 | -42 | -42 | -40 | -40 | -42 | |
| 3.750 | -44 | -44 | -42 | -42 | -44 | |
| .250-28 | .375 | -04 | -04 | -04 | -04 | -04 |
| | .438 | -05 | -05 | -05 | -05 | -05 |
| | .500 | -06 | -06 | -06 | -06 | -06 |
| | .625 | -08 | -08 | -08 | -08 | -08 |
| | .750 | -10 | -10 | -10 | -10 | -10 |
| | .875 | -12 | -12 | -12 | -12 | -12 |
| | 1.000 | -14 | -14 | -14 | -14 | -14 |
| | 1.250 | -18 | -18 | -18 | -18 | -18 |
| | 1.500 | -22 | -22 | -22 | -22 | -22 |
| | 1.750 | -26 | -26 | -26 | -26 | -26 |
| | 2.000 | -30 | -30 | -28 | -28 | -30 |
| | 2.250 | -32 | -32 | -30 | -30 | -32 |
| | 2.500 | -34 | -34 | -32 | -32 | -34 |
| | 2.750 | -36 | -36 | -34 | -34 | -36 |
| | 3.000 | -38 | -38 | -36 | -36 | -38 |
| | 3.250 | -40 | -40 | -38 | -38 | -40 |
| | 3.500 | -42 | -42 | -40 | -40 | -42 |
| | 3.750 | -44 | -44 | -42 | -42 | -44 |
| | 4.000 | -46 | -46 | -44 | -44 | -46 |
| | 4.250 | -48 | -48 | -46 | -46 | -48 |
| 4.500 | -50 | -50 | -48 | -48 | -50 | |
| 4.750 | -52 | -52 | -50 | -50 | -52 | |
| 5.000 | -54 | -54 | -52 | -52 | -54 | |
| 5.250 | -56 | -56 | -54 | -54 | -56 | |
| 5.500 | -58 | -58 | -56 | -56 | -58 | |
| 5.750 | -60 | -60 | -58 | -58 | -60 | |
| 6.000 | -62 | -62 | -60 | -60 | -62 | |

MIL-STD-1251A

TABLE 1 Material and part numbers - Continued

| Material | L | CRES | Steel | | | Titanium |
|----------------------------------|-------|-------------|-------------------------------|-------------|---------------|----------|
| | | AMS-5643 | AMS-6204 | AMS-E327 | | AMS-4967 |
| Protective finish | | -- | Diffused nickel cadmium plate | Black oxide | Cadmium plate | -- |
| Hardness - Rockwell | | C32-38 | C42-46 | C26-32 | | C36-42 |
| Thread designation (UN, UNF, 3A) | | Part number | | | | |
| .3175-24 | .500 | -04 | -04 | -04 | -04 | -04 |
| | .625 | -06 | -06 | -06 | -06 | -06 |
| | .750 | -08 | -08 | -08 | -08 | -08 |
| | .875 | -10 | -10 | -10 | -10 | -10 |
| | 1.000 | -12 | -12 | -12 | -12 | -12 |
| | 1.250 | -16 | -16 | -16 | -16 | -16 |
| | 1.500 | -20 | -20 | -20 | -20 | -20 |
| | 1.750 | -24 | -24 | -24 | -24 | -24 |
| | 2.000 | -28 | -28 | -26 | -26 | -28 |
| | 2.250 | -30 | -30 | -28 | -28 | -30 |
| | 2.500 | -32 | -32 | -30 | -30 | -32 |
| | 2.750 | -34 | -34 | -32 | -32 | -34 |
| | 3.000 | -36 | -36 | -34 | -34 | -36 |
| | 3.250 | -38 | -38 | -36 | -36 | -38 |
| | 3.500 | -40 | -40 | -38 | -38 | -40 |
| | 3.750 | -42 | -42 | -40 | -40 | -42 |
| | 4.000 | -44 | -44 | -42 | -42 | -44 |
| | 4.250 | -46 | -46 | -44 | -44 | -46 |
| | 4.500 | -48 | -48 | -46 | -46 | -48 |
| | 4.750 | -50 | -50 | -48 | -48 | -50 |
| 5.000 | -52 | -52 | -50 | -50 | -52 | |
| 5.250 | -54 | -54 | -52 | -52 | -54 | |
| 5.500 | -56 | -56 | -54 | -54 | -56 | |
| 5.750 | -58 | -58 | -56 | -56 | -58 | |
| 6.000 | -60 | -60 | -58 | -58 | -60 | |
| .375-24 | .625 | -04 | -04 | -04 | -04 | -04 |
| | .750 | -06 | -06 | -06 | -06 | -06 |
| | .875 | -08 | -08 | -08 | -08 | -08 |
| | 1.000 | -10 | -10 | -10 | -10 | -10 |
| | 1.250 | -14 | -14 | -14 | -14 | -14 |
| | 1.500 | -18 | -18 | -18 | -18 | -18 |
| | 1.750 | -22 | -22 | -22 | -22 | -22 |
| | 2.000 | -26 | -26 | -24 | -24 | -26 |
| | 2.250 | -28 | -28 | -26 | -26 | -28 |
| | 2.500 | -30 | -30 | -28 | -28 | -30 |
| | 2.750 | -32 | -32 | -30 | -30 | -32 |
| | 3.000 | -34 | -34 | -32 | -32 | -34 |
| | 3.250 | -36 | -36 | -34 | -34 | -36 |
| | 3.500 | -38 | -38 | -36 | -36 | -38 |
| | 3.750 | -40 | -40 | -38 | -38 | -40 |
| | 4.000 | -42 | -42 | -40 | -40 | -42 |
| | 4.250 | -44 | -44 | -42 | -42 | -44 |
| | 4.500 | -46 | -46 | -44 | -44 | -46 |
| | 4.750 | -48 | -48 | -46 | -46 | -48 |
| | 5.000 | -50 | -50 | -48 | -48 | -50 |
| 5.250 | -52 | -52 | -50 | -50 | -52 | |
| 5.500 | -54 | -54 | -52 | -52 | -54 | |
| 5.750 | -56 | -56 | -54 | -54 | -56 | |
| 6.000 | -58 | -58 | -56 | -56 | -58 | |
| .500-20 | .750 | -03 | -03 | | | -03 |
| | .875 | -05 | -05 | | | -05 |
| | 1.000 | -07 | -07 | | | -07 |
| | 1.250 | -11 | -11 | | | -11 |
| | 1.500 | -15 | -15 | | | -15 |
| | 1.750 | -19 | -19 | | | -19 |
| | 2.000 | -23 | -23 | | | -23 |
| | 2.250 | -25 | -25 | | | -25 |
| | 2.500 | -27 | -27 | | | -27 |

MIL-STD-1251A

TABLE I. Material and part numbers. - Cont. nos.

| Material | CRES | | AMS-6304 | | AMS-6323 | | Inertior |
|---------------------------------|----------|-------------------|----------------------------------|-------------------|----------------|-------------------|----------|
| | AMS-5643 | | AMS-6304 | | AMS-6323 | | AMS-4967 |
| Protective finish | -- | | Diffused nickel cadmium plate | | Black oxide | Cadmium plate | -- |
| Hardness - Rockwell | C42-38 | | C42-46 | | C26-32 | | C36-42 |
| Thread designation (UNJF-3A) | L | Part number | | | | | |
| .500-20 | 2.750 | | -29 | | | -27 | -29 |
| | 3.000 | | -31 | | | -29 | -31 |
| | 3.250 | | -33 | | | -31 | -33 |
| | 3.500 | MS9821 + dash no. | -35 | MS9830 + dash no. | | MS9734 + dash no. | -35 |
| | 3.750 | | -37 | | | -35 | -37 |
| | 4.000 | | -39 | | | -37 | -39 |
| | 4.250 | | -41 | | | -39 | -41 |
| | 4.500 | | -43 | | | -41 | -43 |
| | 4.750 | | -45 | | | -43 | -45 |
| | 5.000 | | -47 | | | -45 | -47 |
| | 5.250 | | -49 | | | -47 | -49 |
| | 5.500 | | -51 | | | -49 | -51 |
| | 5.750 | | -53 | | | -51 | -53 |
| | 6.000 | | -55 | | | -53 | -55 |
| .625-13 | 1.000 | | -04 | | | -04 | -04 |
| | 1.250 | | -08 | | | -08 | -08 |
| | 1.500 | | -11 | | | -11 | -11 |
| | 1.750 | | -16 | | | -16 | -16 |
| | 2.000 | | -20 | | | -19 | -20 |
| | 2.250 | | -22 | | | -21 | -22 |
| | 2.500 | MS9823 + dash no. | -24 | MS9822 + dash no. | | MS9536 + dash no. | -23 |
| | 2.750 | | -26 | | | -25 | -26 |
| | 3.000 | | -28 | | | -27 | -28 |
| | 3.250 | | -30 | | | -29 | -30 |
| | 3.500 | | -32 | | | -31 | -32 |
| | 3.750 | | -34 | | | -33 | -34 |
| | 4.000 | | -36 | | | -35 | -36 |
| | 4.250 | | -38 | | | -37 | -38 |
| 4.500 | | -40 | | | -39 | -40 | |
| 4.750 | | -42 | | | -41 | -42 | |
| 5.000 | | -44 | | | -42 | -44 | |
| 5.250 | | -46 | | | -45 | -46 | |
| 5.500 | | -48 | | | -47 | -48 | |
| 5.750 | | -50 | | | -49 | -50 | |
| 6.000 | | -52 | | | -51 | -52 | |
| .750-16 | 1.250 | | -06 | | | -06 | -06 |
| | 1.500 | | -10 | | | -10 | -10 |
| | 1.750 | | -14 | | | -14 | -14 |
| | 2.000 | | -18 | | | -18 | -18 |
| | 2.250 | | -20 | | | -20 | -20 |
| | 2.500 | | -22 | | | -22 | -22 |
| | 2.750 | MS9824 + dash no. | -24 | MS9893 + dash no. | | MS9537 + dash no. | -24 |
| | 3.000 | | -26 | | | -26 | -26 |
| | 3.250 | | -28 | | | -28 | -28 |
| | 3.500 | | -30 | | | -30 | -30 |
| | 3.750 | | -32 | | | -32 | -32 |
| | 4.000 | | -34 | | | -34 | -34 |
| | 4.250 | | -36 | | | -36 | -36 |
| | 4.500 | | -38 | | | -38 | -38 |
| 4.750 | | -40 | | | -40 | -40 | |
| 5.000 | | -42 | | | -42 | -42 | |
| 5.250 | | -44 | | | -44 | -44 | |
| 5.500 | | -46 | | | -46 | -46 | |
| 5.750 | | -48 | | | -48 | -48 | |
| 6.000 | | -50 | | | -50 | -50 | |

SECTION 707
 BOLTS, MACHINE, HEXAGON HEAD, PD SHANK, LONG THREAD, DRILLED HEAD, THREE HOLES
 APPLICABLE DOCUMENTS: MS9440, 9441, 9442, 9443, 9445, 9447, 9448, 9757, 9758, 9759, 9760, 9762, 9964, 9965

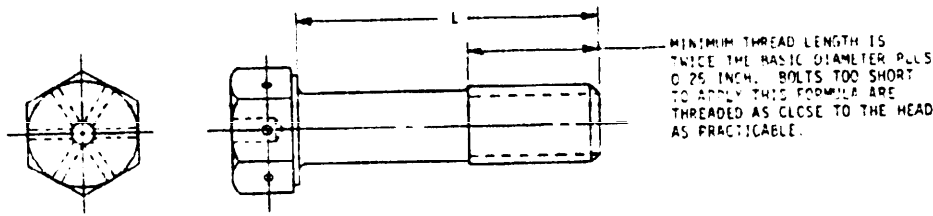


TABLE I. Materials and part numbers.

| Material | Steel | | |
|------------------------------|-------------------------------|---------------|-----|
| | AMS-6304 | AMS-6322 | |
| Protective finish | Diffused nickel cadmium plate | Cadmium plate | |
| Hardness - Rockwell | C42-46 | C26-32 | |
| Thread designation (UNJF-3A) | L | Part number | |
| .190-32 | .312 | --- | -03 |
| | .375 | -04 | -04 |
| | .500 | -05 | -04 |
| | .625 | -06 | -06 |
| | .750 | -08 | -08 |
| | | -10 | -10 |
| | .875 | -12 | -12 |
| | 1.000 | -14 | -14 |
| | 1.250 | -18 | -18 |
| | 1.500 | -22 | -22 |
| | 1.750 | -26 | -26 |
| | 2.000 | -28 | -30 |
| | 2.250 | -30 | -32 |
| | 2.500 | -32 | -34 |
| | 2.750 | -34 | -36 |
| 3.000 | -36 | -38 | |
| 3.250 | -38 | -40 | |
| 3.500 | -40 | -42 | |
| 3.750 | -42 | -44 | |
| .250-28 | .375 | -04 | -04 |
| | .438 | -05 | -05 |
| | .500 | -06 | -06 |
| | .625 | -08 | -08 |
| | .750 | -10 | -10 |
| | .875 | -12 | -12 |
| | 1.000 | -14 | -14 |
| | 1.250 | -18 | -18 |
| | 1.500 | -22 | -22 |
| | 1.750 | -26 | -26 |
| | 2.000 | -28 | -30 |
| | 2.250 | -30 | -32 |
| | 2.500 | -32 | -34 |
| | 2.750 | -34 | -36 |
| | 3.000 | -36 | -38 |
| 3.250 | -38 | -40 | |
| 3.500 | -40 | -42 | |
| 3.750 | -42 | -44 | |
| 4.000 | -44 | -46 | |
| 4.250 | -46 | -48 | |
| 4.500 | -48 | -50 | |
| 4.750 | -50 | -52 | |
| 5.000 | -52 | -54 | |
| 5.250 | -54 | -56 | |
| 5.500 | -56 | -58 | |
| 5.750 | -58 | -60 | |
| 6.000 | -60 | -62 | |

| Material | Steel | | |
|------------------------------|-------------------------------|---------------|-----|
| | AMS-6304 | AMS-6322 | |
| Protective finish | Diffused nickel cadmium plate | Cadmium plate | |
| Hardness - Rockwell | C42-46 | C26-32 | |
| Thread designation (UNJF-3A) | L | Part number | |
| .3125-24 | .500 | -04 | -04 |
| | .625 | -06 | -06 |
| | .750 | -08 | -08 |
| | .875 | -10 | -10 |
| | 1.000 | -12 | -12 |
| | 1.250 | -16 | -16 |
| | 1.500 | -20 | -20 |
| | 1.750 | -24 | -24 |
| | 2.000 | -26 | -28 |
| | 2.250 | -28 | -30 |
| | 2.500 | -30 | -32 |
| | 2.750 | -32 | -34 |
| | 3.000 | -34 | -36 |
| | 3.250 | -36 | -38 |
| | 3.500 | -38 | -40 |
| 3.750 | -40 | -42 | |
| 4.000 | -42 | -44 | |
| 4.250 | -44 | -46 | |
| 4.500 | -46 | -48 | |
| 4.750 | -48 | -50 | |
| 5.000 | -50 | -52 | |
| 5.250 | -52 | -54 | |
| 5.500 | -54 | -56 | |
| 5.750 | -56 | -58 | |
| 6.000 | -58 | -60 | |
| .375-24 | .625 | -04 | -04 |
| | .750 | -06 | -06 |
| | .875 | -08 | -08 |
| | 1.000 | -10 | -10 |
| | 1.250 | -14 | -14 |
| | 1.500 | -18 | -18 |
| | 1.750 | -22 | -22 |
| | 2.000 | -24 | -24 |
| | 2.250 | -26 | -28 |
| | 2.500 | -28 | -30 |
| | 2.750 | -30 | -32 |
| | 3.000 | -32 | -34 |
| | 3.250 | -34 | -36 |
| | 3.500 | -36 | -38 |
| | 3.750 | -38 | -40 |
| 4.000 | -40 | -42 | |
| 4.250 | -42 | -44 | |
| 4.500 | -44 | -46 | |
| 4.750 | -46 | -48 | |
| 5.000 | -48 | -50 | |
| 5.250 | -50 | -52 | |
| 5.500 | -52 | -54 | |
| 5.750 | -54 | -56 | |
| 6.000 | -56 | -58 | |

MIL-STD-1251A

TABLE I. Materials and part numbers - Continued

| Material | Steel | | |
|------------------------------|-------------------------------|---------------|-----|
| | AMS-6304 | AMS-6322 | |
| Protective finish | Diffused nickel cadmium plate | Cadmium plate | |
| Hardness - Rockwell | C42-46 | C26-32 | |
| Thread designation (UNJF-3A) | Part number | | |
| .500-20 | .750 | -- | -03 |
| | .875 | -05 | -05 |
| | 1.000 | -07 | -07 |
| | 1.250 | -11 | -11 |
| | 1.500 | -15 | -15 |
| | 1.750 | -19 | -19 |
| | 2.000 | -21 | -23 |
| | 2.250 | -23 | -25 |
| | 2.500 | -25 | -27 |
| | 2.750 | -27 | -29 |
| | 3.000 | -29 | -31 |
| | 3.250 | -31 | -33 |
| | 3.500 | -33 | -35 |
| | 3.750 | -35 | -37 |
| | 4.000 | -37 | -39 |
| | 4.250 | -39 | -41 |
| | 4.500 | -41 | -43 |
| | 4.750 | -43 | -45 |
| 5.000 | -45 | -47 | |
| 5.250 | -47 | -49 | |
| 5.500 | -49 | -51 | |
| 5.750 | -51 | -53 | |
| 6.000 | -53 | -55 | |
| .625-18 | 1.000 | -04 | -04 |
| | 1.250 | -08 | -08 |
| | 1.500 | -12 | -12 |
| | 1.750 | -16 | -16 |
| | 2.000 | -19 | -20 |
| | 2.250 | -21 | -22 |
| | 2.500 | -23 | -24 |
| | 2.750 | -25 | -26 |
| | 3.000 | -27 | -28 |
| | 3.250 | -29 | -30 |
| | 3.500 | -31 | -32 |
| | 3.750 | -33 | -34 |
| | 4.000 | -35 | -36 |
| | 4.250 | -37 | -38 |
| | 4.500 | -39 | -40 |
| | 4.750 | -41 | -42 |
| | 5.000 | -43 | -44 |
| | 5.250 | -45 | -46 |
| 5.500 | -47 | -48 | |
| 5.750 | -49 | -50 | |
| 6.000 | -51 | -52 | |

| Material | Steel | | |
|------------------------------|-------------------------------|---------------|-----|
| | AMS-6304 | AMS-6322 | |
| Protective finish | Diffused nickel cadmium plate | Cadmium plate | |
| Hardness - Rockwell | C42-46 | C26-32 | |
| Thread designation (UNJF-3A) | L | Part number | |
| .750-16 | 1.250 | -06 | -06 |
| | 1.500 | -10 | -10 |
| | 1.750 | -14 | -14 |
| | 2.000 | -18 | -18 |
| | 2.250 | -20 | -20 |
| | 2.500 | -22 | -22 |
| | 2.750 | -24 | -24 |
| | 3.000 | -26 | -26 |
| | 3.250 | -28 | -28 |
| | 3.500 | -30 | -30 |
| | 3.750 | -32 | -32 |
| | 4.000 | -34 | -34 |
| | 4.250 | -36 | -36 |
| | 4.500 | -38 | -38 |
| | 4.750 | -40 | -40 |
| | 5.000 | -42 | -42 |
| | 5.250 | -44 | -44 |
| | 5.500 | -46 | -46 |
| | 5.750 | -48 | -48 |
| | 6.000 | -50 | -50 |

SECTION 708

BOLTS, MACHINE, HEXAGON HEAD, RD SHANK, LONG THREAD, UNDRILLED
 APPLICABLE DOCUMENTS: MS9283, 9284, 9295, 9286, 9451, 9452, 9453, 9454, 9456, 9458, 9459, 9519, 9519, 9520, 9521, MS9520, 9525, 9526, 9675, 9634, 9635, 9636, 9638, 9805, 9806, 9807, 9808, 9510, 9312, 9513.

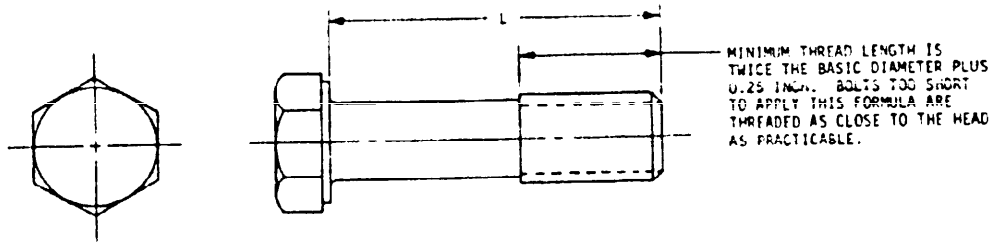


TABLE I. Material and part numbers.

| Material | L | CRES | | Steel | | | Titanium |
|---------------------------------|----------------|-------------|----------------------------------|----------------|------------------|----------|----------|
| | | AMS-5643 | AMS-6304 | AMS-6322 | | AMS-4967 | |
| Protective finish | | -- | Diffused nickel cadmium plate | Black oxide | Cadmium plate | -- | -- |
| Hardness - Rockwell | | C32-38 | C42-46 | C26-32 | | C36-42 | |
| Thread designation (UNJF-3A) | | Part number | | | | | |
| .190-32 | .312 | -03 | -- | -- | -- | -- | -03 |
| | .375 | -04 | -04 | -04 | -04 | -04 | -04 |
| | .438 | -05 | -05 | -05 | -05 | -05 | -05 |
| | .500 | -06 | -06 | -06 | -06 | -06 | -06 |
| | .625 | -08 | -08 | -08 | -08 | -08 | -08 |
| | .750 | -10 | -10 | -10 | -10 | -10 | -10 |
| | .875 | -12 | -12 | -12 | -12 | -12 | -12 |
| | 1.000 | -14 | -14 | -14 | -14 | -14 | -14 |
| | 1.250 | -18 | -18 | -18 | -18 | -18 | -18 |
| | 1.500 | -22 | -22 | -22 | -22 | -22 | -22 |
| | 1.750 | -26 | -26 | -26 | -26 | -26 | -26 |
| | 2.000 | -30 | -28 | -28 | -28 | -28 | -30 |
| | 2.250 | -32 | -30 | -30 | -30 | -30 | -32 |
| | 2.500 | -34 | -32 | -32 | -32 | -32 | -34 |
| | 2.750 | -36 | -34 | -34 | -34 | -34 | -36 |
| | 3.000 | -38 | -36 | -36 | -36 | -36 | -38 |
| | 3.250 | -40 | -38 | -38 | -38 | -38 | -40 |
| | 3.500 | -42 | -40 | -40 | 40 | -40 | -42 |
| 3.750 | -44 | -42 | -42 | -42 | -42 | -44 | |
| .250-28 | .375 | -04 | -04 | -04 | -04 | -04 | -04 |
| | .438 | -05 | -05 | -05 | -05 | -05 | -05 |
| | .500 | -06 | -06 | -06 | -06 | -06 | -06 |
| | .625 | -08 | -08 | -08 | -08 | -08 | -08 |
| | .750 | -10 | -10 | -10 | -10 | -10 | -10 |
| | .875 | -12 | -12 | -12 | -12 | -12 | -12 |
| | 1.000 | -14 | -14 | -14 | -14 | -14 | -14 |
| | 1.250 | -18 | -18 | -18 | -18 | -18 | -18 |
| | 1.500 | -22 | -22 | -22 | -22 | -22 | -22 |
| | 1.750 | -26 | -26 | -26 | -26 | -26 | -26 |
| | 2.000 | -30 | -28 | -28 | -28 | -28 | -30 |
| | 2.250 | -32 | -30 | -30 | -30 | -30 | -32 |
| | 2.500 | -34 | -32 | -32 | -32 | -32 | -34 |
| | 2.750 | -36 | -34 | -34 | -34 | -34 | -36 |
| | 3.000 | -38 | -36 | -36 | -36 | -36 | -38 |
| | 3.250 | -40 | -38 | -38 | -38 | -38 | -40 |
| | 3.500 | -42 | -40 | -40 | -40 | -40 | -42 |
| | 3.750 | -44 | -42 | -42 | -42 | -42 | -44 |
| | 4.000 | -46 | -44 | -44 | -44 | -44 | -46 |
| | 4.250 | -48 | -46 | -46 | -46 | -46 | -48 |
| | 4.500 | -50 | -48 | -48 | -48 | -48 | -50 |
| 4.750 | -52 | -50 | -50 | -50 | -50 | -52 | |
| 5.000 | -54 | -52 | -52 | -52 | -52 | -54 | |
| 5.250 | -56 | -54 | -54 | -54 | -54 | -56 | |
| 5.500 | -58 | -56 | -56 | -56 | -56 | -58 | |
| 5.750 | -60 | -58 | -58 | -58 | -58 | -60 | |
| 6.000 | n ^c | -60 | -60 | -60 | -60 | -60 | |

MIL-STD-1251A

TABLE I. Material and part numbers.- Continued


| Material | | CPEC | Case 1 | | | Titanium |
|---------------------------------|-------|-------------|----------------------------------|----------------|------------------|----------|
| | | AMS-5643 | AMS-631M | AMS-6477 | | AMS-4967 |
| Protective finish | | -- | Diffused nickel cadmium plate | Black oxide | Cadmium plate | -- |
| Hardness - Rockwell | | C32-38 | C42-46 | C26-32 | | C36-42 |
| Thread designation (UNJF-3A) | L | Part number | | | | |
| .375-24 | .500 | -04 | -04 | -04 | -04 | -04 |
| | .625 | -06 | -06 | -06 | -06 | -06 |
| | .750 | -08 | -08 | -08 | -08 | -08 |
| | .875 | -10 | -10 | -10 | -10 | -10 |
| | 1.000 | -12 | -12 | -12 | -12 | -12 |
| | 1.250 | -16 | -16 | -16 | -16 | -16 |
| | 1.500 | -20 | -20 | -20 | -20 | -20 |
| | 1.750 | -24 | -24 | -24 | -24 | -24 |
| | 2.000 | -28 | -26 | -26 | -26 | -28 |
| | 2.250 | -30 | -28 | -28 | -28 | -30 |
| | 2.500 | -32 | -30 | -30 | -30 | -32 |
| | 2.750 | -34 | -32 | -32 | -32 | -34 |
| | 3.000 | -36 | -34 | -34 | -34 | -36 |
| | 3.250 | -38 | -36 | -36 | -36 | -38 |
| | 3.500 | -40 | -38 | -38 | -38 | -40 |
| | 3.750 | -42 | -40 | -40 | -40 | -42 |
| | 4.000 | -44 | -42 | -42 | -42 | -44 |
| | 4.250 | -46 | -44 | -44 | -44 | -46 |
| | 4.500 | -48 | -46 | -46 | -46 | -48 |
| | 4.750 | -50 | -48 | -48 | -48 | -50 |
| 5.000 | -52 | -50 | -50 | -50 | -52 | |
| 5.250 | -54 | -52 | -52 | -52 | -54 | |
| 5.500 | -56 | -54 | -54 | -54 | -56 | |
| 5.750 | -58 | -56 | -56 | -56 | -58 | |
| 6.000 | -60 | -58 | -58 | -58 | -60 | |
| .375-24 | .625 | -04 | -04 | -04 | -04 | -04 |
| | .750 | -06 | -06 | -06 | -06 | -06 |
| | .875 | -08 | -08 | -08 | -08 | -08 |
| | 1.000 | -10 | -10 | -10 | -10 | -10 |
| | 1.250 | -14 | -14 | -14 | -14 | -14 |
| | 1.500 | -18 | -18 | -18 | -18 | -18 |
| | 1.750 | -22 | -22 | -22 | -22 | -22 |
| | 2.000 | -26 | -24 | -24 | -24 | -26 |
| | 2.250 | -28 | -26 | -26 | -26 | -28 |
| | 2.500 | -30 | -28 | -28 | -28 | -30 |
| | 2.750 | -32 | -30 | -30 | -30 | -32 |
| | 3.000 | -34 | -32 | -32 | -32 | -34 |
| | 3.250 | -36 | -34 | -34 | -34 | -36 |
| | 3.500 | -38 | -36 | -36 | -36 | -38 |
| | 3.750 | -40 | -38 | -38 | -38 | -40 |
| | 4.000 | -42 | -40 | -40 | -40 | -42 |
| | 4.250 | -44 | -42 | -42 | -42 | -44 |
| | 4.500 | -46 | -44 | -44 | -44 | -46 |
| | 4.750 | -48 | -46 | -46 | -46 | -48 |
| | 5.000 | -50 | -48 | -48 | -48 | -50 |
| 5.250 | -52 | -50 | -50 | -50 | -52 | |
| 5.500 | -54 | -52 | -52 | -52 | -54 | |
| 5.750 | -56 | -54 | -54 | -54 | -56 | |
| 6.000 | -58 | -56 | -56 | -56 | -58 | |

TABLE I. Material and part numbers. - Continued

| Material | CRES AMS-5643 | Steel | | Titanium | |
|---------------------------------|------------------|----------------------------------|---------------|----------|-----|
| | | AMS-6304 | AMS-6322 | AMS-4967 | |
| Protective finish | -- | Diffused nickel cadmium plate | Cadmium plate | -- | |
| Hardness - Rockwell | C32-38 | C42-46 | C26-32 | C36-42 | |
| Thread designation (UNJF-3A) | L | Part number | | | |
| .500-20 | .750 | -03 | -- | -- | -03 |
| | .875 | -05 | -05 | -05 | -05 |
| | 1.000 | -07 | -07 | -07 | -07 |
| | 1.250 | -11 | -11 | -11 | -11 |
| | 1.500 | -15 | -15 | -15 | -15 |
| | 1.750 | -19 | -19 | -19 | -19 |
| | 2.000 | -23 | -21 | -21 | -23 |
| | 2.250 | -25 | -23 | -23 | -25 |
| | 2.500 | -27 | -25 | -25 | -27 |
| | 2.750 | -29 | -27 | -27 | -29 |
| | 3.000 | -31 | -29 | -29 | -31 |
| | 3.250 | -33 | -31 | -31 | -33 |
| | 3.500 | -35 | -33 | -33 | -35 |
| | 3.750 | -37 | -35 | -35 | -37 |
| | 4.000 | -39 | -37 | -37 | -39 |
| | 4.250 | -41 | -39 | -39 | -41 |
| | 4.500 | -43 | -41 | -41 | -43 |
| | 4.750 | -45 | -43 | -43 | -45 |
| 5.000 | -47 | -45 | -45 | -47 | |
| 5.250 | -49 | -47 | -47 | -49 | |
| 5.500 | -51 | -49 | -49 | -51 | |
| 5.750 | -53 | -51 | -51 | -53 | |
| 6.000 | -55 | -53 | -53 | -55 | |
| .625-18 | 1.000 | -04 | -04 | -04 | |
| | 1.250 | -08 | -08 | -08 | |
| | 1.500 | -12 | -12 | -12 | |
| | 1.750 | -16 | -16 | -16 | |
| | 2.000 | -20 | -19 | -19 | |
| | 2.250 | -22 | -21 | -21 | |
| | 2.500 | -24 | -23 | -23 | |
| | 2.750 | -26 | -25 | -25 | |
| | 3.000 | -28 | -27 | -27 | |
| | 3.250 | -30 | -29 | -29 | |
| | 3.500 | -32 | -31 | -31 | |
| | 3.750 | -34 | -33 | -33 | |
| | 4.000 | -36 | -35 | -35 | |
| | 4.250 | -38 | -37 | -37 | |
| | 4.500 | -40 | -39 | -39 | |
| | 4.750 | -42 | -41 | -41 | |
| | 5.000 | -44 | -43 | -43 | |
| | 5.250 | -46 | -45 | -45 | |
| 5.500 | -48 | -47 | -47 | | |
| 5.750 | -50 | -49 | -49 | | |
| 6.000 | -52 | -51 | -51 | | |
| .750-16 | 1.250 | -06 | -06 | -06 | |
| | 1.500 | -10 | -10 | -10 | |
| | 1.750 | -14 | -14 | -14 | |
| | 2.000 | -18 | -18 | -18 | |
| | 2.250 | -20 | -20 | -20 | |
| | 2.500 | -22 | -22 | -22 | |
| | 2.750 | -24 | -24 | -24 | |
| | 3.000 | -26 | -26 | -26 | |
| | 3.250 | -28 | -28 | -28 | |
| | 3.500 | -30 | -30 | -30 | |
| | 3.750 | -32 | -32 | -32 | |
| | 4.000 | -34 | -34 | -34 | |
| | 4.250 | -36 | -36 | -36 | |
| | 4.500 | -38 | -38 | -38 | |
| | 4.750 | -40 | -40 | -40 | |
| | 5.000 | -42 | -42 | -42 | |
| | 5.250 | -44 | -44 | -44 | |
| | 5.500 | -46 | -46 | -46 | |
| 5.750 | -48 | -48 | -48 | | |
| 6.000 | -50 | -50 | -50 | | |

MIL-STD-1251A

SECTION TOP
BOLTS, MACHINE, SQUARE HEAD
APPLICABLE DOCUMENT: MS35355

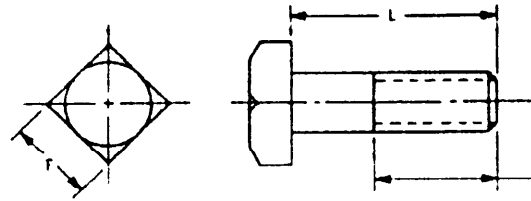

MINIMUM THREAD LENGTH IS TWICE THE BASIC DIAMETER PLUS 0.25 INCH. BOLTS TOO SHORT TO APPLY THIS FORMULA ARE THREADED AS CLOSE TO THE HEAD AS PRACTICABLE.

TABLE I. Material.

| Material | Protective finish | Tensile strength (psi) min. |
|--------------|-------------------|-----------------------------|
| Carbon steel | Cadmium plate | 60,000 |

TABLE II. Part numbers.

| Thread designation (UNC-2A) | .250-20 | .3125-18 | .375-16 | .4375-14 | .500-13 | .625-11 | .750-10 | .875-9 | 1.000-8 | 1.250-7 |
|-----------------------------|-----------------------|----------|---------|----------|---------|---------|---------|--------|---------|---------|
| F max | .275 | .500 | .6675 | .825 | .750 | .9775 | 1.125 | 1.3125 | 1.500 | 1.875 |
| L | MS35355 + dash number | | | | | | | | | |
| .75 | -1 | -32 | -63 | -- | -- | | | | | |
| 1.00 | -2 | -33 | -64 | -94 | -124 | | | | | |
| 1.25 | -3 | -34 | -65 | -95 | -125 | | | | | |
| 1.50 | -4 | -35 | -66 | -96 | -126 | -159 | -192 | -230 | -268 | |
| 2.00 | -5 | -36 | -67 | -97 | -127 | -160 | -193 | -231 | -269 | |
| 2.50 | -6 | -37 | -68 | -98 | -128 | -161 | -194 | -232 | -270 | |
| 3.00 | -7 | -38 | -69 | -99 | -129 | -162 | -195 | -233 | -271 | -341 |
| 3.50 | -8 | -39 | -70 | -100 | -130 | -163 | -196 | -234 | -272 | -342 |
| 4.00 | -9 | -40 | -71 | -101 | -131 | -164 | -197 | -235 | -273 | -343 |
| 4.50 | -10 | -41 | -72 | -102 | -132 | -165 | -198 | -236 | -274 | -344 |
| 5.00 | -11 | -42 | -73 | -103 | -133 | -166 | -199 | -237 | -275 | -345 |
| 5.50 | -12 | -43 | -74 | -104 | -134 | -167 | -200 | -238 | -276 | -346 |
| 6.00 | -13 | -44 | -75 | -105 | -135 | -168 | -201 | -239 | -277 | -347 |
| 6.50 | -14 | -45 | -76 | -106 | -136 | -169 | -202 | -240 | -278 | -348 |
| 7.00 | -15 | -46 | -77 | -107 | -137 | -170 | -203 | -241 | -279 | -349 |
| 7.50 | -16 | -47 | -78 | -108 | -138 | -171 | -204 | -242 | -280 | -350 |
| 8.00 | -17 | -48 | -79 | -109 | -139 | -172 | -205 | -243 | -281 | -351 |
| 8.50 | -18 | -49 | -80 | -110 | -140 | -173 | -206 | -244 | -282 | -352 |
| 9.00 | -19 | -50 | -81 | -111 | -141 | -174 | -207 | -245 | -283 | -353 |
| 9.50 | -20 | -51 | -82 | -112 | -142 | -175 | -208 | -246 | -284 | -354 |
| 10.00 | -21 | -52 | -83 | -113 | -143 | -176 | -209 | -247 | -285 | -355 |
| 11.00 | -22 | -53 | -84 | -114 | -144 | -177 | -210 | -248 | -286 | -356 |
| 12.00 | -23 | -54 | -85 | -115 | -145 | -178 | -211 | -249 | -287 | -357 |
| 13.00 | -24 | -55 | -86 | -116 | -146 | -179 | -212 | -250 | -288 | -358 |
| 14.00 | -25 | -56 | -87 | -117 | -147 | -180 | -213 | -251 | -289 | -359 |
| 15.00 | -26 | -57 | -88 | -118 | -148 | -181 | -214 | -252 | -290 | -360 |
| 16.00 | -27 | -58 | -89 | -119 | -149 | -182 | -215 | -253 | -291 | -361 |
| 17.00 | -28 | -59 | -90 | -120 | -150 | -183 | -216 | -254 | -292 | -362 |
| 18.00 | -29 | -60 | -91 | -121 | -151 | -184 | -217 | -255 | -293 | -363 |
| 19.00 | -30 | -61 | -92 | -122 | -152 | -185 | -218 | -256 | -294 | -364 |
| 20.00 | -31 | -62 | -93 | -123 | -153 | -186 | -219 | -257 | -295 | -365 |
| 21.00 | -- | -- | -- | -- | -154 | -187 | -220 | -258 | -296 | -366 |
| 22.00 | -- | -- | -- | -- | -155 | -188 | -221 | -259 | -297 | -367 |
| 23.00 | | | | | -156 | -189 | -222 | -260 | -298 | -368 |
| 24.00 | | | | | -157 | -190 | -223 | -261 | -299 | -369 |
| 25.00 | | | | | -158 | -191 | -224 | -262 | -300 | -370 |
| 26.00 | | | | | | | -225 | -263 | -301 | -371 |
| 27.00 | | | | | | | -226 | -264 | -302 | -372 |
| 28.00 | | | | | | | -227 | -265 | -303 | -373 |
| 29.00 | | | | | | | -228 | -266 | -304 | -374 |
| 30.00 | | | | | | | -229 | -267 | -305 | -375 |

MIL-STD-1251A

SECTION 801
BOLTS, SELF-LOCKING, LONG THREAD, DRILLED
APPLICABLE DOCUMENTS: MS18153, 18154

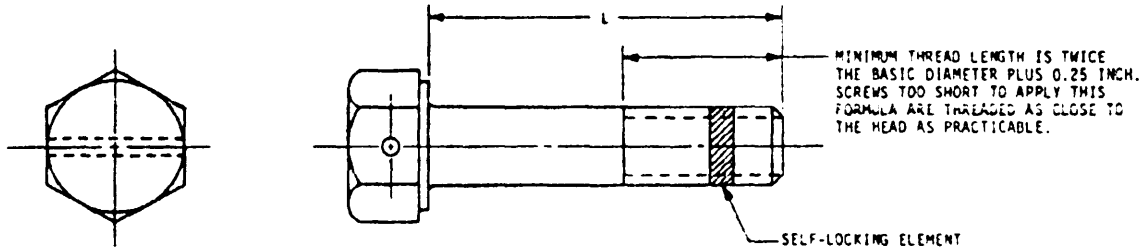


TABLE I. Material.

| Material | Protective finish | Tensile strength (psi) min |
|-------------|-------------------|----------------------------|
| Alloy steel | Cadmium plate | 150,000 |

TABLE II. MS18153, 18154 part numbers.

| Thread size | .250 | .3125 | .375 | .4375 | .500 | .625 | .750 | .875 | 1.000 |
|---|-----------------|-------|------|-------|-------|-------|-------|-------|-------|
| Threads per inch (UNF-2A) MS18153 . . . | 28 | 24 | 24 | 20 | 20 | 18 | 16 | 14 | 12 |
| Threads per inch (UNC-2A) MS18154 . . . | 20 | 18 | 16 | 14 | 13 | 11 | 10 | 9 | 8 |
| L | Dash number 1/2 | | | | | | | | |
| .375 | -1L | -27L | -- | | | | | | |
| .438 | -2L | -28L | -- | | | | | | |
| .500 | -3L | -29L | -55L | | | | | | |
| .625 | -5L | -31L | -57L | -- | -- | -- | | | |
| .750 | -6L | -32L | -58L | -84L | -110L | -133L | | | |
| .875 | -7L | -33L | -59L | -85L | -111L | -134L | | | |
| 1.000 | -8L | -34L | -60L | -86L | -112L | -135L | -157L | -- | -- |
| 1.250 | -9L | -35L | -61L | -87L | -113L | -136L | -158L | -182L | -206L |
| 1.500 | -10L | -36L | -62L | -88L | -114L | -137L | -159L | -183L | -207L |
| 1.750 | -11L | -37L | -63L | -89L | -115L | -138L | -160L | -184L | -208L |
| 2.000 | -12L | -38L | -64L | -90L | -116L | -139L | -161L | -185L | -209L |
| 2.250 | -13L | -39L | -65L | -91L | -117L | -140L | -162L | -186L | -210L |
| 2.500 | -14L | -40L | -66L | -92L | -118L | -141L | -163L | -187L | -211L |
| 2.750 | -15L | -41L | -67L | -93L | -119L | -142L | -164L | -188L | -212L |
| 3.000 | -16L | -42L | -68L | -94L | -120L | -143L | -165L | -189L | -213L |
| 3.250 | -17L | -43L | -69L | -95L | -121L | -144L | -166L | -190L | -214L |
| 3.500 | -18L | -44L | -70L | -96L | -122L | -145L | -167L | -191L | -215L |
| 3.750 | -19L | -45L | -71L | -97L | -123L | -146L | -168L | -192L | -216L |
| 4.000 | -20L | -46L | -72L | -98L | -124L | -147L | -169L | -193L | -217L |
| 4.250 | -21L | -47L | -73L | -99L | -125L | -148L | -170L | -194L | -218L |
| 4.500 | -22L | -48L | -74L | -100L | -126L | -149L | -171L | -195L | -219L |
| 4.750 | -23L | -49L | -75L | -101L | -127L | -150L | -172L | -196L | -220L |
| 5.000 | -24L | -50L | -76L | -102L | -128L | -151L | -173L | -197L | -221L |
| 5.500 | -- | -- | -- | -- | -129L | -152L | -174L | -198L | -222L |
| 6.000 | -- | -- | -- | -- | -130L | -153L | -175L | -199L | -223L |

1/ For non-locking fasteners on MS18153, 18154 see section 1401.

SECTION 802
 BOLTS, SELF-LOCKING, LONG THREAD, UNFILLEDED
 APPLICABLE DOCUMENTS: MS90727, 90728

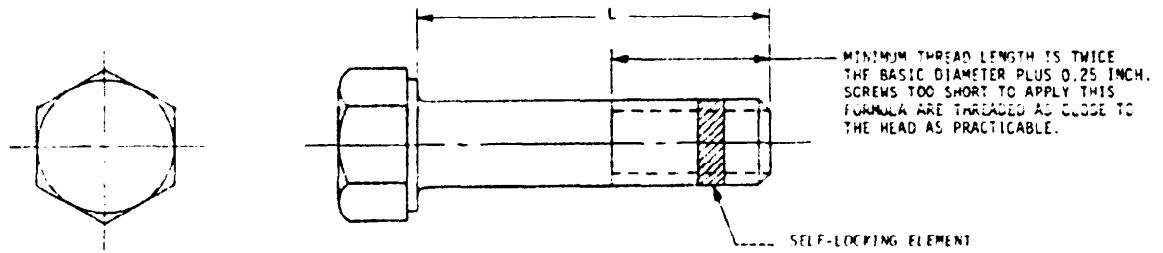


TABLE I. Material.

| Material | Protective finish | Tensile strength (psi) min | Applicable documents |
|-------------|-------------------|---|----------------------|
| Alloy steel | Cadmium plate | 150,000 | MS90727 1/ |
| | | 150,000 sizes thru 1.5 180,000 sizes above 1.5 | MS90728 1/ |

1. for non-locking fasteners see section 1403.

TABLE II. MS90727, 90728 dash numbers.

| Thread size | .250 | .3125 | .375 | .500 | .625 | .750 | 1.000 | 1.250 | 1.500 | 1.750 | 2.000 | 2.250 | 2.500 |
|-----------------------------------|-------------|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Threads per inch (UNF-2A) MS90727 | 28 | 24 | 24 | 20 | 18 | 16 | 12 | 12 | 12 | | | | |
| Threads per inch (UNC-2A) MS90728 | 20 | 18 | 16 | 13 | 11 | 10 | 8 | 7 | 6 | 5 | 4.5 | 4.5 | 4 |
| L | Dash number | | | | | | | | | | | | |
| .375 | -1L | -27L | -53L | -- | | | | | | | | | |
| .438 | -2L | -28L | -54L | -- | | | | | | | | | |
| .500 | -3L | -29L | -55L | -104L | | | | | | | | | |
| .625 | -5L | -31L | -57L | -106L | -155L | -- | | | | | | | |
| .750 | -6L | -32L | -58L | -107L | -156L | -179L | | | | | | | |
| .875 | -7L | -33L | -59L | -108L | -157L | -180L | | | | | | | |
| 1.000 | -8L | -34L | -60L | -109L | -158L | -181L | -224L | -- | -- | | | | |
| 1.250 | -10L | -36L | -62L | -111L | -160L | -183L | -226L | -265L | -- | | | | |
| 1.500 | -12L | -38L | -64L | -113L | -162L | -185L | -228L | -267L | -302L | | | | |
| 1.750 | -13L | -39L | -65L | -114L | -163L | -186L | -229L | -268L | -303L | -319L | -- | | |
| 2.000 | -14L | -40L | -66L | -115L | -164L | -187L | -230L | -269L | -304L | -320L | -- | | |
| 2.250 | -15L | -41L | -67L | -116L | -165L | -188L | -231L | -270L | -305L | -321L | -335L | | |
| 2.500 | -16L | -42L | -68L | -117L | -166L | -189L | -232L | -271L | -306L | -322L | -336L | -- | -- |
| 2.750 | -17L | -43L | -69L | -118L | -167L | -190L | -233L | -272L | -307L | -323L | -337L | -349L | -361L |
| 3.000 | -18L | -44L | -70L | -119L | -168L | -191L | -234L | -273L | -308L | -324L | -338L | -350L | -362L |
| 3.250 | -19L | -45L | -71L | -120L | -169L | -192L | -235L | -274L | -309L | -325L | -339L | -351L | -363L |
| 3.500 | -20L | -46L | -72L | -121L | -170L | -193L | -236L | -275L | -310L | -326L | -340L | -352L | -364L |
| 3.750 | -21L | -47L | -73L | -122L | -171L | -194L | -237L | -276L | -311L | -327L | -341L | -353L | -365L |
| 4.000 | -22L | -48L | -74L | -123L | -172L | -195L | -238L | -277L | -312L | -328L | -342L | -354L | -366L |
| 4.250 | -23L | -49L | -75L | -124L | -173L | -196L | -239L | -278L | -313L | -329L | -343L | -355L | -367L |
| 4.500 | -24L | -50L | -76L | -125L | -174L | -197L | -240L | -279L | -314L | -330L | -344L | -356L | -368L |
| 4.750 | -25L | -51L | -77L | -126L | -175L | -198L | -241L | -280L | -315L | -331L | -345L | -357L | -369L |
| 5.000 | -26L | -52L | -78L | -127L | -176L | -199L | -242L | -281L | -316L | -332L | -346L | -358L | -370L |
| 5.500 | -- | -- | -- | -128L | -177L | -200L | -243L | -282L | -317L | -333L | -347L | -359L | -371L |
| 6.000 | -- | -- | -- | -129L | -178L | -201L | -244L | -283L | -318L | -334L | -348L | -360L | -372L |

MIL-STD-1251A

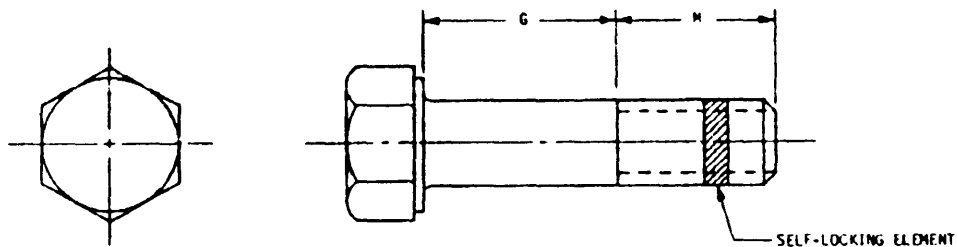
SECTION 803
BOLTS, SELF-LOCKING, SHORT THREAD
APPLICABLE DOCUMENTS: MS21094, 21095

TABLE I. Materials.

| Material | Protective finish | Tensile strength (psi) min | Applicable documents |
|-------------|-------------------|----------------------------|----------------------|
| Alloy steel | Cadmium plate | 125,000 | MS21094 |
| CRLS | Passivate | 80,000 | MS21095 |

TABLE II. MS21094, 21095 dash numbers.

| Thread designation UNF-3A 1/ | M ref | First dash number | Second dash number 2/ | |
|---------------------------------|----------|-------------------|-----------------------|----------------|
| | | MS21094, 21095 | MS21094 | MS21095 |
| .190-32 | .406 | -3 | -003 thru -056 | -001 thru -056 |
| .250-28 | .469 | -4 | -004 thru -072 | -002 thru -072 |
| .3125-24 | .531 | -5 | -006 thru -088 | -006 thru -008 |
| .375-24 | .641 | -6 | -006 thru -088 | -006 thru -088 |
| .4375-20 | .656 | -7 | -008 thru -100 | -008 thru -100 |
| .500-20 | .781 | -8 | -008 thru -100 | -008 thru -100 |
| .625-18 | .953 | -10 | -010 thru -112 | -010 thru -112 |
| .750-16 | .969 | -12 | -012 thru -112 | -012 thru -112 |
| .875-14 | 1.250 | -14 | -014 thru -112 | -014 thru -112 |
| 1.000-12 | 1.375 | -16 | -016 thru -112 | -016 thru -112 |
| 1.250-12 | 1.687 | -20 | -020 thru -128 | -020 thru -128 |

1/ For thread sizes .138 and .164 on MS21095 see section 2107.

2/ Dash number equals grip dimension "G" times 16.
Increments of one (-001 thru -004), two (-006 thru -016), and four (-020 thru -128).

SECTION 901
 BOLTS, SHEAR, HEXAGON HEAD
 APPLICABLE DOCUMENTS: NAS1303-1320, 1588, 1953-1970

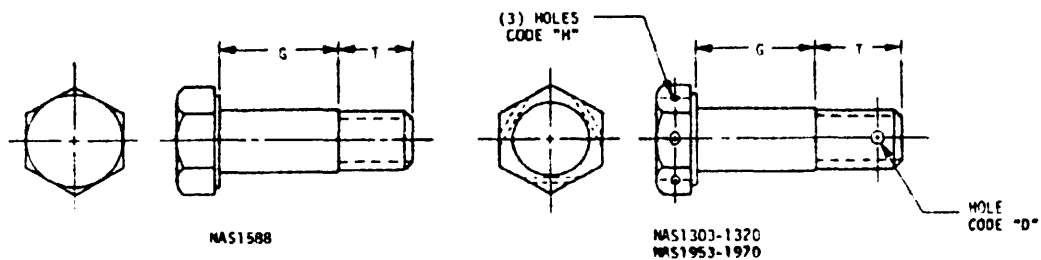


TABLE I. Materials.

| Material | Code | Protective finish | Code | Tensile strength (psi) min | Applicable documents |
|------------------------------------|------|-------------------|------|----------------------------|----------------------|
| Alloy steel | - | Cadmium plate | -- | 160,000 | NAS1303-1320 |
| | | | | 180,000 | NAS1953-1970 |
| CRES | C | Passivate | -- | 180,000 | NAS1953-1970 |
| | | Aluminum coat | P | | |
| Titanium alloy | T | None | -- | | |
| | | Aluminum coat | P | | |
| Corrosion and heat resistant alloy | - | Passivate | -- | 185,000 | NAS1588 |

MIL-STD-1251A

TABLE II. Basic part numbers.

| Thread designation (UNJF-3A) | T ref | Basic part number | | |
|---------------------------------|----------|-------------------|---------|------------|
| | | | | |
| .190-32 | .330 | NAS1303 | NAS1953 | -- |
| | .363 | -- | -- | NAS1588-3 |
| .250-28 | .403 | -- | -- | NAS1588-4 |
| | .425 | NAS1304 | NAS1954 | -- |
| .3125-24 | .469 | NAS1305 | NAS1955 | -- |
| | .501 | -- | -- | NAS1588-5 |
| .375-24 | .578 | NAS1306 | NAS1956 | -- |
| | .594 | -- | -- | NAS1588-6 |
| .4375-20 | .594 | NAS1307 | NAS1957 | -- |
| | .675 | -- | -- | NAS1588-7 |
| .500-20 | .735 | NAS1308 | NAS1958 | -- |
| | .768 | -- | -- | NAS1588-8 |
| .625-18 | .902 | NAS1310 | NAS1960 | -- |
| | .981 | -- | -- | NAS1588-10 |
| .750-16 | 1.041 | NAS1312 | NAS1962 | -- |
| | 1.157 | -- | -- | NAS1588-12 |
| .875-14 | 1.184 | NAS1314 | NAS1964 | -- |
| | 1.351 | -- | -- | NAS1588-14 |
| 1.000-12 | 1.309 | NAS1316 | NAS1966 | -- |
| | 1.519 | -- | -- | NAS1588-16 |
| 1.250-12 | 1.646 | NAS1320 | NAS1970 | -- |
| | -- | -- | -- | -- |


TABLE III. Grip dash numbers.

| Document no. | NAS1588 | NAS1303-1320, NAS1953-1970 |
|---------------------------------|------------------------|----------------------------|
| Thread designation (UNJF-3A) | Grip dash no. range 1/ | Grip dash no. range 1/ |
| .190-32 | -4 thru -48 | -1 thru -96 |
| .250-28 | -4 thru -56 | |
| .3125-24 | -4 thru -64 | |
| .375-24 | -4 thru -72 | |
| .4375-20 | -4 thru -80 | |
| .500-20 | -4 thru -80 | |
| .625-18 | -6 thru -96 | |
| .750-16 | -8 thru -96 | |
| .875-14 | -8 thru -96 | |
| 1.000-12 | -10 thru -96 | |

1/ Grip dash number equals "G" dimension times 16
 increments of one (-1 thru -8), two (-10 thru -16) and four (-20 thru -96).

MIL-STD-1251A

SECTION 902
 BOLTS, SHEAR, HEXAGON HEAD, SELF-LOCKING
 APPLICABLE DOCUMENTS: NAS1223-1235

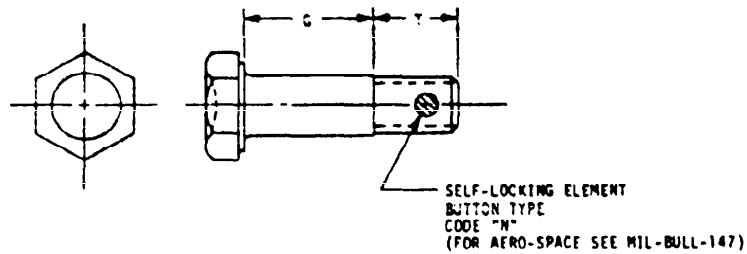TABLE I. Materials.

| Material ^{1/} | Protective finish | Tensile strength (psi) min |
|------------------------|-------------------|----------------------------|
| Alloy steel | Cadmium plate | 160,000 |

^{1/} For CRES bolts listed on NAS1223-1235 see section 201.

TABLE II. Dash numbers.

| Thread designation (UNJF-3A) | T ref | Basic part number | Grip dash number ^{1/} | |
|------------------------------|-------|-------------------|--------------------------------|------------|
| | | | Range | Increments |
| .190-32 | .338 | NAS1223 | | |
| .250-28 | .425 | NAS1224 | | |
| .3125-24 | .469 | NAS1225 | | |
| .375-24 | .578 | NAS1226 | -1 thru -8 | One |
| .4375-20 | .594 | NAS1227 | | |
| .500-20 | .735 | NAS1228 | -10 thru -16 | Two |
| .625-18 | .902 | NAS1230 | | |
| .750-16 | 1.041 | NAS1231 | | |
| .875-14 | 1.184 | NAS1232 | | |
| 1.000-12 | 1.309 | NAS1233 | | |
| 1.250-12 | 1.646 | NAS1235 | -20 thru -96 | Four |

^{1/} Grip dash number equals "G" dimension times 16

MIL-STD-1251A

SECTION 903
 BOLTS, SHEAR, HEXAGON HEAD, SELF-LOCKING AND NON-LOCKING
 APPLICABLE DOCUMENTS: NAS6203-6220, 6303-6420, 6403-6420, 6604-6820
 NAS6704-6720, 6803-6120

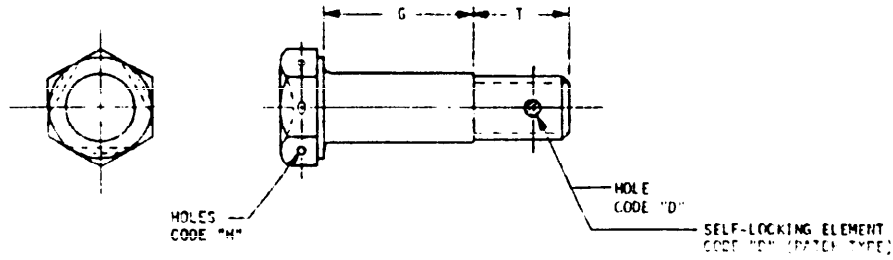


TABLE I. Basic part numbers.

| Material | | Alloy steel | CRES | Titanium |
|-----------------------------|-------|-------------------|---------|----------|
| Tensile strength (psi) min | | 160,000 | 160,000 | 160,000 |
| Inhead designation (UNF-3A) | T ref | Basic part number | | |
| .190-32 | .323 | NAS6203 | NAS6303 | NAS6403 |
| | .345 | -- | -- | NAS6803 |
| .240-28 | .370 | NAS6204 | NAS6304 | NAS6404 |
| | .421 | NAS6604 | NAS6704 | NAS6804 |
| .3125-24 | .438 | NAS6205 | NAS6305 | NAS6405 |
| | .469 | NAS6605 | NAS6705 | NAS6805 |
| .375-24 | .454 | NAS6206 | NAS6306 | NAS6406 |
| | .578 | NAS6606 | NAS6706 | NAS6806 |
| .4375-20 | .528 | NAS6207 | NAS6307 | NAS6407 |
| | .694 | NAS6607 | NAS6707 | NAS6807 |
| .500-20 | .528 | NAS6208 | NAS6308 | NAS6408 |
| | .735 | NAS6608 | NAS6708 | NAS6808 |
| .625-18 | .626 | NAS6210 | NAS6310 | NAS6410 |
| | .902 | NAS6610 | NAS6710 | NAS6810 |
| .750-16 | .666 | NAS6212 | NAS6312 | NAS6412 |
| | 1.041 | NAS6612 | NAS6712 | NAS6812 |
| .875-14 | .759 | NAS6214 | NAS6314 | NAS6414 |
| | 1.184 | NAS6614 | NAS6714 | NAS6814 |
| 1.000-12 | .895 | NAS6216 | NAS6316 | NAS6416 |
| | 1.309 | NAS6616 | NAS6716 | NAS6816 |
| 1.250-12 | 1.083 | NAS6220 | NAS6320 | NAS6420 |
| | 1.645 | NAS6620 | NAS6720 | NAS6820 |

TABLE II. Protective finish.

| Protective finish | Code | Applicable documents |
|-----------------------------|------|--|
| Passivate | U | NAS6303-6320, 6704-6720, NAS6403-6420, 6804-6820 |
| Chromium plate (shank only) | C | NAS6203-6220, 6604-6620, NAS6303-6320, 6704-6720 |
| Aluminum coat | A | NAS6303-6320, 6704-6720, NAS6403-6420, 6804-6820 |
| Cadmium plate | -- | NAS6203-6220, 6403-6420, NAS6604-6620, 6704-6720, NAS6804-6820 |

TABLE III. Grip dash numbers.

| Document no. | NAS6203-6220, NAS6303-6320, NAS6403-6420 | NAS6604-6620, NAS6704-6720, NAS6804-6820 |
|--------------|--|--|
| Thread size | Grip dash no range 1/ | |
| All | -1 thru -96 | -1 thru -64 |

1/ Dash number equals grip dimension "G" times 16
 Increments of one (-1 thru -8), two (-10 thru -16), and four (-20 thru -96).

SECTION 904
 BOLTS, SHEAR, SPLINE DRIVE
 APPLICABLE DOCUMENTS: MS21134, 21296, 21297

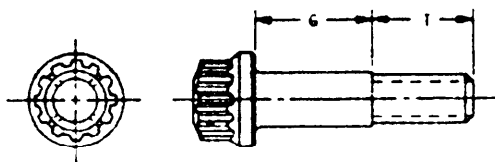


TABLE I. Material and dash numbers.

| Material | | Alloy steel | | |
|---------------------------------|-------------------------|-----------------|----------------------|-----------------|
| Protective finish | | Cadmium plate | | |
| Tensile strength (psi) min. | | 180,000 | 220,000 | 260,000 |
| Document number | | MS21134 | MS21297 | MS21296 |
| Thread designation (UNJF-3A) | ref | Dash number | | |
| | | .190-32 | .378 .408 .438 | -03 -- -- |
| .250-28 | .455 .495 .520 | -04 -- -- | -- -04 -- | -- -- -04 |
| .3125-24 | .541 .589 .634 | -05 -- -- | -- -05 -- | -- -- -05 |
| .375-24 | .604 .659 .719 | -06 -- -- | -- -06 -- | -- -- -06 |
| .4375-20 | .701 .763 .833 | -07 -- -- | -- -07 -- | -- -- -07 |
| .500-20 | .763 .838 .913 | -08 -- -- | -- -08 -- | -- -- -08 |
| .625-18 | .910 1.005 1.095 | -10 -- -- | -- -10 -- | -- -- -10 |
| .750-16 | 1.063 1.173 1.293 | -12 -- -- | -- -12 -- | -- -- -12 |
| .875-14 | 1.223 1.348 1.488 | -14 -- -- | -- -14 -- | -- -- -14 |
| 1.000-12 | 1.396 1.546 1.696 | -16 -- -- | -- -16 -- | -- -- -16 |
| 1.250-12 | 1.646 1.836 | -20 -- | -- -20 | -- -- |
| 1.500-12 | 1.896 2.116 | -24 -- | -- -24 | -- -- |

TABLE II. Grip dash numbers.

| Document no. | MS21134 | MS21297 | MS21296 |
|--------------|---------------------------|--------------|--------------|
| Thread size | Grip dash number range 1/ | | |
| .190 | 003 thru 096 | 003 thru 096 | 002 thru 064 |
| .250 | 003 thru 096 | 003 thru 096 | 002 thru 096 |
| .3125 | 003 thru 096 | 003 thru 096 | 002 thru 096 |
| .375 | 003 thru 096 | 003 thru 096 | 002 thru 096 |
| .4375 | 003 thru 096 | 003 thru 096 | 005 thru 096 |
| .500 | 003 thru 096 | 003 thru 096 | 006 thru 096 |
| .625 | 005 thru 112 | 003 thru 112 | 008 thru 112 |
| .750 | 005 thru 112 | 003 thru 112 | 010 thru 112 |
| .875 | 007 thru 112 | 003 thru 112 | 012 thru 112 |
| 1.000 | 007 thru 112 | 003 thru 112 | 014 thru 112 |
| 1.250 | 010 thru 128 | 003 thru 112 | -- |
| 1.500 | 010 thru 128 | 003 thru 112 | -- |

1/ Grip dash number equals "G" dimension times 16
 Increments of one (-002 thru -008), two (-010 thru -016),
 and four (-020 thru -128).

MIL-STD-1251A

SECTION 1001
 BOLTS, SHOULDER
 APPLICABLE DOCUMENT: NAS1297

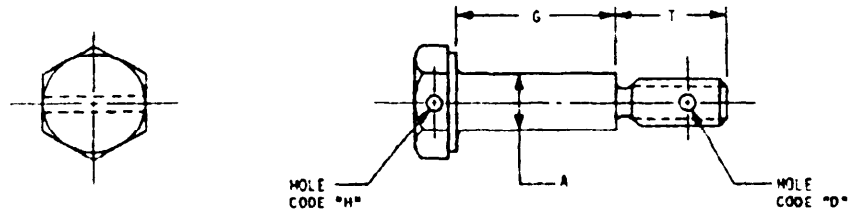


TABLE I. Material.


| Material | Protective finish | Tensile strength (psi) min |
|-------------|-------------------|----------------------------|
| Alloy steel | Leadum plate | 125,000 |

TABLE II. NAS1297 dash numbers. 1/

| Thread designation (UNJF-3A) | .190-32 | .250-28 | .3125-24 | .375-24 | .4375-20 | .500-20 | .625-18 |
|------------------------------|--------------------|---------|----------|---------|----------|---------|---------|
| A max | .249 | .312 | .374 | .437 | .499 | .624 | .749 |
| T ref | .362 | .453 | .498 | .607 | .629 | .770 | .941 |
| First dash number . . . | -3 | -4 | -5 | -6 | -7 | -8 | -10 |
| G | Second dash number | | | | | | |
| .072 | -1 | -- | -- | -- | -- | | |
| .135 | -2 | -2 | -2 | -- | -- | | |
| .198 | -3 | -3 | -3 | -3 | -3 | | |
| .260 | -4 | -4 | -4 | -4 | -4 | -4 | -4 |
| .322 | -5 | -5 | -5 | -5 | -5 | -5 | -5 |
| .385 | -6 | -6 | -6 | -6 | -6 | -6 | -6 |
| .448 | -7 | -7 | -7 | -7 | -7 | -7 | -7 |
| .572 | -9 | -9 | -9 | -9 | -9 | -9 | -9 |
| .698 | -11 | -11 | -11 | -11 | -11 | -11 | -11 |
| .922 | | -13 | -13 | -13 | -13 | -13 | -13 |
| .948 | | -- | -15 | -15 | -15 | -15 | -15 |
| 1.260 | | -- | -- | -- | -20 | -20 | -20 |
| 1.510 | | -- | -- | -- | -- | -24 | -24 |

1/ For fasteners .138-32 (UNJF-3A) see section 2203.

SECTION 1161
BOLTS, SQUARE NECK
APPLICABLE DOCUMENT: MS35751

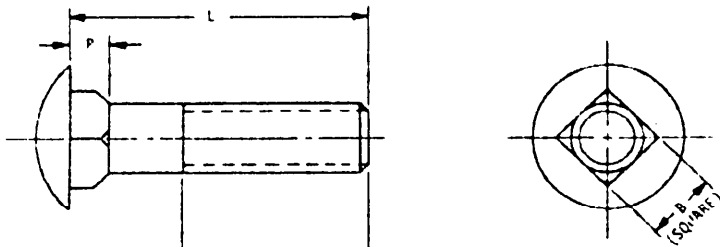

MINIMUM THREAD LENGTH IS TWICE THE NOMINAL SIZE PLUS 0.25 INCH FOR BOLT LENGTHS OF 6.00 INCH AND SHORTER, AND TWICE THE NOMINAL SIZE PLUS 0.50 INCH FOR LONGER LENGTHS. BOLTS TOO SHORT TO APPLY THIS FORMULA ARE THREADED AS CLOSE TO THE NECK AS PRACTICABLE.

TABLE 1. Material and part numbers.

| Material | Carbon steel | | | | | | |
|-----------------------------|----------------------------|------|-------|------|------|------|------|
| Protective finish | Cadmium plate or zinc coat | | | | | | |
| Tensile strength (psi) min. | 60,000 | | | | | | |
| Thread size | .190 | .250 | .3125 | .375 | .500 | .625 | .750 |
| Threads per inch (UNC-2A) . | 24 | 20 | 18 | 16 | 13 | 11 | 10 |
| B max | .199 | .260 | .324 | .388 | .515 | .642 | .768 |
| P max | .125 | .156 | .187 | .219 | .281 | .344 | .406 |
| L | MS35751 + dash number | | | | | | |
| .75 | -1 | -15 | -40 | -68 | -- | | |
| 1.00 | -2 | -16 | -41 | -69 | -123 | | |
| 1.25 | -3 | -17 | -42 | -70 | -124 | | |
| 1.50 | -4 | -18 | -43 | -71 | -125 | -152 | -- |
| 1.75 | -5 | -19 | -44 | -72 | -126 | -153 | -- |
| 2.00 | -6 | -20 | -45 | -73 | -127 | -154 | -181 |
| 2.25 | -7 | -21 | -46 | -74 | -128 | -- | -- |
| 2.50 | -8 | -22 | -47 | -75 | -129 | -156 | -183 |
| 2.75 | -9 | -23 | -48 | -76 | -130 | -157 | -- |
| 3.00 | -10 | -24 | -49 | -77 | -131 | -158 | -185 |
| 3.25 | -11 | -25 | -50 | -78 | -132 | -159 | -- |
| 3.50 | -12 | -26 | -51 | -79 | -133 | -160 | -187 |
| 3.75 | -13 | -27 | -52 | -80 | -134 | -- | -- |
| 4.00 | -14 | -28 | -53 | -81 | -135 | -162 | -189 |
| 4.50 | -- | -29 | -54 | -82 | -136 | -163 | -190 |
| 5.00 | | -30 | -55 | -83 | -137 | -164 | -191 |
| 6.00 | | -32 | -57 | -85 | -139 | -166 | -193 |
| 7.00 | | -34 | -59 | -87 | -141 | -168 | -195 |
| 8.00 | | -36 | -61 | -89 | -143 | -170 | -197 |
| 9.00 | | -- | -63 | -91 | -145 | -172 | -199 |
| 10.00 | | -- | -65 | -93 | -147 | -174 | -201 |
| 11.00 | | | | -94 | -148 | -175 | |
| 12.00 | | | | -95 | -149 | -176 | |

MIL-STD-1251A

SECTION 1201
BOLTS, TEE HEAD
APPLICABLE DOCUMENT: NAS28


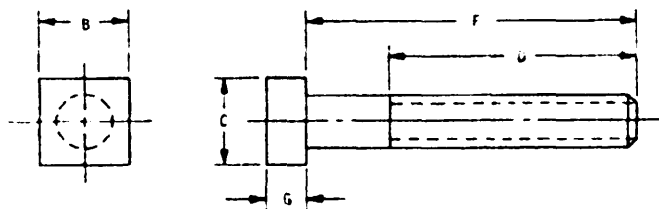


TABLE I. Material and part numbers.

| | | | | | | |
|------------------------------|----------------------------|------|------|------|-----|------------------|
| Material | Steel | | | | | |
| Protective finish | Cadmium plate or zinc coat | | | | | |
| Tensile strength (psi) min | 125,000 | | | | | |
| Thread designation (UNJF-3A) | B | C | D | F | G | NAS28 + dash no. |
| .190-32 | .31 | .25 | 2.25 | 3.25 | .13 | -3 |
| .250-28 | .43 | .38 | 2.50 | 3.50 | .16 | -4 |
| .3125-24 | .56 | .44 | 2.75 | 3.75 | .19 | -5 |
| .375-24 | .56 | .50 | 3.00 | 4.00 | .22 | -6 |
| .4375-20 | .75 | .68 | 3.25 | 4.25 | .25 | -7 |
| .500-20 | .94 | .81 | 3.50 | 4.50 | .28 | -8 |
| .625-18 | 1.00 | 1.00 | 4.00 | 5.00 | .34 | -10 |

MIL-STD-1251A

SECTION 1202
 BOLTS, TEE HEAD, CHAMFERED
 APPLICABLE DOCUMENTS: MS9397, 9398, 9399, 9400,
 MS9402, 9432, 9433, 9434, 9435, 9437

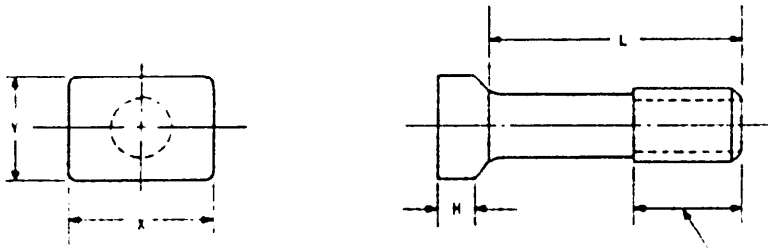

MINIMUM THREAD LENGTH IS TWICE THE BASIC DIAMETER PLUS 0.25 INCH. BOLTS TOO SHORT TO APPLY THIS FORMULA ARE THREADED AS CLOSE TO THE HEAD AS PRACTICABLE.

TABLE I. Materials and part numbers.

| Material | Steel | CRES | Steel | CRES | Steel | CRES | Steel | CRES | Steel | CRES |
|------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Protective finish | Cadmium plate | -- | Cadmium plate | -- | Cadmium plate | -- | Cadmium plate | -- | Cadmium plate | -- |
| Thread designation (UNJF-3A) | .190-32 | | .250-28 | | .3125-24 | | .375-24 | | .500-20 | |
| X max. | .440 | | .500 | | .570 | | .660 | | .860 | |
| Y max. | .320 | | .380 | | .440 | | .500 | | .640 | |
| H nom. | .125 | | .156 | | .188 | | .219 | | .281 | |
| L | MS9397 + dash no. | MS9432 + dash no. | MS9398 + dash no. | MS9433 + dash no. | MS9399 + dash no. | MS9434 + dash no. | MS9400 + dash no. | MS9435 + dash no. | MS9402 + dash no. | MS9437 + dash no. |
| .375 | -04 | | -- | | -- | | | | | |
| .438 | -05 | | -05 | | -- | | | | | |
| .500 | -06 | | -06 | | -04 | | | | | |
| .625 | -08 | | -08 | | -06 | | -- | | -- | |
| .750 | -10 | | -10 | | -08 | | -06 | | -- | |
| .875 | -12 | | -12 | | -10 | | -08 | | -05 | |
| 1.000 | -14 | | -14 | | -12 | | -10 | | -07 | |
| 1.250 | -18 | | -18 | | -16 | | -14 | | -11 | |
| 1.500 | -22 | | -22 | | -20 | | -16 | | -15 | |
| 1.750 | -26 | | -26 | | -24 | | -22 | | -19 | |
| 2.000 | -28 | | -28 | | -26 | | -24 | | -21 | |
| 2.250 | -30 | | -30 | | -28 | | -26 | | -23 | |
| 2.500 | -32 | | -32 | | -30 | | -28 | | -25 | |
| 2.750 | -34 | | -34 | | -32 | | -30 | | -27 | |
| 3.000 | -36 | | -36 | | -34 | | -32 | | -29 | |
| 3.250 | | | -38 | | -36 | | -34 | | -31 | |
| 3.500 | | | -40 | | -38 | | -36 | | -33 | |
| 3.750 | | | -42 | | -40 | | -38 | | -35 | |
| 4.000 | | | -44 | | -42 | | -40 | | -37 | |
| 4.250 | | | -46 | | -44 | | -42 | | -39 | |
| 4.500 | | | -48 | | -46 | | -44 | | -41 | |
| 4.750 | | | -50 | | -48 | | -46 | | -43 | |
| 5.000 | | | -52 | | -50 | | -48 | | -45 | |
| 5.250 | | | -54 | | -52 | | -50 | | -47 | |
| 5.500 | | | -56 | | -54 | | -52 | | -49 | |
| 5.750 | | | -- | | -56 | | -54 | | -51 | |
| 6.000 | | | -- | | -58 | | -56 | | -53 | |

MIL-STD-1251A

SECTION 1301
BOLTS, U
APPLICABLE DOCUMENTS: NAS3103-3110, 3303-3305

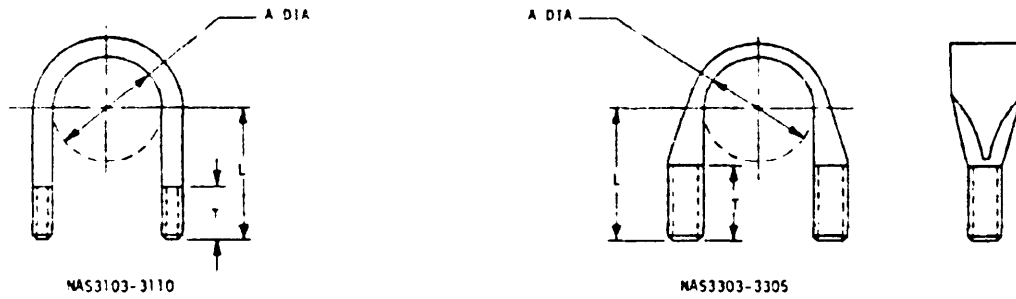


TABLE I. Materials.

| Material | Code | Protective finish | Tensile strength (psi) min |
|--------------|------|-------------------|----------------------------|
| Carbon steel | - | Cadmium plate | 55,000 |
| CREC | C | Passivate | -- |

TABLE II. NAS3103 - 3110 dash numbers.

| Thread designation (UNF-2A) | .190-32 | .250-28 | .3125-24 | .375-24 | .500-20 | .625-18 |
|-----------------------------|--------------------------|--------------|--------------|---------|--------------|---------|
| T min. | .500 | .625 | .750 | | 1.250 | |
| Basic part no. | NAS | | | | | |
| | 3103 | 3104 | 3105 | 3106 | 3108 | 3110 |
| First dash no. 1/ | Second dash no. range 2/ | | | | | |
| -4 | -6 thru -24 | -- | -- | | -- | |
| -5 | -8 thru -24 | -- | -- | | -- | |
| -6 | -8 thru -24 | -10 thru -24 | -10 thru -32 | | -- | |
| -7 | -8 thru -24 | -10 thru -24 | -10 thru -32 | | -- | |
| -8 | -8 thru -24 | -10 thru -24 | -10 thru -32 | | -14 thru -40 | |
| -10 | -10 thru -28 | -12 thru -28 | -12 thru -36 | | -16 thru -40 | |
| -12 | -10 thru -32 | -12 thru -32 | -12 thru -40 | | -16 thru -44 | |
| -14 | -12 thru -32 | -14 thru -32 | -14 thru -40 | | -18 thru -44 | |
| -16 | -12 thru -32 | -14 thru -32 | -14 thru -40 | | -18 thru -48 | |
| -18 | -14 thru -32 | -16 thru -32 | -16 thru -40 | | -20 thru -48 | |
| -20 | -14 thru -32 | -16 thru -32 | -16 thru -40 | | -20 thru -48 | |
| -22 | -16 thru -32 | -18 thru -32 | -18 thru -40 | | -22 thru -48 | |
| -24 | -16 thru -32 | -18 thru -32 | -18 thru -40 | | -22 thru -48 | |
| -28 | -- | -- | -20 thru -40 | | -24 thru -48 | |
| -32 | -- | -- | -22 thru -40 | | -28 thru -48 | |
| -36 | -- | -- | -- | | -28 thru -48 | |
| -40 | -- | -- | -- | | -32 thru -48 | |
| -44 | -- | -- | -- | | -32 thru -48 | |
| -48 | -- | -- | -- | | -36 thru -48 | |

TABLE III. NAS3303 - 3305 dash numbers.

| Thread designation (UNF-3A) | .190-32 | .250-28 | .3125-24 |
|-----------------------------|--------------------------|--------------|--------------|
| T min. | .500 | | .750 |
| Basic part no. | NAS | | |
| | 3303 | 3304 | 3305 |
| First dash no. 1/ | Second dash no. range 2/ | | |
| -4 | -6 thru -24 | -- | -- |
| -5 | -8 thru -24 | -- | -- |
| -6 | -8 thru -24 | -10 thru -24 | -10 thru -32 |
| -7 | -8 thru -24 | -10 thru -24 | -10 thru -32 |
| -8 | -8 thru -24 | -10 thru -24 | -10 thru -32 |
| -10 | -10 thru -28 | -12 thru -28 | -12 thru -36 |
| -12 | -10 thru -32 | -12 thru -32 | -12 thru -40 |
| -14 | -12 thru -32 | -14 thru -32 | -14 thru -40 |
| -16 | -12 thru -32 | -14 thru -32 | -14 thru -40 |
| -18 | -14 thru -32 | -16 thru -32 | -16 thru -40 |
| -20 | -14 thru -32 | -16 thru -32 | -16 thru -40 |
| -22 | -16 thru -32 | -18 thru -32 | -18 thru -40 |
| -24 | -16 thru -32 | -18 thru -32 | -18 thru -40 |
| -28 | -- | -- | -20 thru -40 |
| -32 | -- | -- | -22 thru -40 |

1/ First dash number equals "A" dimension times 8.

2/ Second dash number equals "L" dimension times 8.
Increments of two (-6 thru -24) and four (-28 thru -40).

MIL-STD-1251A

SECTION 1401
SCREWS (AF, HEXAGON HEAD, DRILLED HEAD), ONE FULL
APPROXIMATE DIMENSIONS: MS18153, 18154, 51099, 51100

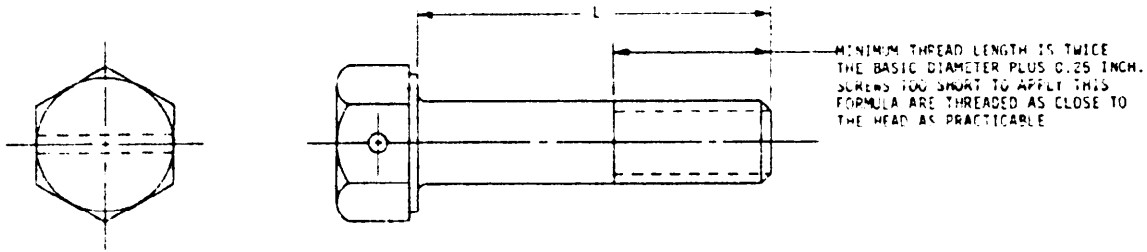


TABLE I. Materials.

| Material | Protective finish | Tensile strength (psi) min | Applicable documents |
|-------------|-------------------|----------------------------|----------------------|
| Alloy steel | Cadmium plate | 150,000 | MS18153, 18154 1/ |
| CRES | Passivate | 70,000 | MS51099, 51100 |

1/ For self-locking on fasteners on MS18153, 18154 see section 801.

TABLE II. MS18153, 18154, 51099, 51100 dash numbers.

| Nominal size | .250 | .3125 | .375 | .4375 | .500 | .625 | .750 | .875 | 1.000 |
|---|-------------|-------|------|-------|------|------|------|------|-------|
| Threads per inch (UNC-2A) MS18154, 51099 | 20 | 18 | 16 | 14 | 13 | 11 | 10 | 9 | 8 |
| Threads per inch (UNF-2A) MS18153, 51100 | 28 | 24 | 24 | 20 | 20 | 18 | 16 | 14 | 12 |
| L | Dash number | | | | | | | | |
| .175 | -1 | -27 | -- | -- | -- | -- | -- | -- | -- |
| .434 | -2 | -28 | -- | -- | -- | -- | -- | -- | -- |
| .500 | -3 | -29 | -55 | -- | -- | -- | -- | -- | -- |
| .625 | -5 | -31 | -57 | -- | -- | -- | -- | -- | -- |
| .750 | -6 | -32 | -58 | -84 | -110 | -133 | -- | -- | -- |
| .875 | -7 | -33 | -59 | -85 | -111 | -134 | -- | -- | -- |
| 1.000 | -8 | -34 | -60 | -86 | -112 | -135 | -157 | -- | -- |
| 1.250 | -9 | -35 | -61 | -87 | -113 | -136 | -158 | -182 | -206 |
| 1.500 | -10 | -36 | -62 | -88 | -114 | -137 | -159 | -183 | -207 |
| 1.750 | -11 | -37 | -63 | -89 | -115 | -138 | -160 | -184 | -208 |
| 2.000 | -12 | -38 | -64 | -90 | -116 | -139 | -161 | -185 | -209 |
| 2.250 | -13 | -39 | -65 | -91 | -117 | -140 | -162 | -186 | -210 |
| 2.500 | -14 | -40 | -66 | -92 | -118 | -141 | -163 | -187 | -211 |
| 2.750 | -15 | -41 | -67 | -93 | -119 | -142 | -164 | -188 | -212 |
| 3.000 | -16 | -42 | -68 | -94 | -120 | -143 | -165 | -189 | -213 |
| 3.250 | -17 | -43 | -69 | -95 | -121 | -144 | -166 | -190 | -214 |
| 3.500 | -18 | -44 | -70 | -96 | -122 | -145 | -167 | -191 | -215 |
| 3.750 | -19 | -45 | -71 | -97 | -123 | -146 | -168 | -192 | -216 |
| 4.000 | -20 | -46 | -72 | -98 | -124 | -147 | -169 | -193 | -217 |
| 4.250 | -21 | -47 | -73 | -99 | -125 | -148 | -170 | -194 | -218 |
| 4.500 | -22 | -48 | -74 | -100 | -126 | -149 | -171 | -195 | -219 |
| 4.750 | -23 | -49 | -75 | -101 | -127 | -150 | -172 | -196 | -220 |
| 5.000 | -24 | -50 | -76 | -102 | -128 | -151 | -173 | -197 | -221 |
| 5.500 | -- | -- | -- | -- | -129 | -152 | -174 | -198 | -222 |
| 6.000 | -- | -- | -- | -- | -130 | -153 | -175 | -199 | -223 |

MIL-STD-1251A

SECTION 1402
 SCREWS, CAP, HEXAGON HEAD, DRILLED SHANK
 APPLICABLE DOCUMENTS: MS51105, 51106, 51109, 51110

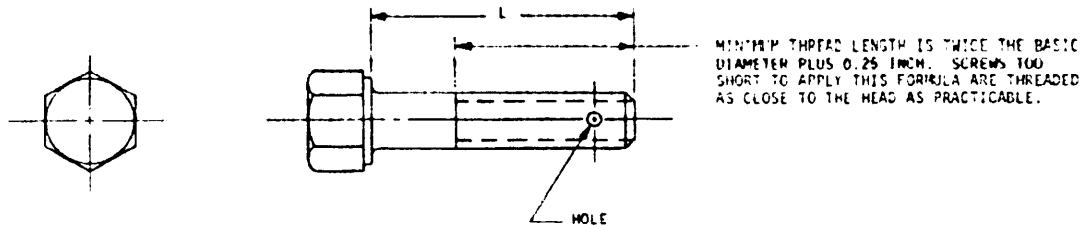


TABLE 1. MS51105, 51106, 51109, 51110 part numbers.

| Thread size | .250 | | .3125 | | .375 | | .4375 | |
|-------------|----------|----------|----------|----------|----------|----------|----------|----------|
| | 1/ or 2/ | 3/ or 4/ | 1/ or 2/ | 3/ or 4/ | 1/ or 2/ | 3/ or 4/ | 1/ or 2/ | 3/ or 4/ |
| L | | | | | | | | |
| .375 | -301 | -1 | -327 | -27 | -- | -- | | |
| .438 | -302 | -2 | -328 | -28 | -- | -- | | |
| .500 | -303 | -3 | -329 | -29 | -355 | -55 | | |
| .625 | -305 | -5 | -331 | -31 | -357 | -57 | -- | -- |
| .750 | -306 | -6 | -332 | -32 | -358 | -58 | -384 | -84 |
| .875 | -307 | -7 | -333 | -33 | -359 | -59 | -385 | -85 |
| 1.000 | -308 | -8 | -334 | -34 | -360 | -60 | -386 | -86 |
| 1.250 | -309 | -9 | -335 | -35 | -361 | -61 | -387 | -87 |
| 1.500 | -310 | -10 | -336 | -36 | -362 | -62 | -388 | -88 |
| 1.750 | -311 | -11 | -337 | -37 | -363 | -63 | -389 | -89 |
| 2.000 | -312 | -12 | -338 | -38 | -364 | -64 | -390 | -90 |
| 2.250 | -313 | -13 | -339 | -39 | -365 | -65 | -391 | -91 |
| 2.500 | -314 | -14 | -340 | -40 | -366 | -66 | -392 | -92 |
| 2.750 | -315 | -15 | -341 | -41 | -367 | -67 | -393 | -93 |
| 3.000 | -316 | -16 | -342 | -42 | -368 | -68 | -394 | -94 |
| 3.250 | -317 | -17 | -343 | -43 | -369 | -69 | -395 | -95 |
| 3.500 | -318 | -18 | -344 | -44 | -370 | -70 | -396 | -96 |
| 3.750 | -319 | -19 | -345 | -45 | -371 | -71 | -397 | -97 |
| 4.000 | -320 | -20 | -346 | -46 | -372 | -72 | -398 | -98 |
| 4.250 | -321 | -21 | -347 | -47 | -373 | -73 | -399 | -99 |
| 4.500 | -322 | -22 | -348 | -48 | -374 | -74 | -400 | -100 |
| 4.750 | -323 | -23 | -349 | -49 | -375 | -75 | -401 | -101 |
| 5.000 | -324 | -24 | -350 | -50 | -376 | -76 | -402 | -102 |
| 5.500 | -- | -- | -- | -- | -- | -- | -- | -- |
| 6.000 | -- | -- | -- | -- | -- | -- | -- | -- |

1/, 2/, 3/ and 4/ see table 11.

MIL-STD-1251A

TABLE I. M551105, 51106, 51109, 51110 part numbers. - Continued

| Thread size | .500 | | .625 | | .750 | | .875 | | 1.000 | |
|-------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| | 1/ or 2/ | 3/ or 4/ | 1/ or 2/ | 3/ or 4/ | 1/ or 2/ | 3/ or 4/ | 1/ or 2/ | 3/ or 4/ | 1/ or 2/ | 3/ or 4/ |
| .375 | | | | | | | | | | |
| .438 | | | | | | | | | | |
| .500 | | | | | | | | | | |
| .625 | --- | --- | --- | --- | | | | | | |
| .750 | -410 | -110 | -433 | -133 | | | | | | |
| .875 | -411 | -111 | -434 | -134 | | | | | | |
| 1.000 | -412 | -112 | -435 | -135 | -457 | -157 | --- | --- | --- | --- |
| 1.250 | -413 | -113 | -436 | -136 | -458 | -158 | -487 | -187 | -506 | -206 |
| 1.500 | -414 | -114 | -437 | -137 | -459 | -159 | -488 | -188 | -507 | -207 |
| 1.750 | -415 | -115 | -438 | -138 | -460 | -160 | -489 | -189 | -508 | -208 |
| 2.000 | -416 | -116 | -439 | -139 | -461 | -161 | -495 | -185 | -509 | -209 |
| 2.250 | -417 | -117 | -440 | -140 | -462 | -162 | -486 | -186 | -510 | -210 |
| 2.500 | -418 | -118 | -441 | -141 | -463 | -163 | -487 | -187 | -511 | -211 |
| 2.750 | -419 | -119 | -442 | -142 | -464 | -164 | -488 | -188 | -512 | -212 |
| 3.000 | -420 | -120 | -443 | -143 | -465 | -165 | -489 | -189 | -513 | -213 |
| 3.250 | -421 | -121 | -444 | -144 | -466 | -166 | -490 | -190 | -514 | -214 |
| 3.500 | -422 | -122 | -445 | -145 | -467 | -167 | -491 | -191 | -515 | -215 |
| 3.750 | -423 | -123 | -446 | -146 | -468 | -168 | -492 | -192 | -516 | -216 |
| 4.000 | -424 | -124 | -447 | -147 | -469 | -169 | -493 | -193 | -517 | -217 |
| 4.250 | -425 | -125 | -448 | -148 | -470 | -170 | -494 | -194 | -518 | -218 |
| 4.500 | -426 | -126 | -449 | -149 | -471 | -171 | -495 | -195 | -519 | -219 |
| 4.750 | -427 | -127 | -450 | -150 | -472 | -172 | -496 | -196 | -520 | -220 |
| 5.000 | -428 | -128 | -451 | -151 | -473 | -173 | -497 | -197 | -521 | -221 |
| 5.500 | -429 | -129 | -452 | -152 | -474 | -174 | -498 | -198 | -522 | -222 |
| 6.000 | -430 | -130 | -453 | -153 | -475 | -175 | -499 | -199 | -523 | -223 |

TABLE II. Footnotes to table I.

| Foot notes | Part numbers | Thread series | Material | Protective finish | Tensile strength (psi) min |
|------------|--------------------|---------------|--------------|-------------------|----------------------------|
| 1/ | M551105 + dash no. | UNC-2A | Carbon steel | Cadmium plate | 120,000 |
| 2/ | M551106 + dash no. | UNF-2A | | | |
| 3/ | M551109 + dash no. | UNC-2A | CRS | Passivate | 70,000 |
| 4/ | M551110 + dash no. | UNF-2A | | | |

SECTION 1403
SCREWS, CAP, HEADLESS (C), UNF, UNF-2A
APPLICABLE DOCUMENTS: MS35307, 35308, 35309, 35310, 90727, 90728

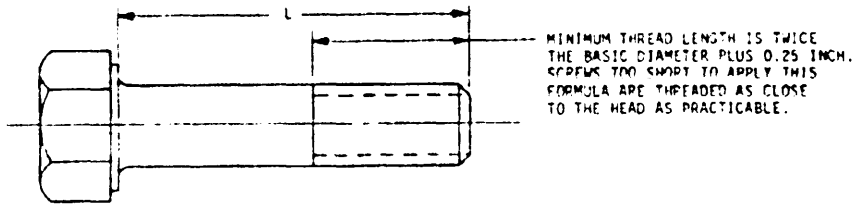


TABLE I. Materials.

| Material | Protective finish | Tensile strength (psi) min | Applicable documents |
|-------------|-------------------|---|----------------------|
| CRES | Passivate | 70,000 | MS35307, 35308 |
| Naval brass | None | 60,000 | MS35309, 35310 |
| Alloy steel | Cadmium plate | 150,000 thread sizes up to 1.5 120,000 thread sizes over 1.5 | MS90727, 90728 |

1/ For self-locking fasteners on MS90727, 90728 see section 802.

TABLE II. MS35307-35310 dash numbers.

| Thread size | .250 | .3125 | .375 | .4375 | .500 | .625 | .750 | .875 | 1.000 | 1.250 |
|---|--------------|-------------------|------|-------------------|------|------|------|-------------------|-------|-------|
| Threads per inch UNC-2A MS35307, MS35309 | 20 | 18 | 16 | 14 ^{1/2} | 13 | 11 | 10 | 9 | 8 | 7 |
| Threads per inch UNF-2A MS35308, MS35310 | 28 | 24 ^{2/3} | 24 | 20 ^{1/2} | 20 | 18 | 16 | 14 ^{2/3} | 12 | 12 |
| L | Dash numbers | | | | | | | | | |
| .375 | -301 | -327 | -353 | -- | -- | | | | | |
| .438 ^{1/2} | -302 | -328 | -354 | -379 | -379 | | | | | |
| .500 | -303 | -329 | -355 | -380 | -404 | | | | | |
| .625 | -305 | -331 | -357 | -382 | -406 | -455 | | -- | | |
| .750 | -306 | -332 | -358 | -383 | -407 | -456 | -479 | -- | | |
| .875 | -307 | -333 | -359 | -384 | -408 | -457 | -480 | -502 | | |
| 1.000 | -308 | -334 | -360 | -385 | -409 | -458 | -481 | -503 | -524 | -- |
| 1.250 | -310 | -336 | -362 | -387 | -411 | -460 | -483 | -505 | -526 | -565 |
| 1.500 | -312 | -338 | -364 | -389 | -413 | -462 | -485 | -507 | -528 | -567 |
| 1.750 | -313 | -339 | -365 | -390 | -414 | -463 | -486 | -508 | -529 | -568 |
| 2.000 | -314 | -340 | -366 | -391 | -415 | -464 | -487 | -509 | -530 | -569 |
| 2.250 | -315 | -341 | -367 | -392 | -416 | -465 | -488 | -510 | -531 | -570 |
| 2.500 | -316 | -342 | -368 | -393 | -417 | -466 | -489 | -511 | -532 | -571 |
| 2.750 | -317 | -343 | -369 | -394 | -418 | -467 | -490 | -512 | -533 | -572 |
| 3.000 | -318 | -344 | -370 | -395 | -419 | -468 | -491 | -513 | -534 | -573 |
| 3.250 ^{1/2} | -319 | -345 | -371 | -396 | -420 | -469 | -492 | -514 | -535 | -574 |
| 3.500 | -320 | -346 | -372 | -397 | -421 | -470 | -493 | -515 | -536 | -575 |
| 3.750 ^{1/2} | -321 | -347 | -373 | -398 | -422 | -471 | -494 | -516 | -537 | -576 |
| 4.000 | -322 | -348 | -374 | -399 | -423 | -472 | -495 | -517 | -538 | -577 |
| 4.250 ^{1/2} | -323 | -349 | -375 | -400 | -424 | -473 | -496 | -518 | -539 | -578 |
| 4.500 | -324 | -350 | -376 | -401 | -425 | -474 | -497 | -519 | -540 | -579 |
| 4.750 ^{1/2} | -325 | -351 | -377 | -402 | -426 | -475 | -498 | -520 | -541 | -580 |
| 5.000 | -326 | -352 | -378 | -403 | -427 | -476 | -499 | -521 | -542 | -581 |
| 5.500 | -- | -- | -- | -- | -428 | -477 | -500 | -522 | -543 | -582 |
| 6.000 | -- | -- | -- | -- | -429 | -478 | -501 | -523 | -544 | -583 |

1/ For MS35307, 35308 dash numbers only.
2/ For MS35308 dash numbers only.

MIL-STD-1251A

TABLE III. MS90727, 90728 dash numbers.

| Thread size | .250 | .3125 | .375 | .500 | .625 | .750 | 1.000 | 1.250 | 1.500 | 1.750 | 2.000 | 2.250 | 2.500 |
|--|-------------|-------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|
| Threads per inch (UNF-2A) MS90727 . . . | 28 | 24 | 24 | 20 | 18 | 16 | 12 | 12 | 12 | -- | -- | -- | -- |
| Threads per inch (UNC-2A) MS90728 . . . | 20 | 18 | 16 | 13 | 11 | 10 | 8 | 7 | 6 | 5 | 4.5 | 4.5 | 4 |
| L | Dash number | | | | | | | | | | | | |
| .375 | - 1 | -27 | -53 | -- | | | | | | | | | |
| .438 | - 2 | -28 | -54 | -- | | | | | | | | | |
| .500 | - 3 | -29 | -55 | -104 | | | | | | | | | |
| .625 | - 5 | -31 | -57 | -106 | -155 | -- | | | | | | | |
| .750 | - 6 | -32 | -58 | -107 | -156 | -179 | | | | | | | |
| .875 | - 7 | -33 | -59 | -108 | -157 | -180 | | | | | | | |
| 1.000 | - 8 | -34 | -60 | -109 | -158 | -181 | -224 | -- | -- | | | | |
| 1.250 | -10 | -36 | -62 | -111 | -160 | -183 | -226 | -265 | -- | | | | |
| 1.500 | -12 | -38 | -64 | -113 | -162 | -185 | -228 | -267 | -302 | | | | |
| 1.750 | -13 | -39 | -65 | -114 | -163 | -186 | -229 | -268 | -303 | -319 | -- | | |
| 2.000 | -14 | -40 | -66 | -115 | -164 | -187 | -230 | -269 | -304 | -320 | -- | | |
| 2.250 | -15 | -41 | -67 | -116 | -165 | -188 | -231 | -270 | -305 | -321 | -335 | | |
| 2.500 | -16 | -42 | -68 | -117 | -166 | -189 | -232 | -271 | -306 | -322 | -336 | -- | -- |
| 2.750 | -17 | -43 | -69 | -118 | -167 | -190 | -233 | -272 | -307 | -323 | -337 | -349 | -361 |
| 3.000 | -18 | -44 | -70 | -119 | -168 | -191 | -234 | -273 | -308 | -324 | -338 | -350 | -362 |
| 3.250 | -19 | -45 | -71 | -120 | -169 | -192 | -235 | -274 | -309 | -325 | -339 | -351 | -363 |
| 3.500 | -20 | -46 | -72 | -121 | -170 | -193 | -236 | -275 | -310 | -326 | -340 | -352 | -364 |
| 3.750 | -21 | -47 | -73 | -122 | -171 | -194 | -237 | -276 | -311 | -327 | -341 | -353 | -365 |
| 4.000 | -22 | -48 | -74 | -123 | -172 | -195 | -238 | -277 | -312 | -328 | -342 | -354 | -366 |
| 4.250 | -23 | -49 | -75 | -124 | -173 | -196 | -239 | -278 | -313 | -329 | -343 | -355 | -367 |
| 4.500 | -24 | -50 | -76 | -125 | -174 | -197 | -240 | -279 | -314 | -330 | -344 | -356 | -368 |
| 4.750 | -25 | -51 | -77 | -126 | -175 | -198 | -241 | -280 | -315 | -331 | -345 | -357 | -369 |
| 5.000 | -26 | -52 | -78 | -127 | -176 | -199 | -242 | -281 | -316 | -332 | -346 | -358 | -370 |
| 5.500 | -- | -- | -- | -128 | -177 | -200 | -243 | -282 | -317 | -333 | -347 | -359 | -371 |
| 6.000 | -- | -- | -- | -129 | -178 | -201 | -244 | -283 | -318 | -334 | -348 | -360 | -372 |

SECTION 1501
SCREWS, CAP, SOCKET HEAD, DRILLED AND UNDRILLED
APPLICABLE DOCUMENTS: NAS1351, 1352

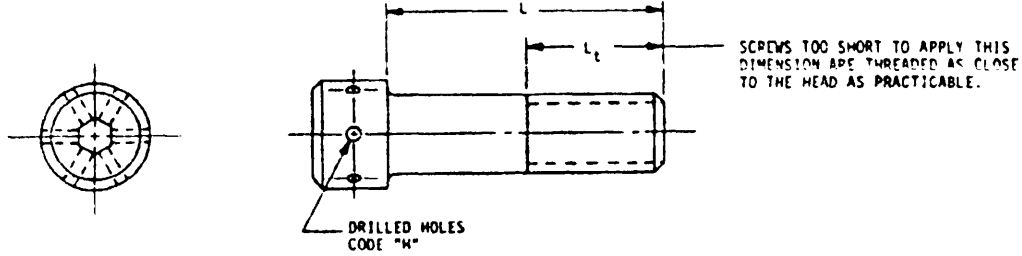


TABLE I. Materials.

| Material | Code | Protective Finish | Code | Tensile strength (psi) min |
|----------------------|------|-------------------|------|----------------------------|
| Alloy steel | -- | Cadmium plate | P | 160,000 |
| | | Black oxide | -- | |
| CRES | C | Cadmium plate | n | 60,000 |
| | | Passivate | -- | |
| Heat resistant steel | N | Silver plate | S | 160,000 |
| | | Passivate | -- | |

TABLE II. NAS1351, 1352 dash numbers. 1/

| Thread size . . . | .060 | .086 | .112 | .138 | .164 | .190 | .250 | .3125 | .375 | .4375 | .500 | .625 | .750 | .875 | 1.000 | 1.250 | 1.500 |
|------------------------------------|--------------------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|------------------|-------|-------|
| Threads per inch NAS1351 (UNRF-3A) | 80 | 64 | 48 | 40 | 36 | 32 | 28 | 24 | 24 | 20 | 20 | 18 | 16 | 14 | 12 | -- | -- |
| Threads per inch NAS1352 (UNRF-3A) | -- | 56 | 40 | 32 | 32 | 24 | 20 | 18 | 16 | 14 | 13 | 11 | 10 | 9 | 8 | 7 | 6 |
| | .500 | .625 | .750 | .750 | .875 | .875 | 1.000 | 1.125 | 1.250 | 1.375 | 1.500 | 1.750 | 2.000 | 2.250 | NAS1351 2.250 | -- | -- |
| | | | | | | | | | | | | | | | NAS1352 2.500 | 3.125 | 3.750 |
| First dash no. . . | -00 | -02 | -04 | -06 | -08 | -3 | -4 | -5 | -6 | -7 | -8 | -10 | -12 | -14 | -16 | -20 | -24 |
| L | Second dash number | | | | | | | | | | | | | | | | |
| .125 | -2 | -- | -- | -- | -- | | | | | | | | | | | | |
| .188 | -3 | -- | -- | -- | -- | | | | | | | | | | | | |
| .250 | -4 | -4 | -4 | -4 | -4 | | | | | | | | | | | | |
| .375 | -6 | -6 | -6 | -6 | -6 | -6 | -6 | -6 | -- | | | | | | | | |
| .500 | -- | -8 | -8 | -8 | -8 | -8 | -8 | -8 | -8 | | | | | | | | |
| .625 | -- | -- | -10 | -10 | -10 | -10 | -10 | -10 | -10 | | | | | | | | |
| .750 | | | -12 | -12 | -12 | -12 | -12 | -12 | -12 | -12 | -12 | -- | | | | | |
| .875 | | | -- | -14 | -14 | -14 | -14 | -14 | -14 | -14 | -14 | -- | | | | | |
| 1.000 | | | -- | -16 | -16 | -16 | -16 | -16 | -16 | -16 | -16 | -16 | | | | | |
| 1.250 | | | | | -20 | -20 | -20 | -20 | -20 | -20 | -20 | -20 | -- | | | | |
| 1.500 | | | | | -24 | -24 | -24 | -24 | -24 | -24 | -24 | -24 | -24 | | | | |
| 1.750 | | | | | -- | -28 | -28 | -28 | -28 | -28 | -28 | -28 | -28 | | | | |
| 2.000 | | | | | | -32 | -32 | -32 | -32 | -32 | -32 | -32 | -32 | -32 | -- | | |
| 2.250 | | | | | | -- | -36 | -36 | -36 | -36 | -36 | -36 | -36 | -36 | -- | | |
| 2.500 | | | | | | -- | -- | -40 | -40 | -40 | -40 | -40 | -40 | -40 | -40 | | |
| 2.750 | | | | | | | | | -44 | -44 | -44 | -44 | -44 | -44 | -44 | -- | |
| 3.000 | | | | | | | | | -48 | -48 | -48 | -48 | -48 | -48 | -48 | -48 | -48 |
| 3.250 | | | | | | | | | -- | -- | -- | -- | -52 | -52 | -52 | -52 | -52 |
| 3.500 | | | | | | | | | | | | -56 | -56 | -56 | -56 | -56 | -56 |
| 4.000 | | | | | | | | | | | | -- | -64 | -64 | -64 | -64 | -64 |
| 4.500 | | | | | | | | | | | | -- | -72 | -72 | -72 | -72 | -72 |
| 5.000 | | | | | | | | | | | | | | -80 | -80 | -80 | -80 |
| 5.500 | | | | | | | | | | | | | | -- | -- | -88 | -88 |
| 6.000 | | | | | | | | | | | | | | -- | -- | -96 | -96 |

1/ For self-locking fasteners on NAS1351, 1352 see section 2101.

MIL-STD-1251A

SECTION 1502
SCREWS, CAP, SOCKET HEAD, UNDRILLED, SHOULDER
APPLICABLE DOCUMENT: MS51975

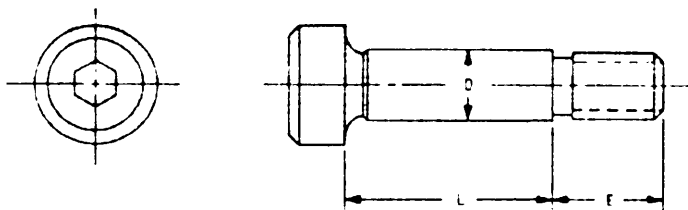


TABLE I. Material.

| Material | Protective finish | Tensile strength (psi) min |
|-------------|-------------------|----------------------------|
| Alloy steel | Cadmium plate | 140,000 |

TABLE II. Part numbers.

| Thread designation (UNC-3A) | .190-24 | .250-20 | .3125-18 | .375-16 | .500-13 | .625-11 |
|-----------------------------|---------------------|---------|----------|---------|---------|---------|
| E min | .355 | .418 | .480 | .595 | .720 | .845 |
| D max | .248 | .3105 | .373 | .498 | .623 | .743 |
| L | 51975 + dash number | | | | | |
| .375 | -1 | -- | -- | | | |
| .500 | -2 | -8 | -16 | | | |
| .625 | -3 | -9 | -17 | | | |
| .750 | -4 | -10 | -18 | -28 | -- | |
| 1.000 | -5 | -11 | -19 | -29 | -- | |
| 1.250 | -6 | -12 | -20 | -30 | -43 | |
| 1.500 | -7 | -13 | -21 | -31 | -44 | -53 |
| 1.750 | -- | -14 | -22 | -32 | -45 | 54 |
| 2.000 | -- | -15 | -23 | -33 | -46 | -55 |
| 2.250 | | | -24 | -34 | -47 | -56 |
| 2.500 | | | -25 | -35 | -48 | -57 |
| 2.750 | | | -26 | -36 | -49 | -58 |
| 3.000 | | | -27 | -37 | -50 | -59 |
| 3.750 | | | -- | -- | -80 | -- |

SECTION 1601
SCREWS, CLOSE TOLERANCE, HEXAGON HEAD
APPLICABLE DOCUMENTS: NAS1982 1982

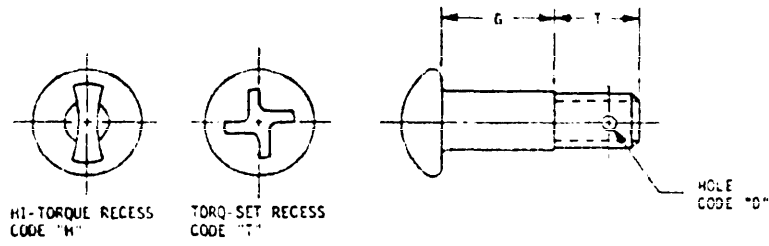


TABLE I. Materials.

| Material | Code | Protective finish | Code | Tensile strength (psi) min |
|----------------|------|-------------------|------|----------------------------|
| Alloy steel | - | Cadmium plate | -- | 180,000 |
| Titanium alloy | T | None | -- | |
| | | Aluminum coat | P | |
| CRCS | C | Passivate | -- | |
| | | Aluminum coat | P | |

TABLE II. Dash numbers.

| Thread designation (-3A) | T ref | Basic part number | Grip dash number 1/ | |
|--------------------------|-------|-------------------|---------------------|------------|
| | | | Range | Increments |
| .164-32 UNJC | .33R | NAS1982 | -1 thru -8 | One |
| .190-32 UNJF | .33B | NAS1983 | | |
| .250-28 UNJF | .425 | NAS1984 | | |
| .3125-24 UNJF | .469 | NAS1985 | -10 thru -16 | Two |
| .375-24 UNJF | .57B | NAS1986 | | |
| .4375-20 UNJF | .594 | NAS1987 | -20 thru -96 | Four |
| .500-20 UNJF | .735 | NAS1988 | | |
| .625-18 UNJF | .902 | NAS1990 | | |

1/ Grip dash number equals "G" dimension times 16

MIL-STD-1251A

SECTION 1602
SCREWS, CLOSE TOLERANCE, FILLISTER HEAD
APPLICABLE DOCUMENTS NAS1121-1128, 1181-1188

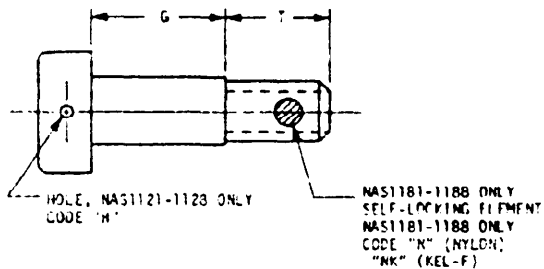



TABLE I. Materials.

| Material | Code | Protective finish | Code | Tensile strength (psi) min | Applicable documents |
|-------------|------|-------------------|------|----------------------------|----------------------------|
| Alloy steel | - | Cadmium plate | -- | 160,000 | NAS1121-1128, NAS1181-1188 |
| CRS | E | Passivate | -- | | |
| | | Cadmium plate | P | | |
| Titanium | V | None | -- | | NAS1121-1128 |
| | | Cadmium plate | P | | |


TABLE II. Dash numbers.

| Thread designation (-3A) | T ref | Basic part no. | Grip dash number 1/ | |
|--------------------------|-------|----------------|--|--------------------|
| | | | Range | Increments |
| .138-32 UNJC | .276 | NAS1121 | -1 thru -8 -10 thru -16 -20 thru -96 | One Two Four |
| | .338 | NAS1181 | | |
| .164-3/4 UNJL | .276 | NAS1122 | | |
| | .338 | NAS1182 | | |
| .190-32 UNJF | .276 | NAS1123 | | |
| | .338 | NAS1183 | | |
| .250-28 UNJF | .316 | NAS1124 | | |
| | .425 | NAS1184 | | |
| .3125-24 UNJF | .375 | NAS1125 | | |
| | .469 | NAS1185 | | |
| .375-24 UNJF | .391 | NAS1126 | | |
| | .578 | NAS1186 | | |
| .4376-20 UNJF | .453 | NAS1127 | | |
| | .594 | NAS1187 | | |
| .500-20 UNJF | .453 | NAS1128 | | |
| | .735 | NAS1188 | | |

1/ Grip dash number equals "G" dimension times 16


MIL-STD-1251A

SECTION 1603
 SCREWS, CLOSE TOLERANCE, FLAT HEAD
 APPLICABLE DOCUMENTS: NAS583-590, 583-599, 1151-1158,
 NAS1202-1210, 1581, 1581, 1581, 1972-1980, 1992-2000, 2803-2810




CROSS-RECESS
 NAS1202-1210
 NO CODE

NAS333-340
 CODE "P"




TORQ-SET RECESS
 NAS1151-1158, 2803-2810
 NO CODE

NAS1580, 1581, 1972-1980
 1992-2000
 CODE "T"




HI-TORQUE RECESS
 NAS583-590
 NO CODE

NAS1580, 1581, 1972, 1980
 1992-2000
 CODE "H"



HEXAGON SOCKET
 NAS333-340 ONLY
 NO CODE

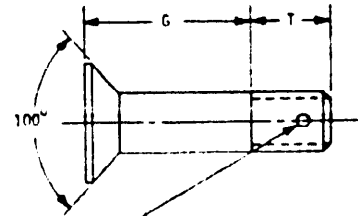

HOLE - CODE "D"
 NAS1151-1158, 1202-1210
 NAS1972-1980, 1992-2000

HOLE - NO CODE
 NAS333-340

NO HOLE - NO CODE
 NAS583-590, 1151-1158, 1202-1210
 NAS1580, 1581, 1972-1980, 2803-2810

NO HOLE - CODE "A"
 NAS333-340

TABLE I. Materials

| Material | Code | Protective finish | Code | Tensile strength (psi) min | Applicable documents |
|----------------|------|----------------------------|---------|----------------------------|------------------------------------|
| | | | | | |
| Steel | - | | C | 160,000 | NAS333-340 |
| | - | | | | 160,000 |
| Alloy steel | - | Cadmium plate | -- | 180,000 | NAS1972-1980, 1992-2000, 2803-2810 |
| | A | | | | 160,000 |
| CRES | E | Passivate Cadmium plate | -- P | 160,000 | NAS1151-1158 |
| | C | Passivate Cadmium plate | -- P | | NAS1580, 1581 |
| | | Passivate Aluminum coat | -- P | | 180,000 |
| Titanium alloy | V | None | - | 160,000 | NAS1580, 1581 |
| | | None Cadmium plate | P | | NAS1151-1158 |
| | | None Aluminum coat | - P | | NAS1972-1980 |
| | T | None Aluminum coat | -- P | 180,000 | NAS1992-2000 |

MIL-STD-1251A

TABLE II. Dash no. for all documents except NAS200-240.

| Thread size (3A) | .130-32 | .154-32 | .190-32 | .250-28 | .3125-24 | .375-24 | .4375-20 | .500-20 | .625-18 |
|--------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Thread designation | UNJC | UNJC | UNJF | UNJF | UNJF | UNJF | UNJF | UNJF | UNJF |
| Basic part number | NAS1151 | NAS1152 | NAS1153 | NAS1154 | NAS1155 | NAS1156 | NAS1157 | NAS1158 | |
| T ref. | .276 | .276 | .276 | .316 | .375 | .391 | .453 | .453 | |
| Second dash no. range 1/ | -1 thru-96 | -2 thru-96 | -2 thru-96 | -2 thru-96 | -3 thru-96 | -4 thru-96 | -4 thru-96 | -5 thru-96 | |
| Thread designation | | UNJC | UNJF | UNJF | UNJF | UNJF | UNJF | UNJF | UNJF |
| Basic part number | | NAS1992 | NAS1993 | NAS1994 | NAS1995 | NAS1996 | NAS1997 | NAS1998 | NAS2000 |
| T ref. | | .338 | .338 | .425 | .469 | .578 | .594 | .735 | .902 |
| Second dash no. range 1/ | | -1 thru-96 | -1 thru-96 | -1 thru-96 | -1 thru-96 | -1 thru-96 | -1 thru-96 | -1 thru-96 | -1 thru-96 |
| Thread designation | | UNJC | UNJF | UNJF | UNJF | UNJF | UNJF | UNJF | UNJF |
| Basic part number | | NAS1202 | NAS1203 | NAS1204 | NAS1205 | NAS1206 | NAS1207 | NAS1208 | NAS1210 |
| T ref. | | .276 | .276 | .316 | .375 | .391 | .453 | .453 | .543 |
| Second dash no. range 1/ | | -1 thru-96 | -1 thru-96 | -1 thru-96 | -1 thru-96 | -1 thru-96 | -1 thru-96 | -4 thru-96 | -5 thru-96 |
| Thread designation | | UNJC | UNJF | UNJF | UNJF | UNJF | UNJF | UNJF | UNJF |
| Basic part number | | NAS1972 | NAS1973 | NAS1974 | NAS1975 | NAS1976 | NAS1977 | NAS1978 | NAS1980 |
| T ref. | | .338 | .338 | .425 | .469 | .578 | .594 | .735 | .902 |
| Second dash no. range 1/ | | -1 thru-96 | -1 thru-96 | -1 thru-96 | -1 thru-96 | -1 thru-96 | -1 thru-96 | -1 thru-96 | -1 thru-96 |
| Thread designation | | | UNJF | UNJF | UNJF | UNJF | UNJF | UNJF | UNJF |
| NAS1580 first dash no. | | | -3 | -4 | -5 | -6 | -7 | -8 | -10 |
| T ref. | | | .363 | .403 | .501 | .594 | .675 | .768 | .981 |
| Second dash no. range 1/ | | | -2 thru-96 | -3 thru-96 | -4 thru-96 | -4 thru-96 | -4 thru-96 | -4 thru-96 | -6 thru-96 |
| Thread designation | | | UNJF | UNJF | UNJF | UNJF | UNJF | UNJF | UNJF |
| NAS1581 first dash no. | | | -3 | -4 | -5 | -6 | -7B | -8 | -10 |
| T ref. | | | .363 | .403 | .501 | .594 | .675 | .768 | .981 |
| Second dash no. range 1/ | | | -2 thru-96 | -3 thru-96 | -4 thru-96 | -4 thru-96 | -4 thru-96 | -4 thru-96 | -6 thru-96 |
| Thread designation | | | UNJF | UNJF | UNJF | UNJF | UNJF | UNJF | UNJF |
| Basic part number | | | NAS583 | NAS584 | NAS585 | NAS586 | NAS587 | NAS588 | NAS590 |
| T ref. | | | .406 | .469 | .531 | .641 | .656 | .781 | .953 |
| Second dash no. range 1/ | | | -2 thru-96 | -3 thru-96 | -3 thru-96 | -3 thru-96 | -5 thru-96 | -5 thru-96 | -5 thru-96 |
| Thread designation | | | UNF | UNF | UNF | UNF | UNF | UNF | UNF |
| Basic part number | | | NAS2803 | NAS2804 | NAS2905 | NAS2906 | NAS2807 | NAS2808 | NAS2810 |
| T ref. | | | .334 | .456 | .530 | .577 | .656 | .703 | .823 |
| Second dash no. range 1/ | | | -2 thru-96 | -3 thru-96 | -3 thru-96 | -3 thru-96 | -5 thru-96 | -5 thru-96 | -5 thru-96 |

1/ Second dash number equals "G" dimension times 16

Increments of one (-1 thru -8), two (-10 thru -16), four (-20 thru -96).

MIL-STD-1251A

TABLE III. NAS333-340 dash numbers

| Thread designation (UNF-3A) | .190-32 | .250-13 | .3125-24 | .375-16 | .4375-20 | .500-16 | .625-16 |
|--------------------------------|-------------|---------|----------|---------|----------|---------|---------|
| Basic document | NAS333 | NAS334 | NAS335 | NAS336 | NAS337 | NAS338 | NAS340 |
| Part number | 400 | 469 | 531 | 601 | 666 | 731 | 803 |
| G | Dash number | | | | | | |
| .125 | -4 | -- | -- | -- | -- | -- | -- |
| .166 | -- | -5 | -5 | -6 | -- | -- | -- |
| .250 | -5 | -- | -- | -- | -- | -- | -- |
| .312 | -- | -6 | -6 | -7 | -7 | -10 | -11 |
| .375 | -6 | -- | -- | -- | -- | -- | -- |
| .438 | -- | -7 | -7 | -10 | -10 | -11 | -12 |
| .500 | -7 | -- | -- | -- | -- | -- | -- |
| .562 | -- | -10 | -10 | -11 | -11 | -12 | -13 |
| .688 | -- | -11 | -11 | -12 | -12 | -13 | -14 |
| .750 | -11 | -- | -- | -- | -- | -- | -- |
| .812 | -- | -12 | -12 | -13 | -13 | -14 | -15 |
| .938 | -- | -13 | -13 | -14 | -14 | -15 | -16 |
| 1.000 | -13 | -- | -- | -- | -- | -- | -- |
| 1.062 | -- | -14 | -14 | -15 | -15 | -16 | -17 |
| 1.166 | -- | -15 | -15 | -16 | -16 | -17 | -20 |
| 1.250 | -15 | -- | -- | -- | -- | -- | -- |
| 1.438 | -- | -17 | -17 | -20 | -20 | -21 | -22 |
| 1.500 | -17 | -- | -- | -- | -- | -- | -- |
| 1.688 | -- | -21 | -21 | -22 | -22 | -23 | -24 |
| 1.750 | -21 | -- | -- | -- | -- | -- | -- |
| 1.938 | -- | -23 | -23 | -24 | -24 | -25 | -26 |
| 2.000 | -23 | -- | -- | -- | -- | -- | -- |
| 2.188 | -- | -25 | -25 | -26 | -26 | -27 | -30 |
| 2.250 | -25 | -- | -- | -- | -- | -- | -- |
| 2.438 | -- | -27 | -27 | -30 | -30 | -31 | -32 |
| 2.500 | -27 | -- | -- | -- | -- | -- | -- |
| 2.688 | -- | -31 | -31 | -32 | -32 | -33 | -34 |
| 2.750 | -31 | -- | -- | -- | -- | -- | -- |
| 2.938 | -- | -33 | -33 | -34 | -34 | -35 | -36 |
| 3.000 | -33 | -- | -- | -- | -- | -- | -- |
| 3.188 | -- | -35 | -35 | -36 | -36 | -37 | -40 |
| 3.250 | -35 | -- | -- | -- | -- | -- | -- |
| 3.438 | -- | -37 | -37 | -40 | -40 | -41 | -42 |
| 3.500 | -37 | -- | -- | -- | -- | -- | -- |
| 3.688 | -- | -41 | -41 | -42 | -42 | -43 | -44 |
| 3.750 | -41 | -- | -- | -- | -- | -- | -- |
| 3.938 | -- | -43 | -43 | -44 | -44 | -45 | -46 |
| 4.000 | -43 | -- | -- | -- | -- | -- | -- |
| 4.188 | -- | -45 | -45 | -46 | -46 | -47 | -50 |
| 4.250 | -45 | -- | -- | -- | -- | -- | -- |
| 4.438 | -- | -47 | -47 | -50 | -50 | -51 | -52 |
| 4.500 | -47 | -- | -- | -- | -- | -- | -- |
| 4.688 | -- | -51 | -51 | -52 | -52 | -53 | -54 |
| 4.750 | -51 | -- | -- | -- | -- | -- | -- |
| 4.938 | -- | -53 | -53 | -54 | -54 | -55 | -56 |
| 5.000 | -53 | -- | -- | -- | -- | -- | -- |
| 5.188 | -- | -55 | -55 | -56 | -56 | -57 | -60 |
| 5.250 | -55 | -- | -- | -- | -- | -- | -- |
| 5.438 | -- | -57 | -57 | -60 | -60 | -61 | -62 |
| 5.500 | -57 | -- | -- | -- | -- | -- | -- |
| 5.688 | -- | -61 | -61 | -62 | -62 | -63 | -64 |
| 5.750 | -61 | -- | -- | -- | -- | -- | -- |
| 5.938 | -- | -63 | -63 | -64 | -64 | -65 | -66 |
| 6.000 | -63 | -- | -- | -- | -- | -- | -- |
| 6.188 | -- | -65 | -65 | -66 | -66 | -67 | -70 |
| 6.250 | -65 | -- | -- | -- | -- | -- | -- |
| 6.438 | -- | -67 | -67 | -70 | -70 | -71 | -72 |
| 6.500 | -67 | -- | -- | -- | -- | -- | -- |
| 6.688 | -- | -71 | -71 | -72 | -72 | -73 | -74 |
| 6.750 | -71 | -- | -- | -- | -- | -- | -- |
| 6.938 | -- | -73 | -73 | -74 | -74 | -75 | -76 |
| 7.000 | -73 | -- | -- | -- | -- | -- | -- |
| 7.188 | -- | -75 | -75 | -76 | -76 | -77 | -80 |
| 7.250 | -75 | -- | -- | -- | -- | -- | -- |
| 7.438 | -- | -77 | -77 | -80 | -80 | -- | -- |
| 7.500 | -77 | -- | -- | -- | -- | -- | -- |

SECTION 1604
SCREWS, CLOSE TOLERANCE, FLAT HEAD, SELF-LOCKING
APPLICABLE DOCUMENTS: NAS1161-1168, NAS1790

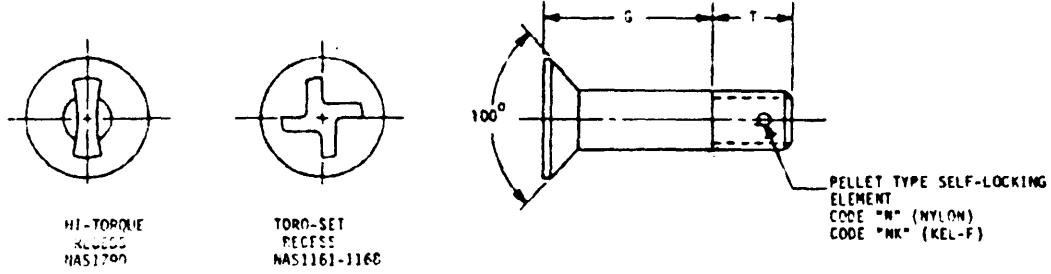


TABLE I. Materials

| Material | Code | Protective finish | Code | Tensile strength (psi) min |
|----------------|-------------------|-------------------|---------------|----------------------------|
| | Alloy steel . . . | - | Cadmium plate | |
| CRES | E | Passivate | -- | |
| | | Cadmium plate | P | |

TABLE II. NAS1161-1168 dash numbers

| Thread designation (-3A) | T ref | Basic part no. | Grip dash number 1/ | |
|--------------------------|-------|----------------|---------------------|------------|
| | | | Range | Increments |
| .138-32 UNJC | .338 | NAS1161 | -1 thru -8 | One |
| .164-32 UNJC | .338 | NAS1162 | | |
| .190-32 UNJF | .338 | NAS1163 | | |
| .250-28 UNJF | .425 | NAS1164 | -10 thru -16 | Two |
| .3125-24 UNJF | .469 | NAS1165 | | |
| .375-24 UNJF | .578 | NAS1166 | | |
| .4375-20 UNJF | .594 | NAS1167 | -20 thru -96 | Four |
| .500-20 UNJF | .735 | NAS1168 | | |

1/ Grip dash number equals "G" dimension times 16

TABLE III. NAS1790 dash numbers

| Thread designation (-3A) | T ref | Dash no. | Grip dash number 1/ |
|--------------------------|-------|----------|---------------------|
| .1900-32UNJF | .338 | -3 | 1/ |
| .2500-28UNJF | .425 | -4 | |
| .3125-24UNJF | .469 | -5 | |
| .3750-24UNJF | .578 | -6 | |
| .4375-20UNJF | .694 | -7 | |
| .5000-20UNJF | .735 | -8 | |
| .5625-18UNJF | .840 | -9 | |
| .6250-18UNJF | .902 | -10 | |

1/ Second dash number indicates grip length in .0625 inch increments.

MIL-STD-1251A

SECTION 1605
 SCREWS, CLOSE TOLERANCE, PAN HEAD
 APPLICABLE DOCUMENTS: NAS1131-1139, 1141-1148, 1171-1173, 1579

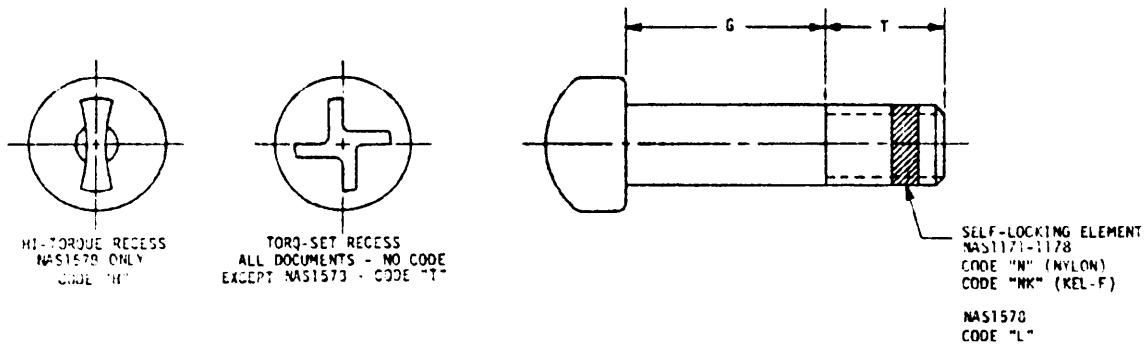


TABLE I. Materials

| Material | Code | Protective finish | Code | Tensile strength (psi) min | Applicable documents | |
|----------------|------|-------------------|------|-------------------------------|------------------------------------|------------------------------------|
| | | | | | | |
| Alloy steel | - | Cadmium plate | -- | 160,000 | NAS1131-1138, 1141-1148, 1171-1178 | |
| | A | | -- | | NAS1578 | |
| CRS | E | Passivate | -- | | 160,000 | NAS1131-1138, 1141-1148, 1171-1178 |
| | | Cadmium plate | P | | | |
| | C | Passivate | -- | | | NAS1578 |
| | | Cadmium plate | P | | | |
| Titanium alloy | V | None | -- | NAS1131-1138, 1141-1148, 1578 | | |
| | | Cadmium plate | P | NAS1131-1138, 1141-1148 | | |

MIL-STD-1251A

TABLE III. NAS1131-1139, 1141-1148, 1171-1178 dash numbers.

| Thread designation (-3A) | T ref | Basic Part No. | Grip dash no. 1/ | |
|-----------------------------|--------------|-------------------------|--|--------------------|
| | | | Range | Increments |
| .1380-22 UNJC | .275 .332 | NAS1131,1141 NAS1171 | -1 thru -8 -10 thru -16 -20 thru -96 | One Two Four |
| .1640-20 UNJC | .276 .330 | NAS1132,1142 NAS1172 | | |
| .1900-32 UNJF | .276 .338 | NAS1133,1143 NAS1173 | | |
| .2500-28 UNJF | .116 .425 | NAS1134,1144 NAS1174 | | |
| .3125-24 UNJF | .375 .469 | NAS1135,1145 NAS1175 | | |
| .3750-24 UNJF | .391 .578 | NAS1136,1146 NAS1176 | | |
| .4375-20 UNJF | .453 .594 | NAS1137,1147 NAS1177 | | |
| .5000-20 UNJF | .453 .735 | NAS1138,1148 NAS1178 | | |

1/ Grip dash no. equals "G" dimension times 16

TABLE III. NAS1578 dash numbers.

| Thread designation (UNJF-3A) | T ref | First dash No. | Grip dash number 1/ |
|---------------------------------|----------|-------------------|---------------------|
| | | | Range |
| .190-32 | .363 | -3 | -2 thru -96 |
| .250-28 | .403 | -4 | -3 thru -96 |
| .3125-24 | .501 | -5 | -4 thru -96 |
| .375-24 | .594 | -6 | -4 thru -96 |
| .4375-20 | .675 | -7 | -4 thru -96 |
| .500-20 | .768 | -8 | -4 thru -96 |

1/ Grip dash number equals "G" dimension times 16

Increments of one (-2 thru -8), two (-10 thru -16), and four (-20 thru -96).

—

—

—

MIL-STD-1251A

SECTION 1801

SCREWS, EYE
APPLICABLE DOCUMENT: M3744E

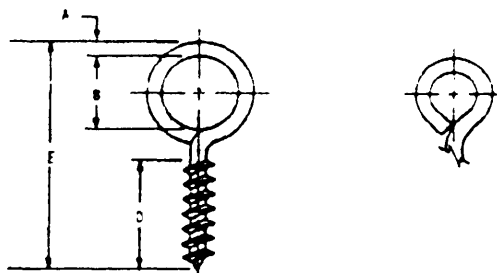


TABLE I. Materials.

| Material | Protective finish |
|--------------|-------------------|
| Carbon steel | Cadmium plate |
| Brass | Black chemical |

TABLE II. Part numbers.

| MS35646- dash no. | | A | B | D | E |
|--------------------------|-------|------|------|------|------|
| Carbon steel | Brass | | | | |
| Large eye, regular shank | | | | | |
| -501 | | .362 | 1.12 | 1.75 | 3.88 |
| -503 | | .306 | .81 | 1.19 | 2.94 |
| -505 | | .262 | .72 | 1.06 | 2.62 |
| -507 | -607 | .225 | .61 | .85 | 2.25 |
| -509 | -609 | .192 | .53 | .75 | 1.94 |
| -511 | -611 | .162 | .47 | .62 | 1.62 |
| -513 | -613 | .135 | .41 | .53 | 1.38 |
| -515 | -615 | .105 | .38 | .44 | 1.19 |
| -517 | -617 | .080 | .34 | .31 | 1.06 |
| Small eye, regular shank | | | | | |
| -534 | -634 | .225 | .30 | .88 | 1.94 |
| -536 | -636 | .192 | .27 | .75 | 1.62 |
| -538 | -638 | .162 | .23 | .62 | 1.38 |
| -540 | -640 | .135 | .22 | .53 | 1.19 |
| -542 | -642 | .105 | .19 | .44 | .94 |
| -544 | -644 | .080 | .16 | .31 | .81 |
| -546 | -646 | .062 | .14 | .31 | .69 |
| Small eye, short shank | | | | | |
| -550 | -650 | .080 | .16 | .22 | .69 |
| -552 | -652 | .062 | .14 | .19 | .50 |

MIL-STD-1251A

SECTION 1901

SCREWS, INSTRUMENT
 APPLICABLE INCLEMENTS: NAS721, 722, 723, 724

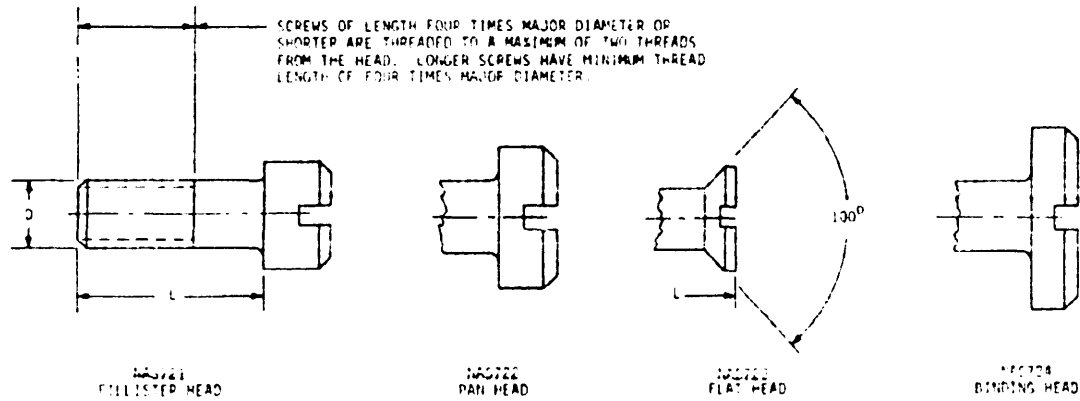


TABLE I. Materials.

| Material | Code | Protective finish | | Tensile strength (psi) min |
|---------------|------|-------------------|------|----------------------------|
| | | | Code | |
| CRS 303 | CF | Passivate | -- | -- |
| CRS 416 | CK | | | 127,000 |
| CRS 420 | CW | | | 240,000 |
| Brass | B | None | P | -- |
| | | Black oxide | K | |
| | | Nickel finish | W | |
| Nickel silver | L | None | P | -- |

TABLE II. NAS721, 722, 723, 724 dash numbers

| Thread designation 3/... | .30 UNM | .40 UNM | .50 UNM | .60 UNM | .80 UNM | 1.00 UNM | 1.20 UNM |
|--------------------------|----------|--------------------|---------|---------|---------|----------|----------|
| Threads per inch..... | 318 | 254 | 203 | 169 | 127 | 102 | 102 |
| D (inches) max..... | .0018 | .0157 | .0197 | .0236 | .0315 | .0354 | .0471 |
| First dash no..... | 30 | 40 | 50 | 60 | 80 | 100 | 120 |
| L (inches) | | Second dash number | | | | | |
| Max | Min | | | | | | |
| .020 | .016 1/2 | -020 | -- | -- | | | |
| .025 | .021 | -025 | -025 | -- | | | |
| .032 | .027 | -032 | -032 | -032 | | | |
| .040 | .035 | -040 | -040 | -040 | -040 | -- | -- |
| .050 | .044 | -050 | -050 | -050 | -050 | -050 | -- |
| .060 | .054 | -060 | -060 | -060 | -060 | -060 | -060 |
| .080 | .072 | -080 | -080 | -080 | -080 | -080 | -080 |
| .100 | .092 | -100 | -100 | -100 | -100 | -100 | -100 |
| .120 | .110 | -120 | -120 | -120 | -120 | -120 | -120 |
| .160 | .150 2/3 | -160 | -160 | -160 | -160 | -160 | -160 |
| .200 | .180 | -- | -200 | -200 | -200 | -200 | -200 |
| .250 | .230 | -- | -- | -250 | -250 | -250 | -250 |
| .320 | .304 | | | | -320 | -320 | -320 |
| .400 | .384 | | | | -- | -400 | -400 |
| .500 | .480 | | | | -- | -- | -500 |
| .600 | .580 | | | | -- | -- | -600 |

1. Dash numbers above line for NAS721, 722 and 724 only.

2. Dash numbers below line for NAS723 only.

3. See Table III of section 6.3.

SECTION 2001

SCREWS, MACHINE, FULL-THREAD HEAD
 APPLICABLE DOCUMENTS: MS35265, 35266, 35273, 35274,
 MS35275, 35276, 35277, 35278, NAS1101

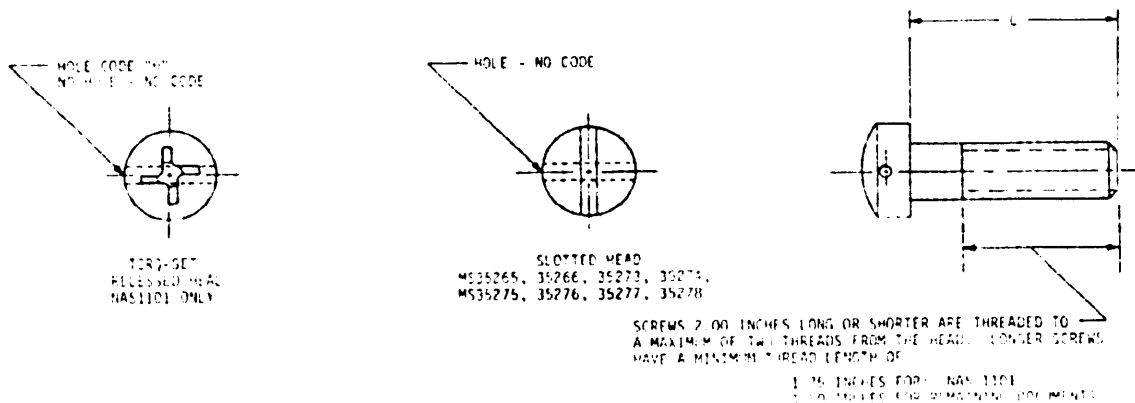


TABLE I. Materials.

| Material | Code | Protective finish | | Tensile strength lb/in ² | Applicable documents |
|----------------|------|---------------------|--------|--|----------------------------------|
| | | Code | Finish | | |
| Carbon steel | - | Cadmium plate | -- | 60,000 | MS35265, 35266 MS35275, 35276 |
| | | Passivate | -- | 80,000 | |
| CRS | E | Cadmium plate | P | 160,000 | NAS 1101 |
| | | Passivate | -- | | |
| Titanium alloy | V | None | -- | 160,000 | NAS 1101 |
| | | Cadmium plate | P | | |
| Alloy steel | - | Cadmium plate | -- | 57,000 | MS35273, 35274 |
| | | Blackened cd. plate | B | | |
| Brass | - | Black chemical | -- | 62,000 | MS35277, 35278 |
| Aluminum alloy | - | Anodize | -- | 62,000 | MS35277, 35278 |

TABLE II. MS35265, 35266, 35273, 35274, 35277, 35278 dash numbers.

| Thread size | .046 | .112 | .138 | .164 | .191 | .250 | .312 | .375 |
|---|------------------|------------------|------------------|------------------|-------------------|-------------------|-------------------|-------------------|
| Threads per inch (UNF-2A) MS35265, MS35273, 35277 | 56 | 40 | 32 | 32 | 24 ^{1/2} | 20 ^{1/2} | 18 ^{1/2} | 16 ^{1/2} |
| Threads per inch (UNF-2A) MS35266, MS35274, 35278 | 64 ^{2/} | 48 ^{2/} | 40 ^{2/} | 36 ^{2/} | 32 | 28 | 24 | 24 |
| Dash numbers | | | | | | | | |
| .105 | -1 | -11 | -24 | -39 | -- | | | |
| .187 | -2 | -12 | -25 | -40 | -58 | | | |
| .250 | -3 | -13 | -26 | -41 | -59 | | | |
| .312 | -4 | -14 | -27 | -42 | -60 | -76 | -- | |
| .375 | -5 | -15 | -28 | -43 | -61 | -77 | -90 | |
| .437 | -6 | -16 | -29 | -44 | -62 | -78 | -91 | |
| .500 | -7 | -17 | -30 | -45 | -63 | -79 | -92 | -107 |
| .625 | -8 | -18 | -31 | -46 | -64 | -80 | -93 | -108 |
| .750 | -9 | -19 | -32 | -47 | -65 | -81 | -94 | -109 |
| .875 | -10 | -20 | -33 | -48 | -66 | -82 | -95 | -110 |
| 1.000 | -- | -21 | -34 | -49 | -67 | -83 | -96 | -111 |
| 1.250 | -- | -22 | -35 | -50 | -68 | -84 | -97 | -112 |
| 1.500 | | -23 | -36 | -51 | -69 | -85 | -100 | -113 |
| 1.750 | | -- | -37 | -52 | -70 | -86 | -101 | -114 |
| 2.000 | | -- | 38 | -53 | -71 | -87 | -102 | -115 |
| 2.250 | | | | -54 | -72 | -88 | -103 | -116 |
| 2.500 | | | | -55 | -73 | -89 | -104 | -117 |
| 2.750 | | | | -56 | -74 | -90 | -105 | -118 |
| 3.000 | | | | -57 | -75 | -91 | -106 | -119 |

^{1/2} For MS35265, 35273 only

^{2/} For MS35266, 35274 only

MIL-STD-1251A

TABLE III MS35275, 35276 dash numbers

| Thread designation | 116 | 111 | 111 | 114 | 111 | 111 | 111 | 111 |
|--------------------------------|-------------|------|------|------|------|------|------|------|
| Thread designation MS 35275 | 56 | 40 | 32 | 32 | 24 | 20 | 16 | 16 |
| Thread designation MS 35276 | 64 | 48 | 40 | 36 | 30 | 24 | 24 | 24 |
| 1 | Dash number | | | | | | | |
| 175 | -201 | -211 | -224 | -239 | -- | -- | -- | -- |
| 185 | -202 | -212 | -225 | -240 | -255 | -- | -- | -- |
| 207 | -203 | -213 | -226 | -241 | -256 | -- | -- | -- |
| 312 | -204 | -214 | -227 | -242 | -257 | -275 | -- | -- |
| 375 | -205 | -215 | -228 | -243 | -258 | -277 | -292 | -- |
| 437 | -206 | -216 | -229 | -244 | -259 | -278 | -293 | -- |
| 500 | -207 | -217 | -230 | -245 | -260 | -279 | -294 | -307 |
| 625 | -208 | -218 | -231 | -246 | -261 | -280 | -295 | -308 |
| 750 | -209 | -219 | -232 | -247 | -262 | -281 | -296 | -309 |
| 875 | -210 | -220 | -233 | -248 | -263 | -282 | -297 | -310 |
| 1 000 | -- | -221 | -234 | -249 | -264 | -283 | -298 | -311 |
| 1 250 | -- | -222 | -235 | -250 | -265 | -284 | -299 | -312 |
| 1 500 | | -223 | -236 | -251 | -266 | -285 | -300 | -313 |
| 1 750 | | -224 | -237 | -252 | -267 | -286 | -301 | -314 |
| 2 000 | | -225 | -238 | -253 | -268 | -287 | -302 | -315 |
| 2 250 | | | | 254 | 270 | 288 | 303 | 316 |
| 2 500 | | | | 255 | 271 | 289 | 304 | 317 |
| 2 750 | | | | 256 | 272 | 290 | 305 | 318 |
| 3 000 | | | | 257 | 273 | 291 | 306 | 319 |
| 3 500 1/ | | | | -- | -- | -350 | -- | -- |

1/ For MS35276 only.

TABLE IV NAS1101 dash numbers

| Thread designation (-1A) | First dash no. | Second dash no. range 1/ | Increments |
|-----------------------------|-------------------|-----------------------------|---|
| .060-80 UNJF | -00 | -3 thru -24 | One (-3 thru -8) Two (-10 thru -16) Four (-20 thru -96) |
| .086-56 UNJC | -02 | -3 thru -24 | |
| .112-40 UNJC | -04 | -3 thru -24 | |
| .138-32 UNJC | -06 | -3 thru -36 | |
| .164-32 UNJC | -08 | -5 thru -56 | |
| .190-32 UNJF | -3 | -5 thru -56 | |
| .250-28 UNJF | -4 | -8 thru -96 | |
| .3125-24 UNJF | -5 | -8 thru -96 | |
| .375-24 UNJF | -6 | -8 thru -96 | |

1/ Second dash number equals "L" dimension times 16

MIL-STD-1251A

SECTION 2002

SCREWS, MACHINE, FLAT HEAD, 82°, FULL THREAD
 APPLICABLE DOCUMENTS: MS18211

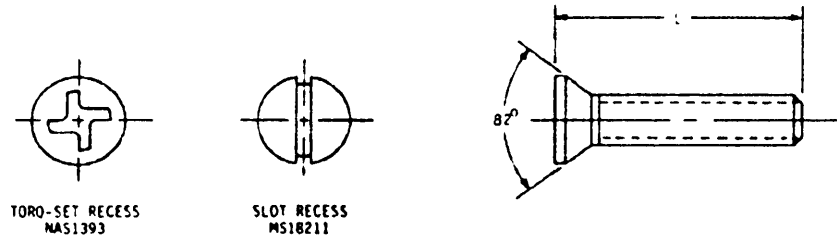


TABLE I. Material

| Material | Code | Protective finish | | Applicable document |
|-----------------|------|-------------------|------|---------------------|
| | | | Code | |
| Plastic (nylon) | -- | None | -- | MS18211 1/ |

1/ For 100° flat head screws on MS18211 see section 2004.

TABLE II. Part numbers.

| Thread designation.... | .086-56 UNC-2A | .112-40 UNC-2A | .138-32 UNC-2A | .164-32 UNC-2A | .190-24 UNC-2A | .190-32 UNF-2A | .250-20 UNF-2A | .250-28 UNF-2A |
|------------------------|----------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| L | MS18211+ dash number | | | | | | | |
| .125 | -1C | -- | -- | -- | | | | |
| .188 | -2C | -17C | -39C | -61C | | | | |
| .250 | -3C | -18C | -40C | -62C | | | | |
| .312 | -4C | -19C | -41C | -63C | -83C | -83F | -109C | -109F |
| .375 | -5C | -20C | -42C | -64C | -84C | -84F | -110C | -110F |
| .438 | -6C | -21C | -43C | -65C | -85C | -85F | -111C | -111F |
| .500 | -7C | -22C | -44C | -66C | -86C | -86F | -112C | -112F |
| .625 | -8C | -23C | -45C | -67C | -87C | -87F | -113C | -113F |
| .750 | -- | -24C | -46C | -68C | -88C | -88F | -114C | -114F |
| .875 | | -25C | -47C | -69C | -89C | -89F | -115C | -115F |
| 1.000 | | -26C | -48C | -70C | -90C | -90F | -116C | -116F |
| 1.250 | | -- | -- | -- | -92C | -92F | -118C | -118F |
| 1.500 | | | | | -94C | -94F | -120C | -120F |
| 1.750 | | | | | -95C | -95F | -121C | -121F |

MIL-STD-1251A

SECTION 2003

SCREWS, MACHINE, FLAT HEAD, 82°, LONG THREAD
 APPLICABLE DOCUMENTS: MS24667, 24671, 35190, 35191,
 MS35198, 35199, 35202, 35203, 51959, 51960

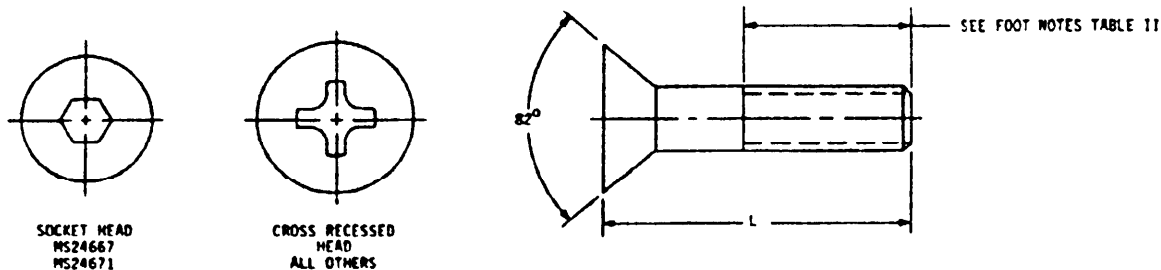


TABLE I. Materials.

| Material | Code | Protective finish | | Tensile strength (psi) min | Applicable documents |
|----------------|------|-------------------|------|-------------------------------|---|
| | | | Code | | |
| Alloy steel | - | Cadmium plate | -- | 160,000 | MS24667 1/ |
| | | Zinc plate | Z | | |
| CRES | - | Passivate | -- | 80,000 | MS24671, 51959, 51960 MS51959, 51960 |
| | | Black oxide | B | | |
| Carbon steel | - | Cadmium plate | -- | 60,000 | MS35190, 35191 1/ |
| Brass | - | Black chemical | -- | 57,000 | MS35198, 35199 |
| Aluminum alloy | - | Anodize | -- | 62,000 | MS35202, 35203 |

1/ For self-locking screws on MS24667, 35190, 35191, see section 2103.

TABLE II. Dash numbers.

| Thread designation | | UNC-3A | UNC-3A | UNC-2A | UNF-2A | UNC-2A | UNF-2A | UNC-2A | UNF-2A | UNC-2A | UNF-2A |
|----------------------------|------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Thread size | L | MS24667 1/ | MS24671 1/ | MS35190 2/ | MS35191 2/ | MS35198 2/ | MS35199 2/ | MS35202 2/ | MS35203 2/ | MS51959 3/ | MS51960 2/ |
| .060 -80 UNF | .125 | | | | -201 | | -109 | | -109 | | -1 |
| | .188 | | | | -202 | | -110 | | -110 | | -2 |
| | .250 | | | | -203 | | -111 | | -111 | | -3 |
| | .312 | | | | -204 | | -112 | | -112 | | -4 |
| | .375 | | | | -205 | | -113 | | -113 | | -5 |
| .086 -56 UNC -64 UNF | .125 | | | -209 | -213 | -1 | -1 | -1 | -1 | -1 | -6 |
| | .188 | | | -210 | -214 | -2 | -2 | -2 | -2 | -2 | -7 |
| | .250 | | | -211 | -215 | -3 | -3 | -3 | -3 | -3 | -8 |
| | .312 | | | -212 | -216 | -4 | -4 | -4 | -4 | -4 | -9 |
| | .375 | | | -213 | -217 | -5 | -5 | -5 | -5 | -5 | -10 |
| | .438 | | | -214 | -218 | -6 | -6 | -6 | -6 | -6 | -11 |
| | .500 | | | -215 | -219 | -7 | -7 | -7 | -7 | -7 | -12 |
| | .625 | | | -216 | -220 | -8 | -8 | -8 | -8 | -8 | -13 |
| | .750 | | | -217 | -221 | -9 | -9 | -9 | -9 | -9 | -14 |
| | .875 | | | -218 | -- | -- | -- | -- | -- | -- | -- |

1/, 2/ and 3/ See footnotes on page 2003.4.

MIL-STD-1251A

TABLE II. Dash numbers - Continued

| Thread size | UNC-1A | UNC-2A | UNC-2B | UNC-2A | UNC-2A | UNC-2A | UNC-2A | UNC-2A | UNC-2A | UNC-2A | UNC-2A | |
|----------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----------------------|
| | | | | | | | | | | | | MS24667 ^{1/} |
| .112 -40 UNC -48 UNF | .125 | -- | -- | -219 | -222 | -10 | -10 | -10 | -10 | -10 | -11 | -15 |
| | .188 | -- | -- | -220 | -223 | -11 | -11 | -11 | -11 | -11 | -12 | -16 |
| | .250 | -1 | -1 | -221 | -224 | -12 | -12 | -12 | -12 | -12 | -13 | -17 |
| | .312 | -- | -- | -222 | -225 | -13 | -13 | -13 | -13 | -13 | -14 | -18 |
| | .375 | -2 | -2 | -223 | -226 | -14 | -14 | -14 | -14 | -14 | -15 | -19 |
| | .438 | -- | -- | -224 | -227 | -15 | -15 | -15 | -15 | -15 | -16 | -20 |
| | .500 | -3 | -3 | -225 | -228 | -16 | -16 | -16 | -16 | -16 | -17 | -21 |
| | .625 | -4 | -4 | -226 | -229 | -17 | -17 | -17 | -17 | -17 | -18 | -22 |
| | .750 | -5 | -5 | -227 | -230 | -18 | -18 | -18 | -18 | -18 | -19 | -23 |
| | .875 | -- | -- | -228 | -231 | -19 | -19 | -19 | -19 | -19 | -20 | -24 |
| | 1.000 | -- | -- | -229 | -232 | -20 | -20 | -20 | -20 | -20 | -21 | -25 |
| | 1.250 | -- | -- | -230 | -- | -- | -- | -- | -- | -- | -- | -- |
| 1.500 | -- | -- | -231 | -- | -- | -- | -- | -- | -- | -- | -- | |
| .138 -32 UNC -40 UNF | .125 | -- | -- | -232 | -233 | -21 | -21 | -21 | -21 | -21 | -24 | -26 |
| | .188 | -- | -- | -233 | -234 | -22 | -22 | -22 | -22 | -22 | -25 | -27 |
| | .250 | -7 | -7 | -234 | -235 | -23 | -23 | -23 | -23 | -23 | -26 | -28 |
| | .312 | -- | -- | -235 | -236 | -24 | -24 | -24 | -24 | -24 | -27 | -29 |
| | .375 | -8 | -8 | -236 | -237 | -25 | -25 | -25 | -25 | -25 | -28 | -30 |
| | .438 | -- | -- | -237 | -238 | -26 | -26 | -26 | -26 | -26 | -29 | -31 |
| | .500 | -9 | -9 | -238 | -239 | -27 | -27 | -27 | -27 | -27 | -30 | -32 |
| | .625 | -10 | -10 | -239 | -240 | -28 | -28 | -28 | -28 | -28 | -31 | -33 |
| | .750 | -11 | -11 | -240 | -241 | -29 | -29 | -29 | -29 | -29 | -32 | -34 |
| | .875 | -- | -- | -241 | -242 | -30 | -30 | -30 | -30 | -30 | -33 | -35 |
| | 1.000 | -- | -- | -242 | -243 | -31 | -31 | -31 | -31 | -31 | -34 | -36 |
| | 1.250 | -- | -- | -243 | -244 | -32 | -32 | -32 | -32 | -32 | -35 | -37 |
| 1.500 | -- | -- | -244 | -245 | -33 | -33 | -33 | -33 | -33 | -36 | -38 | |
| 1.750 | -- | -- | -245 | -246 | -34 | -34 | -34 | -34 | -34 | -37 | -39 | |
| 2.000 | -- | -- | -246 | -247 | -35 | -35 | -35 | -35 | -35 | -38 | -40 | |
| .166 -32 UNC -36 UNF | .125 | -- | -- | -247 | -248 | -36 | -36 | -36 | -36 | -36 | -39 | -41 |
| | .188 | -- | -- | -248 | -249 | -37 | -37 | -37 | -37 | -37 | -40 | -42 |
| | .250 | -- | -- | -249 | -250 | -38 | -38 | -38 | -38 | -38 | -41 | -43 |
| | .312 | -- | -- | -250 | -251 | -39 | -39 | -39 | -39 | -39 | -42 | -44 |
| | .375 | -13 | -13 | -251 | -252 | -40 | -40 | -40 | -40 | -40 | -43 | -45 |
| | .438 | -- | -- | -252 | -253 | -41 | -41 | -41 | -41 | -41 | -44 | -46 |
| | .500 | -14 | -14 | -253 | -254 | -42 | -42 | -42 | -42 | -42 | -45 | -47 |
| | .625 | -15 | -15 | -254 | -255 | -43 | -43 | -43 | -43 | -43 | -46 | -48 |
| | .750 | -16 | -16 | -255 | -256 | -44 | -44 | -44 | -44 | -44 | -47 | -49 |
| | .875 | -- | -- | -256 | -257 | -45 | -45 | -45 | -45 | -45 | -48 | -50 |
| | 1.000 | -17 | -17 | -257 | -258 | -46 | -46 | -46 | -46 | -46 | -49 | -51 |
| | 1.250 | -- | -- | -258 | -259 | -47 | -47 | -47 | -47 | -47 | -50 | -52 |
| 1.500 | -- | -- | -259 | -260 | -48 | -48 | -48 | -48 | -48 | -51 | -53 | |
| 1.750 | -- | -- | -260 | -261 | -49 | -49 | -49 | -49 | -49 | -52 | -54 | |
| 2.000 | -- | -- | -261 | -262 | -50 | -50 | -50 | -50 | -50 | -53 | -55 | |
| 2.250 | -- | -- | -262 | -263 | -- | -- | -- | -- | -- | -- | -- | |
| 2.500 | -- | -- | -263 | -264 | -- | -- | -- | -- | -- | -- | -- | |
| 2.750 | -- | -- | -264 | -265 | -- | -- | -- | -- | -- | -- | -- | |
| 3.000 | -- | -- | -265 | -266 | -- | -- | -- | -- | -- | -- | -- | |
| .190 -24 J -32 UNF | .188 | -- | -- | -266 | -267 | -- | -- | -- | -- | -- | -- | -60 |
| | .250 | -- | -- | -267 | -268 | -51 | -51 | -51 | -51 | -51 | -59 | -61 |
| | .312 | -- | -- | -268 | -269 | -52 | -52 | -52 | -52 | -52 | -60 | -62 |
| | .375 | -19 | -19 | -269 | -270 | -53 | -53 | -53 | -53 | -53 | -61 | -63 |
| | .438 | -- | -- | -270 | -271 | -54 | -54 | -54 | -54 | -54 | -62 | -64 |
| | .500 | -20 | -20 | -271 | -272 | -55 | -55 | -55 | -55 | -55 | -63 | -65 |
| | .625 | -21 | -21 | -272 | -273 | -56 | -56 | -56 | -56 | -56 | -64 | -66 |
| | .750 | -22 | -22 | -273 | -274 | -57 | -57 | -57 | -57 | -57 | -65 | -67 |
| | .875 | -- | -- | -274 | -275 | -58 | -58 | -58 | -58 | -58 | -66 | -68 |
| | 1.000 | -23 | -23 | -275 | -276 | -59 | -59 | -59 | -59 | -59 | -67 | -69 |
| | 1.250 | -24 | -24 | -276 | -277 | -60 | -60 | -60 | -60 | -60 | -68 | -70 |
| | 1.500 | -25 | -25 | -277 | -278 | -61 | -61 | -61 | -61 | -61 | -69 | -71 |
| 1.750 | -- | -- | -278 | -279 | -62 | -62 | -62 | -62 | -62 | -70 | -72 | |
| 2.000 | -- | -- | -279 | -280 | -63 | -63 | -63 | -63 | -63 | -71 | -73 | |
| 2.250 | -- | -- | -280 | -281 | -64 | -64 | -64 | -64 | -64 | -72 | -74 | |
| 2.500 | -- | -- | -281 | -282 | -65 | -65 | -65 | -65 | -65 | -73 | -75 | |
| 2.750 | -- | -- | -282 | -283 | -- | -- | -- | -- | -- | -- | -- | |
| 3.000 | -- | -- | -283 | -284 | -- | -- | -- | -- | -- | -- | -- | |

1/, 2/ and 3/ See footnotes on page 2003.4.

MIL-STD-1251A

TABLE 1: Dash numbers - Cont. UNC

| Thread designation | | UNC-3A | UNC-3A | UNC-2A | UNF-2A | UNC-2A | UNF-2A | UNC-2A | UNF-2A | UNC-2A | UNF-2A |
|-----------------------------|-------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| Thread size | L | MS24667 1/ | MS24671 1/ | MS35190 2/ | MS35191 2/ | MS35190 2/ | MS35190 2/ | MS35202 2/ | MS35203 2/ | MS35460 3/ | MS51960 2/ |
| .750 -20 UNC -28 UNF | .250 | -- | -- | -- | -285 | -- | -- | -- | -- | -- | -78 |
| | .312 | -- | -- | -284 | -286 | -66 | -66 | -66 | -66 | -76 | -79 |
| | .375 | -27 | -27 | -285 | -287 | -67 | -67 | -67 | -67 | -77 | -80 |
| | .438 | -- | -- | -286 | -288 | -68 | -68 | -68 | -68 | -78 | -81 |
| | .500 | -28 | -28 | -287 | -289 | -69 | -69 | -69 | -69 | -79 | -82 |
| | .625 | -29 | -29 | -288 | -290 | -70 | -70 | -70 | -70 | -80 | -83 |
| | .750 | -30 | -30 | -289 | -291 | -71 | -71 | -71 | -71 | -81 | -84 |
| | .875 | -- | -- | -290 | -292 | -72 | -72 | -72 | -72 | -82 | -85 |
| | 1.000 | -31 | -31 | -291 | -293 | -73 | -73 | -73 | -73 | -83 | -86 |
| | 1.250 | -32 | -32 | -292 | -294 | -74 | -74 | -74 | -74 | -84 | -87 |
| | 1.500 | -33 | -33 | -293 | -295 | -75 | -75 | -75 | -75 | -85 | -88 |
| | 1.750 | -34 | -- | -294 | -296 | -76 | -76 | -76 | -76 | -86 | -89 |
| | 2.000 | -35 | -- | -295 | -297 | -77 | -77 | -77 | -77 | -87 | -90 |
| 2.250 | -- | -- | -296 | -298 | -78 | -78 | -78 | -78 | -88 | -91 | |
| 2.500 | -- | -- | -297 | -299 | -79 | -79 | -79 | -79 | -89 | -92 | |
| 2.750 | -- | -- | -298 | -300 | -- | -- | -- | -- | -90 | -- | |
| 3.000 | -- | -- | -299 | -301 | -- | -- | -- | -- | -91 | -- | |
| .3125 -18 UNC -24 UNF | .375 | -37 | -37 | -300 | -302 | -80 | -80 | -80 | -80 | -92 | -95 |
| | .438 | -- | -- | -301 | -303 | -81 | -81 | -81 | -81 | -93 | -96 |
| | .500 | -38 | -38 | -302 | -304 | -82 | -82 | -82 | -82 | -94 | -97 |
| | .625 | -39 | -39 | -303 | -305 | -83 | -83 | -83 | -83 | -95 | -98 |
| | .750 | -40 | -40 | -304 | -306 | -84 | -84 | -84 | -84 | -96 | -99 |
| | .875 | -- | -- | -305 | -307 | -85 | -85 | -85 | -85 | -97 | -100 |
| | 1.000 | -41 | -41 | -306 | -308 | -86 | -86 | -86 | -86 | -98 | -101 |
| | 1.250 | -42 | -42 | -307 | -309 | -87 | -87 | -87 | -87 | -99 | -102 |
| | 1.500 | -43 | -43 | -308 | -310 | -88 | -88 | -88 | -88 | -100 | -103 |
| | 1.750 | -44 | -44 | -309 | -311 | -89 | -89 | -89 | -89 | -101 | -104 |
| | 2.000 | -45 | -45 | -310 | -312 | -90 | -90 | -90 | -90 | -102 | -105 |
| | 2.250 | -46 | -46 | -311 | -313 | -91 | -91 | -91 | -91 | -103 | -106 |
| | 2.500 | -47 | -47 | -312 | -314 | -92 | -92 | -92 | -92 | -104 | -107 |
| 2.750 | -- | -- | -313 | -315 | -- | -- | -- | -- | -- | -- | |
| 3.000 | -- | -- | -314 | -316 | -- | -- | -- | -- | -- | -- | |
| .375 -16 UNC -24 UNF | .500 | -49 | -49 | -315 | -317 | -93 | -93 | -93 | -93 | -107 | -110 |
| | .625 | -50 | -50 | -316 | -318 | -94 | -94 | -94 | -94 | -108 | -111 |
| | .750 | -51 | -51 | -317 | -319 | -95 | -95 | -95 | -95 | -109 | -112 |
| | .875 | -- | -- | -318 | -320 | -96 | -96 | -96 | -96 | -110 | -113 |
| | 1.000 | -52 | -52 | -319 | -321 | -97 | -97 | -97 | -97 | -111 | -114 |
| | 1.250 | -53 | -53 | -320 | -322 | -98 | -98 | -98 | -98 | -112 | -115 |
| | 1.500 | -54 | -54 | -321 | -323 | -99 | -99 | -99 | -99 | -113 | -116 |
| | 1.750 | -55 | -55 | -322 | -324 | -100 | -100 | -100 | -100 | -114 | -117 |
| | 2.000 | -56 | -56 | -323 | -325 | -101 | -101 | -101 | -101 | -115 | -118 |
| | 2.250 | -57 | -57 | -324 | -326 | -102 | -102 | -102 | -102 | -116 | -119 |
| | 2.500 | -58 | -58 | -325 | -327 | -103 | -103 | -103 | -103 | -117 | -120 |
| | 2.750 | -59 | -59 | -326 | -328 | -104 | -104 | -104 | -104 | -118 | -121 |
| | 3.000 | -- | -60 | -327 | -329 | -105 | -105 | -105 | -105 | -119 | -122 |
| .500 -13 UNC -20 UNF | .750 | -73 | -73 | -340 | -342 | | | | | | |
| | .875 | -- | -- | -341 | -343 | | | | | | |
| | 1.000 | -74 | -74 | -342 | -344 | | | | | | |
| | 1.250 | -75 | -75 | -343 | -345 | | | | | | |
| | 1.500 | -76 | -76 | -344 | -346 | | | | | | |
| | 1.750 | -77 | -77 | -345 | -347 | | | | | | |
| | 2.000 | -78 | -78 | -346 | -348 | | | | | | |
| | 2.250 | -79 | -79 | -347 | -349 | | | | | | |
| 2.500 | -80 | -80 | -348 | -350 | | | | | | | |
| 2.750 | -81 | -81 | -349 | -351 | | | | | | | |
| 3.000 | -82 | -82 | -350 | -352 | | | | | | | |
| .625 -11 UNC -18 UNF | 1.250 | -84 | -84 | | | | | | | | |
| | 1.500 | -85 | -85 | | | | | | | | |
| | 1.750 | -86 | -86 | | | | | | | | |
| | 2.000 | -87 | -87 | | | | | | | | |
| | 2.250 | -88 | -88 | | | | | | | | |
| 2.500 | -89 | -89 | | | | | | | | | |
| 2.750 | -90 | -90 | | | | | | | | | |
| 3.000 | -91 | -91 | | | | | | | | | |

1/, 2/ and 3/ See footnotes on page 2003.4.

MIL-STD-1251A

TABLE 1: Dash numbers - Continued

| Thread designation ... | | UNC-3A | UNC-3A | UNC-2A | UNF-2A | UNC-2A | UNF-2A | UNC-2A | UNF-2A | UNC-2A | UNF-2A |
|------------------------|-------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Thread size | L | MS24667 ^{1/} | MS24671 ^{1/} | MS35190 ^{2/} | MS35191 ^{2/} | MS35192 ^{2/} | MS35193 ^{2/} | MS35202 ^{2/} | MS35203 ^{2/} | MS51959 ^{3/} | MS51960 ^{2/} |
| | 1.250 | -93 | -93 | | | | | | | | |
| | 1.500 | -94 | -94 | | | | | | | | |
| | 1.750 | -95 | -95 | | | | | | | | |
| .750 | 2.000 | -96 | -96 | | | | | | | | |
| -10 UNC | 2.250 | -97 | -97 | | | | | | | | |
| -16 UNF | 2.500 | -98 | -98 | | | | | | | | |
| | 2.750 | -99 | -99 | | | | | | | | |
| | 3.000 | -100 | -100 | | | | | | | | |

1/ Minimum thread length is twice the basic diameter plus 0.50 inch. Screws too short to apply this formula are threaded as close to the head as practicable.

2/ Screws 2.00 inches long or shorter are threaded to a maximum of two threads from the head. Longer screws have a minimum thread length of 1.50 inches.

3/ Screws 2.00 inches long or shorter are threaded to a maximum of two threads from the head. Longer screws have a minimum thread length of 1.75 inches.

MIL-STD-1251A

SECTION 2004

SCREWS, MACHINE, FLAT HEAD, 100°, FULL THREAD
 APPLICABLE DOCUMENTS: MS18211, NAS662, 1219

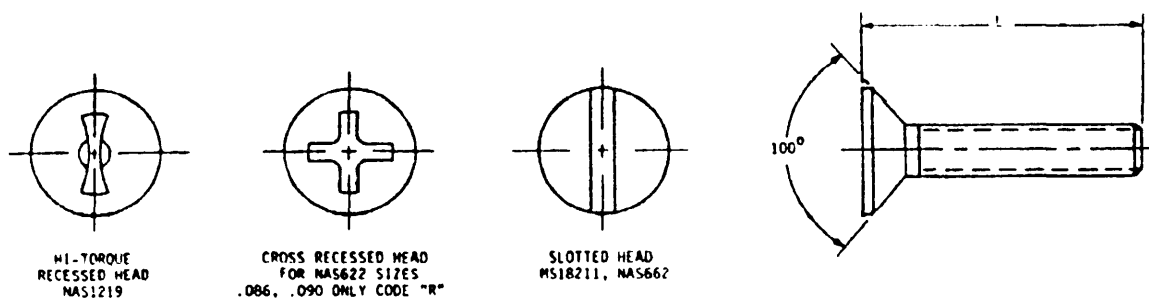


TABLE I. Materials

| Material | Code | Protective finish | | Tensile strength (psi) min | Applicable documents |
|-----------------|------|--------------------------------------|---------|-------------------------------|----------------------|
| | | | Code | | |
| Plastic (nylon) | - | None | -- | -- | MS18211 1/ |
| Carbon steel | - | Cadmium plate | -- | 55,000 | NAS622 2/ |
| Brass | B | Cd. plate (yellow iridescent) | -- | -- | |
| CRES | C | Passivate | -- | -- | NAS1219 |
| CRES A286 | E | Cadmium plate Passivate | P -- | 160,000 | |
| CRES 302 | CR | Passivate | -- | 125,000 | |
| Alloy steel | - | Cadmium plate Blackened cd. plate | T B | 160,000 | |
| Titanium | V | None | -- | 160,000 | |

1/ For MS18211, 100° flat head screws see section 2002.

2/ For self-locking screws on NAS662 see section 2104.

MIL-STD-1251A

TABLE II. MS18211 dash numbers.

| Thread designation (-2A) | .086-56 UNC | .112-40 UNC | .138-32 UNC | .164-32 UNC | .190-24 UNC | .190-32 UNF | .250-20 UNC | .250-28 UNF |
|-----------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| L | Dash number | | | | | | | |
| .175 | -9C | -- | -- | -- | | | | |
| .188 | -10C | -28C | -50C | -72C | | | | |
| .250 | -11C | -29C | -51C | -73C | | | | |
| .312 | -12C | -30C | -52C | -74C | -96C | -96F | -122C | -122F |
| .375 | -13C | -31C | -53C | -75C | -97C | -97F | -123C | -123F |
| .438 | -14C | -32C | -54C | -76C | -98C | -98F | -124C | -124F |
| .500 | -15C | -33C | -55C | -77C | -99C | -99F | -125C | -125F |
| .625 | -16C | -34C | -56C | -78C | -100C | -100F | -126C | -126F |
| .750 | -- | -35C | -57C | -79C | -101C | -101F | -127C | -127F |
| .875 | | -36C | -58C | -80C | -102C | -102F | -128C | -128F |
| 1.000 | | -37C | -59C | -81C | -103C | -103F | -129C | -129F |
| 1.250 | | -- | -- | -- | -105C | -105F | -131C | -131F |
| 1.500 | | | | | -107C | -107F | -133C | -133F |
| 1.750 | | | | | -108C | -108F | -134C | -134F |

TABLE III. NAS662, 1219 dash numbers

| Thread size | Thread designation | First dash no. | Second dash number 1/ | | Increments |
|-------------|--------------------|----------------|-----------------------|-------------|--|
| | | | Range | | |
| | | | NAS662 | NAS1219 | |
| .060-80 | UNF -2A | -0 | -2 thru -8 | -- | one(-2 thru -8) two(-10 thru -16) four(-20 thru -64) |
| .086-56 | UNC -2A | -2 | -2 thru -20 | -- | |
| .112-40 | UNJC-3A | -04 | -- | -3 thru -24 | |
| .138-32 | UNJC-3A | -06 | | -4 thru -36 | |
| .164-32 | UNJC-3A | -08 | | -5 thru -56 | |
| .190-32 | UNJF-3A | -3 | | -5 thru -64 | |
| .250-28 | UNJF-3A | -4 | | -8 thru -64 | |
| .3125-24 | UNJF-3A | -5 | | -8 thru -64 | |
| .375-24 | UNJF-3A | -6 | | -8 thru -64 | |

1/ Second dash number equals "L" dimension times 16

1251A.1000

SCREWS, MACHINE, FLAT HEAD, 100°, LONG THREAD
 APPLICABLE DOCUMENTS: MS24693, NAS514, 1102

SCREWS 2.00 INCHES LONG OR SHORTER ARE THREADED TO A MINIMUM OF TWO THREADS FROM THE HEAD. LONGER SCREWS HAVE A MINIMUM THREAD LENGTH OF 1.75 INCHES.

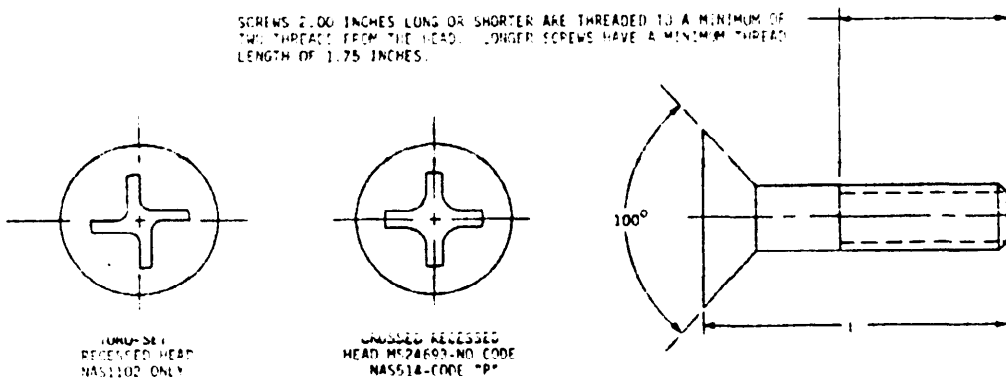


TABLE I. Materials.

| Material | Protective finish | | Tensile strength (psi) min | Applicable documents |
|-----------------|-------------------|--------------------|----------------------------|----------------------|
| | Code | Code | | |
| Carbon steel | S | Cadmium plate | 60,000 | MS24693 |
| Aluminum alloy | A | Anodize | 62,000 | |
| Brass | B | None | 55,000 | |
| | BB | Black oxide | | |
| | NB | Nickel plate | | |
| | CB | Cadmium plate | | |
| Cu-Si alloy | U | None | 60,000 | NAS1102 |
| Ni-Cu alloy | N | None | 80,000 | |
| CRCS | C | Passivate | | |
| | - | Black oxide | B | |
| | E | Passivate | 160,000 | |
| | | Blackened cd. coat | | P |
| Titanium | V | None | 125,000 | NAS514 |
| | | Blackened cd. coat | | |
| Alloy steel | - | Cadmium plate | 125,000 | NAS514 |
| | | Blackened cd. coat | | |
| Low alloy steel | - | Cadmium plate | 125,000 | NAS514 |
| | | Blackened cd. coat | | |

MIL-STD-1251A

TABLE X. MS24693 dash numbers.

| Thread designation | UNC-2A | | | | | | |
|--------------------|--------------|---------|---------|---------|---------|----------|---------|
| | .112-40 | .138-32 | .164-32 | .190-24 | .250-20 | .3125-24 | .375-24 |
| L | Dash numbers | | | | | | |
| .188 | -1 | -23 | -- | -- | -- | -- | -- |
| .250 | -2 | -24 | -46 | -- | -- | -- | -- |
| .312 | -3 | -25 | -47 | -69 | -91 | -- | -- |
| .375 | -4 | -26 | -48 | -70 | -92 | -- | -- |
| .438 | -5 | -27 | -49 | -71 | -93 | -- | -- |
| .500 | -6 | -28 | -50 | -72 | -94 | -116 | -138 |
| .625 | -7 | -29 | -51 | -73 | -95 | -117 | -139 |
| .750 | -8 | -30 | -52 | -74 | -96 | -118 | -140 |
| .875 | -9 | -31 | -53 | -75 | -97 | -119 | -141 |
| 1.00 | -10 | -32 | -54 | -76 | -98 | -120 | -142 |
| 1.25 | -12 | -34 | -56 | -78 | -100 | -122 | -144 |
| 1.50 | -14 | -36 | -58 | -80 | -102 | -124 | -146 |
| 1.75 | -- | -38 | -60 | -82 | -104 | -126 | -148 |
| 2.00 | -- | -40 | -62 | -84 | -106 | -128 | -150 |
| 2.25 | -- | -- | -- | -- | -- | -- | -- |
| 2.50 | -- | -42 | -64 | -86 | -108 | -130 | -152 |
| 2.75 | -- | -- | -- | -- | -- | -- | -- |
| 3.00 | -- | -- | -66 | -88 | -110 | -132 | -154 |

TABLE XI. MS24693 dash numbers. - Continued

| Thread designation | UNF-2A | | | | | | |
|--------------------|--------------|---------|---------|---------|---------|----------|---------|
| | .112-4R | .138-40 | .164-36 | .190-32 | .250-2R | .3125-24 | .375-24 |
| L | Dash numbers | | | | | | |
| .188 | -201 | -- | -- | -- | -- | -- | -- |
| .250 | -202 | -224 | -246 | -268 | -- | -- | -- |
| .312 | -203 | -225 | -247 | -269 | -- | -- | -- |
| .375 | -204 | -226 | -248 | -270 | -292 | -- | -- |
| .438 | -205 | -227 | -249 | -271 | -293 | -- | -- |
| .500 | -206 | -228 | -250 | -272 | -294 | -316 | -338 |
| .625 | -207 | -229 | -251 | -273 | -295 | -317 | -339 |
| .750 | -208 | -230 | -252 | -274 | -296 | -318 | -340 |
| .875 | -209 | -231 | -253 | -275 | -297 | -319 | -341 |
| 1.00 | -210 | -232 | -254 | -276 | -298 | -320 | -342 |
| 1.25 | -212 | -234 | -256 | -278 | -300 | -322 | -344 |
| 1.50 | -214 | -236 | -258 | -280 | -302 | -324 | -346 |
| 1.75 | -216 | -238 | -260 | -282 | -304 | -326 | -348 |
| 2.00 | -- | -240 | -262 | -284 | -306 | -328 | -350 |
| 2.25 | -- | -241 | -263 | -285 | -307 | -- | -- |
| 2.50 | -- | -242 | -264 | -286 | -308 | -330 | -352 |
| 2.75 | -- | -- | -265 | -287 | -309 | -- | -- |
| 3.00 | -- | -- | -266 | -288 | -310 | -332 | -354 |

TABLES XII. NAS514, 1102 dash numbers.

| Basic part no. | NAS514F | | NAS1102 | |
|----------------|--------------------------|----------------|--------------------------|----------------|
| | Thread designation (-3A) | First dash no. | Second dash no. range 1/ | First dash no. |
| .086-56 UNJC | -- | -- | -02 | -3 thru -24 |
| .112-40 UNJC | -440 | -3 thru -24 | -04 | -3 thru -24 |
| .138-32 UNJC | -632 | -3 thru -32 | -06 | -4 thru -36 |
| .164-32 UNJC | -832 | -4 thru -32 | -08 | -5 thru -36 |
| .190-32 UNJF | -1032 | -4 thru -32 | -1 | -5 thru -56 |
| .250-28 UNJF | -428 | -6 thru -32 | -4 | -8 thru -96 |
| .3125-24 UNJF | -524 | -8 thru -32 | -5 | -8 thru -96 |
| .375-24 UNJF | -624 | -8 thru -32 | -6 | -8 thru -96 |

1/ Second dash number equals "L" dimension times 16 and four (-20 thru -96).

Increments of one (-3 thru -8), two (-10 thru -16),

SECTION 2006

SCREWS, MACHINE, FLAT HEAD, 100°, SHORT THREAD
 APPLICABLE DOCUMENTS: MS24694, NAS517, 560, 1221, 1620-1628

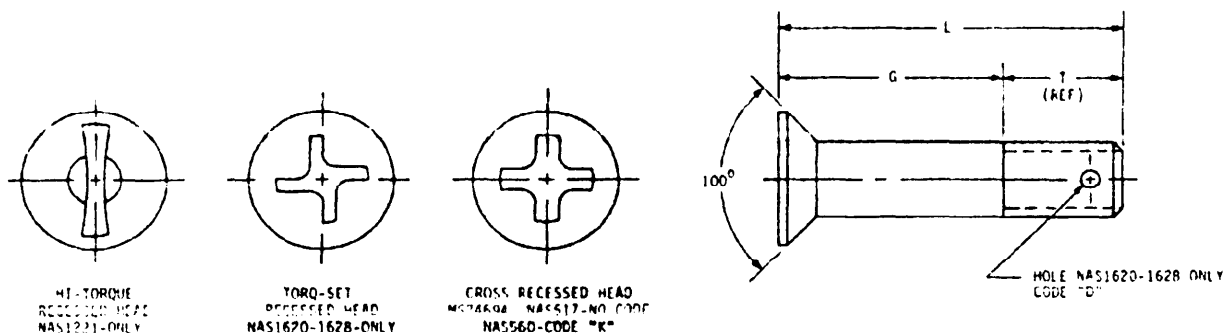


TABLE 1. Materials.

| Material | Code | Protective finish | | Tensile strength (psi) min | Applicable documents |
|-------------------|------|-------------------|------|----------------------------|-------------------------|
| | | | Code | | |
| Aluminum alloy | A | Anodize | -- | 62,000 | MS24694 |
| Alloy steel | S | Cadmium plate | -- | 125,000 | |
| | -- | | | 160,000 | NAS517, 1221, 1620-1628 |
| CRS | C | Passivate | -- | 85,000 | MS24694 |
| | E | Cadmium plate | P | 160,000 | NAS1221, 1620-1628 |
| CRS Low strength | C | Cadmium plate | P | 75,000 | NAS560 |
| CRS High temp | H | | | 140,000 | |
| CRS High strength | Y | | | 160,000 | |
| Titanium alloy | V | None | -- | 160,000 | NAS1221, 1620-1628 |
| | | Cadmium plate | P | | NAS 1620-1628 |

MIL-STD-1251A

TABLE II. MS24694 dash numbers.

| Thread designation -3A) | .164-32 UNC | .190-32 UNF | .250-28 UNF | .3125-24 UNF | .375-24 UNF | .4375-24 UNF | .500-20 UNF |
|----------------------------|----------------|----------------|----------------|-----------------|----------------|-----------------|----------------|
| T ref 1/ | .438 | .469 | .531 | .562 | .625 | .719 | .844 |
| Dash number | | | | | | | |
| .281 | -1 | -46 | -- | -- | -- | -- | -- |
| .344 | -2 | -47 | -92 | -137 | -- | -- | -- |
| .406 | -3 | -48 | -93 | -138 | -181 | -- | -- |
| .469 | -4 | -49 | -94 | -139 | -182 | -225 | -270 |
| .594 | -6 | -51 | -96 | -141 | -184 | -227 | -272 |
| .719 | -8 | -53 | -98 | -143 | -186 | -229 | -274 |
| .844 | -10 | -55 | -100 | -145 | -188 | -231 | -276 |
| .969 | -12 | -57 | -102 | -147 | -190 | -233 | -278 |
| 1.219 | -16 | -61 | -106 | -151 | -194 | -237 | -282 |
| 1.469 | -20 | -65 | -110 | -155 | -198 | -241 | -286 |
| 1.719 | -24 | -69 | -114 | -159 | -202 | -245 | -290 |
| 1.969 | -28 | -73 | -118 | -163 | -206 | -249 | -294 |
| 2.219 | -32 | -77 | -122 | -167 | -210 | -253 | -298 |
| 2.469 | -- | -81 | -126 | -171 | -214 | -257 | -302 |
| 2.719 | -- | -85 | -130 | -175 | -218 | -261 | -306 |
| 2.969 | -- | -89 | -134 | -179 | -222 | -265 | -310 |
| 3.219 | -- | -- | -- | -- | -- | -- | -314 |
| 3.469 | -- | -- | -- | -- | -- | -- | -318 |
| 3.669 | -- | -- | -- | -- | -- | -- | -326 |

1/ Screws too short for this dimension to apply are threaded to within a maximum of two threads from the head.


TABLE III. NAS517, 560, 1221, 1620-1628 dash numbers

| Thread size | .112-40 | .138-32 | .164-32 | .190-32 | .250-28 | .3125-24 | .375-24 | .4375-20 | .500-20 |
|---------------------------|-------------|------------|-------------|--------------|-------------|-------------|-------------|-------------|-------------|
| Thread designation | | | | UNJF-3A | UNJF-3A | UNJF-3A | UNJF-3A | UNJF-3A | UNJF-3A |
| NAS517 first dash no. | | | | -3 | -4 | -5 | -6 | -7 | -8 |
| T ref | | | | .406 | .468 | .531 | .625 | .719 | .750 |
| Second dash no. range 1/ | | | | -0 thru -32 | -0 thru -32 | -0 thru -32 | -1 thru -32 | -1 thru -32 | -2 thru -32 |
| Thread designation | | | | UNF-3A | UNF-3A | UNF-3A | UNF-3A | UNF-3A | UNF-3A |
| NAS560 first dash no. | | | | -3 | -4 | -5 | -6 | -7 | -8 |
| T ref | | | | .463 | .526 | .614 | .645 | .727 | .761 |
| Second dash no. range 1/ | | | | K00 thru K32 | K0 thru K32 | K0 thru K32 | K1 thru K32 | K1 thru K32 | K2 thru K32 |
| Thread designation | UNJC-2A | UNJC-2A | UNJC-2A | UNJF-3A | UNJF-3A | UNJF-3A | UNJF-3A | UNJF-3A | UNJF-3A |
| Document number | NAS1620 | NAS1621 | NAS1622 | NAS1623 | NAS1624 | NAS1625 | NAS1626 | NAS1627 | NAS1628 |
| T ref | .220 | .276 | .276 | .276 | .316 | .375 | .391 | .453 | .453 |
| Second dash no. range 2/ | 1 thru -64 | 1 thru 64 | 1 thru 64 | 1 thru 64 | 1 thru 61 | 1 thru 64 | 1 thru 64 | 1 thru 64 | 1 thru 64 |
| Thread designation | UNJC-3A | UNJC-3A | UNJC-3A | UNJF-3A | UNJF-3A | UNJF-3A | UNJF-3A | | |
| NAS1221 first dash no. 3/ | -04 | -06 | -08 | -3 | -4 | -5 | -6 | | |
| T ref | .233 | .276 | .339 | .339 | .426 | .470 | .579 | | |
| Second dash no. range 2/ | -1 thru -96 | -2 thru 96 | -2 thru -96 | -2 thru -96 | -3 thru -96 | -3 thru -96 | -4 thru -96 | | |

- 1/ Second dash number equals "G" dimension times 16. Increments of one (-0 thru -8), two (-10 thru -16), and four (-20 thru -32).
- 2/ Second dash number equals "G" dimension times 16. Increments of one (-1 thru -8), two (-10 thru -16), and four (-20 thru -96).
- 3/ For self-locking screws on NAS1221 see section 2106.

MIL-STD-1251A

SECTION 2007

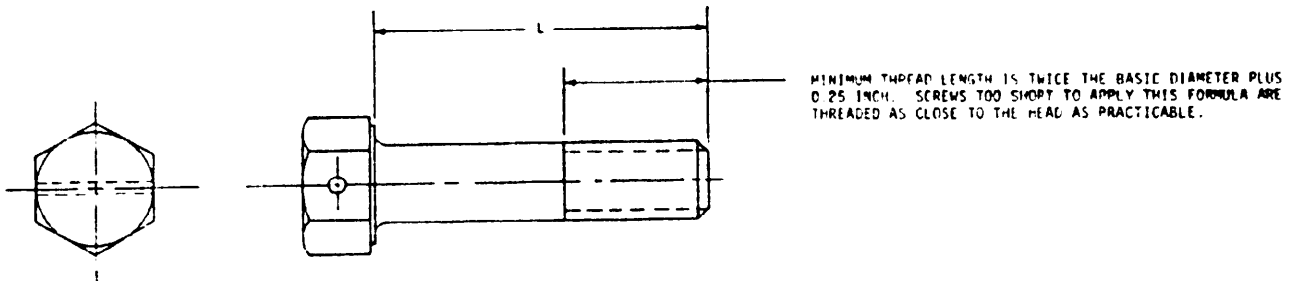SCREWS, MACHINE, HEXAGON HEAD, FINE SWANK, DRILLED
APPLICABLE DOCUMENTS: MS9498, 9499, 9640, 9641, 9792, 9793TABLE I. Materials.

| Materials | Hardness-Rockwell | Applicable documents |
|------------------------------------|-------------------|----------------------|
| Corrosion and heat resistant steel | -- | MS9498 MS9499 |
| CRES | C32-38 | MS9792 MS9793 |
| Titanium | C36-42 | MS9640 MS9641 |

TABLE II. Dash numbers.

| Thread size..... (UNJF-3A) | .138-40 | | | .164-36 | | |
|-------------------------------|-------------|--------|--------|---------|--------|--------|
| | MS9498 | MS9640 | MS9792 | MS9499 | MS9641 | MS9793 |
| L | Dash number | | | | | |
| .250 | -02 | | | -- | | |
| .312 | -03 | | | -03 | | |
| .375 | -04 | | | -04 | | |
| .438 | -05 | | | -05 | | |
| .500 | -06 | | | -06 | | |
| .625 | -08 | | | -08 | | |
| .750 | -10 | -10 | -10 | -10 | -10 | -10 |
| .875 | -12 | -12 | -12 | -12 | -12 | -12 |
| 1.000 | -14 | -14 | -14 | -14 | -14 | -14 |
| 1.250 | -18 | -18 | -18 | -18 | -18 | -18 |
| 1.500 | -22 | -22 | -22 | -22 | -22 | -22 |
| 1.750 | -26 | -26 | -26 | -26 | -26 | -26 |
| 2.000 | -30 | -30 | -30 | -28 | -30 | -30 |

MIL-STD-1251A

SECTION 2008

SCREWS, MACHINE, HEXAGON HEAD, FULL SHANK, UNDRILLED
 APPLICABLE DOCUMENTS: MS9487, 9488, 9649, 9650, 9781, 9782

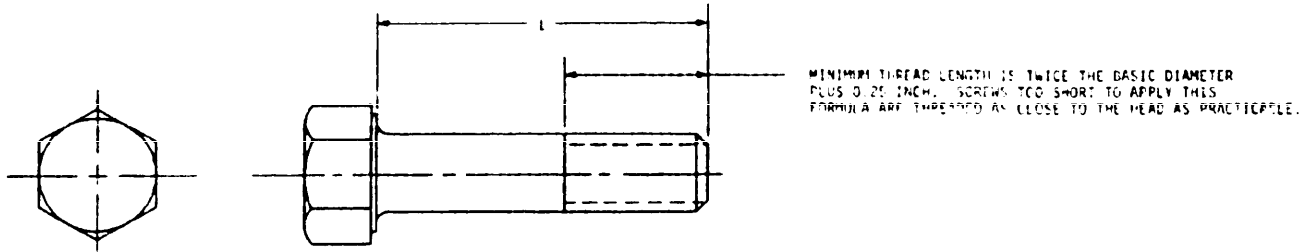


TABLE I. Materials.

| Materials | Hardness-Rockwell | Applicable documents |
|------------------------------------|-------------------|----------------------|
| Corrosion and heat resistant steel | -- | MS9487 MS9488 |
| CRES | C32-38 | MS9781 MS9782 |
| Titanium | C36-42 | MS9649 MS9650 |

TARIF 11. Dash numbers.

| Thread size (UNF-3A) | .138-40 | | | .164-36 | | |
|------------------------------|-------------|--------|--------|---------|--------|--------|
| Document no. | MS9487 | MS9649 | MS9781 | MS9488 | MS9650 | MS9782 |
| L | Dash number | | | | | |
| .250 | -02 | | | -- | | |
| .312 | -03 | | | -03 | | |
| .375 | -04 | | | -04 | | |
| .438 | -05 | | | -05 | | |
| .500 | -06 | | | -06 | | |
| .625 | -08 | | | -08 | | |
| .750 | -10 | -10 | -10 | -10 | -10 | -10 |
| .875 | -12 | -12 | -12 | -12 | -12 | -12 |
| 1.000 | -14 | -14 | -14 | -14 | -14 | -14 |
| 1.250 | -18 | -18 | -18 | -18 | -18 | -18 |
| 1.500 | -22 | -22 | -22 | -22 | -22 | -22 |
| 1.750 | -26 | -26 | -26 | -26 | -26 | -26 |
| 2.000 | -30 | -30 | -30 | -28 | -30 | -30 |

SECTION 2009
 SCREW, MACHINE, HEXAGON HEAD, FULL THREAD
 APPLICABLE DOCUMENTS: MS1849, NAS 1801, NAS 1162

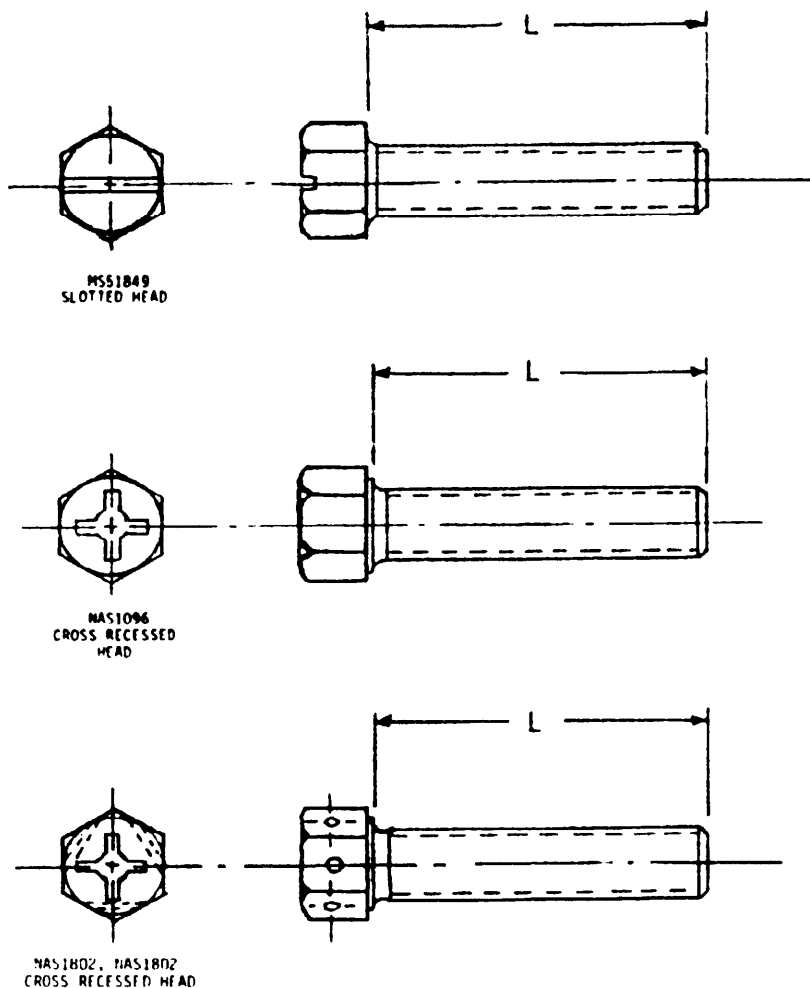


TABLE 1. Materials and part numbers.

| Material | Carbon steel | | | | | | | | | | | | | | | Alloy steel | | | | | | | | |
|----------------------------|---------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-------------|------------|--|------|--|--|------|------|------|
| | Cadmium plate | | | | | | | | | | | | | | | | | | | | | | | |
| Protective finish | | | | | | | | | | | | | | | | | | | | | | | | |
| Tensile strength (psi) min | 60,000 | | | | | | | | | | | | | | | 125,000 | | | | | | | | |
| Thread size | .112 | | | .138 | | | .164 | | | .190 | | | .250 | | | .3125 | | | .375 | | | .138 | .164 | .190 |
| Threads per inch | 4R | 40 | 40 | 32 | 36 | 32 | 32 | 24 | 28 | 20 | 24 | 18 | 24 | 16 | 32 | 32 | 32 | | | | | | | |
| Series designation | UNF -2A | UNC -2A | UNF -2A | UNC -2A | UNF -2A | UNC -2A | UNF -2A | UNC -2A | UNF -2A | UNC -2A | UNF -2A | UNC -2A | UNF -2A | UNC -2A | UNC -3A | UNC -3A | UNF -3A | | | | | | | |
| Basic part no. | MS1849 | | | | | | | | | | | | | | | NAS1096 | | | | | | | | |
| L | Dash number | | | | | | | | | | | | | | | | | | | | | | | |
| .250 | -1 | -11 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | | | | | | | |
| .312 | -2 | -12 | -22 | -32 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -1-5 | -- | -- | | | | | | | |
| .375 | -3 | -13 | -23 | -33 | -43 | -53 | -- | -- | -- | -- | -- | -- | -- | -- | -1-6 | -2-6 | -- | | | | | | | |
| .500 | -4 | -14 | -24 | -34 | -44 | -54 | -64 | -74 | -- | -- | -- | -- | -- | -- | -1-8 | -2-8 | -3-8 | | | | | | | |
| .625 | -5 | -15 | -25 | -35 | -45 | -55 | -65 | -75 | -85 | -95 | -- | -- | -- | -- | -1-10 | -2-10 | -3-10 | | | | | | | |
| .750 | -6 | -16 | -26 | -36 | -46 | -56 | -66 | -76 | -86 | -96 | -106 | -116 | -126 | -136 | -1-12 | -2-12 | -3-12 | | | | | | | |
| .875 | -- | -- | -27 | -37 | -47 | -57 | -67 | -77 | -87 | -97 | -107 | -117 | -127 | -137 | -1-14 | -2-14 | -3-14 | | | | | | | |
| 1.000 | -- | -- | -- | -- | -48 | -58 | -68 | -78 | -88 | -98 | -108 | -118 | -128 | -138 | -- | -2-16 | -3-16 | | | | | | | |
| 1.250 | -- | -- | -- | -- | -- | -- | -69 | -79 | -89 | -99 | -109 | -119 | -129 | -139 | -- | -- | -3-20 | | | | | | | |
| 1.500 | -- | -- | -- | -- | -- | -- | -- | -70 | -80 | -90 | -100 | -110 | -120 | -130 | -140 | -- | -3-24 | | | | | | | |
| 1.750 | -- | -- | -- | -- | -- | -- | -- | -- | -71 | -81 | -91 | -101 | -111 | -121 | -131 | -141 | -- | | | | | | | |
| 2.000 | -- | -- | -- | -- | -- | -- | -- | -- | -72 | -82 | -92 | -102 | -112 | -122 | -132 | -142 | -- | | | | | | | |

MIL-STD-1251A


TABLE II. Materials and part numbers.

| Material | | Alloy steel | | CRES | |
|----------------------------|--------------------|----------------|-----------------|----------------|-----------------|
| Protective finish | | Cadmium plate | | Passivate | |
| Tensile strength (psi min) | | 160,000 | | 160,000 | |
| Basic part no. | | NAS1801 | | NAS1802 | |
| Thread size | Thread designation | First dash no. | Second dash no. | First dash no. | Second dash no. |
| .1120-40 | UNJC-3A | 04 | <u>1/</u> | 04 | <u>1/</u> |
| .1380-32 | UNJC-3A | 06 | | 06 | |
| .1640-32 | UNJC-3A | 08 | | 08 | |
| .1900-32 | UNJF-3A | 3 | | 3 | |
| .2500-28 | UNJF-3A | 4 | | 4 | |
| .3125-24 | UNJF-3A | 5 | | 5 | |
| .3750-24 | UNJF-3A | 6 | | 6 | |

1/ Second dash number of part number indicates the length in .0625 increments.

SECTION 2010

SCREWS, MACHINE, HEXAGON HEAD, PD SHANK, DRILLED HEAD
 APPLICABLE DOCUMENTS: MS9292, 9527, 9528, 9622, 9623, 9614, 9915

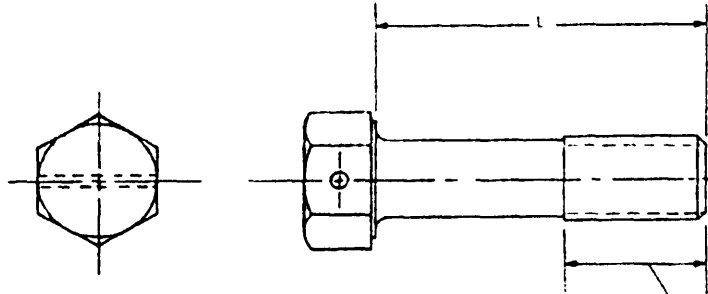

MINIMUM THREAD LENGTH IS
 TWICE THE BASIC DIAMETER
 PLUS 0.25 INCH. SCREWS
 TOO SHORT TO APPLY THIS
 FORMULA ARE THREADED AS
 CLOSE TO THE HEAD AS PRACTICABLE.


TABLE 1. Materials and dash numbers.

| Material | Steel | | | CRES | | Titanium | |
|-------------------------------------|---------------|---------|-------------|---------|---------|----------|---------|
| Protective finish | Cadmium plate | | Black oxide | -- | | -- | |
| Hardness-Rockwell | C26-32 | | | C32-38 | | C36-42 | |
| Thread designation (UNF-3A) | .138-40 | .164-36 | .138-40 | .138-40 | .164-36 | .138-40 | .164-36 |
| Document no. | MS9527 | MS9528 | MS9792 | MS9814 | MS9815 | MS9622 | MS9623 |
| L | Dash number | | | | | | |
| .250 | -02 | -- | -02 | -02 | -02 | -02 | -02 |
| .312 | -03 | -03 | -03 | -03 | -03 | -03 | -03 |
| .375 | -04 | -04 | -04 | -04 | -04 | -04 | -04 |
| .438 | -05 | -05 | -05 | -05 | -05 | -05 | -05 |
| .500 | -06 | -06 | -06 | -06 | -06 | -06 | -06 |
| .625 | -08 | -08 | -08 | -08 | -08 | -08 | -08 |
| .750 | -10 | -10 | -10 | -10 | -10 | -10 | -10 |
| .875 | -12 | -12 | -12 | -12 | -12 | -12 | -12 |
| 1.000 | -14 | -14 | -14 | -14 | -14 | -14 | -14 |
| 1.250 | -18 | -18 | -18 | -18 | -18 | -18 | -18 |
| 1.500 | -22 | -22 | -22 | -22 | -22 | -22 | -22 |
| 1.750 | -- | -26 | -- | -26 | -26 | -26 | -26 |
| 2.000 | -- | -28 | -- | -30 | -30 | -30 | -30 |

MIL-STD-1251A

SECTION 2011

SCREWS, MACHINE, HEXAGON HEAD, PD SHANK, UNDRILLED
 APPLICABLE DOCUMENTS: MS9449, 9450, 9516, 9517, 9631, 9803, 9804

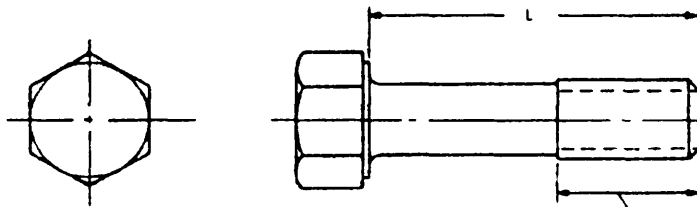

MINIMUM THREAD LEAD IS
 TWICE THE BASIC DIAMETER
 PLUS 0.25 INCH. SCREWS TOO
 SHORT TO APPLY THIS FORMULA
 ARE THREADED AS CLOSE TO THE
 HEAD AS PRACTICABLE.

TABLE 1. Materials and dash numbers.

| | Steel | | | | CPES | | Titanium |
|-----------------------------------|---------------|---------|---------------------------------|---------|---------|---------|----------|
| | Cadmium plate | | Diffused nickel - cadmium plate | | -- | | -- |
| Hardness-Rockwell..... | C26-32 | | C42-46 | | C32-38 | | C36-42 |
| Thread designation (UNJF-3A)..... | .138-40 | .164-36 | .138-40 | .164-36 | .138-40 | .164-36 | .138-40 |
| Document no. | MS9516 | MS9517 | MS9449 | MS9450 | MS9803 | MS9804 | MS9631 |
| L | Dash number | | | | | | |
| .250 | -02 | -- | -02 | -- | -02 | -02 | -02 |
| .312 | -03 | -03 | -03 | -03 | -03 | -03 | -03 |
| .375 | -04 | -04 | -04 | -04 | -04 | -04 | -04 |
| .438 | -05 | -05 | -05 | -05 | -05 | -05 | -05 |
| .500 | -06 | -06 | -06 | -06 | -06 | -06 | -06 |
| .625 | -08 | -08 | -08 | -08 | -08 | -08 | -08 |
| .750 | -10 | -10 | -10 | -10 | -10 | -10 | -10 |
| .875 | -12 | -12 | -12 | -12 | -12 | -12 | -12 |
| 1.000 | -14 | -14 | -14 | -14 | -14 | -14 | -14 |
| 1.250 | -18 | -18 | -18 | -18 | -18 | -18 | -18 |
| 1.500 | -22 | -22 | -22 | -22 | -22 | -22 | -22 |
| 1.750 | -- | -26 | -- | -26 | -26 | -26 | -26 |
| 2.000 | -- | -28 | -- | -28 | -30 | -30 | -30 |

MIL-STD-1251A

SECTION 2012
SCREWS, MACHINE, SELF-SEALING, PAN HEAD, FULL THREAD
APPLICABLE DOCUMENTS: MS3212, 3213, NAS1216

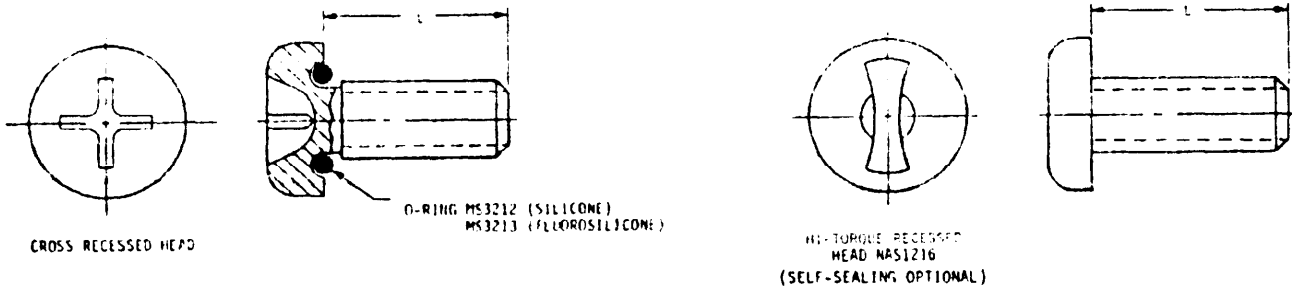


TABLE I. Materials.

| Material | Code | Protective finish | | Tensile strength (psi) min | Applicable documents |
|-------------|------|----------------------|------|----------------------------|----------------------|
| | | | Code | | |
| Alloy steel | - | Cadmium plate | P | 160,000 | NAS1216 |
| | | Blackened cad. plate | B | | |
| CRS A236 | E | Passivate | -- | 160,000 | NAS1216 |
| | | Cadmium plate | P | | |
| CRS 517 | RR | Passivate | -- | 125,000 | |
| CRS | - | Passivate | -- | 75,000 | MS3212, 3213 |
| Titanium | V | None | -- | 160,000 | NAS1216 |

TABLE II. MS3212, 3213 dash numbers.

| Thread designation (-2A) | .112-40 UNC | .138-32 UNC | .164-32 UNC | .190-32 UNF | .190-24 UNF | .250-20 UNF |
|--------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| L | Dash number | | | | | |
| .250 | -1 | -11 | -21 | -- | -- | -- |
| .312 | -2 | -12 | -22 | -- | -- | -- |
| .375 | -3 | -13 | -23 | -31 | -39 | -47 |
| .438 | -4 | -14 | -24 | -32 | -40 | -48 |
| .500 | -5 | -15 | -25 | -33 | -41 | -49 |
| .625 | -7 | -17 | -27 | -35 | -43 | -51 |
| .750 | -8 | -18 | -28 | -36 | -44 | -52 |
| .875 | -9 | -19 | -29 | -37 | -45 | -53 |
| 1.000 | -10 | -20 | -30 | -38 | -46 | -54 |
| 1.250 | -- | -- | -- | -- | -- | -56 |

1/ For self-locking screws on MS3212,3213, see section 2108.


TABLE III. NAS1216 dash numbers.

| Thread designation (-3A) | First dash no. | Second dash number 1/ | |
|--------------------------------|----------------|-----------------------|----------------------|
| | | Range | Increment |
| .112-40UNC | -04 | -2 thru -24 | One (-2 thru -8) |
| .138-32UNC | -06 | -3 thru -36 | |
| .164-32UNC | -08 | -5 thru -56 | Two (-10 thru -16) |
| .190-32UNF | -3 | -5 thru -56 | |
| .250-28UNF | -4 | -8 thru -64 | Three (-20 thru -64) |
| .3125-24UNF | -5 | -8 thru -64 | |
| .375-24UNF | -6 | -8 thru -64 | |


1/ Second dash number equals "L" dimension times 16

SECTION 2013


SCREWS, MACHINE, PAN HEAD, LONG THREAD
 APPLICABLE DOCUMENTS: MS18212, 35206, 35207, 35214, 35215, 35218, 35219, 51957, 51958, NAS600-606, 1100, 1635




TORO-SET RECESSED HEAD NAS1100 ONLY



CROSS-RECESSED HEAD MS35206, 35207 MS35214, 35215 MS35218, 35219 MS51957, 51958 NAS600-606 NAS1635



SLOTTED HEAD MS18212 ONLY

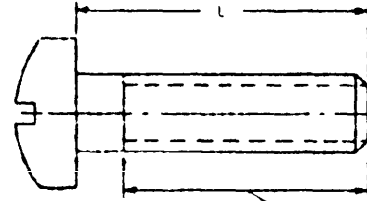

SCREWS 2.00 INCHES LONG OR SHORTER ARE THREADED TO A MAXIMUM OF TWO THREADS FROM THE HEAD. LONGER SCREWS HAVE A MINIMUM COMPLETE THREAD LENGTH OF: 1.75 INCHES FOR MS18212, 35206, 35207, 51957, 51958, NAS600-606, 1100, 1635 AND 1.5 INCHES FOR MS35214, 35215, 35218, 35219

TABLE I. Materials.

| Material | Code | Protective finish | | Tensile strength (psi) min | Applicable documents |
|-----------------|------|---------------------|------|----------------------------|----------------------|
| | | | Code | | |
| Plastic (nylon) | | None | -- | -- | MS18212 |
| Carbon steel | | Cadmium plate | -- | 60,000 | MS35206, 35207 |
| Brass | | Black chemical | -- | 55,000 | MS35214, 35215 |
| Aluminum alloy | | Anodize | -- | 67,000 | MS35218, 35219 |
| Alloy steel | | Cadmium plate | -- | 160,000 | NAS600-606, 1100 |
| | | Blackened cd. plate | B | | |
| | | Passivate | -- | 80,000 | MS51957, 51958 |
| | | Black oxide | B | | |
| CRES | | Passivate | -- | 160,000 | NAS1635 1/ |
| | | Black oxide | F | | |
| Titanium alloy | V | Passivate | -- | 160,000 | NAS1100 |
| | | Cadmium plate | P | | |

1/ For self-locking screws on NAS1635 see section 2109.

TABLE II. Dash numbers.

| Thread size | NAS 600-606 | | | NAS 1100 | | | NAS 1635 | | |
|-------------|----------------|--------------------------|--------------------------|----------------|--------------------------|--------------------------|----------------|--------------------------|--------------------------|
| | Basic part no. | Thread designation (-3A) | Second dash 1/ no. range | First dash no. | Thread designation (-3A) | Second dash 1/ no. range | First dash no. | Thread designation (-3A) | Second dash 1/ no. range |
| .060-80 | -- | -- | -3 thru -24 | -00 | UNJF | -3 thru -24 | -00 | UNF | -2 thru -6 |
| .086-56 | -- | -- | -3 thru -24 | -02 | UNJC | -3 thru -24 | -02 | UNC | -2 thru -12 |
| .112-40 | 600 | UNC | -3 thru -24 | -04 | UNJC | -3 thru -24 | -04 | UNC | -3 thru -24 |
| .138-32 | 601 | UNC | -3 thru -36 | -06 | UNJC | -3 thru -36 | -06 | UNC | -3 thru -36 |
| .164-32 | 602 | UNF | -5 thru -56 | -08 | UNJF | -5 thru -56 | -08 | UNF | -5 thru -48 |
| .190-32 | 603 | UNF | -5 thru -56 | -1 | UNJF | -5 thru -56 | -1 | UNF | -5 thru -56 |
| .250-28 | 604 | UNF | -8 thru -96 | -4 | UNJF | -8 thru -96 | -4 | UNF | -8 thru -64 |
| .3125-24 | 605 | UNF | -8 thru -96 | -5 | UNJF | -8 thru -96 | -5 | UNF | -8 thru -64 |
| .375-24 | 606 | UNF | -8 thru -96 | -6 | UNJF | -8 thru -96 | -6 | UNF | -8 thru -64 |

1/ Second dash number equals "L" dimension times 16. Increments of one (-2 thru -8), two (-10 thru -16), and four (-20 thru -46).

MIL-STD-1251A

TABLE 1. Dash Numbers

| Dash number | | MS 15018 | MS 15019 | MS 15024 | MS 15016 | MS 15014 | MS 15017 | MS 15015 | MS 15013 | MS 15012 |
|---------------------------------|------|-------------|----------|----------|----------|----------|----------|----------|----------|----------|
| Thread designation (-2A) | | UNC | UNF | UNC | UNF | UNC | UNF | UNC | UNF | UNC |
| Thread size Threads per inch | | Dash number | | | | | | | | |
| .086 | .125 | -1 | -1 | -1 | -1 | -101 | -101 | -1 | -1 | -1 |
| | .168 | -2 | -2 | -2 | -2 | -202 | -202 | -2 | -2 | -2 |
| | .250 | -3 | -3 | -3 | -3 | -203 | -203 | -3 | -3 | -3 |
| | .312 | -4 | -4 | -4 | -4 | -204 | -204 | -4 | -4 | -4 |
| | .375 | -5 | -5 | -5 | -5 | -205 | -205 | -5 | -5 | -5 |
| | .438 | -6 | -6 | -6 | -6 | -206 | -206 | -6 | -6 | -6 |
| | .500 | -7 | -7 | -7 | -7 | -207 | -207 | -7 | -7 | -7 |
| | .625 | -8 | -8 | -8 | -8 | -208 | -208 | -8 | -8 | -8 |
| | .750 | -9 | -9 | -9 | -9 | -209 | -209 | -9 | -9 | -9 |
| | .875 | -- | -- | -- | -- | -210 | -210 | -10 | -- | -- |
| .114 | .125 | -10 | -10 | -10 | -10 | -211 | -211 | -11 | -11 | -11 |
| | .188 | -11 | -11 | -11 | -11 | -212 | -212 | -12 | -12 | -12 |
| | .250 | -12 | -12 | -12 | -12 | -213 | -213 | -13 | -13 | -13 |
| | .312 | -13 | -13 | -13 | -13 | -214 | -214 | -14 | -14 | -14 |
| | .375 | -14 | -14 | -14 | -14 | -215 | -215 | -15 | -15 | -15 |
| | .438 | -15 | -15 | -15 | -15 | -216 | -216 | -16 | -16 | -16 |
| | .500 | -16 | -16 | -16 | -16 | -217 | -217 | -17 | -17 | -17 |
| | .625 | -17 | -17 | -17 | -17 | -218 | -218 | -18 | -18 | -18 |
| | .750 | -18 | -18 | -18 | -18 | -219 | -219 | -19 | -19 | -19 |
| | .875 | -19 | -19 | -19 | -19 | -220 | -220 | -20 | -- | -- |
| 1.000 | -20 | -20 | -20 | -20 | -221 | -221 | -21 | -21 | -21 | |
| 1.250 | -- | -- | -- | -- | -222 | -222 | -- | -- | -22 | |
| 1.500 | -- | -- | -- | -- | -223 | -223 | -23 | -- | -23 | |
| .138 | .125 | -21 | -21 | -21 | -21 | -224 | -224 | -24 | -24 | -24 |
| | .188 | -22 | -22 | -22 | -22 | -225 | -225 | -25 | -25 | -25 |
| | .250 | -23 | -23 | -23 | -23 | -226 | -226 | -26 | -26 | -26 |
| | .312 | -24 | -24 | -24 | -24 | -227 | -227 | -27 | -27 | -27 |
| | .375 | -25 | -25 | -25 | -25 | -228 | -228 | -28 | -28 | -28 |
| | .438 | -26 | -26 | -26 | -26 | -229 | -229 | -29 | -29 | -29 |
| | .500 | -27 | -27 | -27 | -27 | -230 | -230 | -30 | -30 | -30 |
| | .625 | -28 | -28 | -28 | -28 | -231 | -231 | -31 | -31 | -31 |
| | .750 | -29 | -29 | -29 | -29 | -232 | -232 | -32 | -32 | -32 |
| | .875 | -30 | -30 | -30 | -30 | -233 | -233 | -33 | -33 | -33 |
| 1.000 | -31 | -31 | -31 | -31 | -234 | -234 | -34 | -34 | -34 | |
| 1.250 | -32 | -32 | -32 | -32 | -235 | -235 | -35 | -35 | -35 | |
| 1.500 | -33 | -33 | -33 | -33 | -236 | -236 | -36 | -36 | -36 | |
| 1.750 | -34 | -34 | -34 | -34 | -237 | -237 | -37 | -37 | -37 | |
| 2.000 | -35 | -35 | -35 | -35 | -238 | -238 | -38 | -38 | -38 | |
| .164 | .125 | -36 | -36 | -36 | -36 | -239 | -239 | -39 | -39 | -39 |
| | .188 | -37 | -37 | -37 | -37 | -240 | -240 | -40 | -40 | -40 |
| | .250 | -38 | -38 | -38 | -38 | -241 | -241 | -41 | -41 | -41 |
| | .312 | -39 | -39 | -39 | -39 | -242 | -242 | -42 | -42 | -42 |
| | .375 | -40 | -40 | -40 | -40 | -243 | -243 | -43 | -43 | -43 |
| | .438 | -41 | -41 | -41 | -41 | -244 | -244 | -44 | -44 | -44 |
| | .500 | -42 | -42 | -42 | -42 | -245 | -245 | -45 | -45 | -45 |
| | .625 | -43 | -43 | -43 | -43 | -246 | -246 | -46 | -46 | -46 |
| | .750 | -44 | -44 | -44 | -44 | -247 | -247 | -47 | -47 | -47 |
| | .875 | -45 | -45 | -45 | -45 | -248 | -248 | -48 | -48 | -48 |
| 1.000 | -46 | -46 | -46 | -46 | -249 | -249 | -49 | -49 | -49 | |
| 1.250 | -47 | -47 | -47 | -47 | -250 | -250 | -50 | -50 | -50 | |
| 1.500 | -48 | -48 | -48 | -48 | -251 | -251 | -51 | -51 | -51 | |
| 1.750 | -49 | -49 | -49 | -49 | -252 | -252 | -52 | -52 | -52 | |
| 2.000 | -50 | -50 | -50 | -50 | -253 | -253 | -53 | -53 | -53 | |
| 2.250 | -- | -- | -- | -- | -254 | -254 | -54 | -- | 51 | |
| 2.500 | -- | -- | -- | -- | -255 | -255 | -55 | -- | -- | |
| 2.750 | -- | -- | -- | -- | -256 | -256 | -56 | -- | -- | |
| 3.000 | -- | -- | -- | -- | -257 | -257 | -57 | -- | -- | |

MIL-STD-1251A

TABLE III. Dash numbers - Continued

| Document no. | MS35218 | MS35219 | MS35214 | MS35215 | MS35206 | MS35207 | MS51957 | MS51958 | MS18212 | |
|---------------------------------|---------|-------------|---------|---------|---------|---------|---------|---------|---------|------|
| Thread designation (-2A) | UNC | UNF | UNC | UNF | UNC | UNF | UNC | UNF | UNC | |
| Thread size Threads per inch | L | Dash number | | | | | | | | |
| .190 | .125 | -- | -- | -- | -- | -- | -- | -- | -- | |
| | .188 | -- | -- | -- | -- | -258 | -258 | -- | -- | |
| | .250 | -51 | -51 | -51 | -51 | -259 | -259 | -59 | -59 | |
| | .312 | -52 | -52 | -52 | -52 | -260 | -260 | -60 | -60 | |
| | .375 | -53 | -53 | -53 | -53 | -261 | -261 | -61 | -61 | |
| | .438 | -54 | -54 | -54 | -54 | -262 | -262 | -62 | -62 | |
| | .500 | -55 | -55 | -55 | -55 | -263 | -263 | -63 | -63 | |
| | .625 | -56 | -56 | -56 | -56 | -264 | -264 | -64 | -64 | |
| | .750 | -57 | -57 | -57 | -57 | -265 | -265 | -65 | -65 | |
| | -24UNC | .875 | -58 | -58 | -58 | -58 | -266 | -266 | -66 | -66 |
| 1.000 | | -59 | -59 | -59 | -59 | -267 | -267 | -67 | -67 | |
| -32UNF | 1.250 | -60 | -60 | -60 | -60 | -268 | -268 | -68 | -68 | |
| | 1.500 | -61 | -61 | -61 | -61 | -269 | -269 | -69 | -69 | |
| | 1.750 | -62 | -62 | -62 | -62 | -270 | -270 | -70 | -70 | |
| | 2.000 | -63 | -63 | -63 | -63 | -271 | -271 | -71 | -71 | |
| | 2.250 | -64 | -64 | -64 | -64 | -272 | -272 | -72 | -72 | |
| | 2.500 | -65 | -65 | -65 | -65 | -273 | -273 | -73 | -73 | |
| | 2.750 | -- | -- | -- | -- | -274 | -274 | -- | -- | |
| | 3.000 | -- | -- | -- | -- | -275 | -275 | -- | -- | |
| | .250 | .312 | -66 | -66 | -66 | -66 | -276 | -276 | -76 | -76 |
| | | .375 | -67 | -67 | -67 | -67 | -277 | -277 | -77 | -77 |
| .438 | | -68 | -68 | -68 | -68 | -278 | -278 | -78 | -- | |
| .500 | | -69 | -69 | -69 | -69 | -279 | -279 | -79 | -79 | |
| .625 | | -70 | -70 | -70 | -70 | -280 | -280 | -80 | -80 | |
| .750 | | -71 | -71 | -71 | -71 | -281 | -281 | -81 | -81 | |
| -20UNC | | .875 | -72 | -72 | -72 | -72 | -282 | -282 | -82 | -- |
| | | 1.000 | -73 | -73 | -73 | -73 | -283 | -283 | -83 | -83 |
| -28UNF | | 1.250 | -74 | -74 | -74 | -74 | -284 | -284 | -84 | -84 |
| | | 1.500 | -75 | -75 | -75 | -75 | -285 | -285 | -85 | -85 |
| | 1.750 | -76 | -76 | -76 | -76 | -286 | -286 | -86 | -86 | |
| | 2.000 | -77 | -77 | -77 | -77 | -287 | -287 | -87 | -87 | |
| | 2.250 | -78 | -78 | -78 | -78 | -288 | -288 | -88 | -88 | |
| | 2.500 | -79 | -79 | -79 | -79 | -289 | -289 | -89 | -89 | |
| | 2.750 | -- | -- | -- | -- | -290 | -290 | -- | -- | |
| | 3.000 | -- | -- | -- | -- | -291 | -291 | -- | -- | |
| | .3125 | .375 | -80 | -80 | -80 | -80 | -292 | -292 | -92 | -92 |
| | | .438 | -81 | -81 | -81 | -81 | -293 | -293 | -93 | -93 |
| .500 | | -82 | -82 | -82 | -82 | -294 | -294 | -94 | -94 | |
| .625 | | -83 | -83 | -83 | -83 | -295 | -295 | -95 | -95 | |
| .750 | | -84 | -84 | -84 | -84 | -296 | -296 | -96 | -96 | |
| .875 | | -85 | -85 | -85 | -85 | -297 | -297 | -97 | -97 | |
| -18UNC | | 1.000 | -86 | -86 | -86 | -86 | -298 | -298 | -98 | -98 |
| | | 1.250 | -87 | -87 | -87 | -87 | -299 | -299 | -99 | -99 |
| -24UNF | | 1.500 | -88 | -88 | -88 | -88 | -300 | -300 | -100 | -100 |
| | | 1.750 | -89 | -89 | -89 | -89 | -301 | -301 | -101 | -101 |
| | 2.000 | -90 | -90 | -90 | -90 | -302 | -302 | -102 | -102 | |
| | 2.250 | -91 | -91 | -91 | -91 | -303 | -303 | -103 | -103 | |
| | 2.500 | -92 | -92 | -92 | -92 | -304 | -304 | -104 | -104 | |
| | 2.750 | -- | -- | -- | -- | -305 | -305 | -- | -- | |
| | 3.000 | -- | -- | -- | -- | -306 | -306 | -- | -- | |
| | .375 | .500 | -- | -- | -- | -- | -- | -- | -- | -92 |
| | | .625 | -93 | -93 | -93 | -93 | -307 | -307 | -107 | -93 |
| | | .750 | -94 | -94 | -94 | -94 | -308 | -308 | -108 | -94 |
| .875 | | -95 | -95 | -95 | -95 | -309 | -309 | -109 | -95 | |
| 1.000 | | -96 | -96 | -96 | -96 | -310 | -310 | -110 | -- | |
| 1.250 | | -97 | -97 | -97 | -97 | -311 | -311 | -111 | -96 | |
| -16UNC | | 1.500 | -98 | -98 | -98 | -98 | -312 | -312 | -112 | -97 |
| | | 1.750 | -99 | -99 | -99 | -99 | -313 | -313 | -113 | -98 |
| -24UNF | | 2.000 | -100 | -100 | -100 | -100 | -314 | -314 | -114 | -99 |
| | | 2.250 | -101 | -101 | -101 | -101 | -315 | -315 | -115 | -100 |
| | 2.500 | -102 | -102 | -102 | -102 | -316 | -316 | -116 | -- | |
| | 2.750 | -103 | -103 | -103 | -103 | -317 | -317 | -117 | -101 | |
| | 3.000 | -104 | -104 | -104 | -104 | -318 | -318 | -118 | -- | |
| | | -105 | -105 | -105 | -105 | -319 | -319 | -119 | -102 | |

FIGURE 1-4

SCREW, MACHINE, PAN HEAD, (SHEET 1 OF 4)
 APPLICABLE DOCUMENTS: MS27033, NAS1630, 1402-1406, 1630-1634

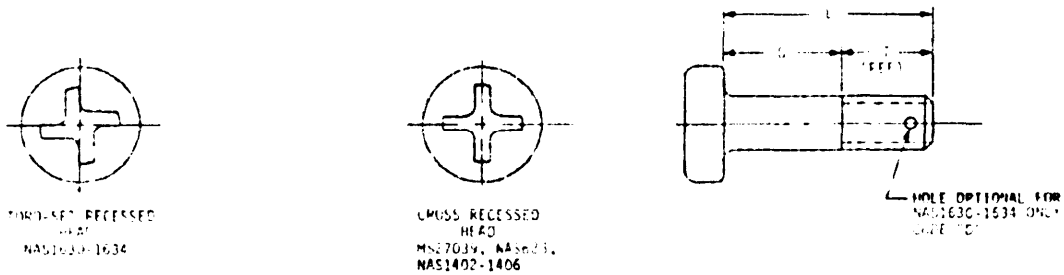


TABLE I. Materials

| Material | Code | Disposition Factor | | Tensile strength (psf) min | Applicable documents |
|------------------------------------|------|--------------------|------|----------------------------|-------------------------------|
| | | Code | Code | | |
| Alloy steel | - | Cadmium plate | -- | 160,000 | MS27033, 1402-1406, 1630-1634 |
| | | | | 125,000 | MS27039 |
| Steel | E | Passivate | -- | 160,000 | NAS1630-1634 |
| | | | | Cadmium plate | -- |
| Corrosion and heat resistant steel | C | Passivate | -- | 125,000 | MS27039 |
| Titanium alloy | V | None | -- | 160,000 | NAS1630-1634 |
| | | | | Cadmium plate | -- |
| Aluminum alloy | DD | Anodize | -- | 62,000 | MS27039 |
| Miscellaneous bronze | BP | Cadmium plate | -- | 65,000 | |
| | | | | E | -- |

TABLE II. MS27033 dash numbers

| Thread designation (-3A) | .164-32 UNF | .190-32 UNF | .200-20 UNF | .2125-24 UNF | .275-24 UNF | .4175-20 UNF | .500-20 UNF |
|--------------------------|-------------|-------------|-------------|--------------|-------------|--------------|-------------|
| Top ref | .438 | .469 | .531 | .578 | .688 | .703 | .828 |
| First dash no. | -0-8 | -1- | -4- | -5- | -6- | -7- | -8- |
| Second dash no. | L | | | | | | |
| 04 | .281 | .281 | .281 | -- | -- | -- | -- |
| 05 | .344 | .344 | .344 | .399 | .466 | -- | -- |
| 06 | .406 | .406 | .406 | .422 | .469 | .453 | .453 |
| 07 | .469 | .469 | .469 | .484 | .531 | .516 | .516 |
| 08 | .531 | .531 | .531 | .547 | .594 | .578 | .578 |
| 09 | .594 | .594 | .594 | .609 | .656 | .641 | .641 |
| 10 | .656 | .656 | .656 | .672 | .719 | .703 | .703 |
| 12 | .781 | .781 | .781 | .797 | .844 | .828 | .828 |
| 14 | .906 | .906 | .906 | .922 | .969 | .953 | .953 |
| 16 | 1.031 | 1.031 | 1.031 | 1.047 | 1.094 | 1.078 | 1.078 |
| 18 | 1.156 | 1.156 | 1.156 | 1.172 | 1.219 | 1.203 | 1.203 |
| 20 | 1.281 | 1.281 | 1.281 | 1.297 | 1.344 | 1.328 | 1.328 |
| 24 | 1.531 | 1.531 | 1.531 | 1.547 | 1.594 | 1.578 | 1.578 |
| 28 | 1.781 | 1.781 | 1.781 | 1.797 | 1.844 | 1.828 | 1.828 |
| 32 | 2.031 | 2.031 | 2.031 | 2.047 | 2.094 | 2.078 | 2.078 |
| 36 | 2.281 | 2.281 | 2.281 | 2.297 | 2.344 | 2.328 | 2.328 |
| 40 | -- | 2.531 | 2.531 | 2.547 | 2.594 | 2.578 | 2.578 |
| 44 | -- | 2.781 | 2.781 | 2.797 | 2.844 | 2.828 | 2.828 |
| 48 | -- | 3.031 | 3.031 | 3.047 | 3.094 | 3.078 | 3.078 |

12 screws too short to apply this dimension are threaded to within a maximum of two threads from the head

MIL-STD-1251A

TABLE 10. NAS1400, 1401, 1402, 1403, 1404, 1405, 1406, 1407, 1408

| | | | | | | | |
|---------------------------|-------------|------------|-------------|-------------|-------------|-------------|-------------|
| Thread size | .112-40 | .138-32 | .164-32 | .190-32 | .250-28 | .3125-24 | .375-24 |
| Thread designation | | | UNC-2A | UNF-3A | UNF-3A | UNF-3A | UNF-3A |
| NAS1400 first dash no. | | | -2 | -3 | -4 | -5 | -6 |
| T ref. | | | .276 | .276 | .316 | .375 | .391 |
| Second dash no. range 1/4 | | | -1 thru -96 | -1 thru -96 | -1 thru -96 | -1 thru -96 | -1 thru -96 |
| Thread designation | | | UNC-2A | UNF-3A | UNF-3A | UNF-3A | UNF-3A |
| Document no. | | | NAS1402 | NAS1403 | NAS1404 | NAS1405 | NAS1406 |
| T ref. | | | .238 | .336 | .425 | .465 | .578 |
| Second dash no. range 1/4 | | | -1 thru -96 | -1 thru -96 | -1 thru -96 | -1 thru -96 | -1 thru -96 |
| Thread designation | UNC-2A | UNC-2A | UNC-2A | UNF-3A | UNF-3A | | |
| Document no. | NAS1630 | NAS1631 | NAS1632 | NAS1633 | NAS1634 | | |
| T ref. | .220 | .276 | .276 | .276 | .316 | | |
| Second dash no. range 1/4 | -1 thru -64 | 1 thru -64 | -1 thru -64 | -1 thru -64 | -1 thru -64 | | |

1' Second dash number equals "G" dimension times 16
 Increments of one (-1 thru -6), two (-10 thru -16), and
 four (-20 thru -96).

MIL-STD-1251A

SECTION 1101
 SCREWS, SELF-LOCKING, CAP, SOCKET HEAD
 APPLICABLE DOCUMENTS: NAS 1351, 1352

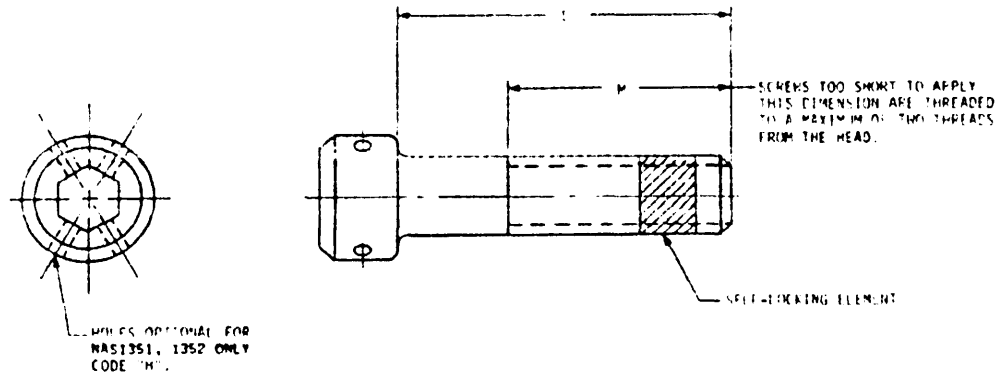


TABLE I. Materials.

| Material | Protective finish | | Tensile strength (psi) min | Applicable documents |
|----------------------|-------------------|---------------|----------------------------|----------------------|
| | Code | Code | | |
| Alloy steel | - | Cadmium plate | 170,000 | NAS 1351, 1352 |
| | | Black oxide | | |
| CPES | C | Passivate | 80,000 | NAS 1351, 1352 |
| | | Cadmium plate | | |
| Heat resistant steel | N | Silver plate | 160,000 | |
| | | Passivate | | |

MIL-STD-1251A

TABLE II. MAS1351, 1352 dash numbers. 1/

| Thread size | 060 | 096 | 112 | 138 | 174 | 210 | 250 | 3125 | 375 | 4375 | 500 | 625 | 750 | 875 | 1000 | 1375 | 1500 | 1750 | 2000 | 2250 | 2500 | 1.250 | 1.500 | | |
|------------------------------------|--------------------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
| Threads per inch MAS1351 (UNRF-3A) | 80 | 64 | 43 | 40 | 35 | 31 | 28 | 24 | 24 | 20 | 20 | 18 | 16 | 14 | 12 | 10 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Threads per inch MAS1352 (UNRC-3A) | .. | 56 | 47 | 37 | 32 | 24 | 20 | 18 | 16 | 14 | 13 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | .. | .. | |
| M | .. | 500 | 625 | 750 | 750 | 875 | 1000 | 1.125 | 1.250 | 1.375 | 1.500 | 1.750 | 2.000 | 2.250 | 2.500 | 3.000 | 3.750 | 4.500 | 5.250 | 6.000 | 6.750 | 7.500 | 8.250 | 9.000 | |
| First dash no. | ..00 | ..02 | ..04 | ..06 | ..08 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 |
| | Second dash number | | | | | | | | | | | | | | | | | | | | | | | | |
| 125 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 198 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 250 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 375 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 500 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 625 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 750 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 875 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 1000 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 1250 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 1500 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 1750 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 2000 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 2500 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 3000 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 3500 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |
| 4000 | ..10 | ..12 | ..14 | ..16 | ..18 | ..20 | ..22 | ..24 | ..26 | ..28 | ..30 | ..32 | ..34 | ..36 | ..38 | ..40 | ..42 | ..44 | ..46 | ..48 | ..50 | ..52 | ..54 | ..56 | ..58 |

1/ For non-locking screws on MAS1351, 1352, see section 1502.

SECTION 2102

SCREWS, SELF-LOCKING, FILLISTER HEAD
APPLICABLE DOCUMENT: NAS1191

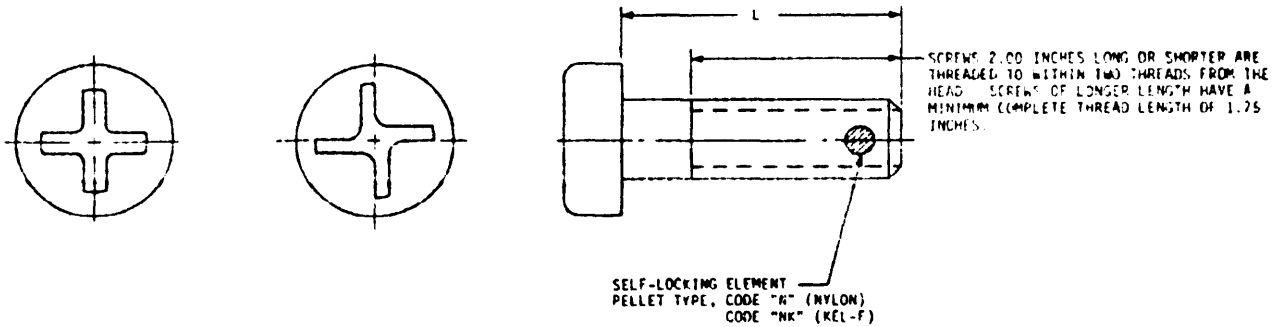


TABLE I. Materials.

| Material | Code | Protective finish | | Tensile strength (psi) min |
|-------------|------|----------------------------|---------|-------------------------------|
| | | | Code | |
| Alloy steel | - | Cadmium plate | -- | 160,000 |
| CRES | E | Passivate Cadmium plate | -- H | |

TABLE II. NAS1191 dash numbers.

| Thread designation (-3A) | Dia. dash no. | Length dash number 1/ | |
|-----------------------------|---------------------|-----------------------|------------|
| | | Range | Increments |
| .086-56UNJC | -02 | - | One |
| .112-40UNJC | -04 | -3 thru -8 | |
| .138-32UNJC | -06 | | |
| .164-32UNJC | -08 | -10 thru -16 | Two |
| .190-32UNJF | -3 | | Four |
| .250-28UNJF | -4 | | |
| .3125-24UNJF | -5 | -20 thru -96 | |
| .375-24UNJF | -6 | | |

1/ Length dash number equals "L" dimension times 16

MIL-STD-1251A

SCREWS, SELF-LOCKING, FLAT HEAD, F2°
 APPLICABLE DOCUMENTS: MS24667, 35190, 35191

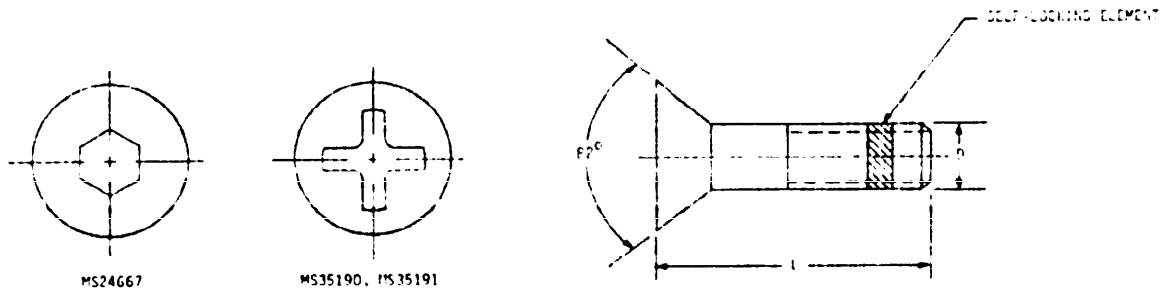


TABLE I. Materials.

| Material | Protective finish | Code | Tensile strength (psi) min | Applicable documents |
|-------------|-------------------|------|----------------------------|----------------------|
| | | | | |
| Alloy steel | Zinc plate | Z | 160,000 | MS24667 1/ |

1/ For non-locking screws see section 2003.

TABLE II. MS24667 part numbers.

| Thread designation (UNC-3A) | .112-40 | .138-32 | .164-32 | .190-24 | .250-20 | .3125-18 | .375-16 | .500-13 | .625-11 | .750-10 |
|-----------------------------|-----------------------|---------|---------|---------|---------|----------|---------|---------|---------|---------|
| L | MS24667 + dash number | | | | | | | | | |
| .250 | -11 | -7L | -- | -- | -- | -- | -- | -- | -- | -- |
| .375 | -2L | -8L | -13L | -19L | -27L | -37L | -- | -- | -- | -- |
| .500 | -3L | -9L | -14L | -20L | -28L | -38L | -49L | -- | -- | -- |
| .625 | -4L | -10L | -15L | -21L | -29L | -39L | -50L | -- | -- | -- |
| .750 | 5L | 11L | -16L | -22L | -30L | -40L | -51L | -73L | -- | -- |
| 1.000 | -- | -- | -17L | -23L | -31L | -41L | -52L | -74L | -- | -- |
| 1.250 | | | | -24L | -32L | -42L | -53L | -75L | -84L | -93L |
| 1.500 | | | | -25L | -33L | -43L | -54L | -76L | -85L | -94L |
| 1.750 | | | | -- | -34L | -44L | -55L | -77L | -86L | -95L |
| 2.000 | | | | | -35L | -45L | -56L | -78L | -87L | -96L |
| 2.250 | | | | | -- | -46L | -57L | -79L | -88L | -97L |
| 2.500 | | | | | -- | -47L | -58L | -80L | -89L | -98L |
| 2.750 | | | | | | | -59L | -81L | -90L | -99L |
| 3.000 | | | | | | | -- | -82L | -91L | -100L |

1/ Screws above heavy line are threaded to a maximum two threads from the head.
 Screws below heavy line are threaded to a minimum thread length of twice the basic diameter plus 0.50 inch.

MIL-STD-1251A

TABLE III. MS35191 part numbers.

| Thread designation (UNC-2A) ... | .060-80 | .112-40 | .130-32 | .164-32 | .190-32 | .250-28 | .3125-24 | .375-24 | .500-20 |
|---------------------------------|-----------------------|---------|---------|---------|---------|---------|----------|---------|---------|
| L 1/ | MS35191 + dash number | | | | | | | | |
| .125 2/ | -209L | -219L | -232L | -247L | -- | | | | |
| .188 | -210L | -220L | -233L | -248L | -266L | | | | |
| .250 | -211L | -221L | -234L | -249L | -267L | | | | |
| .312 | -212L | -222L | -235L | -250L | -268L | -284L | -- | | |
| .375 | -213L | -223L | -236L | -251L | -269L | -285L | -300L | | |
| .438 | -214L | -224L | -237L | -252L | -270L | -286L | -301L | | |
| .500 | -215L | -225L | -238L | -253L | -271L | -287L | -302L | -315L | -- |
| .625 | -216L | -226L | -239L | -254L | -272L | -288L | -303L | -316L | -- |
| .750 | -217L | -227L | -240L | -255L | -273L | -289L | -304L | -317L | -340L |
| .875 | -218L | -228L | -241L | -256L | -274L | -290L | -305L | -318L | -341L |
| 1.000 | -- | -229L | -242L | -257L | -275L | -291L | -306L | -319L | -342L |
| 1.250 | -- | -230L | -243L | -258L | -276L | -292L | -307L | -320L | -343L |
| 1.500 | | -231L | -244L | -259L | -277L | -293L | -308L | -321L | -344L |
| 1.750 | | -- | -245L | -260L | -278L | -294L | -309L | -322L | -345L |
| 2.000 | | -- | -246L | -261L | -279L | -295L | -310L | -323L | -346L |
| 2.250 | | | | -262L | -280L | -296L | -311L | -324L | -347L |
| 2.500 | | | | -263L | -281L | -297L | -312L | -325L | -348L |
| 2.750 | | | | -264L | -282L | -298L | -313L | -326L | -349L |
| 3.000 | | | | -265L | -283L | -299L | -314L | -327L | -350L |

1/ Screws 2.00 inches long or shorter are threaded to a maximum of two threads from the head. Longer screws have a minimum thread length of 1.50 inches.

2/ Screws above heavy line have undercut heads.

TABLE IV. MS35191 part numbers.

| Thread designation (UNF-2A) ... | .060-80 | .086-64 | .112-48 | .138-40 | .164-36 | .190-32 | .250-28 | .3125-24 | .375-24 | .500-20 |
|---------------------------------|-----------------------|---------|---------|---------|---------|---------|---------|----------|---------|---------|
| L 1/ | MS35191 + dash number | | | | | | | | | |
| .125 2/ | -201L | -213L | -222L | -233L | -248L | -- | -- | | | |
| .188 | -202L | -214L | -223L | -234L | -249L | -267L | -- | | | |
| .250 | -203L | -215L | -224L | -235L | -250L | -268L | -285L | | | |
| .312 | -204L | -216L | -225L | -236L | -251L | -269L | -286L | | | |
| .375 | -205L | -217L | -226L | -237L | -252L | -270L | -287L | -302L | | |
| .438 | -- | -218L | -227L | -238L | -253L | -271L | -288L | -303L | | |
| .500 | | -219L | -228L | -239L | -254L | -272L | -289L | -304L | -317L | -- |
| .625 | | -220L | -229L | -240L | -255L | -273L | -290L | -305L | -318L | -- |
| .750 | | -221L | -230L | -241L | -256L | -274L | -291L | -306L | -319L | -342L |
| .875 | | | -231L | -242L | -257L | -275L | -292L | -307L | -320L | -343L |
| 1.000 | | | -232L | -243L | -258L | -276L | -293L | -308L | -321L | -344L |
| 1.250 | | | -- | -244L | -259L | -277L | -294L | -309L | -322L | -345L |
| 1.500 | | | | -245L | -260L | -278L | -295L | -310L | -323L | -346L |
| 1.750 | | | | -246L | -261L | -279L | -296L | -311L | -324L | -347L |
| 2.000 | | | | -247L | -262L | -280L | -297L | -312L | -325L | -348L |
| 2.250 | | | | | -263L | -281L | -298L | -313L | -326L | -349L |
| 2.500 | | | | | -264L | -282L | -299L | -314L | -327L | -350L |
| 2.750 | | | | | -265L | -283L | -300L | -315L | -328L | -351L |
| 3.000 | | | | | -266L | -284L | -301L | -316L | -329L | -352L |


1/ Screws 2.00 inches long or shorter are threaded to a maximum of two threads from the head. Longer screws have a minimum thread length of 1.50 inches.

2/ Screws above heavy line have undercut heads.


MIL-STD-1251A

SECTION 2104

SCREWS, SELF-LOCKING, FLAT HEAD, 100°, FULL THREAD
 APPLICABLE DOCUMENT: NAS662



CROSS RECESS
 OPTIONAL FOR THREAD
 SIZE .086 ONLY
 CODE "R"



SLOT RECESS

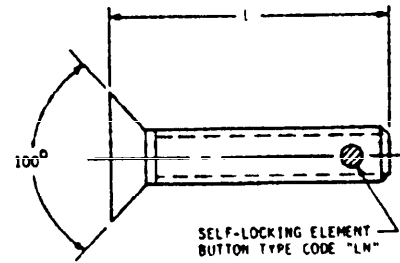


TABLE I. Materials.

| Material | Code | Protective finish |
|----------|--------------|-------------------|
| | Carbon steel | |
| CRES | C | Passivate |
| Brass | B | Cadmium plate |

TABLE II. NAS662 dash numbers.

| Thread designation (-2A) | .080-80 UNF | .086-96 UNC |
|--------------------------------|--------------------|-------------|
| First dash no. ... | -0 | -2 |
| L | Second dash number | |
| .125 | -2 | -2 |
| .188 | -3 | -3 |
| .250 | -4 | -4 |
| .312 | -5 | -5 |
| .375 | -6 | -6 |
| .438 | -7 | -7 |
| .500 | -8 | -8 |
| .625 | -- | -10 |
| .750 | -- | -12 |
| .875 | | -14 |
| 1.000 | | -16 |
| 1.250 | | -20 |

1/ For non-locking screws on NAS662 see section 2004.

SECTION 2104

SCREWS, SELF-LOCKING, FLAT HEAD, 100°, LONG THREAD
 APPLICABLE DOCUMENTS: MS21093, NAS1189

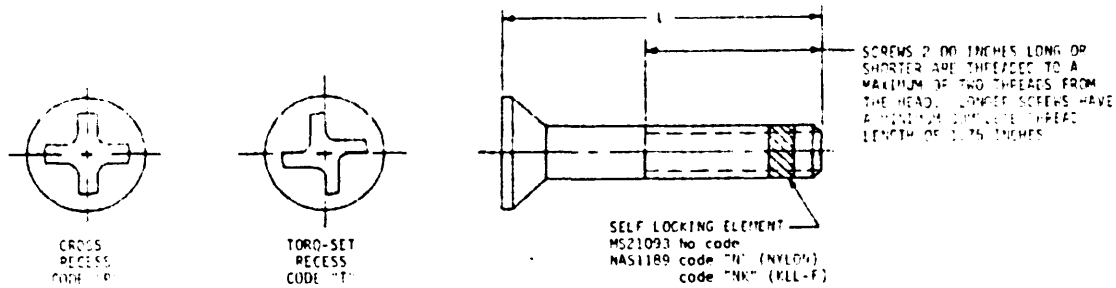


TABLE I. Materials.

| Material | Code | Protective Finish | Code | Tensile strength (psi) min | Applicable documents |
|-------------|------|----------------------------|---------|----------------------------|----------------------|
| | | | | | |
| Alloy steel | - | Cadmium plate | -- | 160,000 | NAS1189 |
| CPIS | E | Cadmium plate Passivate | M -- | | |

TABLE II. MS21093 dash numbers

| Thread designation | .086-56 UNC | .112-40 UNC | .130-32 UNC | .164-32 UNC | .190-32 UNF | .250-29 UNF | .3125-24 UNF | .375-24 UNF |
|--------------------|--------------------|-------------|-------------|-------------|-------------|-------------|--------------|-------------|
| First dash no. | -01 | -04 | -06 | -08 | -1 | -4 | -6 | -6 |
| L | Second dash number | | | | | | | |
| .188 | -01 | -- | -- | -- | -- | -- | -- | -- |
| .250 | -02 | -09 | -18 | -- | -- | -- | -- | -- |
| .312 | -03 | -10 | -19 | -31 | -- | -- | -- | -- |
| .375 | -04 | -11 | -20 | -32 | -43 | -- | -- | -- |
| .438 | -05 | -12 | -21 | -33 | -44 | -- | -- | -- |
| .500 | -06 | -13 | -22 | -34 | -45 | -56 | -- | -- |
| .625 | -07 | -14 | -23 | -35 | -46 | -57 | -67 | -77 |
| .750 | -08 | -15 | -24 | -36 | -47 | -58 | -68 | -78 |
| .875 | -- | -16 | -25 | -37 | -48 | -59 | -69 | -79 |
| 1.000 | | -17 | -26 | -38 | -49 | -60 | -70 | -80 |
| 1.250 | | -- | -27 | -39 | -50 | -61 | -71 | -81 |
| 1.500 | | -- | -28 | -40 | -51 | -62 | -72 | -82 |
| 1.750 | | | -29 | -41 | -52 | -63 | -73 | -83 |
| 2.000 | | | -30 | -42 | -53 | -64 | -74 | -84 |
| 2.250 | | | -- | -- | -54 | -65 | -75 | -85 |
| 2.500 | | | | | -55 | -66 | -76 | -86 |
| 2.750 | | | | | -- | -- | -- | -87 |
| 3.000 | | | | | -- | -- | -- | -88 |

MIL-STD-1251A

TABLE III. NAS1189 dash numbers.

| Thread designation (-3A) | first dash no. | second dash number 1/ | |
|-----------------------------|----------------------|-----------------------|------------------------|
| | | Range | Increments |
| .086-56 UNJC | -02 | -3 thru -24 | One (-3 thru -8) |
| .112-40 UNJC | -04 | -3 thru -24 | |
| .133-32 UNJC | -06 | -4 thru -36 | |
| .164-32 UNJC | -08 | -5 thru -56 | Two (-10 thru -32) |
| .190-32 UNJF | -3 | -5 thru -56 | |
| .250-28 UNJF | -4 | -3 thru -96 | |
| .3125-24 UNJF | -5 | -8 thru -96 | Four (-34 thru -96) |
| .375-24 UNJF | -6 | -8 thru -96 | |

1/ Second dash number equals "L" dimension times 16

SECTION 2106
 SCREWS, SELF-LOCKING, FLAT HEAD,
 10° CONE, SHORT THREAD
 APPLICABLE DOCUMENTS: MS21091, 21092, NAS1221

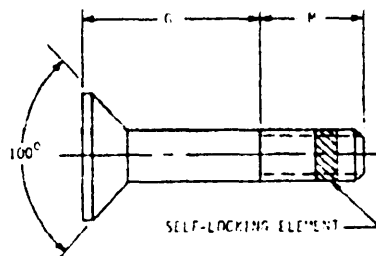




TABLE I. Materials.

| Material | Code | Protective finish | | Tensile strength (psi) min | Applicable documents |
|-------------|------|-------------------|------|----------------------------|----------------------|
| | | | Code | | |
| Alloy steel | | Cadmium plate | -- | 125,000 160,000 | MS21091 NAS1221 |
| | | Passivate | -- | 90,000 | MS21092 |
| CRES | E | Cadmium plate | P | 160,000 | NAS1221 |
| | | None | -- | | |
| Titanium | V | None | -- | | |

TABLE II. Dash numbers.

| Thread size | 112-40 | 138-32 | 164-32 | 190-32 | 250-28 | 3125-24 | 375-24 | 4375-20 | 500-20 |
|-----------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|--------------|--------------|
| Thread designation (-3A) ... | UNC | UNC | UNC | UNF | UNF | UNF | UNF | UNF | UNF |
| MS21091, 21092 first dash no. ... | -04 | -06 | -08 | -3 | -4 | -5 | -6 | -7 | -8 |
| M ref ... | .250 | .312 | .437 | .469 | .506 | .531 | .641 | .656 | .781 |
| Second dash no. range 1/ ... | 002 thru 029 | 002 thru 040 | 002 thru 040 | 002 thru 048 | 004 thru 049 | 006 thru 049 | 006 thru 048 | 008 thru 049 | 008 thru 064 |
| Thread designation (-3A) ... | UNJC | UNJC | UNJC | UNJF | UNJF | UNJF | UNJF | | |
| NAS 1221 3/ first dash no. ... | -04 | -06 | -08 | -3 | -4 | -5 | -6 | | |
| M ref ... | .232 | .276 | .338 | .338 | .425 | .469 | .578 | | |
| Second dash no. range 2/ ... | -1L thru -96L | -2L thru -96L | -2L thru -96L | -2L thru -96L | -3L thru -96L | -3L thru -96L | -4L thru -96L | | |

- 1/ Second dash number equals grip dimension times 16 (020 thru 064). Increments of one (002 thru 004), two (006 thru 016) and four (020 thru 064).
- 2/ Second dash number equals grip dimension times 16 (-20L thru -96L). Increments of one (-1L thru -8L), two (-10L thru -16L) and four (-20L thru -96L).
- 3/ For non-locking screws on NAS 1221 see section 2006.

MIL-STD-1251A

SECTION 2107

SCREW, SELF-LOCKING, HEXAGON HEAD
 APPLICABLE DOCUMENT: MS21095

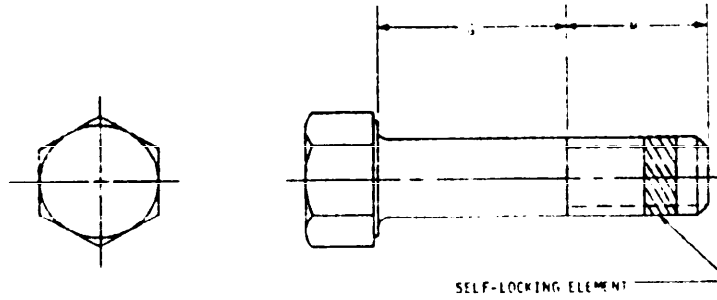


TABLE I. Material and dash numbers.

| | | |
|--------------------------------------|-----------------|---------|
| Material | CRES | |
| Protective finish .. | Passivate | |
| Tensile strength (psi) min | 80,000 | |
| Thread designation (UNF-3A) | .138-32 | .164-32 |
| Min. ref. | .312 | .437 |
| MS21095 1/ First dash no. | -1 | -2 |
| | Second dash no. | |
| .062 | -001 | |
| .125 | -002 | |
| .187 | -003 | |
| .250 | -004 | |
| .375 | -006 | |
| .500 | -008 | |
| .625 | -010 | |
| .750 | -012 | |
| .875 | -014 | |
| 1.000 | -016 | |
| 1.250 | -020 | |
| 1.500 | -024 | |
| 1.750 | -028 | |
| 2.000 | -032 | |
| 2.250 | -036 | |
| 2.500 | -040 | |

1/ For screw sizes above .164 on MS21095 see section 804.

SECTION 2108

SCREWS, SELF-LOCKING, PAN HEAD, FULL THREAD
 APPLICABLE DOCUMENTS: MS3212, 3213

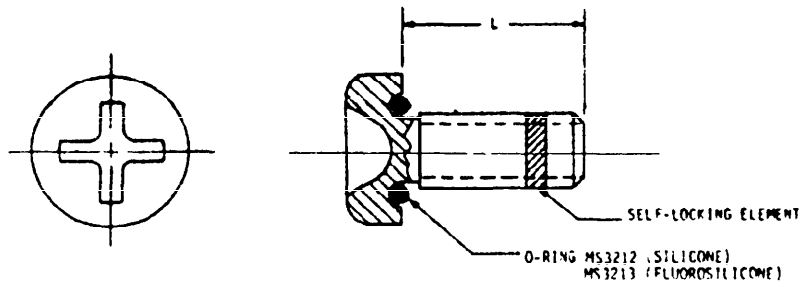


TABLE I. Material.

| Material | Protective finish | Tensile strength (PSI) min |
|----------|-------------------|----------------------------|
| CRES | Passivate | 75,000 |

TABLE II. Part numbers.

| Thread designation (-2A) | .112-40 UNC | .138-32 UNC | .164-32 UNC | .190-32 UNF | .190-24 UNC | .250-20 UNC |
|--------------------------------|----------------------------|----------------|----------------|----------------|----------------|----------------|
| L | MS3212, 3213 + dash number | | | | | |
| .250 | -1L | -11L | -21L | -- | -- | -- |
| .312 | -2L | -12L | -22L | -- | -- | -- |
| .375 | -3L | -13L | -23L | -31L | -39L | -47L |
| .438 | -4L | -14L | -24L | -32L | -40L | -48L |
| .500 | -5L | -15L | -25L | -33L | -41L | -49L |
| .625 | -7L | -17L | -27L | -35L | -43L | -51L |
| .750 | -8L | -18L | -28L | -36L | -44L | -52L |
| .875 | -9L | -19L | -29L | -37L | -45L | -53L |
| 1.000 | -10L | -20L | -30L | -38L | -46L | -54L |
| 1.250 | -- | -- | -- | -- | -- | -56L |

1/ For non-locking screws on MS3212, 3213 see section 2012.

MIL-STD-1251A

SECTION 2171
SCREWS, SELF-LOCKING, PAN HEAD, UNF THREAD
APPLICABLE DOCUMENTS: MS21090, NAS1190, 1635

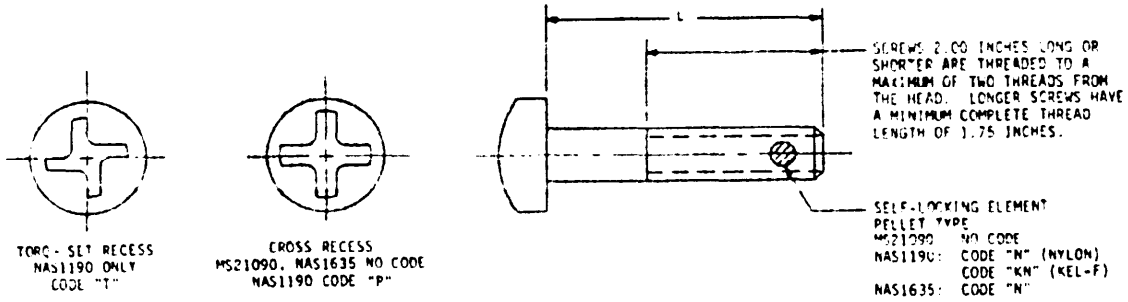


TABLE I. Materials.

| Material | Code | Protective finish | Code | Tensile strength (psi) min | Applicable documents |
|--------------|------|----------------------------|---------|----------------------------|----------------------|
| | | | | | |
| Alloy steel | - | Cadmium plate | -- | 160,000 | NAS1190 |
| Carbon steel | - | Cadmium plate | -- | 55,000 | MS21090 |
| CRS | E | Passivate Cadmium plate | -- H | 160,000 | NAS1190 |
| | - | Passivate Black oxide | -- P | | NAS1635 1/ |

1/ For non-locking screws on NAS1635 see section 2013.

TABLE II MS21090 dash numbers.

| Thread designation.. | .086-56 UNC | .112-40 UNC | .138-32 UNC | .164-32 UNF | .190-32 UNF | .250-28 UNF | .3125-24 UNF | .375-24 UNF |
|----------------------|--------------------|-------------|-------------|-------------|-------------|-------------|--------------|-------------|
| First dash no. | -02 | -04 | -06 | -08 | -3 | -4 | -5 | -6 |
| L | Second dash number | | | | | | | |
| .188 | -01 | -09 | -19 | -33 | -- | -- | -- | -- |
| .250 | -02 | -10 | -20 | -34 | -47 | -- | -- | -- |
| .312 | -03 | -11 | -21 | -35 | -48 | -62 | -- | -- |
| .375 | -04 | -12 | -22 | -36 | -49 | -63 | -76 | -- |
| .438 | -05 | -13 | -23 | -37 | -50 | -64 | -77 | -- |
| .500 | -06 | -14 | -24 | -38 | -51 | -65 | -78 | -89 |
| .625 | -07 | -15 | -25 | -39 | -52 | -66 | -79 | -90 |
| .750 | -08 | -16 | -26 | -40 | -53 | -67 | -80 | -91 |
| .875 | -- | -17 | -27 | -41 | -54 | -68 | -81 | -92 |
| 1.000 | -- | -18 | -28 | -42 | -55 | -69 | -82 | -93 |
| 1.250 | -- | -- | -29 | -43 | -56 | -70 | -83 | -94 |
| 1.500 | -- | -- | -30 | -44 | -57 | -71 | -84 | -95 |
| 1.750 | -- | -- | -31 | -45 | -58 | -72 | -85 | -96 |
| 2.000 | -- | -- | -32 | -46 | -59 | -73 | -86 | -97 |
| 2.250 | -- | -- | -- | -- | -60 | -74 | -87 | -98 |
| 2.500 | -- | -- | -- | -- | -61 | -75 | -88 | -99 |
| 2.750 | -- | -- | -- | -- | -- | -- | -- | -100 |
| 3.000 | -- | -- | -- | -- | -- | -- | -- | -101 |

MIL-STD-1251A

TABLE III. NAS1190 dash numbers.

| Thread designation (-3A) | First dash no. | Second dash number 1/ | |
|-----------------------------|-------------------|-----------------------|---------------------|
| | | Range | Increments |
| .036-56 UNJC | -02 | -3 thru -12 | One (-3 thru -12) |
| .112-40 UNJC | -04 | -3 thru -24 | |
| .138-32 UNJC | -06 | -3 thru -36 | |
| .164-32 UNJC | -08 | -4 thru -48 | Two (-10 thru -16) |
| .190-32 UNJF | -3 | -5 thru -56 | |
| .250-24 UNJF | -4 | -5 thru -64 | Four (-20 thru -64) |
| .3125-24 UNJF | -5 | -8 thru -64 | |
| .375-24 UNJF | -6 | -8 thru -64 | |

1/ Second dash number equals "L" dimension times 16

TABLE IV. NAS1635 dash numbers.

| Thread designation (-2A) | First dash no. | Second dash number 1/ | |
|-----------------------------|-------------------|-----------------------|---------------------|
| | | Range | Increments |
| .060-80 UNF | -00 | -2 thru -6 | One (-2 thru -6) |
| .086-56 UNC | -02 | -2 thru -12 | |
| .112-40 UNC | -04 | -3 thru -24 | |
| .138-32 UNC | -06 | -3 thru -36 | Two (-10 thru -16) |
| .164-32 UNC | -03 | -4 thru -48 | |
| .190-32 UNF | -3 | -5 thru -56 | Four (-20 thru -64) |
| .250-28 UNF | -4 | -5 thru -64 | |
| .3125-24 UNF | -5 | -8 thru -64 | |
| .375-24 UNF | -6 | -8 thru -64 | |

1/ Second dash number equals "L" dimension times 16

SECTION 2110

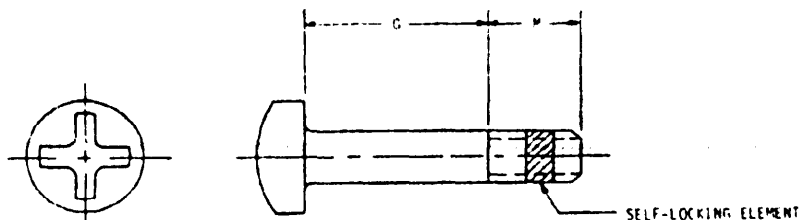
SCREWS, SELF-LOCKING, PAN HEAD, SHORT THREAD
APPLICABLE DOCUMENTS: MS21096, MS21097

TABLE I. Materials.

| Material | Protective finish | Tensile strength (psi) min | Applicable documents |
|-------------|-------------------|----------------------------|----------------------|
| Alloy steel | Cadmium plate | 125,000 | MS21096 |
| CRS | Passivate | 80,000 | MS21097 |

TABLE II. MS21096, 21097 dash numbers.

| Thread designation (-3A) | M min | First dash no. | Second dash number 1/ | |
|--------------------------|-------|----------------|-----------------------|---|
| | | | Range | Increments |
| .112-40UNC | .250 | -04 | 001 thru 028 | One (001 thru 004) Two (006 thru 016) Four (020 thru 064) |
| .138-32UNC | .312 | -06 | 001 thru 040 | |
| .164-32UNC | .437 | -08 | 001 thru 040 | |
| .190-32UNF | .469 | -3 | 003 thru 048 | |
| .250-28UNF | .506 | -4 | 004 thru 048 | |
| .3125-24UNF | .531 | -5 | 006 thru 048 | |
| .375-24UNF | .641 | -6 | 006 thru 048 | |
| .4375-20UNF | .656 | -7 | 008 thru 048 | |
| .500-20UNF | .781 | -8 | 008 thru 064 | |

1/ Grip dash number equals "G" dimension times 16

MIL-STD-1251A

SECTION 1251

SCREWS, SHOULDER, BRAZIER HEAD
 APPLICABLE DOCUMENT: NAS1298

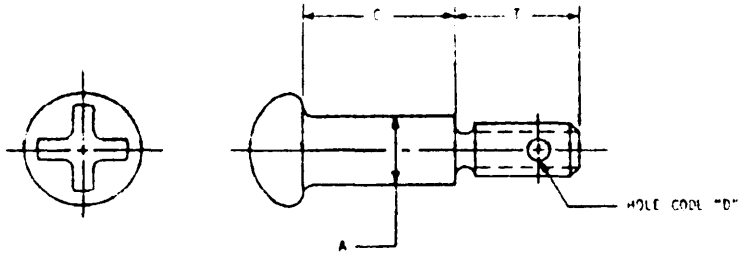


TABLE I. Material

| Material | Protective finish | Tensile strength (psi) min |
|-------------|-------------------|----------------------------|
| Alloy steel | Cadmium plate | 125,000 |

TABLE II. NAS1298 dash numbers.

| Thread designation (-3A) | .138-32 UNJC | .190-32 UNJF | .250-28 UNJF | .3125-24 UNJF | .375-24 UNJF | .4375-20 UNJF |
|--------------------------------|--------------------|--------------|--------------|---------------|--------------|---------------|
| A max | .189 | .249 | .312 | .374 | .437 | .499 |
| T ref | .362 | .362 | .453 | .498 | .607 | .629 |
| First dash no. | -06 | -3 | -4 | -5 | -6 | -7 |
| Grip | Second dash number | | | | | |
| .072 | -1 | -1 | -- | -- | -- | -- |
| .135 | -2 | -2 | -2 | -2 | -- | -- |
| .196 | -3 | -3 | -3 | -3 | -3 | -3 |
| .260 | -4 | -4 | -4 | -4 | -4 | -4 |
| .322 | -5 | -5 | -5 | -5 | -5 | -5 |
| .385 | -6 | -6 | -6 | -6 | -6 | -6 |
| .448 | -7 | -7 | -7 | -7 | -7 | -7 |
| .572 | -- | -9 | -9 | -9 | -9 | -9 |
| .698 | -- | -11 | -11 | -11 | -11 | -11 |
| .822 | -- | -- | -13 | -13 | -13 | -13 |
| .948 | -- | -- | -- | -15 | -15 | -15 |
| 1.260 | -- | -- | -- | -- | -- | -20 |

SECTION 2262
 SCREWS, SHOULDER, FLAT HEAD
 APPLICABLE DOCUMENT: NAS1299

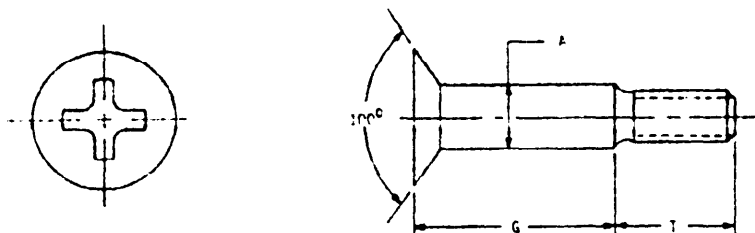


TABLE I. Material.

| Material | Protective finish | Tensile strength (psi) min |
|-------------|-------------------|----------------------------|
| Alloy steel | Cadmium plate | 125,000 |

TABLE II. NAS1299 dash numbers.

| Thread designation... | .138-32 UNJC-3A | .190-32 UNJF-3A | .250-28 UNJF-3A | .3125-28 UNJF-3A | .375-24 UNJF-3A | .4375-20 UNJF-3A |
|-----------------------|--------------------|--------------------|--------------------|---------------------|--------------------|---------------------|
| A max..... | .189 | .249 | .312 | .374 | .437 | .499 |
| T ref..... | .362 | .362 | .453 | .498 | .607 | .629 |
| First dash no. | -06 | -3 | -4 | -5 | -6 | -7 |
| G | Second dash number | | | | | |
| .070 | -1 | | | | | |
| .135 | -2 | | | | | |
| .198 | -3 | | | | | |
| .260 | -4 | | | | | |
| .322 | -5 | | | | | |
| .385 | -6 | | | | | |
| .448 | -7 | | | | | |
| .572 | -9 | | | | | |
| .698 | -11 | | | | | |
| .822 | -13 | | | | | |
| .948 | -15 | | | | | |
| 1.260 | -20 | | | | | |

MIL-STD-1251A

SECTION 2203
 SCREWS - SLIP-ON HEAD
 APPLICABLE DOCUMENTS - NAS1297

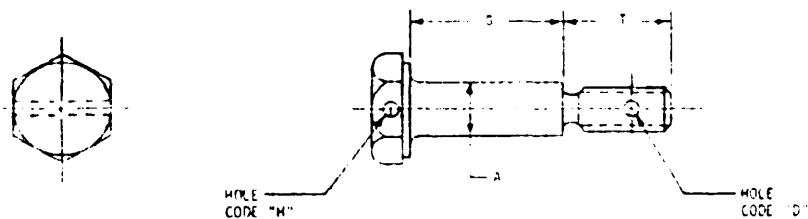


TABLE T. Material.

| Material | Protective finish | Tensile strength (psi) min |
|-------------|-------------------|----------------------------|
| Alloy steel | Cadmium plate | 170,000 |

TABLE 11. NAS1297 dash numbers.

| | |
|------------------------------------|--------------------|
| Thread designation (UNJC-3A) | .138-32 |
| A nom. | .189 |
| T ref. | .362 |
| First dash no. | -06 |
| G | Second dash number |
| .072 | -1 |
| .135 | -2 |
| .199 | -3 |
| .260 | -4 |
| .322 | -5 |
| .385 | -6 |
| .447 | -7 |

1/ For sizes above .138-32, see section 1001.

SECTION 2301

SCREWS, TAPPING, THREAD CUTTING, FLAT HEAD
 APPLICABLE DOCUMENTS MS24627, 24628, 51870

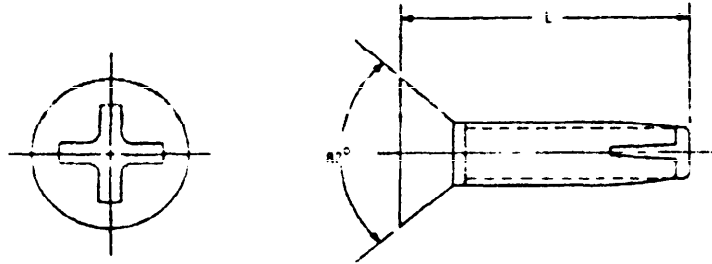


TABLE I. Materials.

| Material | Code | Protective finish | Applicable documents |
|----------|--------------|-------------------|----------------------|
| | Carbon steel | | |
| CRES | C | Passivate | MS51870 |

TABLE II. MS24627, 24628, 51870 part numbers.

| Thread size | .086 | .112 | .138 | .164 | .190 | .250 | .138 | .190 | .250 | | |
|------------------|------------------------------|------|------|------|------|------|-----------------------|------|------|------|-----|
| Threads per inch | 56 | 40 | 32 | 32 | 24 | 20 | 32 | 24 | 20 | | |
| L | MS24627, 24628 + dash number | | | | | | MS51870 + dash number | | | | |
| .250 | -1 | -10 | -20 | -30 | -- | -- | -1 | -C1 | -- | -- | -- |
| .312 | -2 | -11 | -21 | -31 | -45 | -- | -- | -- | -- | -- | -- |
| .375 | -3 | -12 | -22 | -32 | -46 | -- | -2 | -C2 | -12 | -C12 | -- |
| .438 | -- | -13 | -23 | -- | -- | -- | -- | -- | -- | -- | -- |
| .500 | -5 | -14 | -24 | -34 | -48 | -62 | -3 | -C3 | -13 | -C13 | -23 |
| .625 | -- | -15 | -25 | -35 | -49 | -63 | -4 | -C4 | -14 | -C14 | -24 |
| .750 | -- | -16 | -26 | -36 | -50 | -64 | -5 | -C5 | -15 | -C15 | -25 |
| .875 | -- | -- | -27 | -37 | -51 | -65 | -- | -- | -16 | -C16 | -26 |
| 1.000 | -- | -- | -28 | -38 | -52 | -66 | -- | -- | -17 | -C17 | -27 |
| 1.250 | -- | -- | -- | -39 | -53 | -67 | -- | -- | -- | -- | -28 |
| 1.500 | -- | -- | -- | -40 | -54 | -68 | -- | -- | -- | -- | -29 |
| 1.750 | -- | -- | -- | -41 | -55 | -69 | -- | -- | -- | -- | -30 |
| 2.000 | -- | -- | -- | -- | -56 | -70 | -- | -- | -- | -- | -31 |

MIL-STD-1251A

SECTION 2302

SCREWS, TAPPING, THREAD CUTTING, HEXAGON HEAD
 APPLICABLE DOCUMENT: MSS1869

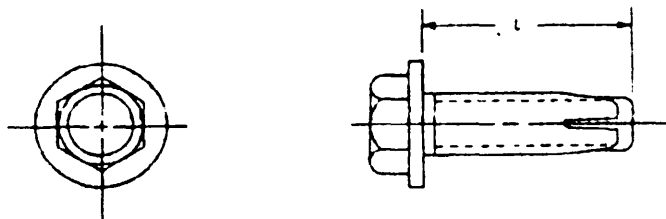


TABLE I. Materials.

| Material | Code | Protective finish |
|----------|--------------|-------------------|
| | Carbon steel | |
| CRES | C | Passivate |

TABLE II. Part numbers.

| Thread size | .138 | | .190 | | .250 | |
|--------------------|-----------------------|-----|------|------|------|------|
| Threads per inch.. | 32 | | 24 | | 20 | |
| L | MSS1869 + dash number | | | | | |
| .250 | -1 | -C1 | -- | -- | -- | -- |
| .375 | -2 | -C2 | -12 | -C12 | -- | -- |
| .500 | -3 | -C3 | -13 | -C13 | -23 | -C23 |
| .625 | -4 | -C4 | -14 | -C14 | -24 | -C24 |
| .750 | -5 | -C5 | -15 | -C15 | -25 | -C25 |
| .875 | -- | -- | -16 | -C16 | -26 | -C26 |
| 1.000 | | | -17 | -C17 | -27 | -C27 |
| 1.250 | | | -- | -- | -28 | -C28 |
| 1.500 | | | -- | -- | -29 | -C29 |
| 1.750 | | | | | -30 | -C30 |
| 2.000 | | | | | -31 | -C31 |

SECTION 2303

SCREWS, TAPPING, THREAD CUTTING, PAN HEAD
 APPLICABLE DOCUMENTS: MS24625, 24629, 24630, 51863

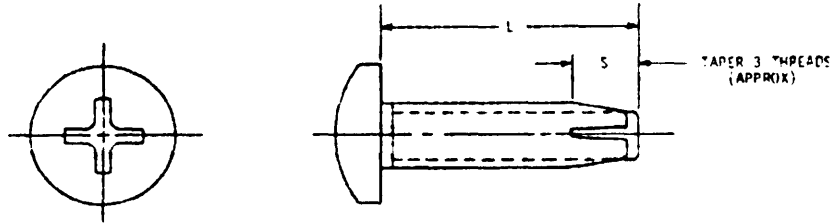


TABLE I. Materials.

| Material | Protective finish | Applicable documents | |
|--------------|-------------------|----------------------|-----------------------|
| | | Code | |
| Carbon steel | Cadmium plate | -- | MS24625, 24629, 51863 |
| CRS | Passivate | -- | MS24630 |
| | | r | MS51863 |

TABLE II. MS24625 part numbers.

| Thread size | .086 | .112 | .138 | .164 | .190 | .250 |
|------------------------|-------------|------|------|------|------|------|
| Threads per inch | 32 | 24 | 20 | 18 | 16 | 14 |
| L | Dash number | | | | | |
| .188 | -1 | -- | -- | -- | | |
| .250 | -2 | -9 | -17 | -- | | |
| .312 | -3 | -10 | -18 | -28 | | |
| .375 | -4 | -11 | -19 | -29 | -42 | -55 |
| .500 | -5 | -12 | -20 | -30 | -43 | -56 |
| .625 | -6 | -13 | -21 | -31 | -44 | -57 |
| .750 | | -14 | -22 | -32 | -45 | -58 |
| .875 | | -- | -23 | -33 | -46 | -59 |
| 1.000 | | -- | -24 | -34 | -47 | -60 |
| 1.250 | | | -25 | -35 | -48 | -61 |
| 1.500 | | | -26 | -36 | -49 | -62 |
| 1.750 | | | -- | -37 | -50 | -63 |
| 2.000 | | | | -38 | -51 | -64 |
| 2.250 | | | | -39 | -52 | -65 |
| 2.500 | | | | -40 | -53 | -66 |

MIL-STD-1251A

TABLE III. MS24629, 24630 dash numbers.

| Thread size | .086 | .112 | .138 | .164 | .190 | .250 | | |
|---------------------|-------------|------|------|------|------|------|-----|-----|
| Threads per inch .. | 56 | 40 | 32 | 32 | 24 | 32 | 20 | 28 |
| L | Dash number | | | | | | | |
| .125 | -1 | -- | -- | -- | | | | |
| .188 | -2 | -9 | -20 | -- | | | | |
| .250 | -3 | -10 | -21 | -33 | | | | |
| .312 | -4 | -11 | -22 | -34 | -44 | -64 | -- | -- |
| .325 | -5 | -12 | -23 | -35 | -45 | -65 | -56 | -- |
| .500 | -6 | -13 | -24 | -36 | -46 | -66 | -57 | -73 |
| .625 | -7 | -14 | -25 | -37 | -47 | -67 | -58 | -74 |
| .750 | -- | -15 | -26 | -38 | -48 | -68 | -59 | -75 |
| .875 | -- | -16 | -27 | -39 | -49 | -69 | -60 | -76 |
| 1.000 | | -17 | -28 | -40 | -50 | -70 | -61 | -77 |
| 1.250 | | -- | -- | -41 | -51 | -71 | -62 | -78 |
| 1.500 | | -- | -30 | -- | -52 | -72 | -63 | -79 |

TABLE IV. MS51863 dash numbers.

| Thread size | .086 | .112 | .138 | .164 | .190 | .250 | |
|---------------------|-------------|------|------|------|------|------|--|
| Threads per inch .. | 56 | 40 | 32 | 32 | 24 | 20 | |
| L | Dash number | | | | | | |
| .250 | -1 | -11 | -21 | -- | -- | -- | |
| .375 | -2 | -12 | -22 | -32 | -42 | -- | |
| .500 | -3 | -13 | -23 | -33 | -43 | -53 | |
| .625 | -4 | -14 | -24 | -34 | -44 | -54 | |
| .750 | | -15 | -25 | -35 | -45 | -55 | |
| .875 | | -16 | -26 | -36 | -46 | -56 | |
| 1.000 | | | -27 | -37 | -47 | -57 | |
| 1.250 | | | -- | -38 | -48 | -58 | |
| 1.500 | | | -- | -39 | -49 | -59 | |
| 1.750 | | | | | -50 | -60 | |
| 2.000 | | | | | -- | -61 | |
| 2.250 | | | | | -- | -62 | |

SECTION 24.1
SCREWS, TAPPING, THREAD FORMING, FLAT HEAD
APPLICABLE DOCUMENTS: MIL-STD-1251A

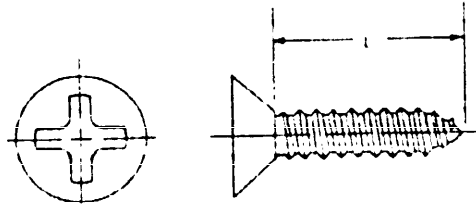


TABLE I. Material and part numbers.

| Nominal size | Carbon steel | | | | | CRS | | | | |
|---------------------|---------------|-----|-----|-----|-----|-----------|------|------|------|------|
| | Cadmium plate | | | | | Passivate | | | | |
| Thread size | 112 | 138 | 164 | 190 | 240 | 112 | 138 | 164 | 190 | 240 |
| Threads per inch | 24 | 20 | 18 | 16 | 14 | 24 | 20 | 18 | 16 | 14 |
| MS1942+ dash number | | | | | | | | | | |
| .250 | -1 | -- | -- | -- | -- | -11 | -- | -- | -- | -- |
| .312 | -- | 12 | -- | -- | -- | -- | -12C | -- | -- | -- |
| .375 | -3 | -13 | -23 | -33 | -- | -3C | -13C | -23C | -33C | -- |
| .500 | -4 | -14 | -24 | -34 | -54 | -4C | -14C | -24C | -34C | -54C |
| .625 | -5 | -15 | -25 | -35 | -55 | -5C | -15C | -25C | -35C | -55C |
| .750 | -6 | -16 | -26 | -36 | -56 | -6C | -16C | -26C | -36C | -56C |
| .875 | | -17 | -27 | -37 | -57 | | -17C | -27C | -37C | -57C |
| 1.000 | | -18 | -28 | -38 | -58 | | -18C | -28C | -38C | -58C |
| 1.250 | | -- | -29 | -39 | -59 | | -- | -29C | -39C | -59C |
| 1.500 | | | -30 | -40 | -60 | | | -30C | -40C | -60C |
| 1.750 | | | -- | -41 | -61 | | | -- | -41C | -61C |
| 2.000 | | | -- | -42 | -62 | | | -- | -42C | -62C |
| 2.250 | | | | | -63 | | | | | -63C |
| 2.500 | | | | | -64 | | | | | -64C |

MIL-STD-1251A

SECTION 2402

SCREWS, TAPPING, THREAD FORMING, HEXAGON HEAD
 APPLICABLE DOCUMENTS: MSS1850, S1871

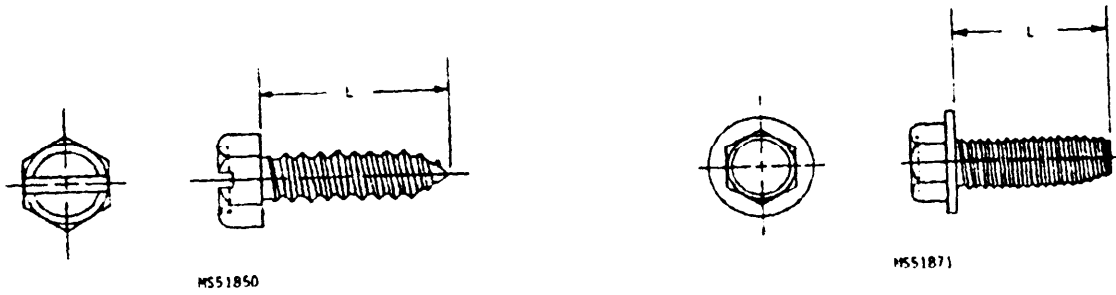


TABLE I. Materials.

| Materials | Protective finish | Tensile strength (psi) min | Applicable documents |
|--------------|-------------------|----------------------------|----------------------|
| Carbon steel | Cadmium plate | -- | MSS1850 |
| CRFS | Passivate | -- | |
| Alloy steel | Cadmium plate | 150,000 | MSS1871 |

TABLE II. MSS1850 dash numbers.

| Material | Carbon steel | | | | | | CRFS | | | | | |
|------------------|--------------|------|------|------|------|------|------|------|------|------|------|------|
| | .112 | .138 | .164 | .190 | .250 | .312 | .112 | .138 | .164 | .190 | .250 | .312 |
| Thread size | | | | | | | | | | | | |
| Threads per inch | 24 | 20 | 18 | 16 | 14 | 12 | 24 | 20 | 18 | 16 | 14 | 12 |
| L | dash number | | | | | | | | | | | |
| .250 | -1 | -- | -- | | | | -11 | -- | -- | | | |
| .312 | -2 | -22 | -- | | | | -12 | -32 | -- | | | |
| .375 | -3 | -23 | -43 | | | | -13 | -33 | -53 | | | |
| .500 | -4 | -24 | -44 | -64 | -- | -- | -14 | -34 | -54 | -74 | -- | -- |
| .625 | -5 | -25 | -45 | -65 | -85 | -- | -15 | -35 | -55 | -75 | -95 | -- |
| .750 | -6 | -26 | -46 | -66 | -86 | -106 | -16 | -36 | -56 | -76 | -96 | -116 |
| .875 | | -27 | -47 | -67 | -87 | -107 | | -37 | -57 | -77 | -97 | -117 |
| 1.000 | | | -49 | -69 | -89 | -109 | | | -59 | -79 | -99 | -119 |
| 1.250 | | | | -69 | -89 | -109 | | | | -79 | -99 | -119 |
| 1.500 | | | | -70 | -90 | -110 | | | | -80 | -100 | -120 |
| 1.750 | | | | | -91 | -111 | | | | | -101 | -121 |
| 2.000 | | | | | | -92 | | | | | -102 | -122 |

TABLE III. MSS1871 dash numbers.

| Material | Alloy steel | | |
|------------------|-------------|------|------|
| | .250 | .375 | .500 |
| Thread size | | | |
| Threads per inch | 20 | 16 | 13 |
| L | Dash number | | |
| .500 | -1 | -- | -- |
| .675 | -2 | -12 | -- |
| .750 | -3 | -13 | -23 |
| .875 | -4 | -14 | -24 |
| 1.000 | -5 | -15 | -25 |
| 1.250 | -6 | -16 | -26 |
| 1.500 | -7 | -17 | -27 |
| 1.750 | -- | -- | -28 |
| 2.000 | -- | -- | -29 |
| 2.250 | -- | -- | -30 |

SECTION 2403

SCREWS, TAPPING, THREAD FORMING, PAN HEAD
 APPLICABLE DOCUMENTS: MSS1861

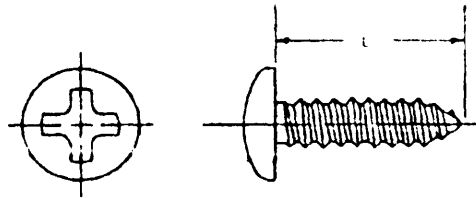


TABLE 1. Materials and part numbers.

| Material | Carbon steel | | | | | | CRES | | | | | |
|----------------------|---------------------|------|------|------|------|------|------------|------|------|------|------|------|
| Protective finish .. | Zinc plating | | | | | | Passivated | | | | | |
| Thread size | .086 | .112 | .138 | .164 | .190 | .250 | .086 | .112 | .138 | .164 | .190 | .250 |
| Threads per inch ... | 32 | 24 | 20 | 18 | 16 | 14 | 32 | 24 | 20 | 18 | 16 | 14 |
| L | MSS1861 dash number | | | | | | | | | | | |
| .188 | -1 | -- | -- | | | | -1C | -- | -- | -- | | |
| .250 | -2 | -12 | -22 | | | | -2C | -12C | -22C | -- | | |
| .312 | -3 | -- | -- | | | | -3C | -13C | -23C | -33C | | |
| .375 | -4 | -14 | -24 | -34 | -44 | -- | -4C | -14C | -24C | -34C | -44C | -- |
| .500 | -- | -15 | -25 | -35 | -45 | -65 | -- | -15C | -25C | -35C | -45C | -65C |
| .625 | -- | -16 | -26 | -36 | -46 | -66 | -- | -16C | -26C | -36C | -46C | -66C |
| .750 | | -17 | -27 | -37 | -47 | -67 | | -17C | -27C | -37C | -47C | -67C |
| .875 | | -- | -28 | -38 | -48 | -68 | | -- | -28C | -38C | -48C | -68C |
| 1.000 | | -- | -29 | -39 | -49 | -69 | | -- | -29C | -39C | -49C | -69C |
| 1.250 | | | | -40 | -50 | -70 | | | | -40C | -50C | -70C |
| 1.500 | | | | -41 | -51 | -71 | | | | -41C | -51C | -71C |
| 1.750 | | | | -- | -52 | -72 | | | | -- | -52C | -72C |
| 2.000 | | | | | -53 | -73 | | | | | -53C | -73C |
| 2.250 | | | | | -- | -74 | | | | | -- | -74C |
| 2.500 | | | | | -- | -75 | | | | | -- | -75C |

MIL-STD-1251A

TABLE I. Materials and part numbers.



MS35492



MS35494




TABLE I. Materials and part numbers.

| Material | | Carbon steel | | Brass | |
|-------------------|------|----------------------------|--------------------|--------------------|--------------------|
| Protective finish | | Cadmium plate or zinc coat | | Plain | |
| Thread size | L | MS35494 + dash no. | MS35492 + dash no. | MS35494 + dash no. | MS35492 + dash no. |
| .09E-26 | .15 | -1 | -901 | -201 | -202 |
| | .33 | -2 | -902 | -202 | -203 |
| | .50 | -3 | -903 | -203 | -204 |
| | .62 | -4 | -904 | -204 | -205 |
| | .75 | -5 | -905 | -205 | -206 |
| .112-22 | .25 | -8 | -9 | -208 | -209 |
| | .38 | -9 | -10 | -210 | -211 |
| | .50 | -10 | -11 | -211 | -212 |
| | .62 | -11 | -12 | -212 | -213 |
| | .75 | -12 | -13 | -213 | -214 |
| | .88 | -13 | -14 | -214 | -215 |
| | 1.00 | -14 | -15 | -215 | -216 |
| | 1.25 | -15 | -16 | -216 | -217 |
| .138-18 | .38 | -31 | -27 | -230 | -227 |
| | .50 | -32 | -28 | -231 | -228 |
| | .62 | -33 | -29 | -232 | -229 |
| | .75 | -34 | -30 | -233 | -230 |
| | .88 | -35 | -31 | -234 | -231 |
| | 1.00 | -36 | -32 | -235 | -232 |
| | 1.25 | -37 | -33 | -236 | -233 |
| | 1.50 | -38 | -34 | -237 | -234 |
| | 1.75 | -39 | -35 | -238 | -235 |
| | 2.00 | -40 | -36 | -239 | -236 |
| .164-15 | .38 | -56 | -49 | -253 | -250 |
| | .50 | -57 | -50 | -254 | -251 |
| | .62 | -58 | -51 | -255 | -252 |
| | .75 | -59 | -52 | -256 | -253 |
| | .88 | -60 | -53 | -257 | -254 |
| | 1.00 | -61 | -54 | -258 | -255 |
| | 1.25 | -62 | -55 | -259 | -256 |
| | 1.50 | -63 | -56 | -260 | -257 |
| | 1.75 | -64 | -57 | -261 | -258 |
| | 2.00 | -65 | -58 | -262 | -259 |
| .190-13 | .50 | -83 | -74 | -275 | -272 |
| | .62 | -84 | -75 | -276 | -273 |
| | .75 | -85 | -76 | -277 | -274 |
| | .88 | -86 | -77 | -278 | -275 |
| | 1.00 | -87 | -78 | -279 | -276 |
| | 1.25 | -88 | -79 | -280 | -277 |
| | 1.50 | -89 | -80 | -281 | -278 |
| | 1.75 | -90 | -81 | -282 | -279 |
| | 2.00 | -91 | -82 | -283 | -280 |
| | 2.25 | -92 | -83 | -284 | -281 |
| 2.50 | -93 | -84 | -285 | -282 | |
| 2.75 | -94 | -85 | -286 | -283 | |
| 3.00 | -95 | -86 | -287 | -284 | |
| 3.25 | -96 | -87 | -288 | -285 | |
| 3.50 | -97 | -88 | -289 | -286 | |

SECTION 2601

SETSCREWS, CONE POINT
 APPLICABLE DOCUMENTS: MS51038, 51973, 51974

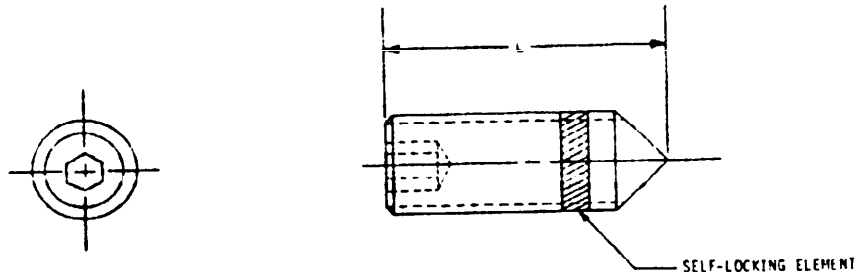


TABLE I. MS51973, 51974 part numbers.

| Material | Alloy steel | | | | | | | | | | | | | | | | | | |
|------------------------|---------------|-----|--------|-----|--------|-----|--------|-----|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----|
| | Cadmium plate | | | | | | | | | | | | | | | | | | |
| Protective finish | | | | | | | | | | | | | | | | | | | |
| Thread size | .086 | | .112 | | .138 | | .164 | | .190 | | .250 | | .3125 | | .375 | | .500 | | |
| Threads per inch (-3A) | 56 UNC | | 40 UNC | | 32 UNC | | 32 UNC | | 24 UNF | 32 UNF | 20 UNC | 28 UNF | 18 UNC | 24 UNF | 16 UNC | 24 UNF | 13 UNC | 20 UNF | |
| L | 1/ | 2/ | 1/ | 2/ | 1/ | 2/ | 1/ | 2/ | 1/ | 3/ | 1/ | 3/ | 1/ | 3/ | 1/ | 3/ | 1/ | 3/ | |
| .125 | -1 | -8 | -101 | -17 | -111 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| .188 | -2 | -9 | -102 | -18 | -112 | -28 | -137 | -- | -102 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| .250 | -- | -10 | -103 | -19 | -113 | -29 | -133 | -39 | -103 | -50 | -113 | -- | -- | -- | -- | -- | -- | -- | -- |
| .312 | -- | -11 | -104 | -20 | -114 | -30 | -134 | -40 | -104 | -51 | -114 | -62 | -126 | -- | -- | -- | -- | -- | -- |
| .375 | -- | -- | -105 | -21 | -115 | -31 | -135 | -41 | -105 | -52 | -115 | -63 | -127 | -73 | -137 | -- | -- | -- | -- |
| .500 | -- | -- | -107 | -22 | -117 | -32 | -137 | -42 | -107 | -53 | -117 | -64 | -128 | -74 | -138 | -83 | -148 | -- | -- |
| .625 | -- | -- | -109 | -- | -119 | -33 | -139 | -43 | -109 | -54 | -119 | -65 | -129 | -75 | -139 | -84 | -149 | -- | -- |
| .750 | -- | -- | -- | -- | -120 | -- | -140 | -44 | -110 | -55 | -120 | -66 | -130 | -76 | -140 | -85 | -150 | -- | -- |
| .875 | -- | -- | -- | -- | -121 | -- | -141 | -- | -- | -- | -- | -131 | -- | -141 | -- | -151 | -- | -- | -- |
| 1.000 | -- | -- | -- | -- | -- | -- | -142 | -- | -111 | -56 | -122 | -67 | -132 | -77 | -142 | -86 | -152 | -- | -- |
| 1.250 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -123 | -- | -133 | -- | -143 | -- | -153 | -- | -- |
| 1.500 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -124 | -- | -134 | -- | -144 | -- | -154 | -- | -- |
| 1.750 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -135 | -- | -145 | -- | -155 | -- | -- | -- |
| 2.000 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -136 | -- | -146 | -- | -156 | -- | -- | -- |
| 2.500 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -157 | -- | -- | -- |
| 3.000 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -158 | -- | -- | -- |

- 1/ MS51973 + dash number, non-locking screws.
- 2/ MS51973 + dash number, self-locking screws.
- 3/ MS51974 + dash number, self-locking screws.

TABLE II. MS51038 dash numbers, self-locking.

| Material | CRES | | | | | | | |
|------------------------|-------------|--------|--------|--------|--------|--------|--------|--------|
| | Passivate | | | | | | | |
| Thread size | .112 | .138 | .164 | .190 | .250 | .3125 | .375 | .500 |
| Threads per inch (-3A) | 40 UNC | 32 UNC | 32 UNF | 32 UNF | 28 UNF | 24 UNF | 24 UNF | 20 UNF |
| L | Dash number | | | | | | | |
| .125 | -101 | -110 | -- | -- | -- | -- | -- | -- |
| .188 | -102 | -111 | -122 | -134 | -144 | -- | -- | -- |
| .250 | -103 | -112 | -123 | -135 | -145 | -157 | -- | -- |
| .312 | -104 | -113 | -124 | -136 | -146 | -158 | -- | -- |
| .375 | -105 | -114 | -125 | -137 | -147 | -159 | -179 | -- |
| .500 | -107 | -116 | -127 | -139 | -149 | -160 | -170 | -180 |
| .625 | -109 | -118 | -129 | -141 | -151 | -161 | -171 | -181 |
| .750 | -- | -119 | -130 | -142 | -152 | -162 | -172 | -182 |
| .875 | -- | -120 | -131 | -- | -153 | -163 | -173 | -183 |
| 1.000 | -- | -- | -132 | -143 | -154 | -164 | -174 | -184 |
| 1.250 | -- | -- | -- | -- | -155 | -165 | -175 | -185 |
| 1.500 | -- | -- | -- | -- | -156 | -166 | -176 | -186 |
| 1.750 | -- | -- | -- | -- | -- | -167 | -177 | -187 |
| 2.000 | -- | -- | -- | -- | -- | -168 | -178 | -188 |
| 2.500 | -- | -- | -- | -- | -- | -- | -- | -189 |
| 3.000 | -- | -- | -- | -- | -- | -- | -- | -190 |

SECTION 2602

SETSCREWS, CAP POINT

APPLICABLE DOCUMENTS: MSS1021, 51023, 51963, 51964

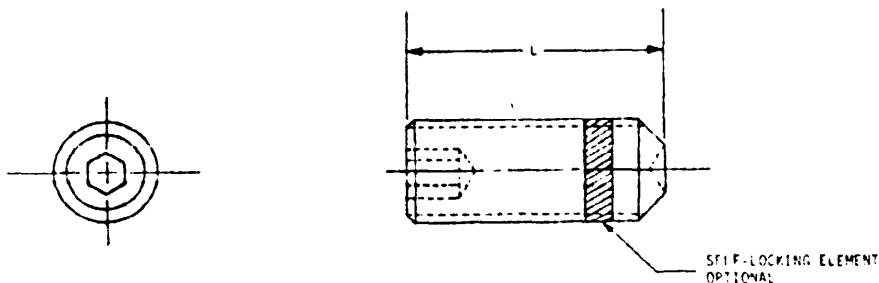


TABLE I. Materials.

| Materials | Protective finish | Hardness-Rockwell | Applicable documents |
|-------------|-------------------|-------------------|----------------------|
| CRES | Passivate | -- | MSS1023, 51023 |
| Alloy Steel | Cadmium plate | C45-53 | MSS1963, 51964 |

TABLE II. MSS1021, 51023 part numbers.

| Thread size (3-A) | .060 | | .086 | | .112 | | .138 | | .164 | | .190 | | .250 | | | | |
|----------------------|--------|----|--------|--------|--------|--------|------|--------|------|--------|--------|--------|--------|-----|--------|--------|------|
| | RD UNF | | 56 UNF | 64 UNF | 48 UNF | 40 UNF | | 32 UNF | | 36 UNF | 32 UNF | 24 UNF | 32 UNF | | 20 UNF | 28 UNF | |
| | 1/ | 2/ | 1/ | 1/ | 2/ | 4/ | 1/ | 2/ | 4/ | 1/ | 2/ | 4/ | 1/ | 3/ | 2/ | 1/ | 3/ |
| .125 | -1 | -1 | -9 | -18 | -9 | -- | -27 | -21 | -111 | -- | -- | -131 | -- | -- | -- | -- | -- |
| .100 | -2 | -2 | -10 | -19 | -10 | -102 | -28 | -22 | -112 | -- | -91 | -117 | -47 | -48 | -102 | -55 | -60 |
| .250 | -3 | -3 | -11 | -20 | -11 | -103 | -29 | -23 | -113 | -38 | -32 | -133 | -43 | -49 | -103 | -56 | -61 |
| .317 | | | -12 | -21 | -12 | -104 | -30 | -24 | -114 | -39 | -33 | -134 | -44 | -50 | -104 | -57 | -62 |
| .375 | | | -- | -- | -13 | -105 | -31 | -25 | -115 | -40 | -34 | -135 | -45 | -51 | -105 | -58 | -63 |
| .438 | | | -- | -- | -14 | -106 | -- | -- | -116 | -- | -- | -136 | -- | -- | -106 | -- | -- |
| .500 | | | | | -15 | -107 | -32 | | -117 | -41 | -36 | -137 | -47 | -52 | -107 | -60 | -64 |
| .625 | | | | | -- | -109 | -- | | -119 | -42 | -- | -139 | -48 | -53 | -109 | -61 | -65 |
| .750 | | | | | -- | -- | -- | | -120 | -- | -- | -140 | -49 | -54 | -110 | -62 | -66 |
| .875 | | | | | | | | | -121 | | | -141 | | | -- | -- | -121 |
| 1.000 | | | | | | | | | -- | | | -142 | | | -111 | -63 | -122 |
| 1.250 | | | | | | | | | -- | | | -- | | | -- | -- | -123 |
| 1.500 | | | | | | | | | | | | | | | | | -124 |
| 1.750 | | | | | | | | | | | | | | | | | -- |
| 2.000 | | | | | | | | | | | | | | | | | -- |
| 2.500 | | | | | | | | | | | | | | | | | |
| 3.000 | | | | | | | | | | | | | | | | | |

- 1/ MSS1023 + dash number, non-locking screws.
- 2/ MSS1021 + dash number, non-locking screws.
- 3/ MSS1023 + dash number, self-locking screws.
- 4/ MSS1021 + dash number, self-locking screws.

MIL-STD-1251A

TABLE II. MS51021, 51022 part numbers - Continued

| Thread size | .125 | | | .175 | | | .250 | | |
|-------------|-----------|-----------|------|-----------|-----------|------|-----------|-----------|------|
| | 18 UNC | 24 UNF | 3/4 | 16 UNC | 24 UNF | 3/4 | 15 UNC | 20 UNF | 3/4 |
| L | 2/ | 1/ | 3/ | 2/ | 1/ | 2/ | 2/ | 1/ | 3/ |
| .125 | -- | | -- | | | | | | |
| .188 | -- | | -- | | | | | | |
| .250 | -6P | | -125 | | | | | | |
| .312 | -64 | -73 | -126 | -80 | -- | -- | -- | -- | -- |
| .375 | -70 | -74 | -127 | -81 | -84 | -137 | -91 | -93 | -147 |
| .438 | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| .500 | -72 | -75 | -128 | -83 | -85 | -138 | -93 | -94 | -148 |
| .625 | -73 | -76 | -129 | -84 | -- | -139 | -94 | -- | -149 |
| .750 | -74 | -- | -130 | -85 | -- | -140 | -95 | -- | -150 |
| .875 | -- | | -131 | -- | | -141 | -- | | -151 |
| 1.000 | -75 | | -132 | -86 | | -142 | -96 | | -152 |
| 1.250 | -- | | -133 | -- | | -143 | -- | | -153 |
| 1.500 | | | -134 | | | -144 | | | -154 |
| 1.750 | | | -135 | | | -145 | | | -155 |
| 2.000 | | | -136 | | | -146 | | | -156 |
| 2.500 | | | | | | | | | -157 |
| 3.000 | | | | | | | | | -158 |

- 1/ MS51023 + dash number, non-locking screws.
- 2/ MS51021 + dash number, non-locking screws.
- 3/ MS51023 + dash number, self-locking screws.
- 4/ MS51021 + dash number, self-locking screws.

TABLE III. MS51963, 51964 part numbers.

| Thread size | 060 | | 086 | | .112 | | | .138 | | | .164 | | | .190 | | .250 | |
|-------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----|------|------|
| | 80 UNF | 56 UNC | 48 UNF | 40 UNC | 40 UNF | 32 UNC | 36 UNF | 32 UNC | 24 UNC | 32 UNF | 24 UNC | 32 UNF | 20 UNC | 28 UNF | | | |
| L | 1/ | 2/ | 1/ | 2/ | 4/ | 1/ | 2/ | 4/ | 1/ | 2/ | 4/ | 2/ | 1/ | 3/ | 2/ | 1/ | 3/ |
| .125 | -1 | -1 | -17 | -9 | -210 | -27 | -20 | -220 | -37 | -35 | -240 | -- | -- | -- | -- | -- | -- |
| .188 | -2 | -2 | -18 | -10 | -211 | -28 | -21 | -221 | -38 | -34 | -241 | -46 | -48 | -121 | -62 | -63 | -131 |
| .250 | -3 | -3 | -19 | -11 | -212 | -29 | -22 | -222 | -39 | -35 | -242 | -47 | -49 | -122 | -63 | -64 | -132 |
| .312 | | | -20 | -12 | -213 | -30 | -23 | -223 | -40 | -36 | -243 | -48 | -50 | -123 | -64 | -65 | -133 |
| .375 | | | -21 | -13 | -214 | -31 | -24 | -224 | -41 | -37 | -244 | -49 | -51 | -124 | -65 | -66 | -134 |
| .438 | | | -- | -14 | -215 | -- | -25 | -225 | -- | -38 | -245 | -50 | -- | -- | -66 | -- | -- |
| .500 | | | | -15 | -216 | | -26 | -226 | -43 | -39 | -246 | -51 | -53 | -126 | -67 | -68 | -136 |
| .625 | | | | -16 | -218 | | -27 | -228 | -- | -40 | -248 | -52 | -54 | -128 | -68 | -69 | -138 |
| .750 | | | | -- | -- | | -28 | -229 | -- | -41 | -249 | -53 | -55 | -129 | -69 | -70 | -139 |
| .875 | | | | | | | -29 | -230 | | -42 | -250 | -54 | -- | -- | -70 | -- | -140 |
| 1.000 | | | | | | | -30 | -- | | -43 | -251 | -55 | -56 | -130 | -71 | -71 | -141 |
| 1.250 | | | | | | | -- | -- | | -- | -56 | -57 | -- | -72 | -72 | -- | -142 |
| 1.500 | | | | | | | | | | | | | | | -73 | | -143 |
| 1.750 | | | | | | | | | | | | | | | -74 | | -- |
| 2.000 | | | | | | | | | | | | | | | -75 | | -- |
| 2.500 | | | | | | | | | | | | | | | | | |
| 3.000 | | | | | | | | | | | | | | | | | |

- 1/ MS51964 + dash number, non-locking screws.
- 2/ MS51963 + dash number, non-locking screws.
- 3/ MS51964 + dash number, self-locking screws.
- 4/ MS51963 + dash number, self-locking screws.

MIL-STD-1251A

TABLE 1. MIL-STD-1251A PART DIMENSIONS - CONTINUED



| Thread size | .3125 | | | .375 | | | .4375 | | .500 | | .625 | .750 | .875 | 1.000 |
|---------------------------|-----------|-----------|------|-----------|-----------|------|-----------|-----------|-----------|------|-----------|-----------|----------|----------|
| Threads per inch (-3A) | 18 UNC | 24 UNF | 32 | 16 UNC | 24 UNF | 32 | 14 UNC | 13 UNC | 20 UNF | 24 | 11 UNC | 10 UNC | 9 UNC | 8 UNC |
| L | 27 | 37 | 37 | 27 | 27 | 37 | 27 | 27 | 37 | 37 | 27 | 27 | 27 | 27 |
| .125 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| .188 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| .250 | -81 | -78 | -144 | -99 | -92 | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| .312 | -82 | -79 | -145 | -100 | -93 | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| .375 | -83 | -80 | -146 | -101 | -94 | -156 | -118 | -135 | -- | -166 | -- | -- | -- | -- |
| .438 | -84 | -- | -- | -102 | -- | -- | -119 | -136 | -- | -- | -- | -- | -- | -- |
| .500 | -85 | -82 | -147 | -103 | -96 | -157 | -120 | -137 | -107 | -167 | -153 | -- | -- | -- |
| .625 | -86 | -83 | -148 | -104 | -97 | -158 | -121 | -138 | -108 | -168 | -154 | -170 | -- | -- |
| .750 | -87 | -84 | -149 | -105 | -98 | -159 | -122 | -139 | -109 | -169 | -155 | -170 | -- | -- |
| .875 | -88 | -- | -150 | -106 | -- | -160 | -123 | -140 | -- | -170 | -156 | -171 | -184 | -- |
| 1.000 | -89 | -85 | -151 | -107 | -99 | -161 | -124 | -141 | -110 | -171 | -157 | -172 | -185 | -197 |
| 1.250 | -90 | -86 | -152 | -108 | -100 | -162 | -125 | -142 | -- | -172 | -158 | -173 | -186 | -198 |
| 1.500 | -91 | -- | -153 | -109 | -101 | -163 | -126 | -143 | -- | -173 | -159 | -174 | -187 | -199 |
| 1.750 | -92 | -- | -154 | -110 | -- | -164 | -127 | -144 | -- | -174 | -160 | -175 | -188 | -200 |
| 2.000 | -93 | -- | -155 | -111 | -- | -165 | -128 | -145 | -- | -175 | -161 | -176 | -189 | -201 |
| 2.500 | -- | -- | -- | -112 | -- | -- | -129 | -146 | -- | -176 | -162 | -177 | -190 | -202 |
| 3.000 | -- | -- | -- | -- | -- | -- | -130 | -147 | -- | -177 | -163 | -178 | -191 | -203 |

- 1. MIL-STD-1251A - dash number, non-locking screws.
- 2. MIL-STD-1251A - dash number, non-locking screws.
- 3. MIL-STD-1251A - dash number, self-locking screws.
- 4. MIL-STD-1251A - dash number, self-locking screws.

SECTION 2000

SCREWS, FLAT POINT

APPLICABLE DOCUMENTS: MSS1029, 51031, 51965, 51966



SELF-LOCKING ELEMENT MSS1029,
51031, 51965, 51966
OPTIONAL NON-LOCKING: MSS1965

TABLE I. Materials.

| Material | Protective finish | Hardness-Rockwell | Applicable document |
|-------------|-------------------|-------------------|---------------------|
| Alloy steel | Cadmium plate | C45-53 | MSS1965, 51966 |
| CRES | Passivate | -- | MSS1029, 51031 |

TABLE II. MSS1029, 51031 part numbers (self-locking).

| Thread size | .112 | .138 | .164 | .190 | .250 | .3125 | .375 | .500 |
|------------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Threads per inch (-3A) | 40 UNC | 32 UNC | 32 UNC | 32 UNF | 24 UNF | 24 UNF | 24 UNF | 20 UNF |
| L | 1/ | 1/ | 1/ | 2/ | 2/ | 2/ | 2/ | 2/ |
| .125 | -101 | -111 | -- | -- | -- | -- | -- | -- |
| .148 | -102 | -112 | -132 | -102 | -112 | -- | -- | -147 |
| .250 | -103 | -113 | -133 | -103 | -113 | -125 | -- | -- |
| .312 | -104 | -114 | -134 | -104 | -114 | -126 | -- | -- |
| .375 | -105 | -115 | -135 | -105 | -115 | -127 | -137 | -147 |
| .500 | -107 | -117 | -137 | -107 | -117 | -128 | -138 | -148 |
| .625 | -109 | -119 | -139 | -109 | -119 | -129 | -139 | -149 |
| .750 | -- | -120 | -140 | -110 | -120 | -130 | -140 | -150 |
| .875 | -- | -121 | -141 | -- | -121 | -131 | -141 | -151 |
| 1.000 | -- | -- | -142 | -111 | -122 | -132 | -142 | -152 |
| 1.250 | -- | -- | -- | -- | -123 | -133 | -143 | -153 |
| 1.500 | -- | -- | -- | -- | -124 | -134 | -144 | -154 |
| 1.750 | -- | -- | -- | -- | -- | -135 | -145 | -155 |
| 2.000 | -- | -- | -- | -- | -- | -136 | -146 | -156 |
| 2.500 | -- | -- | -- | -- | -- | -- | -- | -157 |
| 3.000 | -- | -- | -- | -- | -- | -- | -- | -158 |

1/ MSS1029 + dash number.
2/ MSS1031 + dash number.

TABLE III. MSS1965, 51966 part numbers.

| Thread size | .086 | | .112 | | .138 | | .164 | | .190 | | .250 | | .3125 | | .375 | | .500 | |
|------------------------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|
| Threads per inch (-3A) | 56 UNC | | 40 UNC | | 32 UNC | | 32 UNC | | 24 UNC | | 28 UNF | | 18 UNC | | 24 UNF | | 13 UNC | |
| L | 1/ | 2/ | 1/ | 2/ | 1/ | 2/ | 1/ | 2/ | 1/ | 2/ | 1/ | 2/ | 1/ | 2/ | 1/ | 2/ | 1/ | 2/ |
| .125 | -1 | -8 | -101 | -17 | -111 | -27 | -131 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- |
| .198 | -2 | -9 | -102 | -18 | -112 | -28 | -132 | -39 | -111 | -51 | -- | -- | -- | -- | -- | -- | -- | -- |
| .250 | -- | -10 | -103 | -19 | -113 | -29 | -133 | -40 | -112 | -52 | -122 | -64 | -134 | -76 | -- | -- | -- | -- |
| .312 | -- | -11 | -104 | -20 | -114 | -30 | -134 | -41 | -113 | -53 | -123 | -65 | -135 | -77 | -- | -- | -- | -- |
| .375 | -- | -105 | -21 | -115 | -31 | -135 | -42 | -114 | -54 | -124 | -66 | -136 | -78 | -146 | -88 | -156 | -- | -- |
| .500 | -- | -107 | -- | -117 | -32 | -137 | -43 | -116 | -55 | -126 | -67 | -137 | -79 | -147 | -89 | -157 | -- | -- |
| .625 | -- | -109 | -- | -119 | -33 | -139 | -44 | -118 | -56 | -128 | -68 | -138 | -80 | -148 | -90 | -158 | -- | -- |
| .750 | -- | -- | -- | -120 | -- | -140 | -45 | -119 | -57 | -129 | -69 | -139 | -81 | -149 | -91 | -159 | -- | -- |
| .875 | -- | -- | -- | -121 | -- | -141 | -- | -- | -- | -130 | -- | -140 | -- | -150 | -- | -160 | -- | -- |
| 1.000 | -- | -- | -- | -- | -- | -142 | -- | -- | -120 | -58 | -131 | -70 | -141 | -82 | -151 | -92 | -161 | -- |
| 1.250 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -132 | -- | -142 | -- | -152 | -- | -162 | -- | -- |
| 1.500 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -133 | -- | -143 | -- | -153 | -- | -163 | -- | -- |
| 2.000 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -144 | -- | -154 | -- | -164 | -- | -- |
| 2.500 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -145 | -- | -155 | -- | -165 | -- | -- |
| 3.000 | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -- | -146 | -- | -156 | -- | -166 | -- | -167 |

1/ MSS1965 + dash number, non-locking.
2/ MSS1965 + dash number, self-locking.
3/ MSS1966 + dash number, self-locking.

MIL-STD-1251A

SECTION 2604
 SETSCREWS, HALF-DWG POINT
 APPLICABLE DOCUMENT: MSS1977

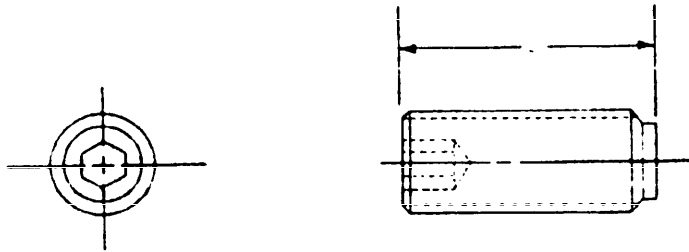


TABLE I. Material and part numbers.

| Material | Alloy steel | | | | | | | | | |
|-----------------------------|-----------------------|---------|---------|---------|---------|---------|----------|---------|---------|---------|
| Protective finish | Cadmium plate | | | | | | | | | |
| Hardness-Rockwell | C45-53 | | | | | | | | | |
| Thread designation (UNC-3A) | .086-56 | .112-40 | .138-32 | .164-32 | .190-24 | .250-20 | .3125-18 | .375-16 | .500-13 | .625-11 |
| L | MSS1977 - dash number | | | | | | | | | |
| .125 | -1 | -9 | -18 | -- | -- | -- | -- | -- | -- | -- |
| .188 | -2 | -10 | -19 | -29 | -39 | -- | -- | -- | -- | -- |
| .250 | -3 | -11 | -20 | -30 | -40 | -49 | -61 | -- | -- | -- |
| .312 | | -12 | -21 | -31 | -41 | -50 | -62 | -- | -- | -- |
| .375 | | -- | -22 | -32 | -42 | -51 | -63 | -- | -- | -- |
| .500 | | -- | -23 | -33 | -43 | -52 | -64 | -74 | -84 | -94 |
| .625 | | | | | | -53 | -65 | -75 | -85 | -95 |
| .750 | | | | | | -54 | -66 | -76 | -86 | -96 |
| 1.000 | | | | | | -55 | -67 | -77 | -87 | -97 |
| 1.250 | | | | | | -- | -- | -78 | -88 | -98 |

SECTION 2605
 SETSCREWS, RIVAL POINT
 APPLICABLE DOCUMENT: MIL-STD-1251A

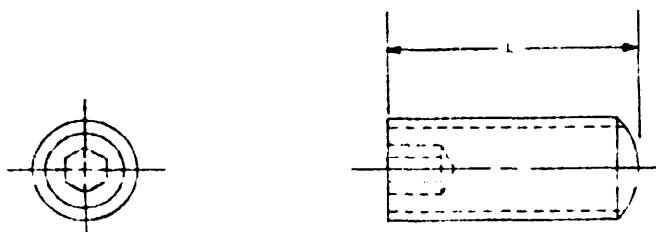


TABLE 1. Material and part numbers.

| Material | Alloy steel | | | | | | | | | |
|-----------------------------|-----------------------|---------|---------|---------|---------|---------|---------|---------|---------|----|
| Protective finish | Cadmium plate | | | | | | | | | |
| Hardness-Rockwell | C45-53 | | | | | | | | | |
| Thread designation (UNF-3A) | .086-56 | .112-40 | .138-32 | .164-32 | .190-24 | .250-20 | .312-14 | .375-16 | .500-13 | |
| L | MSE10P1 - dash number | | | | | | | | | |
| .125 | -1 | -8 | -16 | -- | -- | -- | -- | -- | -- | -- |
| .188 | -2 | -9 | -17 | -26 | -36 | -- | -- | -- | -- | -- |
| .250 | -- | -10 | -18 | -27 | -37 | -46 | -58 | -- | -- | -- |
| .312 | -- | -- | -19 | -28 | -38 | -47 | -59 | -- | -- | -- |
| .375 | -- | -- | -20 | -29 | -39 | -48 | -60 | -70 | -- | -- |
| .500 | -- | -- | -- | -30 | -40 | -49 | -61 | -71 | -90 | -- |
| .625 | -- | -- | -- | -- | -- | -50 | -62 | -72 | -81 | -- |
| .750 | -- | -- | -- | -- | -- | -51 | -63 | -73 | -82 | -- |
| 1.000 | -- | -- | -- | -- | -- | -52 | -64 | -74 | -83 | -- |

MIL-STD-1251A

SECTION 2700
 DIMENSIONS
 APPLICABLE EQUIPMENT: MS21316





TABLE I. Materials.

| Material | Protective finish | Tensile strength (psi) min |
|--------------|-------------------|----------------------------|
| Carbon steel | Cadmium plate | 48,000 |

TABLE II. MS21316 dash numbers.

| NOMINAL SIZE | | .138 | .164 | .190 | .250 | .3125 | .375 |
|---------------------------|-----------|----------|----------|----------|----------|----------|----------|
| THREADS PER INCH (UNC-2A) | | 32 | 32 | 24 | 20 | 18 | 16 |
| A HEAD WIDTH | MAX | .31 | .36 | .42 | .55 | .70 | .83 |
| | MIN | .29 | .34 | .40 | .52 | .67 | .80 |
| B HEAD HEIGHT | MAX | .33 | .38 | .48 | .64 | .78 | .95 |
| | MIN | .31 | .36 | .46 | .61 | .75 | .92 |
| C HEAD THICKNESS | MAX | .05 | .06 | .06 | .07 | .09 | .11 |
| | MIN | .04 | .05 | .05 | .05 | .07 | .09 |
| D DIAMETER OF FLAT | MAX | .07 | .09 | .10 | .13 | .17 | .21 |
| | MIN | .06 | .08 | .09 | .12 | .16 | .19 |
| E SHOULDER DIAMETER | MAX | .25 | .31 | .35 | .47 | .59 | .76 |
| | MIN | .23 | .29 | .32 | .44 | .56 | .71 |
| L LENGTH | TOLERANCE | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. |
| .25 | ±.03 | 1 | | | | | |
| .38 | | | | | | | |
| .50 | | 3 | 13 | 22 | 33 | 43 | |
| .62 | | | | 23 | 34 | | |
| .75 | | | | 24 | 35 | 45 | 56 |
| 1.00 | | 5 | 15 | 25 | 36 | 46 | 57 |
| 1.50 | ±.06 | | | 26 | | | |
| 2.00 | | | | 27 | 37 | 47 | 58 |
| | | | | 28 | 38 | 48 | 59 |
| 2.50 | ±.09 | | | | 39 | 49 | 60 |
| 3.00 | | | | | | 50 | 61 |

| STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL | |
|--|---------------|
| <p>INSTRUCTIONS. This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.</p> <p>NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.</p> | |
| DOCUMENT IDENTIFIER (Number) AND TITLE | |
| MIL-STD-1251A Screws And Bolts Preferred For Design, Listing Of | |
| NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER | |
| <input type="checkbox"/> VENDOR <input type="checkbox"/> USER <input type="checkbox"/> MANUFACTURER | |
| 1. <input type="checkbox"/> HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? <input type="checkbox"/> IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW. | |
| A. GIVE PARAGRAPH NUMBER AND WORDING | |
| B. RECOMMENDED WORDING CHANGE | |
| C. REASON FOR RECOMMENDED CHANGE(S) | |
| 2. REMARKS | |
| SUBMITTED BY (Printed or typed name and address - Optional) | TELEPHONE NO. |
| | DATE |

FOLD

DEPARTMENT OF THE ARMY



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

BUSINESS REPLY CARD
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Armament Research and
Development Command
ATTN: DRDAR-TST-S
Dover, NJ 07801



FOLD