

MILITARY STANDARD

MIL-STD-1323-389
(NAVY)

UNIT LOAD FOR UNDERWAY REPLENISHMENT GUIDANCE CONTROL UNIT: WGU-39/B, F/LASER GUIDED BOMBS IN CONTAINER, CNU-371/E


19 MAY 1993

UNIT LOAD DATA


NUMBER OF CONTROL UNITS PER CONTAINER	1
NUMBER OF CONTAINERS PER UNIT LOAD	9
GROSS WEIGHT OF ONE CONTAINER (LBS)	143.5
GROSS WEIGHT OF STEEL PALLET (LBS)	94
WEIGHT OF WOOD BATTENS (LBS)	8
WEIGHT OF STEEL STRAPPING (LBS)	8.5
GROSS WEIGHT OF UNIT LOAD (LBS)	1400 Δ
CUBE (CU FT)	49.3

FOR HAZARD CLASSIFICATION SEE SWO20-AC-SAF-010/020/030

Δ DO NOT USE FOR SHIPPING WEIGHT
DO NOT STACK MORE THAN 4 UNIT LOADS HIGH IN STORAGE.

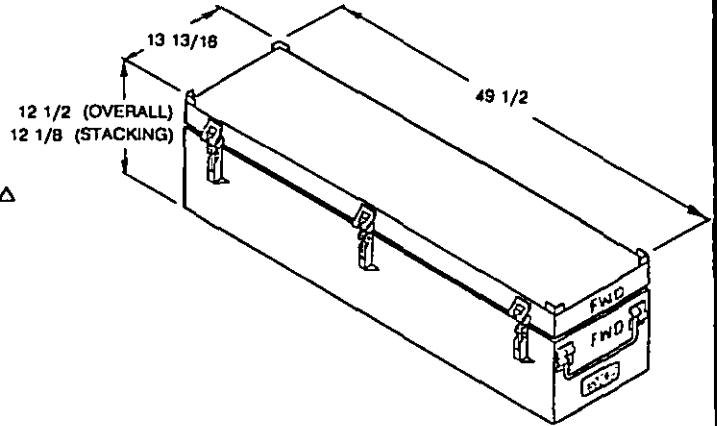

CONTAINER, CNU-371/E
DWG. 793500

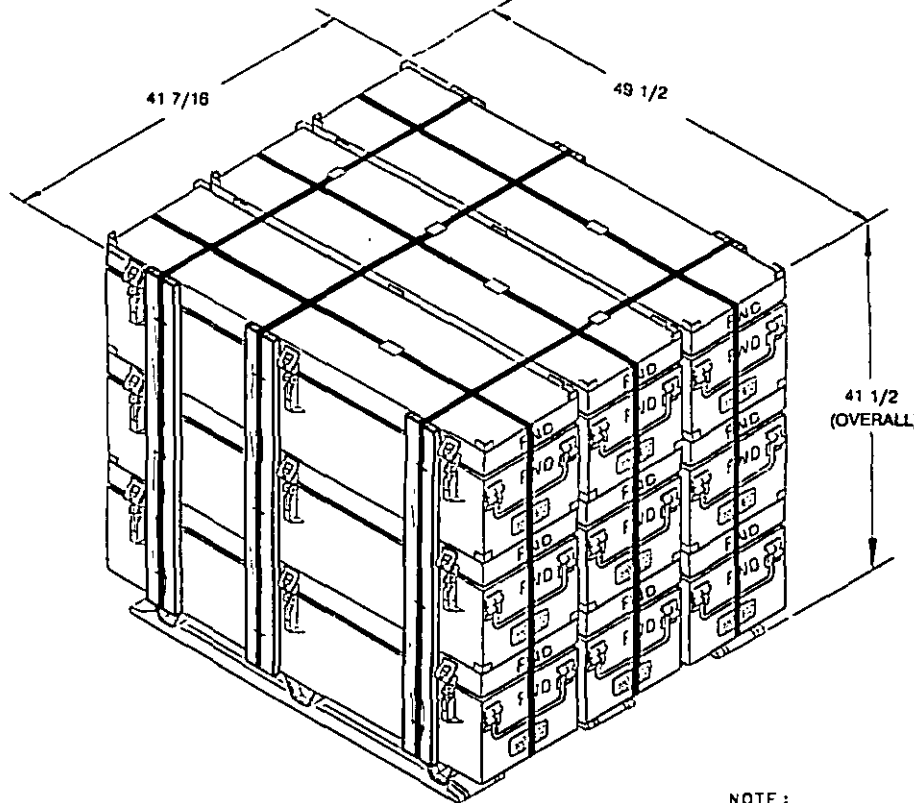

TEST REPORT NUMBER 83057

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION IS UNLIMITED.

NOTE:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING,
CONTAINERLOADING AND CARLOADING MILITARY
STANDARDS, REFER TO INDEX TO STANDARDS,
MIL-HDBK-236 (NAVY).

FSC 8140

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

SIGNATURE: TDA, WPNSTA EARLE DATE:

ORIGINATOR: DATE:

SIGNATURE: ARMSYSCOM BY DIRECTION DATE:

WPNSTA EARLE, NEW JERSEY

PALLETIZING PROCEDURE


- (A) THREAD LONGITUDINAL STRAPS, ITEM 2, BETWEEN 4th AND 5th DECK WIRES (2 PLACES) AND 11th AND 12th DECK WIRES OF PALLET, ITEM 1, AS SHOWN IN DETAIL A.
- (B) POSITION CONTAINERS ON PALLET WITH EQUAL OVERHANG ON BOTH SIDES AND BOTH ENDS. BE SURE THAT THE LATCHES OF THE CONTAINER FOR EACH ROW ARE BUTTED AGAINST EACH OTHER.
- (C) POSITION LATERAL STRAPS, ITEM 3, UNDER THE PALLET DECK, AROUND THE VERTICAL BATTENS, ITEM 5, AND OVER THE UNIT LOAD AT LOCATIONS AS SHOWN. TENSION AND DOUBLE NOTCH SEAL, ITEM 4. BE SURE TO SECURE THE TWO OUTBOARD STRAPS FIRST THEN THE CENTER STRAP.
- (D) POSITION LONGITUDINAL STRAPS, ITEM 2, OVER THE UNIT LOAD. TENSION AND DOUBLE NOTCH SEAL, ITEM 4.
- (E) SECURE STRAPS TO VERTICAL BATTENS WITH STAPLES, ITEM 6, AS SHOWN.

MARKING:

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129 (NAVY).

DEPALLETIZING PROCEDURE

- (A) REMOVE STAPLES.
- (B) CUT AND REMOVE STRAPS AND BATTENS.
- (C) REMOVE CONTAINERS.

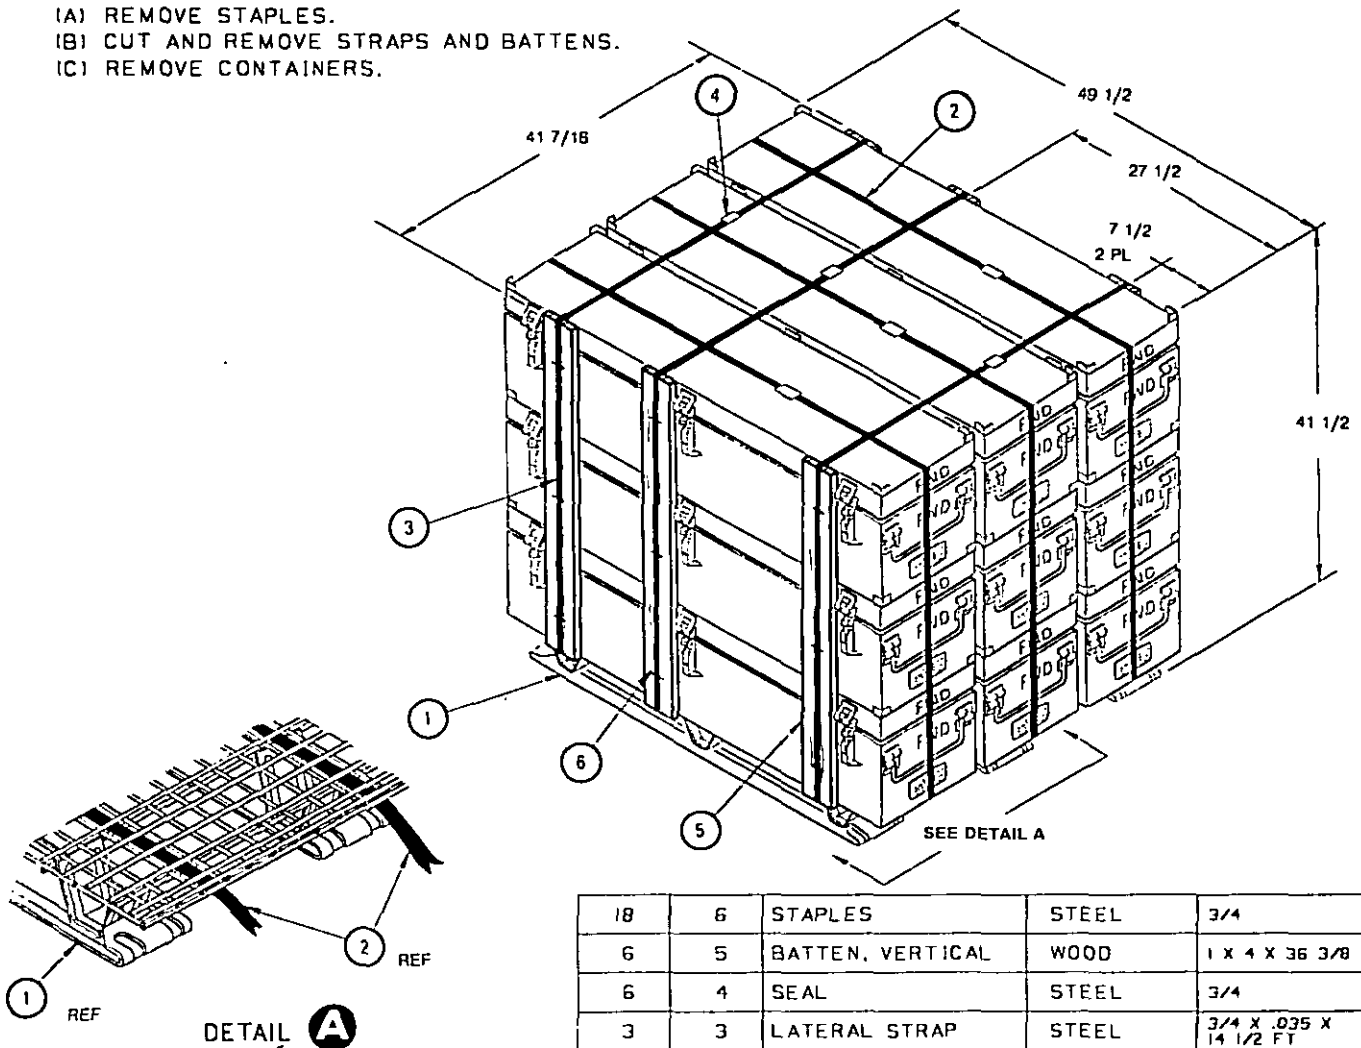

18	6	STAPLES	STEEL	3/4
6	5	BATTEN, VERTICAL	WOOD	1 X 4 X 36 3/8
6	4	SEAL	STEEL	3/4
3	3	LATERAL STRAP	STEEL	3/4 X .035 X 14 1/2 FT
3	2	LONGITUDINAL STRAP	STEEL	3/4 X .035 X 16 FT
1	1	PALLET, MK 3 MOD 0	564200	40 X 48 X 4 3/4
REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS

LIST OF MATERIALS

NOTES:

ALL MATERIALS SHALL BE IN ACCORDANCE WITH THE GENERAL DOCUMENT, MIL-STD-1323 (NAVY).