

MIL-STD-1754  
29 December 1978

# MILITARY STANDARD

FASTENING DEVICES  
PREFERRED FOR DESIGN,  
LISTING OF



FSC 5325

**MIL-STD-1754**  
**29 December 1978**

DEPARTMENT OF DEFENSE  
Washington, DC 20301

Fastening Devices Preferred For Design, Listing of

MIL-STD-1754

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Aeronautical Systems Division (AFSC), ATTN: ASD/ENESS, Wright-Patterson Air Force Base, Ohio 45433 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

MIL-STD-1754  
29 December 1978

## FOREWORD

1. The purpose of this bookform standard is to provide a commodity type parts document on fastening devices to aid military equipment designers and engineers in the selection of preferred fastening devices.

2. This document consists of an index of preferred standardization documents and a listing of preferred parts within these documents that have been selected with respect to configuration, sizes, lengths, materials, and finishes for fastening devices.

3. The selection of preferred documents listed in this standard and the selection of part numbers within the preferred documents were made as follows:

### a. Selection of Documents

(1) Documents listed or scheduled for listing in the Department of Defense Index of Specifications and Standards (DODISS).

(2) Documents which are active for design.

(3) Documents specifying part numbers (dash numbers) which designate specific sizes, materials and finishes.

### b. Selection of Part Numbers

(1) By conducting a thorough search and evaluation of existing DoD procurement information.

(2) By evaluation of preferred parts listed in recent weapon system contracts.

(3) By evaluation of preferred parts lists obtained from industry.

4. To increase the scope and versatility of this fastening devices standard, periodic revisions will be developed. Results from Standardization studies, MILITARY PARTS CONTROL ADVISORY GROUP (MPCAG) evaluations, evaluation of a new family of fastening devices and recommendations from interested activities will form the basis for these revisions.

**MIL-STD-1754**  
**29 December 1978**

**CONTENTS**

	<u>Page</u>
Paragraph 1. SCOPE-----	1
2. REFERENCED DOCUMENTS-----	2-4
3. DEFINITIONS-----	4-6
4. GENERAL STATEMENTS-----	6
5. DETAILED REQUIREMENTS-----	6
6. NOTES-----	6

**SECTIONS**

Section 100 EYELET, METALLIC	
101 Eyelet, Metallic, Electrical, Printed Circuit Board, Funnel Type-----	101.1
102 Eyelet, Metallic, Electrical, Rolled Flange Type-----	102.1
103 Eyelet, Metallic, Flat Range Type-----	103.1
104 Eyelet-Lacing-----	104.1
105 Eyelet, Metallic, Rolled Flange Type; and Eyelet Washer-----	105.1
106 Eyelet, Metallic, Telescopic Flange Type-----	106.1
200 FASTENER, SLIDE, INTERLOCKING	
201 Fasteners-Interlocking Slide-----	201.1
300 FASTENER, SNAP	
301 Fasteners, Snap Style 1, Large Curtain Type-----	301.1

MIL-STD-1754  
29 December 1978

# SECTIONS - Continued

	<u>Page</u>
Section 302 Fasteners, Snap Style 1A, Small Curtain Type-----	302.1
303 Fasteners, Snap Style 1B, Mud-Proof Curtain Type-----	303.1
304 Fasteners, Snap, Style 2, Regular Wire Spring Clamp Type-----	304.1
305 Fasteners, Snap, Style 2A, Small Wire Spring Clamp Type-----	305.1
306 Fasteners, Snap, Style 3, Pronged Ring- Head Type-----	306.1
307 Fasteners, Snap, Style 4, Three Way Locking Type-----	307.1
308 Fasteners, Snap, Style 7, Rivet Type-----	308.1
400 FASTENER, SNAPSLIDE	
401 Fastener-Snapslide-----	401.1
500 STUD, SNAPSLIDE, FASTENER	
501 Stud, Style I, Snapslide Fastener-----	501.1
502 Stud, Style III, Snapslide Fastener-----	502.1
503 Stud, Style IV, Snapslide Fastener-----	503.1
600 FASTENER ASSEMBLY, TURNLOCK	
601 Fastener, Rotary, Quick-Operating, Flush Head Floating Type, 2210 LBS Minimum Tensile Strength-----	601.1
602 Fastener, Rotary, Quick-Operating, Protruding Head, Floating Type, 2210 LBS Minimum Tensile Strength-----	602.1

MIL-STD-1754

29 December 1978

## SECTIONS - Continued

	<u>Page</u>
Section 700 GROMMET, METALLIC	
701 Grommets, Metallic, Plain and Spur, with Washer Type I and Type III-----	701.1
800 GROMMET, PLASTIC	
801 Grommet-Drainage, Plastic-----	801.1
802 Grommet, Plastic, Edging-----	802.1
803 Grommet-Plastic Flip Type-----	803.1
804 Grommet, Plastic-Split-----	804.1
900 GROMMET, RUBBER	
901 Grommets, Synthetic and Silicone Rubber, Hot Oil and Coolant Resistant-----	901.1

MIL-STD-1754

29 December 1978

## 1. SCOPE

1.1 Scope. This standard provides a listing of preferred fastening devices encompassing the following characteristics:

- a. Configuration
- b. Size
- c. Materials
- d. Protective Coatings and Finishes

1.2 Purpose. The purpose of this standard is as follows:

- a. Provide the designer with a listing of preferred fastening devices to promote their use in design of weapon systems and equipments.
- b. Control and minimize the variety of fastening devices used in military equipment thereby facilitating logistic support of the equipment during its life cycle.

1.3 Application. To minimize the proliferation of fastening devices, only the preferred part number listed herein are authorized for use in new design. All other part numbers, even though shown on current Military Specification Sheets, Military Standards (MS), National Aerospace Standards (NAS), Aeronautical Standards (AS), and Air Force/Navy Aeronautical Standards (AN), are not approved for use in new design unless approved by the cognizant Government procuring activity.

1.4 Intended use. Implement this standard by including one of the following options in the contract:

a. Require this standard as a supplement to an end use type standard such as MIL-STD-1471 or MIL-STD-1515. When thus required, only the fastening devices listed in both the end use type and this standard are acceptable. Use of other fastening devices requires approval of the Government procuring activity.

b. Require this standard as a guide to be used with an end use type standard such as MIL-STD-1471 or MIL-STD-1515. When thus required, the fastening devices listed in the end use type standard and this standard are acceptable. The designer must assure himself the fastening devices listed in both the end use type standard and this standard are not adequate for his requirement before using fastening devices not listed herein. Use of fastening devices not listed in the end use type standard requires approval of the Government procuring activity.

**MIL-STD-1754****29 December 1978**

c. Require this standard and indicate exceptions to it. When thus required, only the fastening devices listed in this standard and not excluded by the exceptions are acceptable. Use of other fastening devices requires approval of the Government procuring activity.

d. Require this standard as a guide. When thus required, the designer must assure himself the fastening devices listed in this standard are not adequate for the requirement before using other fastening devices.

**2. REFERENCED DOCUMENTS**

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this standard to the extent specified herein.

**SPECIFICATIONS****MILITARY**

- MIL-E-20652/1 - Eyelets, Metallic, Rolled Flange Type; And Eyelet Washer.
- MIL-E-20652/2 - Eyelets, Metallic, Flat Flange Type.
- MIL-E-20652/3 - Eyelets, Metallic, Telescopic Type.

**STANDARDS****MILITARY**

- MS17731 - Fastener, Rotary, Quick-Operating, Flush Head, Floating Type, 2210 LBS Min Tensile Strength.
- MS17732 - Fastener, Rotary, Quick-Operating, Protruding Head, Floating Type, 2210 LBS Min Tensile Strength.
- MS20230 - Grommet, Metallic, Plain and Spur, With Washer, Type I and Type III.
- MS21266 - Grommet, Plastic, Edging.
- MS21323 - Stud-Style I Snapslide Fastener.
- MS21325 - Stud-Style III Snapslide Fastener.
- MS21326 - Stud, Style IV Snapslide Fastener.



**MIL-STD-1754**  
**29 December 1978**

STANDARDS

MILITARY - Continued

- |         |   |
|---------|---|
| MS21327 | - Fastener Installation-Snapslide.  |
| MS21332 | - Fastener-Snapslide.   |
| MS27977 | - Fasteners, Snap, Style 1 (Large Curtain Type).                          |
| MS27978 | - Fasteners, Snap, Style 1A (Small Curtain Type).                         |
| MS27979 | - Fasteners, Snap, Style 1B (Mud-Proof Curtain Type).                     |
| MS27980 | - Fasteners, Snap, Style 2 (Regular Wire Spring Clamp Type).              |
| MS27981 | - Fasteners, Snap, Style 2A (Small Wire Spring Clamp Type).               |
| MS27982 | - Fasteners, Snap, Style 3 (Pronged Ring Head Type).                      |
| MS27983 | - Fasteners, Snap, Style 4 (Three Way Locking Type).                      |
| MS27986 | - Fasteners, Snap, Style 7 (Rivet Type).                                  |
| MS35489 | - Grommets, Synthetic and Silicone Rubber, Hot Oil and Coolant Resistant. |

AIR FORCE-NAVY AERONAUTICAL

- |       |                                 |
|-------|---------------------------------|
| AN229 | - Fasteners-Interlocking Slide. |
| AN231 | - Grommet-Drainage, Plastics.   |
| AN240 | - Eyelet-Lacing.                |

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

**MIL-STD-1754****29 December 1978**

2.2 Other Publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC. (AIA)

NATIONAL AEROSPACE STANDARDS

- |         |   |
|---------|---|
| NAS557  | - Grommet, Plastic-Split.   |
| NAS1368 | - Grommet-Plastic Flip Type.  |
| NAS1453 | - Eyelet, Metallic, Electrical, Printed Circuit Board, Funnel Type. |
| NAS1788 | - Eyelet, Metallic, Electrical, Rolled Flange Type.                 |

(Application for copies should be addressed to the Aerospace Industries Association of America, Inc., 1725 De Sales Street, N.W., Washington, DC 20036.)

### 3. DEFINITIONS

3.1 Adopted Industry Standards. Any Industry Specification or Standard which is listed in the Department of Defense Index of Specifications and Standards (DODISS).

3.2 Commodity Type Document. A document which lists preferred parts within a Federal Supply Classification class or Item Name. This document is to be used for selecting preferred parts for a new design when the document is invoked as a contractual requirement in conjunction with a parts control requirement.

3.3 End Use Type Document. A document that lists preferred documents and establishes parts requirements which are contractually binding for the design and construction/manufacture of a weapon system or an established equipment category such as MIL-STD-1515.

3.4 Military Parts Control Advisory Group (MPCAG). A Department of Defense organization which provides advice to the Military Departments and military contractors on the selection of parts in assigned commodity classes, and collects data on nonstandard parts for developing or updating military specifications and standards.

MIL-STD-1754  
29 December 1978

3.5 Definitions of approved item names used in this standard are as follows:

- a. Eyelet, Metallic. A one-piece metal item; usually tubular, flanged at one end, the other end open. It is used primarily for lining and reinforcing the edges of holes. The unflanged end is designed to be inserted through a hole and crimped to form a mating flange.
- b. Fastener, Slide, Interlocking. Limited to items commonly known as "zipper".
- c. Fastener, Snap. A nonpositive fastening device consisting of a STUD, SNAP FASTENER and a SOCKET, SNAP FASTENER. It may have any one or several of the following components: POST, SNAP FASTENER; CLINCH PLATE, SNAP FASTENER; and CAP, SNAP FASTENER. It is used as a means of attaching covers, curtains, or similar items to each other or to vehicles, hatch coaming, bulkheads, and the like.
- d. Fastener, Snapslide. A mechanical device consisting of a latch, latch guide, post, and washer designed to support and hold equipment in a fixed position.
- e. Stud, Snapslide, Fastener. An item which is used in conjunction with FASTENER, SNAPSLIDE. It secures the latch when mated with the notched rest of the latch.
- f. Fastener Assembly, Turnlock. An item consisting of a STUD, TURNLOCK FASTENER or a STUD ASSEMBLY, TURNLOCK FASTENER, and a RECEPTACLE, TURNLOCK FASTENER. It is designed to provide a means for securely locking two items together and allow for quick locking or un-locking action.
- g. Grommet, Metallic. A two-piece metallic item, one piece usually tubular in appearance and flanged at one end, the other piece a plain tooth or spur washer or retaining ring. It is primarily used for lining and reinforcing the edges of holes. The unflanged end is designed to be inserted through a hole and retained in place by being crimped over the plain or tooth washer or retaining ring or by clinching action between the spur washer and the flanged end.
- h. Grommet, Plastic. An item of any peripheral shape having flanges or a groove(s) on its outer perimeter to provide a self-retaining characteristics when inserted in a hole, clamp, or the like. Designed for the purpose of protecting and/or insulating wires, cables and other items passing through it.

**MIL-STD-1754****29 December 1978**

i. Grommet, Rubber. An item of any peripheral shape having flanges or a groove(s) on its outer perimeter to provide a self-retaining characteristics when inserted in a hole, clamp, or the like. Designed for the purpose of protecting and/or insulating wires, cables and other items passing through it.

**4. GENERAL STATEMENTS****4.1 Selection procedure.**

4.1.1 Document selection. The applicable section shall be selected after reviewing the table of contents.

4.1.2 Part number selection (preliminary). A preliminary selection of the applicable part number shall be made after reviewing the nominal parameters (sizes, materials, tensile strength) listed in the sections.

4.1.3 Part number selection (final). A final selection of the applicable part number shall be made after reviewing the detailed requirements specified in the referenced fastening device documents for suitability in the particular military equipment being designed (considering the application and environmental conditions).

**5. DETAILED REQUIREMENTS**

5.1 The detailed requirements for preferred fastening devices are contained in the applicable fastening device document and associated procurement specification. If there is disagreement between the nominal parameters listed in this standard and the parameters specified in the applicable fastening device document or associated procurement specification, the parameters specified in the applicable fastening device document or associated procurement specification shall prevail.

**6. NOTES**

6.1 Dimensions. Dimensions shown in the sections contained herein are in inches.

**MIL-STD-1754**  
**29 December 1971**

**Custodians:**

Army - GL  
Navy -  
Air Force - 11

**Review activities:**

Army - AT, AV, EA, ER, MI  
Navy - OS, SH  
Air Force -  
DLA - DM, IS  
NS

**User activities:**

Army - ME  
Navy - MC  
Air Force - 99

**Preparing activity:**

Air Force - 11

**Agent:**

DLA - IS

(Project 5325-0176)




MIL-STD-1754  
29 December 1978

# SECTION 101

EYELET, METALLIC, ELECTRICAL, PRINTED CIRCUIT  
BOARD, FUNNEL TYPE

APPLICABLE DOCUMENT: NAS1453

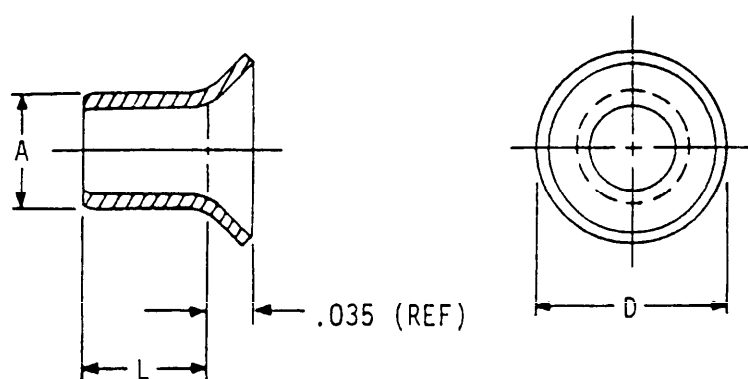

MATERIAL	PROTECTIVE FINISH
COPPER	SOLDER ELECTROPLATE

TABLE I. EYELET CONFIGURATION DASH NUMBERS.

A	D	L	APPLICABLE PRINTED CIRCUIT BOARD THICKNESS (REF)	MAXIMUM AWG LEAD WIRE SIZE	NAS1453 DASH NO.
.047	.080	.095	.062	NO. 22	-3-095S
.060	.100	.095	.062	NO. 20	-4-095S






MIL-STD-175  
29 December 197

## SECTION 102

EYELET, METALLIC, ELECTRICAL,  
ROLLED FLANGE TYPE

APPLICABLE DOCUMENT: NAS1788

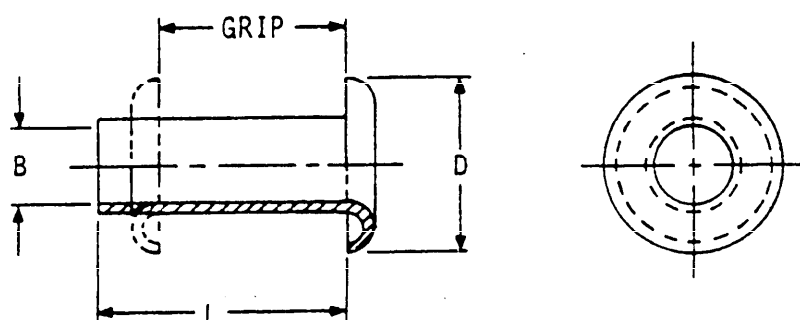

MATERIAL	PROTECTIVE FINISH
BRASS	ELECTROPLATED TIN-LEAD OR TIN

MIL-STD- 1754

29 December 1978

TABLE I. EYELET CONFIGURATION DASH NUMBERS.

D	L	B	GRIP (MAX)	NAS1703 DASH NO.
.080	.062	.036	.020	-1-2T
	.093		.051	-1-3T
	.125		.082	-1-4T
.105	.062	.043	.020	-2-2T
	.093		.051	-2-3T
	.125		.082	-2-4T
	.156		.113	-2-5T
	.187		.144	-2-6T
	.219		.176	-2-7T
.150	.093	.069	.045	-3-3T
	.125		.077	-3-4T
	.156		.108	-3-5T
	.187		.139	-3-6T
	.219		.171	-3-7T
	.250		.202	-3-8T
	.281		.233	-3-9T
	.312		.264	-3-10T
.200	.093	.097	.045	-4-3T
	.125		.077	-4-4T
	.156		.108	-4-5T
	.187		.139	-4-6T
	.219		.171	-4-7T
	.250		.202	-4-8T
	.281		.233	-4-9T
	.312		.264	-4-10T
	.344		.296	-4-11T
.245	.093	.127	.040	-5-3T
	.125		.072	-5-4T
	.156		.103	-5-5T
	.187		.134	-5-6T
	.219		.166	-5-7T
	.250		.197	-5-8T
	.281		.228	-5-9T
	.312		.259	-5-10T

MIL-STD-1754  
29 December 1978

TABLE I. EYELET CONFIGURATION DASH NUMBERS. - CONTINUED

D	L	B	GRIP (MAX)	NAS1788 DASH NO.
.290	.093	.157	.040	-6-3T
	.125		.072	-6-4T
	.156		.103	-6-5T
	.187		.134	-6-6T
	.219		.166	-6-7T
	.250		.197	-6-8T
	.281		.228	-6-9T
	.312		.259	-6-10T
	.344		.291	-6-11T
	.375		.322	-6-12T
	.406		.353	-6-13T
	.437		.384	-6-14T
.340	.093	.188	.035	-7-3T
	.125		.067	-7-4T
	.156		.098	-7-5T
	.187		.129	-7-6T
	.219		.161	-7-7T
	.250		.192	-7-8T
	.281		.223	-7-9T
	.312		.254	-7-10T
	.344		.286	-7-11T
	.375		.317	-7-12T
.385	.093	.218	.035	-8-3T
	.125		.067	-8-4T
	.156		.098	-8-5T
	.187		.129	-8-6T
	.219		.161	-8-7T
	.250		.192	-8-8T
	.281		.223	-8-9T
	.312		.254	-8-10T
	.344		.286	-8-11T
	.375		.317	-8-12T
	.406		.348	-8-13T




MIL-STD-1754  
29 December 1978

# SECTION 103

EYELET, METALLIC, FLAT FLANGE TYPE

APPLICABLE DOCUMENT: MIL-E-20652/2

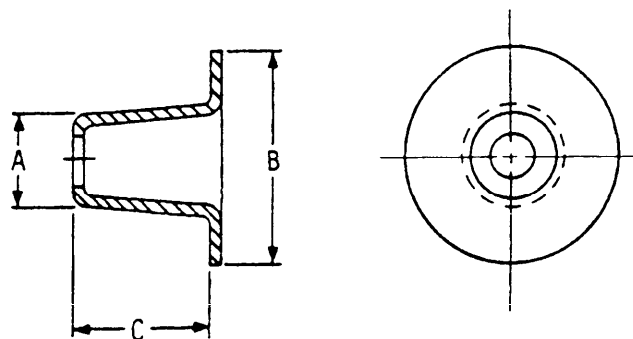

MATERIAL	PROTECTIVE FINISH
ALUMINUM	ANODIZED


TABLE I. EYELET CONFIGURATION DASH NUMBERS.

A	B	C	M20652/2 DASH NO.
.131- .157	.236	.125	-AAE201
.144- .175	.256	.132	-AAE202
.156- .184	.298	.130	-AAE203
.208- .234	.439	.224	-AAE204



**MIL-STD-1754**  
**29 December 1978**

**SECTION 104**  
**EYELET - LACING**  
**APPLICABLE DOCUMENT: AN240**

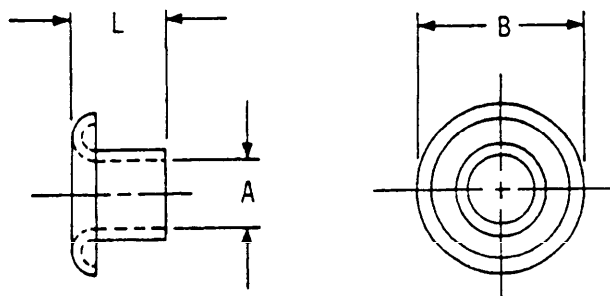

MATERIAL	PROTECTIVE FINISH
STEEL	CADMIUM PLATE OR BLACK ENAMEL
BRASS	BLACK ENAMEL

**TABLE I. EYELET CONFIGURATION DASH NUMBER.**

A	B	L	FOR USE WITH MATERIAL THICKNESS (MAX.)	AN240 DASH NO.	
				STEEL	BRASS
.125	.312	.170	.094	F2	-2
.188	.375	.190	.109	F3	-3
.250	.500	.210	.125	F4	-4






**MIL-STD-1754**  
**29 December 1978**

## SECTION 105

EYELET, METALLIC, ROLLED FLANGE TYPE; AND EYELET WASHER

APPLICABLE DOCUMENT: MIL-E-20652/1

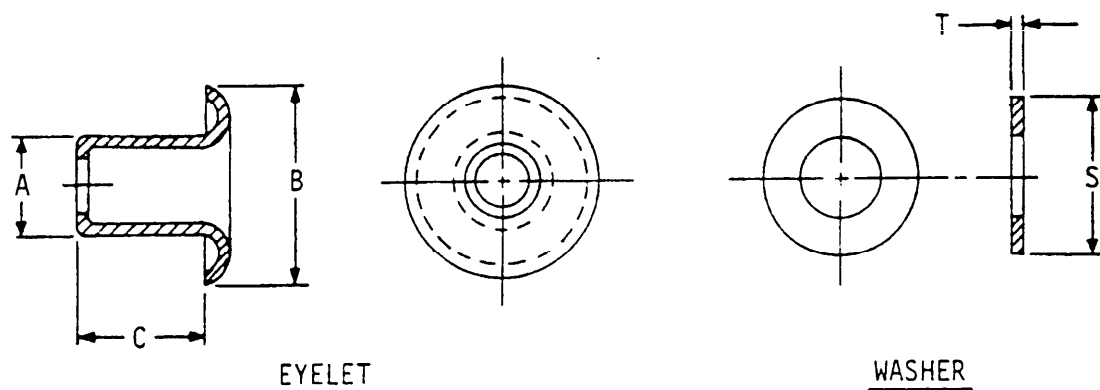

MATERIAL	PROTECTIVE FINISH
ALUMINUM	BLACK ENAMEL
BRASS	BLACK CHEMICAL

TABLE I. EYELET CONFIGURATION DASH NUMBERS.

A	B	C	M20652/1 DASH NO.
.156	.254	.121	-ABE102
.158	.245	.182	-BBE103
.158	.245	.222	-BBE104
.170	.260	.147	-BBE105
.177	.300	.138	-ABE106
.200	.300	.187	-BBE110
.192- .208	.346	.145	-ABE111
.200	.343	.210	-ABE112
.200	.403	.143	-BBE114
.200	.403	.210	-BBE117
.200	.403	.250	-BBE118

A	B	C	M20652/1 DASH NO.
.204	.345	.185	-BBE119
.212	.550	.237	-BBE120
.212	.550	.297	-BBE121
.221	.388	.166	-ABE122
.210- .233	.460	.155	-BBE124
.273	.450	.185	-BBE125
.279	.494	.180	-ABE126
.285- .297	.490	.198	-ABE128
.238- .321	.505	.222	-ABE129
.350	.592	.188	-ABE131

NOTE: ABE INDICATES ALUMINUM ALLOY, BLACK ENAMEL FINISH EYELET.  
BBE INDICATES BRASS, BLACK CHEMICAL FINISH EYELET.

**MIL-STD-1754**  
**29 December 1978**

TABLE II. WASHER CONFIGURATION DASH NUMBER.


S	T	M20652/1 DASH NO.	USE WITH EYELETS- NUMBER
.450	.020	-BBW101	BBE114, BBE117 BBE118
.503	.031	-BBW102	BBE120, BBE121

NOTE: BBW INDICATES BRASS, BLACK CHEMICAL FINISH WASHER.

MIL-STD-1754  
29 December 1978

## SECTION 106

EYELET, METALLIC, TELESCOPIC TYPE  
APPLICABLE DOCUMENT: MIL-E-20652/3

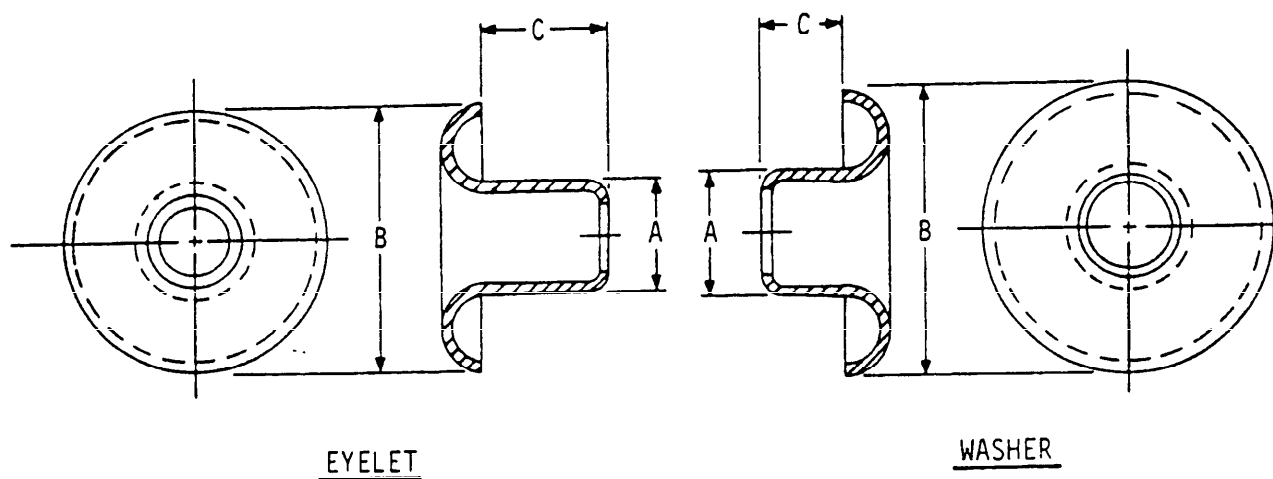

MATERIAL	PROTECTIVE FINISH
ALUMINUM	BLACK ENAMEL
BRASS	BLACK CHEMICAL

**MIL-STD-1754**  
**29 December 1978**

TABLE I. EYELET AND WASHER CONFIGURATION DASH NUMBERS.

PART	A	B	C	M20652/3 DASH NO.	FOR USE WITH DASH NUMBER
EYELET	.190-	.350	.153	-BBT301	-BBT302
	.250				
WASHER	.225-	.428	.118	-BBT302	-BBT301
	.235				
EYELET	.200	.403	.210	-BBT307	-BBT308
WASHER	.243	.425	.125	-BBT308	-BBT307
EYELET	.212-	.455	.162	-ABT309	-ABT310
	.268				
WASHER	.255	.450	.120	-ABT310	-ABT309
EYELET	.223	.388	.166	-ABT313	-ABT314
WASHER	.255	.440	.095	-ABT314	-ABT313
EYELET	.295-	.540	.150	-ABT317	-ABT318
	.310				
WASHER	.335	.545	.100	-ABT318	-ABT317

NOTE: ABT INDICATES ALUMINUM ALLOY, BLACK ENAMEL TELESCOPIC EYELET OR WASHER.


BBT INDICATES BRASS, BLACK CHEMICAL FINISH TELESCOPIC EYELET OR WASHER.

MIL-STD-175  
29 December 197

SECTION 201  
FASTENERS - INTERLOCKING SLIDE  
APPLICABLE DOCUMENT: AN229


TYPE A

NON-SEPARATING,  
SINGLE ACTION

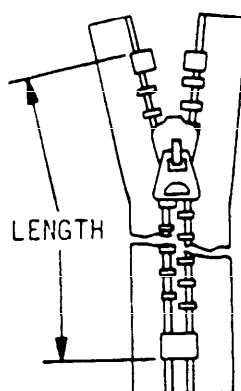

TYPE B

SEPARATING,  
SINGLE ACTION

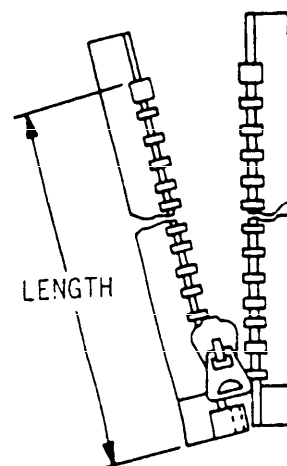

MATERIAL	PROTECTIVE FINISH (CHAIN)
BRASS	NATURAL

**MIL-STD-1754**  
**29 December 1978**

TABLE I. TYPE "A" CONFIGURATION DASH NUMBERS.

SIZE	LENGTH	AN229 DASH NO.		SIZE	LENGTH	AN229 DASH NO.	
		LOCKING	NONLOCKING			LOCKING	NONLOCKING
1 (LIGHT-MEDIUM SERVICE)	2	-1AL8-I	-1AS8-I	2 (MEDIUM SERVICE)	15	-2AL60-I	-2AS60-I
	3	12	12		16	64	64
	4	16	16		17	68	68
	5	20	20		18	72	72
	6	24	24		19	76	76
	7	28	28		20	80	80
	8	32	32		21	84	84
	9	36	36		22	88	88
	10	40	40		23	92	92
	11	44	44		24	96	96
	12	48	48		25	100	100
	13	52	52		26	104	104
	14	56	56		27	108	108
	15	60	60		28	112	112
	16	64	64		29	116	116
	17	68	68		30	120	120
	18	72	72		31	124	124
	19	76	76		32	128	128
	20	80	80		33	132	132
	22	88	88		34	136	136
	24	96	96		35	140	140
	26	104	104		36	144	144
	28	112	112		37	148	148
	30	120	120		38	152	152
	32	128	128		39	156	156
	34	136	136		40	160	160
	36	144	144		41	164	164
2 (MEDIUM SERVICE)	4	-2AL16-I	-2AS16-I		42	168	168
	5	20	20		43	172	172
	6	24	24		44	176	176
	7	28	28		45	180	180
	8	32	32		46	184	184
	9	36	36		47	188	188
	10	40	40		48	192	192
	11	44	44		49	196	196
	12	48	48		50	200	200
	13	52	52		51	204	204
	14	56	56		52	208	208

**MIL-STD-1754**  
**29 December 1978**

**TABLE I. TYPE "A" CONFIGURATION DASH NUMBERS. - CONTINUED**

SIZE	LENGTH	AN229 DASH NO.		SIZE	LENGTH	AN229 DASH NO.	
		LOCKING	NONLOCKING			LOCKING	NONLOCKING
2 (MEDIUM SERVICE)	53	-2AL212-I	-2AS212-I	4 (HEAVY SERVICE)	14	-4AL56-I	-4AS56-I
	54	216	216		15	60	60
	55	220	220		16	64	64
	56	224	224		17	68	68
	57	228	228		18	72	72
	58	232	232		19	76	76
	59	236	236		20	80	80
	60	240	240		21	84	84
	61	244	244		22	88	88
	62	248	248		23	92	92
	63	252	252		24	96	96
	64	256	256		25	100	100
	65	260	260		26	104	104
	66	264	264		27	108	108
	67	268	268		28	112	112
	68	272	272		29	116	116
	69	276	276		30	120	120
	70	280	280		31	124	124
	71	284	284		32	128	128
	72	288	288		33	132	132
	73	292	292		34	136	136
	74	296	296		35	140	140
	75	300	300		36	144	144
	76	304	304		37	148	148
	77	308	308		38	152	152
	78	312	312		39	156	156
	79	316	316		40	160	160
	80	320	320		41	164	164
4 (HEAVY SERVICE)	4	-4AL16-I	-4AS16-I		42	168	168
	5	20	20		43	172	172
	6	24	24		44	176	176
	7	28	28		45	180	180
	8	32	32		46	184	184
	9	36	36		47	188	188
	10	40	40		48	192	192
	11	44	44		49	196	196
	12	48	48		50	200	200
	13	52	52		51	204	204
					52	208	208

**MIL-STD-1754**  
**29 December 1978**

**TABLE I. TYPE "A" CONFIGURATION DASH NUMBERS. - CONTINUED**

SIZE	LENGTH	AN229 DASH NO.		SIZE	LENGTH	AN229 DASH NO.	
		LOCKING	NONLOCKING			LOCKING	NONLOCKING
4 (HEAVY SERVICE)	53	-4AL212-I	-4AS212-I	4 (HEAVY SERVICE)	57	-4AL228-I	-4AS228-I
	54	216	216		58	232	232
	55	220	220		59	236	236
	56	224	224		60	240	240

**TABLE II. TYPE "B" CONFIGURATION DASH NUMBERS.**

SIZE	LENGTH	AN229 DASH NO.		SIZE	LENGTH	AN229 DASH NO.	
		LOCKING	NONLOCKING			LOCKING	NONLOCKING
2 (MEDIUM SERVICE)	5	-2BL20-I	-2BS20-I	4 (HEAVY SERVICE)	8	-4BL32-I	-4BS32-I
	6	24	24		9	36	36
	7	28	28		10	40	40
	8	32	32		11	44	44
	9	36	36		12	48	48
	10	40	40		13	52	52
	11	44	44		14	56	56
	12	48	48		15	60	60
	13	52	52		16	64	64
	14	56	56		17	68	68
	15	60	60		18	72	72
	16	64	64		19	76	76
	17	68	68		20	80	80
	18	72	72		21	84	84
	19	76	76		22	88	88
	20	80	80		23	92	92
	21	84	84		24	96	96
	22	88	88		25	100	100
	23	92	92		26	104	104
	24	96	96		27	108	108
	25	100	100		28	112	112
	26	104	104		29	116	116
	27	108	108		30	120	120
	28	112	112		31	124	124
	29	116	116		32	128	128
	30	120	120		33	132	132
4 (HEAVY SERVICE)	6	-4BL24-I	-4BS24-I		34	136	136
	7	28	28		35	140	140



**MIL-STD-1754**  
**29 December 1978**

**TABLE II. TYPE "B" CONFIGURATION DASH NUMBERS. - CONTINUED**

SIZE	LENGTH	AN229 DASH NO.	
		LOCKING	NONLOCKING
4 (HEAVY SERVICE)	36	-4BL144-I	-4BS144-I
	37	148	148
	38	152	152
	39	156	156
	40	160	160
	41	164	164
	42	168	168
	43	172	172
	44	176	176
	45	180	180
	46	184	184
	47	188	188
	48	192	192
	49	196	196
	50	200	200
	51	204	204
	52	208	208
	53	212	212
	54	216	216
	55	220	220
	56	224	224
	57	228	228
	58	232	232

SIZE	LENGTH	AN229 DASH NO.	
		LOCKING	NONLOCKING
4 (HEAVY SERVICE)	59	-4BL236-I	-4BS236-I
	60	240	240
	61	244	244
	62	248	248
	63	252	252
	64	256	256
	65	260	260
	66	264	264
	67	268	268
	68	272	272
	69	276	276
	70	280	280
	71	284	284
	72	288	288
	73	292	292
	74	296	296
	75	300	300
	76	304	304
	77	308	308
	78	312	312
	79	316	316
	80	320	320




**MIL-STD-1754**  
**29 December 1978**

# SECTION 301

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

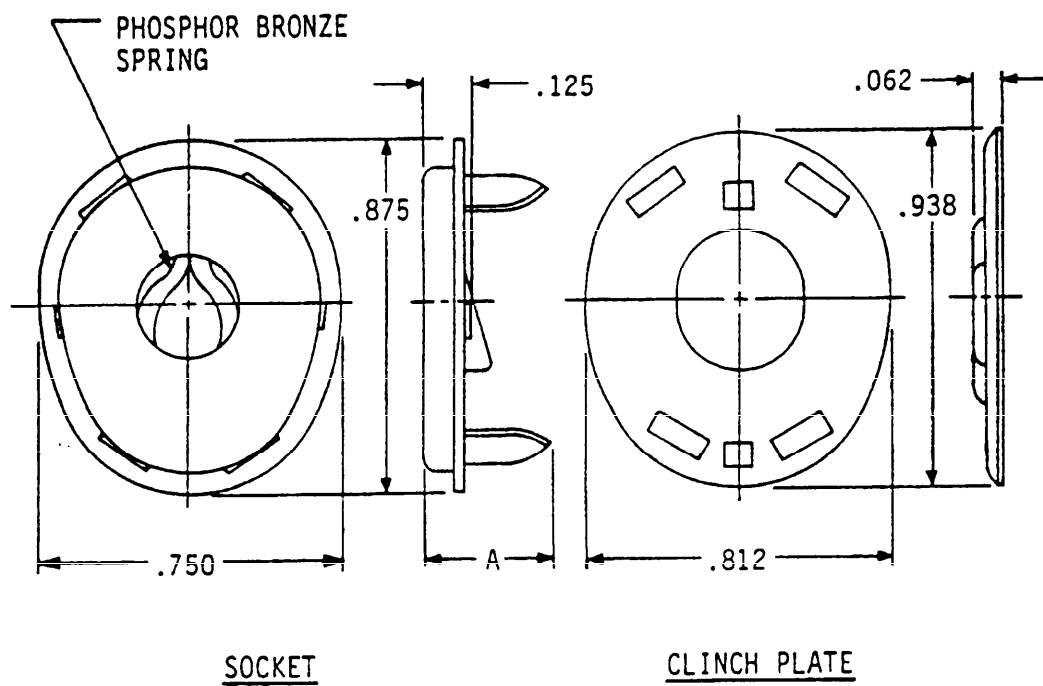

(OPERATES ON SINGLE POINT LIFT PRINCIPLE)

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

**MIL-STD-1754**  
**29 December 1978**

TABLE I. CLINCH PLATE AND SOCKET CONFIGURATION DASH NUMBER.


PART	A	MS27977 DASH NO.	
		BLACK	NICKEL PLATE
SOCKET, REG. PRONG	.328	-1B	-1N
SOCKET, LONG PRONG	.375	-2B	-2N
CLINCH PLATE	--	-3B	-3N

1. SOCKET AND CLINCH PLATE CONSTITUTE THE FEMALE HALF OF THE STYLE 1 FASTENERS. THE FOLLOWING PARTS IN THIS SECTION CONSTITUTE THE MALE HALF.
2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.


**MIL-STD-1754**  
**29 December 1978**

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

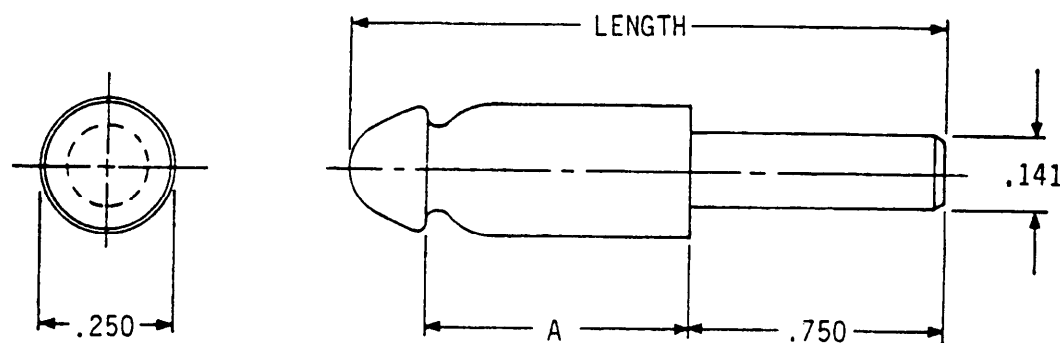

STUD, SOLID RIVET BASE

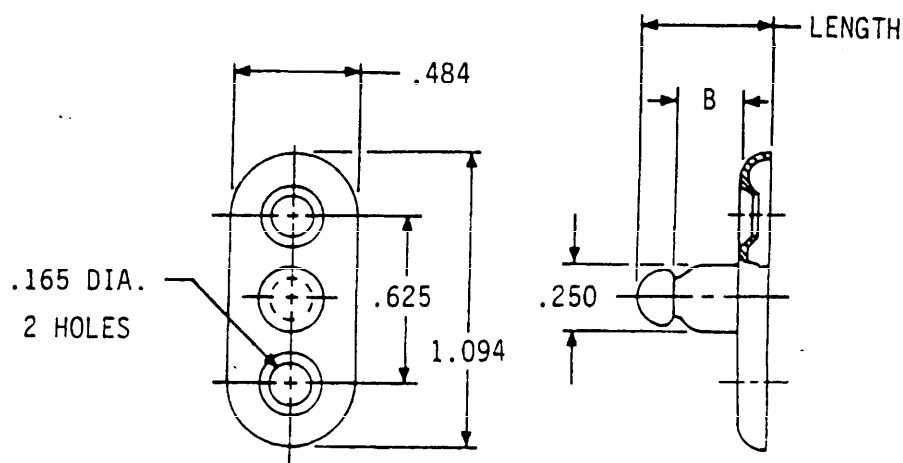

STUD, TWO SCREW BASE

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATED

**MIL-STD-1754**  
**29 December 1978**

TABLE II. STUD CONFIGURATION DASH NUMBERS.


PART	A	B	LENGTH	MS27977 DASH NO.	
				BLACK	NICKEL PLATE
STUD, SOLID	.281	— —	1.172	-4B	-4N
RIVET BASE	.500	— —	1.391	-5B	-5N
STUD, TWO SCREW BASE	— —	.250	.500	-6B	-6N
	— —	.500	.750	-7B	-7N

NOTE: STUD, AS APPLICABLE, CONSTITUTES THE MALE HALF OF THE STYLE 1 FASTENER. (SEE PAGE 301.1 FOR THE FEMALE HALF.)


MIL-STD-1754  
29 December 1978

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

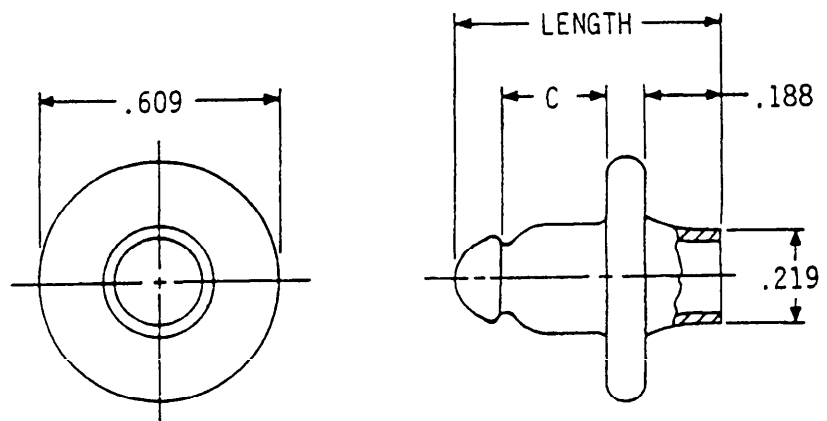

STUD, EYELET BASE

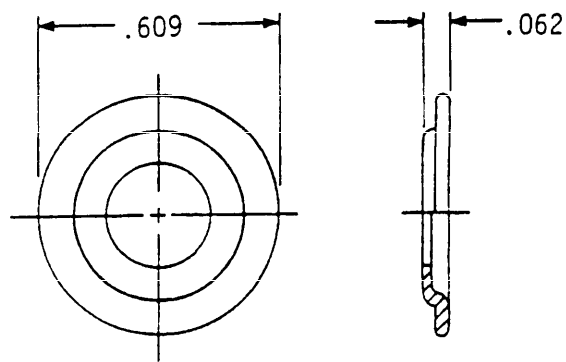

WASHER

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

**MIL-STD-1754**  
**29 December 1978**

TABLE III. STUD AND WASHER CONFIGURATION DASH NUMBERS.

PART	C	LENGTH	MS27977 DASH NO.	
			BLACK	NICKEL PLATE
STUD, EYELET BASE	.265	.688	-8B	-8N
	.500	.922	-9B	-9N
WASHER	--	--	-10B	-10N


NOTE: STUD AND WASHER, AS APPLICABLE, CONSTITUTE THE MALE HALF OF THE STYLE 1 FASTENER. (SEE PAGE 301.1 FOR THE FEMALE HALF.)



MIL-STD-1754  
29 December 1978

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

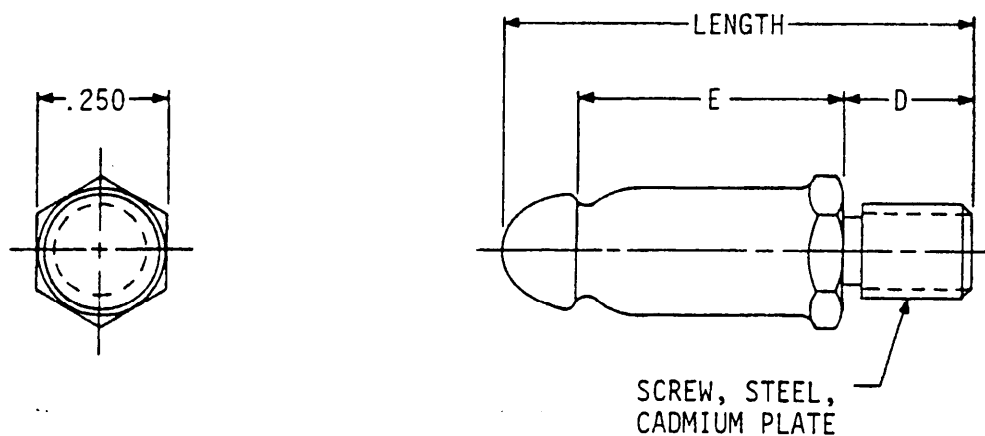

STUD, MACHINE SCREW BASE, SMALL HEX

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

**MIL-STD-1754**  
**29 December 1978**

**TABLE IV. STUD CONFIGURATION DASH NUMBERS.**


THREAD SIZE	E	D	LENGTH	MS27977 DASH NO.	
				BLACK	NICKEL PLATE
NO. 8- 32UNC -2A	.250	.188	.578	-11B	-11N
		.250	.641	-12B	-12N
		.375	.766	-13B	-13N
		.625	1.016	-14B	-14N
	.500	.188	.828	-15B	-15N
		.250	.891	-16B	-16N
		.375	1.016	-17B	-17N
		.625	1.266	-18B	-18N
NO. 10- 32UNF -2A	.250	.188	.578	-19B	-19N
		.250	.641	-20B	-20N
		.375	.766	-21B	-21N
		.625	1.016	-22B	-22N
	.500	.188	.828	-23B	-23N
		.250	.891	-24B	-24N
		.375	1.016	-25B	-25N
		.625	1.266	-26B	-26N

- NOTE: 1. STUD, AS APPLICABLE, CONSTITUTES THE MALE HALF OF STYLE 1 FASTENER.  
 (SEE PAGE 301.1 FOR THE FEMALE HALF.)
2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.

**MIL-STD-1754**  
**29 December 1978**

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

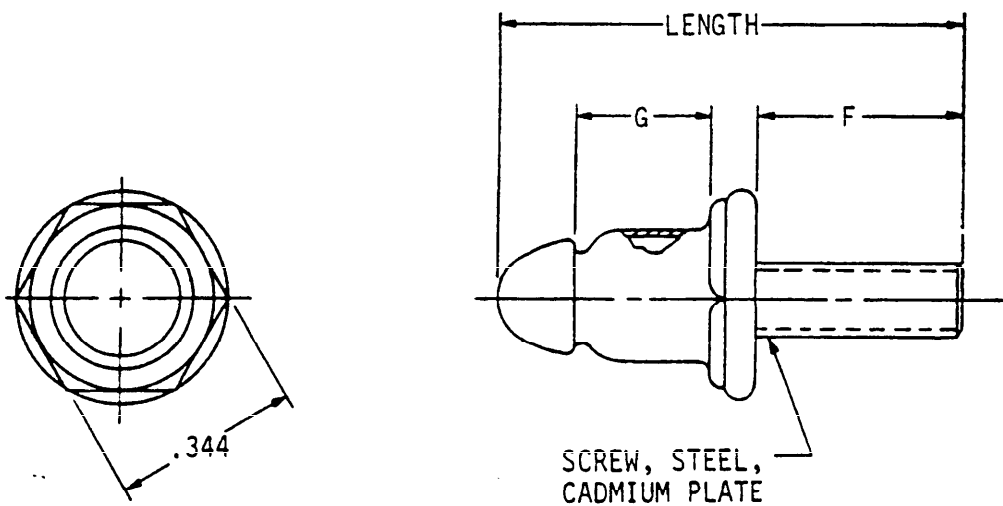

STUD, MACHINE SCREW BASE, LARGE HEX

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

**MIL-STD-1754**  
**29 December 1978**

TABLE V. STUD CONFIGURATION DASH NUMBERS.


THREAD SIZE	G	F	LENGTH	MS27977 DASH NO.	
				BLACK	NICKEL PLATE
NO. 8- 32UNC -2A	.250	.188	.688	-27B	-27N
		.250	.750	-28B	-28N
		.375	.875	-29B	-29N
		.625	1.125	-30B	-30N
	.500	.188	.938	-31B	-31N
		.250	1.000	-32B	-32N
		.375	1.125	-33B	-33N
		.625	1.375	-34B	-34N

THREAD SIZE	G	F	LENGTH	MS27977 DASH NO.	
				BLACK	NICKEL PLATE
NO. 10- 32UNF -2A	.250	.188	.688	-35B	-35N
		.250	.750	-36B	-36N
		.375	.875	-37B	-37N
		.625	1.125	-38B	-38N
	.500	.188	.938	-39B	-39N
		.250	1.000	-40B	-40N
		.375	1.125	-41B	-41N
		.625	1.375	-42B	-42N

- NOTE: 1. STUD, AS APPLICABLE, CONSTITUTES THE MALE HALF OF STYLE 1 FASTENER.  
 (SEE PAGE 301.1 FOR THE FEMALE HALF.)
2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.

**MIL-STD-1754**  
**29 December 1978**

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE  
APPLICABLE DOCUMENT: MS27977

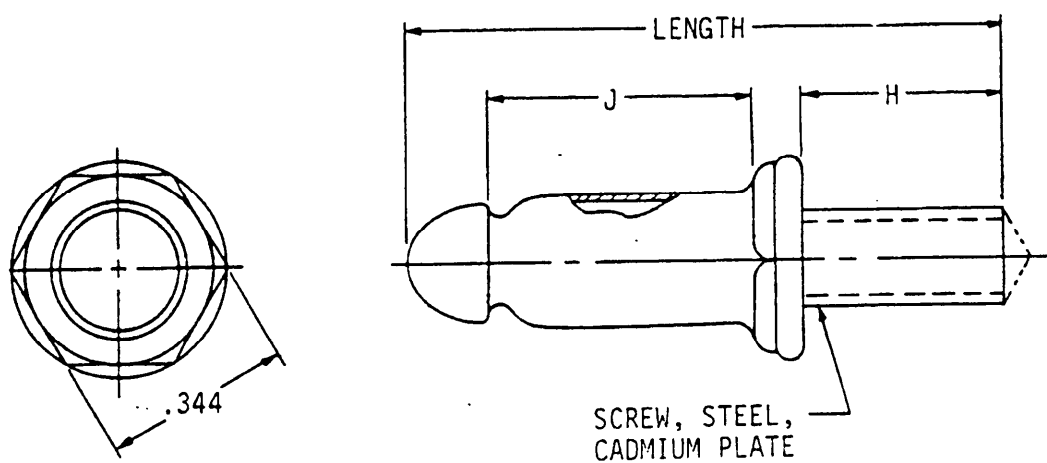

STUD, SELF-TAPPING SCREW BASE

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

**MIL-STD-1754**  
**29 December 1978**



TABLE VI. STUD CONFIGURATION DASH NUMBERS.

SCREW SIZE & TYPE POINT	J	H	LENGTH	MS27977 DASH NO.	
				BLACK	NICKEL PLATE
NO. 8 GIMLET POINT	.250	.375	.875	-43B	-43N
	.500	.375	1.125	-44B	-44N
NO. 10 BLUNT POINT	.250	.375	.875	-47B	-47N
		.500	1.000	-48B	-48N
		.625	1.125	-49B	-49N
	.500	.375	1.125	-50B	-50N
		.500	1.250	-51B	-51N
		.625	1.375	-52B	-52N

- NOTE: 1. STUD, AS APPLICABLE, CONSTITUTES THE MALE HALF OF STYLE 1 FASTENER.  
 (SEE PAGE 301.1 FOR THE FEMALE HALF.)
2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.

**MIL-STD-1754**  
**29 December 1978**

**FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE**  
**APPLICABLE DOCUMENT: MS27977**

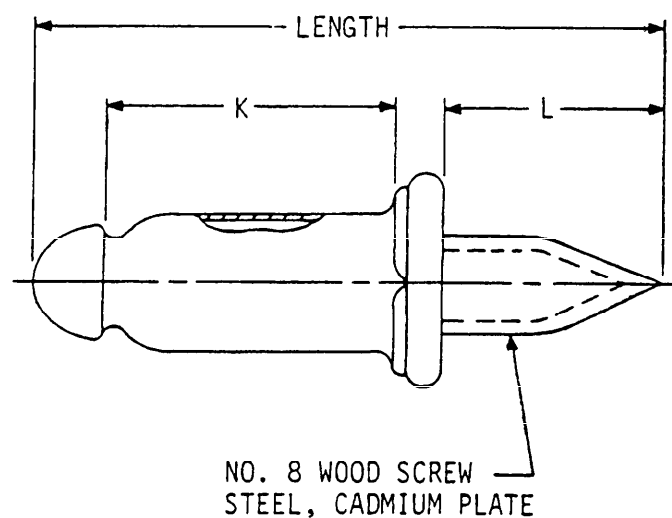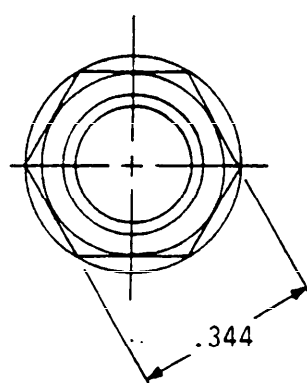

STUD, WOOD SCREW BASE

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

**MIL-STD-1754****29 December 1978****TABLE VII. STUD CONFIGURATION DASH NUMBERS.**

L	K	LENGTH	MS27977 DASH NO.	
			BLACK	NICKEL PLATE
.375	.266	.891	-59B	-59N
	.500	1.125	-60B	-60N
.750	.266	1.266	-61B	-61N
	.500	1.500	-62B	-62N


- NOTE: 1. STUD, AS APPLICABLE, CONSTITUTES MALE HALF OF STYLE 1 FASTENER.  
(SEE PAGE 301.1 FOR THE FEMALE HALF.)
2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.




**MIL-STD-1754**  
**29 December 1978**

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

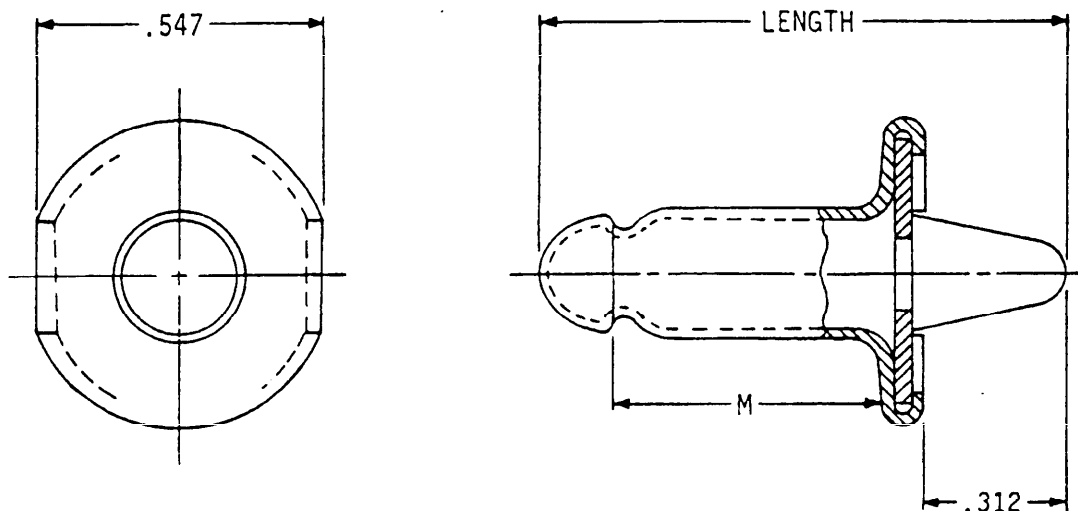

STUD, TWO PRONG, CLINCH BASE

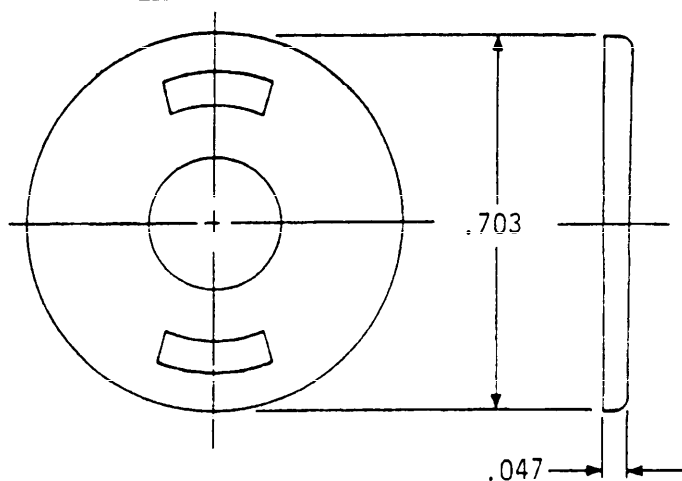

WASHER

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

**MIL-STD-1754**  
**29 December 1978**

TABLE VIII. STUD AND WASHER CONFIGURATION DASH NUMBERS.


PART	M	LENGTH	MS27977 DASH NO.	
			BLACK	NICKEL PLATE
STUD	.281	.828	-63B	-63N
STUD	.500	1.047	-64B	-64N
WASHER	--	--	-65B	-65N

NOTE: STUD AND WASHER, AS APPLICABLE, CONSTITUTE THE MALE HALF OF THE STYLE 1 FASTENER. (SEE PAGE 301.1 FOR THE FEMALE HALF.)

MIL-STD-1754  
29 December 1978

FASTENERS, SNAP, STYLE 1, LARGE CURTAIN TYPE

APPLICABLE DOCUMENT: MS27977

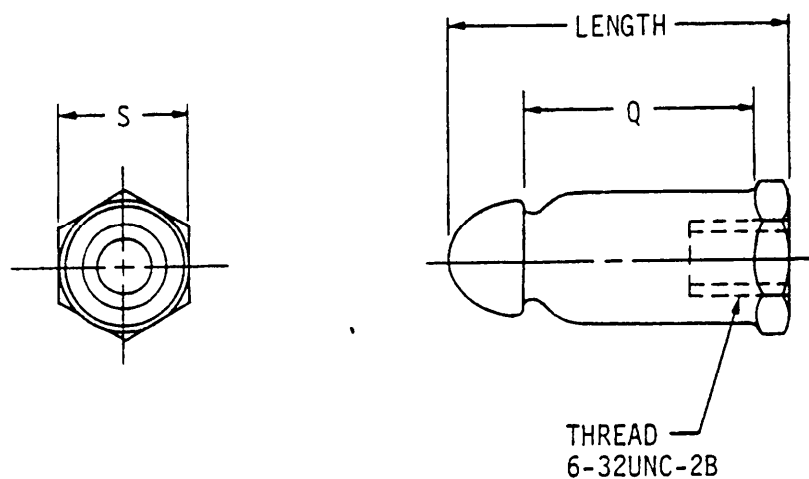

STUD, INTERNAL THREAD

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

**MIL-STD-1754**  
**29 December 1978**

TABLE IX. STUD CONFIGURATION DASH NUMBERS.


PART	S	Q	LENGTH	MS27977 DASH NO.	
				BLACK	NICKEL PLATE
SHELL CONSTRUCTION WITH CADMIUM PLATED STEEL THREADED INSERT	.344	.531	.531	-66B	-66N
		.766	.766	-67B	-67N
SOLID CONSTRUCTION WITH TAPPED HOLE	.250	.531	.531	-68B	-68N
		.766	.766	-69B	-69N

- NOTE: 1. STUD, AS APPLICABLE, CONSTITUTES THE MALE HALF OF THE STYLE 1 FASTENER. (SEE PAGE 301.1 FOR THE FEMALE HALF.)
2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.


**MIL-STD-1754**  
**29 December 1978**

## SECTION 302

FASTENERS, SNAP, STYLE 1A, SMALL CURTAIN TYPE  
 APPLICABLE DOCUMENT: MS27978

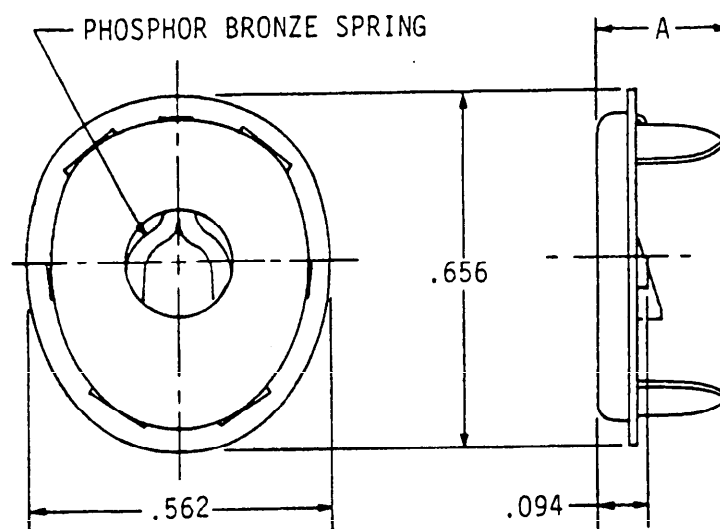

SOCKET  
 (OPERATES ON SINGLE POINT LIFT PRINCIPLE)

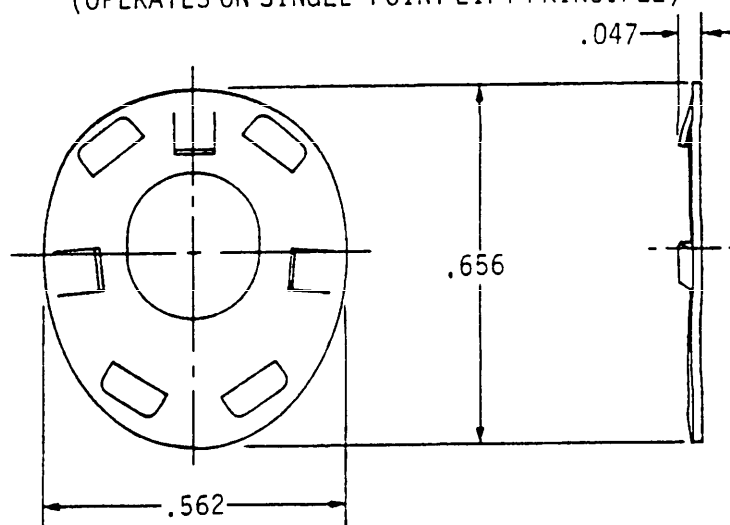

CLINCH PLATE

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

MIL-STD-1754

29 December 1978

TABLE I. CLINCH PLATE AND SOCKET CONFIGURATION DASH NUMBER.


PART	A	MS27978 DASH NO.	
		BLACK	NICKEL PLATE
SOCKET REG. PRONG	.250	-1B	-1N
SOCKET LONG PRONG	.297	-2B	-2N
CLINCH .. PLATE	- -	-3B	-3N

- NOTES: 1. SOCKET AND CLINCH PLATE CONSTITUTE THE FEMALE HALF OF THE STYLE 1A FASTENER. THE FOLLOWING PARTS IN THIS SECTION CONSTITUTE THE MALE HALF.
2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.


**MIL-STD-1754**  
**29 December 1978**

FASTENERS, SNAP, STYLE 1A, SMALL CURTAIN TYPE


APPLICABLE DOCUMENT: MS27978

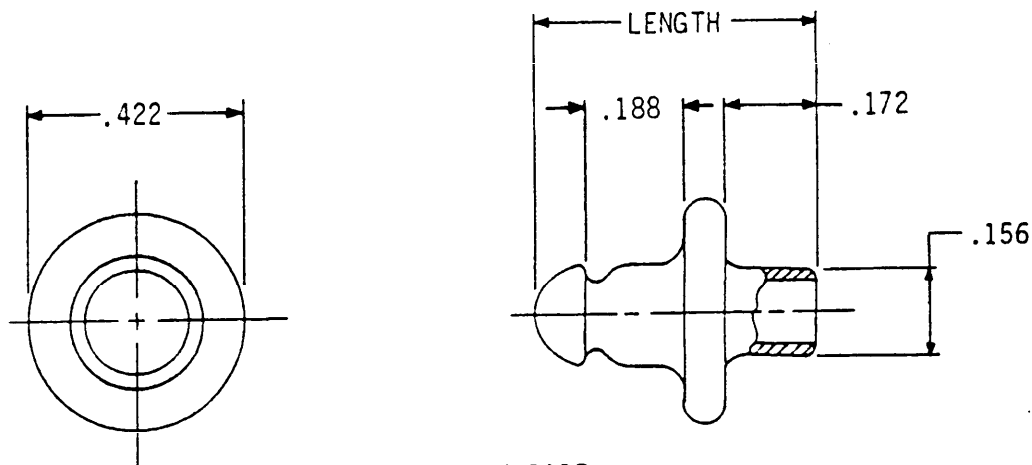

STUD, EYELET BASE

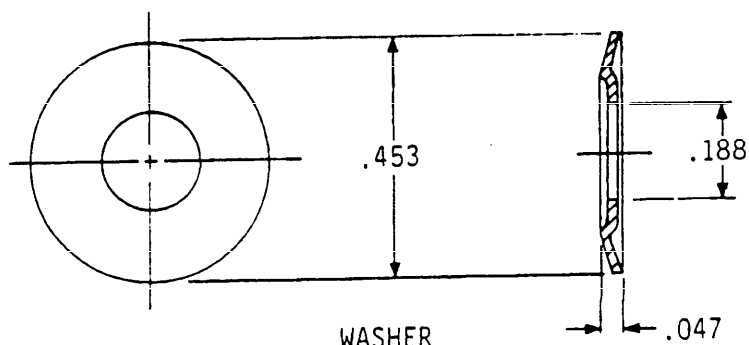

WASHER

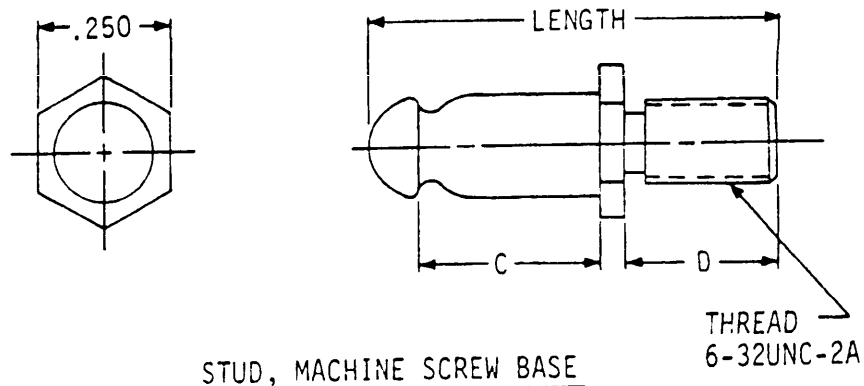

STUD, MACHINE SCREW BASE

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

**MIL-STD-1754**  
**29 December 1978**

TABLE II. STUD AND WASHER CONFIGURATION DASH NUMBERS.

PART	C	D	LENGTH	MS27978 DASH NO.	
				BLACK	NICKEL PLATE
STUD, EYELET BASE	--	--	.531	-4B	-4N
WASHER	--	--	--	-5B	-5N
STUD, MACH SCREW BASE	.188	.312	.641	-6B	-6N
		.438	.766	-7B	-7N
		.562	.891	-8B	-8N
	.344	.312	.797	-9B	-9N
		.438	.922	-10B	-10N
		.562	1.047	-11B	-11N

NOTE: 1. STUD AND WASHER AS APPLICABLE CONSTITUTE THE MALE HALF OF THE STYLE 1A FASTENER. (SEE PAGE 302.1 FOR THE FEMALE HALF.)




MIL-STD-1754  
29 December 1978

### SECTION 303


FASTENER, SNAP, STYLE 1B, MUD-PROOF CURTAIN TYPE

APPLICABLE DOCUMENT: MS27979

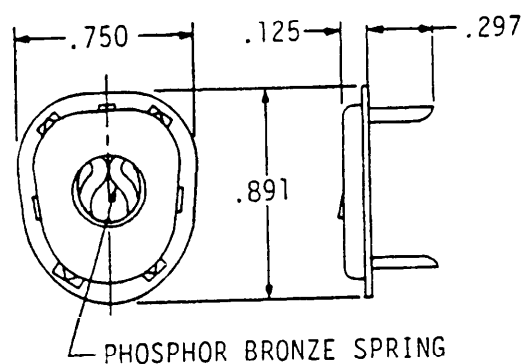

SOCKET

(OPERATES ON SINGLE POINT LIFT PRINCIPLE)

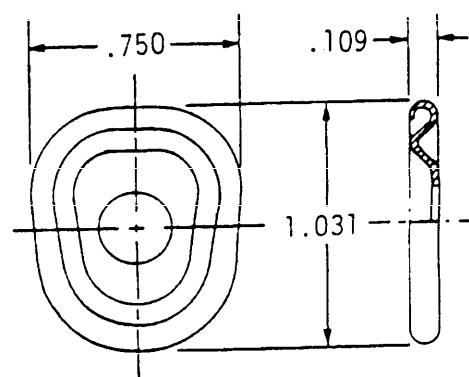

CLINCH PLATE

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK

**MIL-STD-1754**  
**29 December 1978**


TABLE I. CLINCH PLATE AND SOCKET CONFIGURATION DASH NUMBER.

PART	MS27979 DASH NO.
SOCKET	-1
CLINCH PLATE	-2


- NOTE: 1. SOCKET AND CLINCH PLATE CONSTITUTE THE FEMALE HALF OF STYLE 1B FASTENER. (SEE PAGE 303.1 FOR THE MALE HALF.)
2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.

**MIL-STD-1754**  
**29 December 1978**

FASTENER, SNAP, STYLE 1B, MUD-PROOF CURTAIN TYPE  
APPLICABLE DOCUMENT: MS27979

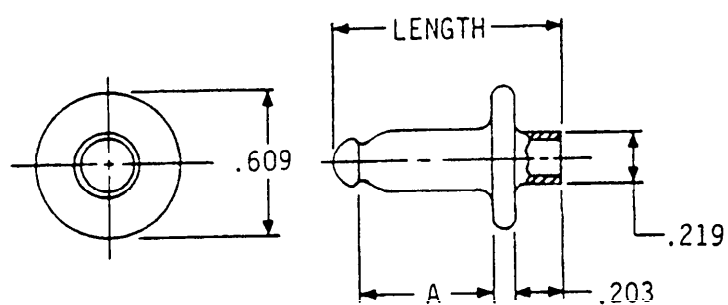

STUD, EYELET BASE

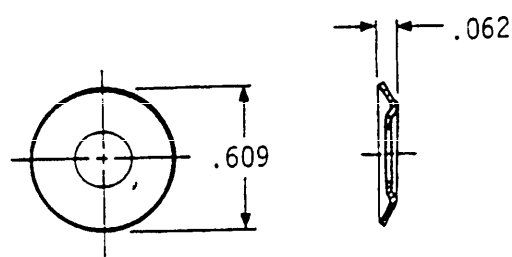

WASHER

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK

**MIL-STD-1754**  
**29 December 1978**

TABLE II. STUD AND WASHER CONFIGURATION DASH NUMBERS.



PART	A	LENGTH	MS27979 DASH NO.
STUD, EYELET BASE	.172	.578	-5
STUD, EYELET BASE	.359	.766	-4
STUD, EYELET BASE	.562	.969	-3
WASHER	--	--	-6

NOTE: STUD, AS APPLICABLE CONSTITUTES THE MALE HALF OF THE STYLE 1B FASTENER.  
(SEE PAGE 303.1 FOR THE FEMALE HALF.)



**MIL-STD-1754**  
**29 December 1978**

# SECTION 304

FASTENERS, SNAP, STYLE 2, REGULAR WIRE SPRING CLAMP TYPE  
 APPLICABLE DOCUMENT: MS27980

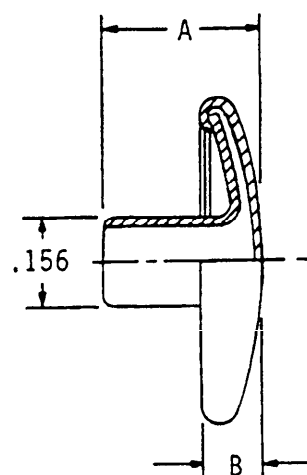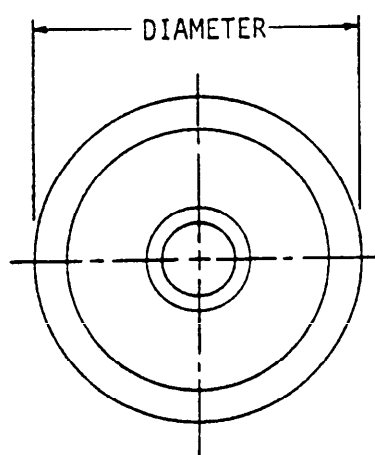

BUTTON

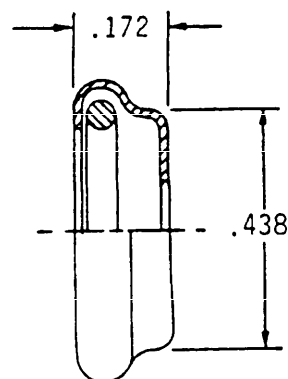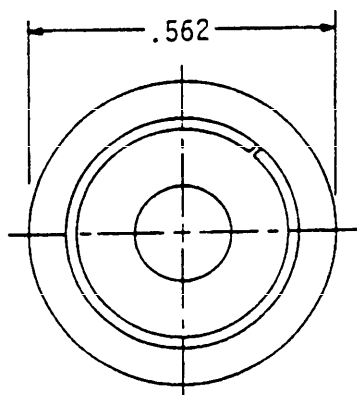

SOCKET

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

**MIL-STD-1754**  
**29 December 1978**

TABLE I. BUTTON AND SOCKET CONFIGURATION DASH NUMBERS.


DIAMETER	A	B	MS27980 DASH NO.	
			BLACK	NICKEL PLATE
.600	.281	.109	-1B	-1N
.600	.375	.109	-2B	-2N
.500	.297	.109	-3B	-3N
.750	.297	.156	-4B	-4N

NOTE: BUTTON AND SOCKET, AS APPLICABLE, CONSTITUTE THE FEMALE HALF OF THE STYLE 2 FASTENER. THE FOLLOWING PARTS IN THIS SECTION CONSTITUTE THE MALE HALF.



**MIL-STD-1754**  
**29 December 1978**

FASTENERS, SNAP, STYLE 2, REGULAR WIRE SPRING CLAMP TYPE


APPLICABLE DOCUMENT: MS27980

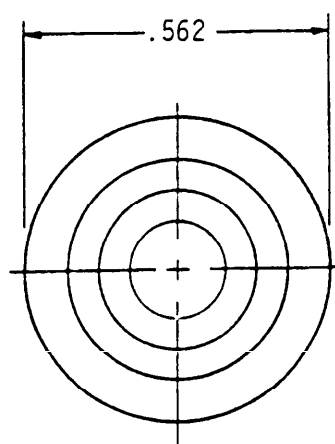

STUD

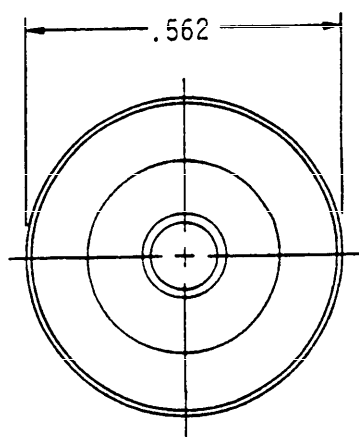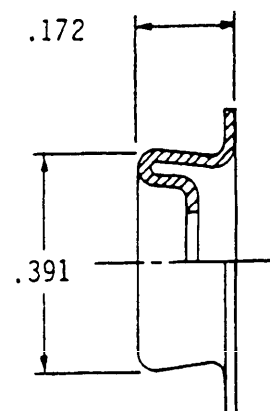

EYELET

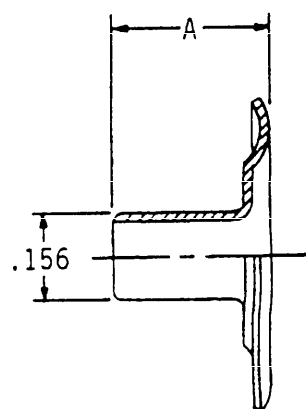

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

**MIL-STD-1754**  
**29 December 1978**

TABLE II. STUD AND EYELET CONFIGURATION DASH NUMBERS.


PART	A	MS27980 DASH NO.	
		BLACK	NICKEL PLATE
STUD	--	-7B	-7N
EYELET	.281	-8B	-8N
EYELET	.344	-9B	-9N

NOTE: STUD AND EYELET, AS APPLICABLE, CONSTITUTE THE MALE HALF OF THE STYLE 2 FASTENER. (SEE PAGE 304.1 FOR THE FEMALE HALF.)



**MIL-STD-1754**  
**29 December 1978**

FASTENERS, SNAP, STYLE 2, REGULAR WIRE SPRING CLAMP TYPE  
 APPLICABLE DOCUMENT: MS27980

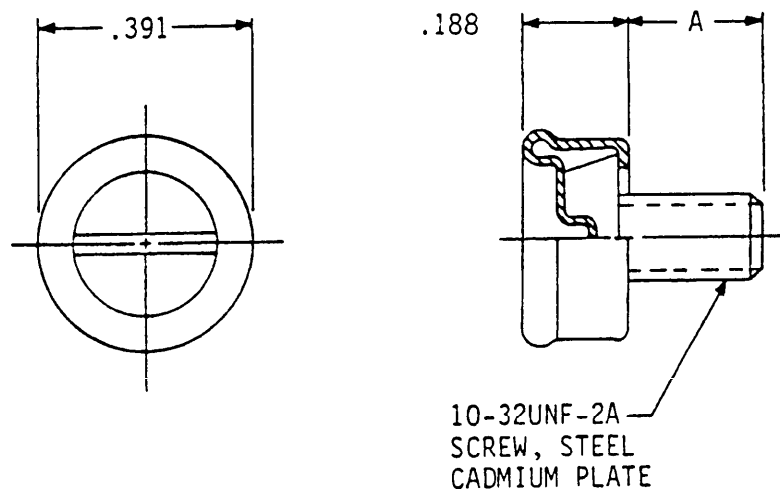

STUD, MACHINE SCREW BASE

MATERIAL	PROTECTIVE FINISH
BRASS (SEE NOTE 2)	BLACK OR NICKEL PLATE

TABLE III. STUD CONFIGURATION DASH NUMBERS.


A	MS27980 DASH NO.	
	BLACK	NICKEL PLATE
.250	-15B	-15N
.312	-16B	-16N
.375	-17B	-17N
.625	-18B	-18N

- NOTES: 1. STUD, AS APPLICABLE, CONSTITUTES THE MALE HALF OF THE STYLE FASTENER. (SEE PAGE 304.1 FOR THE FEMALE HALF.)
2. UNLESS OTHERWISE SPECIFIED, ALL COMPONENTS ARE BRASS.

**MIL-STD-1754****29 December 1978**

FASTENERS, SNAP, STYLE 2, REGULAR WIRE SPRING CLAMP TYPE

APPLICABLE DOCUMENT: MS27980

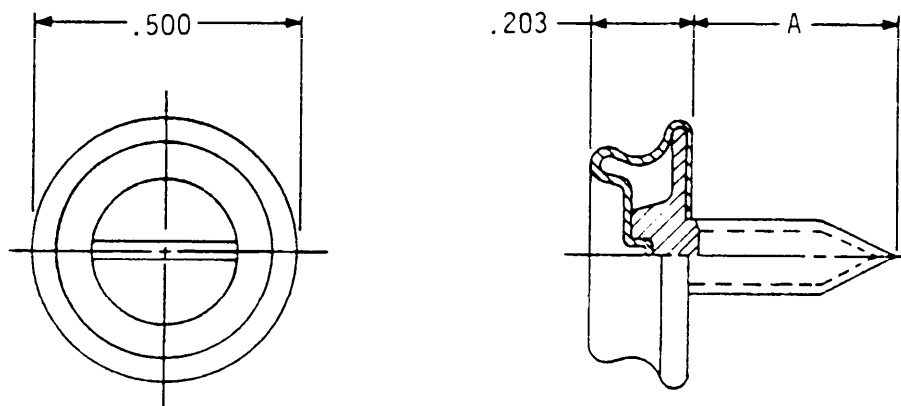

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE


TABLE IV. STUD CONFIGURATION DASH NUMBERS.

PART	SCREW SIZE	A	MS27980 DASH NO.	
			BLACK	NICKEL PLATE
STUD, WOOD SCREW BASE	NO. 7	.625	-19B	-19N
STUD, SELF-TAPPING SCREW BASE	NO. 7	.375	-20B	-20N
STUD, SELF-TAPPING SCREW BASE	NO. 10	.625	-21B	-21N

NOTE: STUD, AS APPLICABLE, CONSTITUTES THE MALE HALF OF THE STYLE 2 FASTENER.  
(SEE PAGE 304.1 FOR THE FEMALE HALF.)

**MIL-STD-1754**  
**29 December 1978**

FASTENERS, SNAP, STYLE 2, REGULAR WIRE SPRING CLAMP TYPE  
 APPLICABLE DOCUMENT: MS27980

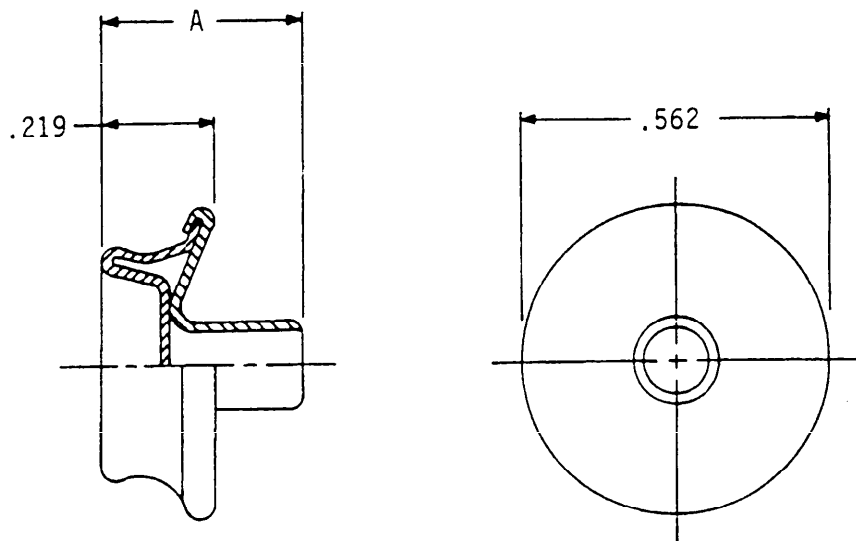

STUD-EYELET COMBINATION

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

TABLE V. STUD CONFIGURATION DASH NUMBERS.

PART	A	MS27980 DASH NO.	
		BLACK	NICKEL PLATE
STUD-EYELET COMB.	.344	-26B	-26N
STUD-EYELET COMB.	.391	-27B	-27N

NOTE: STUD AND EYELET COMBINATION, AS APPLICABLE, CONSTITUTE THE MALE HALF OF THE STYLE 2 FASTENER. (SEE PAGE 304.1 FOR THE FEMALE HALF.)





MIL-STD-1754  
29 December 1978

## SECTION 305

FASTENERS, SNAP, STYLE 2A, SMALL WIRE SPRING CLAMP TYPE

APPLICABLE DOCUMENT: MS27981

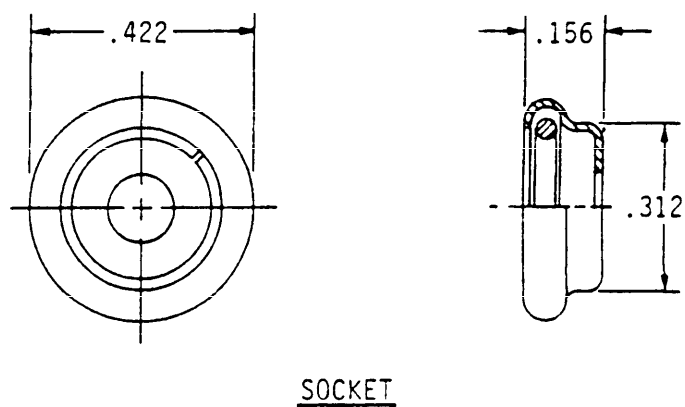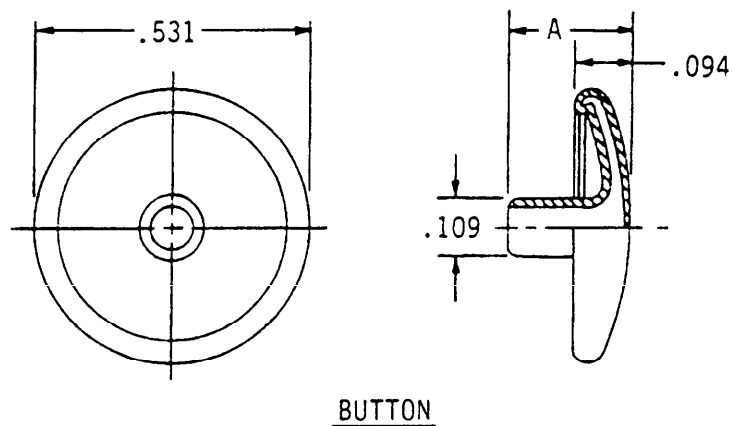

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

**MIL-STD-1754****29 December 1978****TABLE I. BUTTON AND SOCKET CONFIGURATION DASH NUMBERS.**



PART	A	MS27981 DASH NO.	
		BLACK	NICKEL PLATE
BUTTON	.219	-1B	-1N
BUTTON	.281	-2B	-2N
SOCKET	- -	-3B	-3N

NOTE: BUTTON AND SOCKET, AS APPLICABLE, CONSTITUTE THE FEMALE HALF OF THE STYLE 2A FASTENER. (SEE PAGE 305.3 FOR THE MALE HALF.)



**MIL-STD-1754**  
**29 December 1978**

FASTENERS, SNAP, STYLE 2A, SMALL WIRE SPRING CLAMP TYPE

APPLICABLE DOCUMENT: MS27981

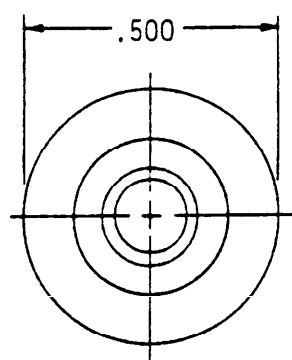

STUD

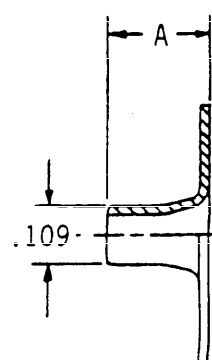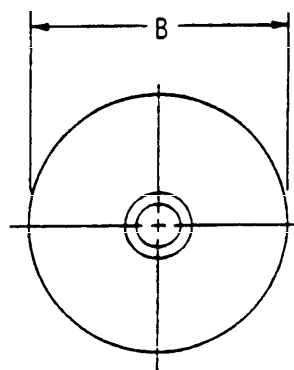

EYELET

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

**MIL-STD-1754**  
**29 December 1978**

TABLE II. STUD AND EYELET CONFIGURATION DASH NUMBERS.

PART	A	B	MS27981 DASH NO.	
			BLACK	NICKEL PLATE
STUD	--	--	-4B	-4N
EYELET	.188	.500	-5B	-5N
EYELET	.250	.500	-6B	-6N

NOTE: STUD AND EYELET, AS APPLICABLE, CONSTITUTE THE MALE HALF OF STYLE 2A FASTENER. (SEE PAGE 305.1 FOR THE FEMALE HALF.)





MIL-STD-1754  
29 December 1978

# SECTION 306

FASTENERS, SNAP, STYLE 3, PRONGED RING-HEAD TYPE

APPLICABLE DOCUMENT: MS27982

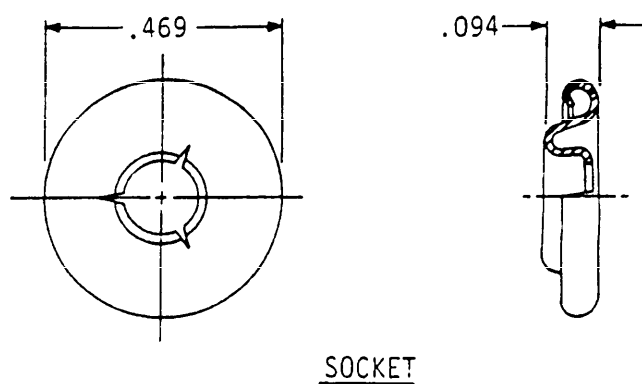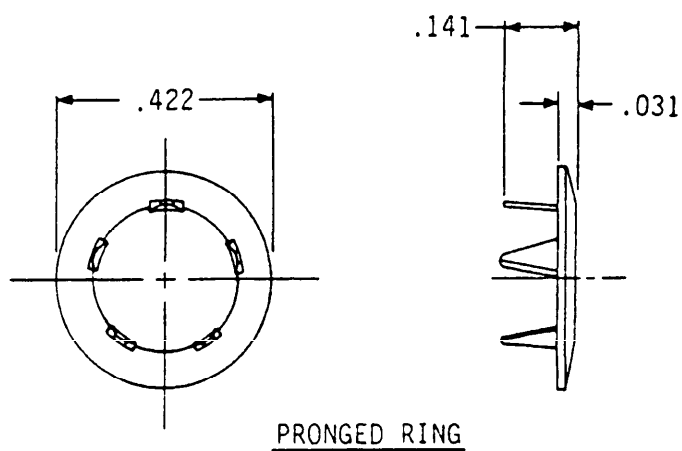

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

**MIL-STD-1754**  
**29 December 1978**



TABLE II. PRONGED RING AND SOCKET CONFIGURATION DASH NUMBERS.

PART	MS27982 DASH NO.	
	BLACK	NICKEL PLATE
PRONGED RING	-1B	-1N
SOCKET	-2B	-2N

NOTE: PRONGED RING AND SOCKET CONSTITUTE THE FEMALE HALF OF THE STYLE 3 FASTENER. (SEE PAGE 306.3 FOR THE MALE HALF.)

**MIL-STD-1754**  
**29 December 1978**

FASTENERS, SNAP, STYLE 3, PRONGED RING-HEAD TYPE  
 APPLICABLE DOCUMENT: MS27982

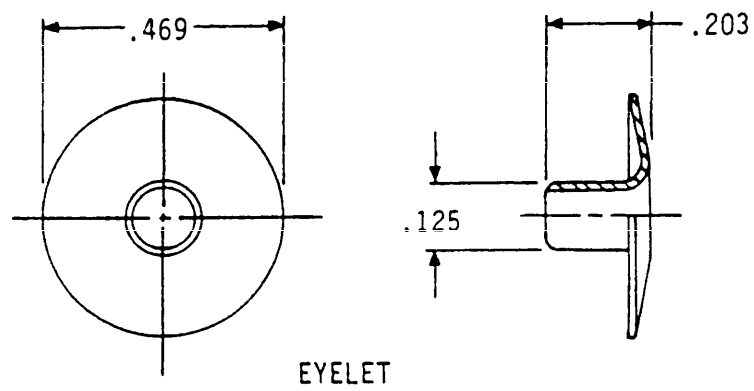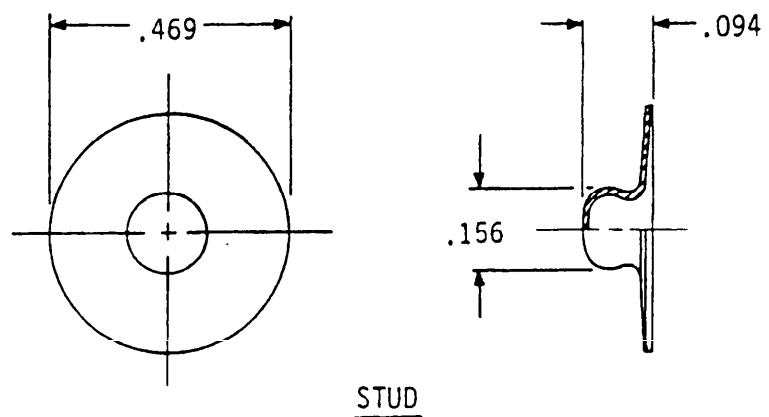

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

**MIL-STD-1754**  
**29 December 1978**

TABLE II. STUD AND EYELET CONFIGURATION DASH NUMBERS.

PART	MS27982 DASH NO.	
	BLACK	NICKEL PLATE
STUD	-4B	-4N
EYELET	-5B	-5N



NOTE: STUD AND EYELET CONSTITUTE THE MALE HALF STYLE 3 FASTENER. (SEE PAGE 306.1 FOR THE FEMALE HALF.)

MIL-STD-1754  
29 December 1978

# SECTION 307

FASTENERS, SNAP, STYLE 4, THREE WAY LOCKING TYPE

APPLICABLE DOCUMENT: MS27983

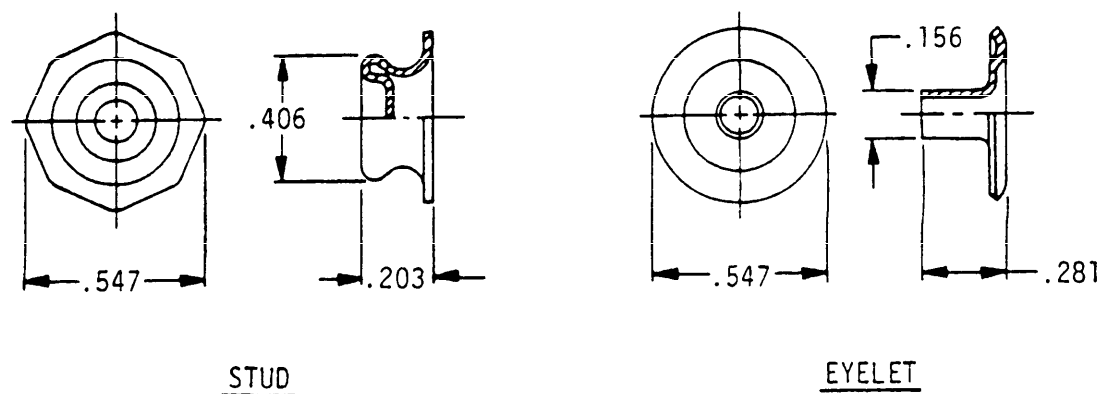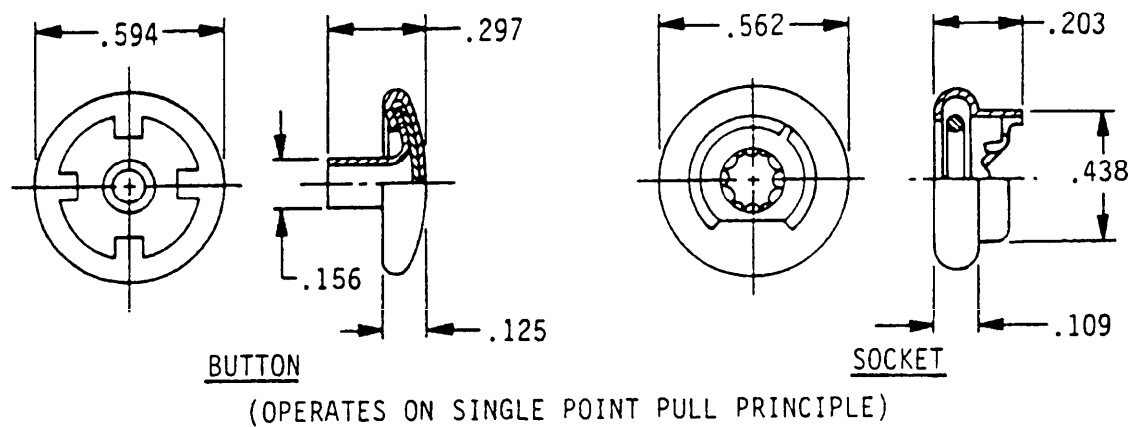

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

**MIL-STD-1754**  
**29 December 1978**

TABLE I. FASTENER CONFIGURATION DASH NUMBERS.

PART	MS27983 DASH NO.	
	BLACK	NICKEL PLATE
BUTTON	-1	-1N
SOCKET	-2	-2N
STUD	-3	-3N
EYELET	-4	-4N


- NOTES: 1. BUTTON AND SOCKET CONSTITUTE FEMALE HALF OF STYLE 4 FASTENER.  
2. STUD AND EYELET CONSTITUTE MALE HALF OF STYLE 4 FASTENER.

MIL-STD-1754  
29 December 1978

# SECTION 308

FASTENERS, SNAP, STYLE 7, RIVET TYPE

APPLICABLE DOCUMENT: MS27986

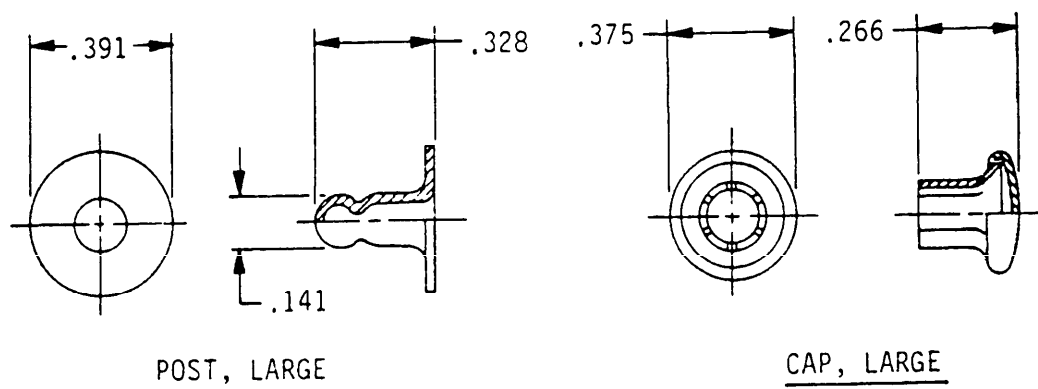

MATERIAL	PROTECTIVE FINISH
BRASS	BLACK OR NICKEL PLATE

TABLE 1. FASTENER CONFIGURATION DASH NUMBERS.

PART	MS27986 DASH NO.	
	BLACK	NICKEL PLATE
POST, LARGE	-3B	-3N
CAP, LARGE	-4B	-4N






**MIL-STD-1754**  
**29 December 1978**

## SECTION 401

### FASTENER-SNAPSLIDE

APPLICABLE DOCUMENTS: MS21332 AND MS21327

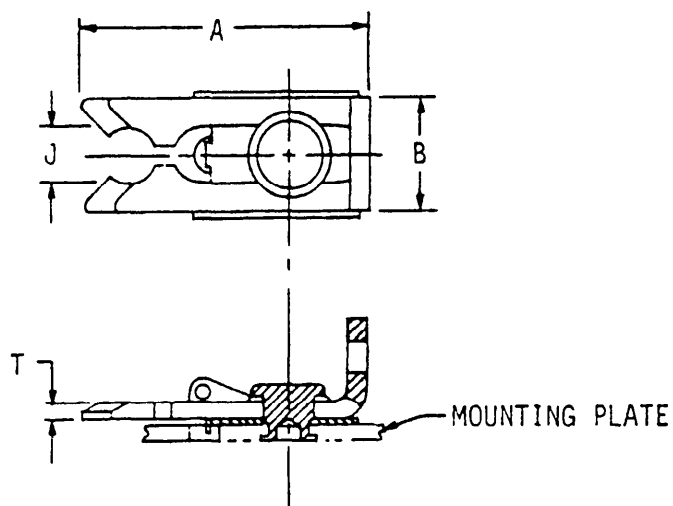

MATERIAL	PROTECTIVE FINISH
LATCH: CRES	PASSIVATE
LATCH GUIDE: CRES	PASSIVATE
RIVET: NI-CU ALLOY	PASSIVATE
WASHER: PHOSPHOR BRONZE	NICKEL PLATE

TABLE I. FASTENER CONFIGURATION DASH NUMBERS.

A	B	J	T	MS21332 DASH NO.
1.125	.438	.187	.050	-4
1.469	.562	.250	.078	-1

NOTE: TO BE USED WITH THE STUDS ON MS21323, MS21325 OR MS21326.  
 (SEE SECTION 500.)




**MIL-STD-1754**  
**29 December 1978**

## SECTION 501

STUD, STYLE I, SNAPSLIDE FASTENER

APPLICABLE DOCUMENT: MS21323

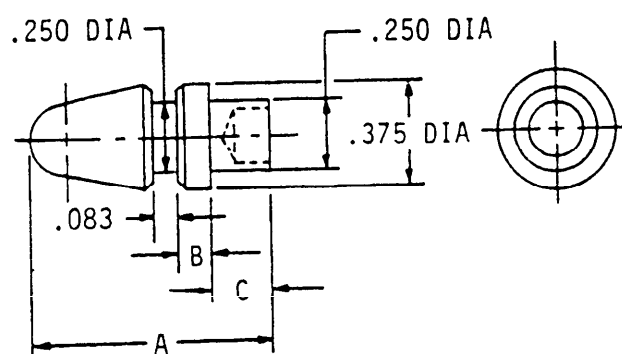

MATERIAL	PROTECTIVE FINISH
CRES	PASSIVATE

TABLE I. STUD CONFIGURATION DASH NUMBERS.

A	B	C	MS21323 DASH NO.
.736	.080	.156	-1
.792	.105	.188	-2
.792	.250	.156	-3

NOTE: TO BE USED WITH MS21332 (SEE 401.1).




MIL-STD-1754  
29 December 1978

## SECTION 502

STUD, STYLE III, SNAPSLIDE FASTENER

APPLICABLE DOCUMENT: MS21325

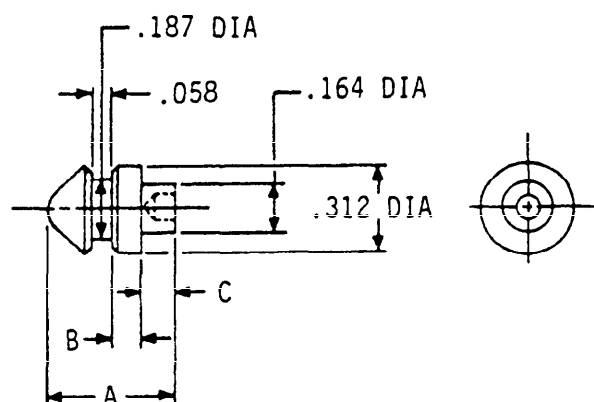

MATERIAL	PROTECTIVE FINISH
CRES	PASSIVATE

TABLE I. STUD CONFIGURATION DASH NUMBERS.

A	B	C	D	MS21325 DASH NO.
.406	.105	.109	.094	-1
.578	.075	.312	.094	-2
.453	.156	.125	.094	-3
.375	.062	.125	.094	-4
.359	.075	.094	.078	-5

NOTE: TO BE USED WITH MS21332 (SEE 401.1).




MIL-STD-175  
29 December 1971

# SECTION 503

STUD, STYLE IV, SNAPSLIDE FASTENER

APPLICABLE DOCUMENT: MS21326

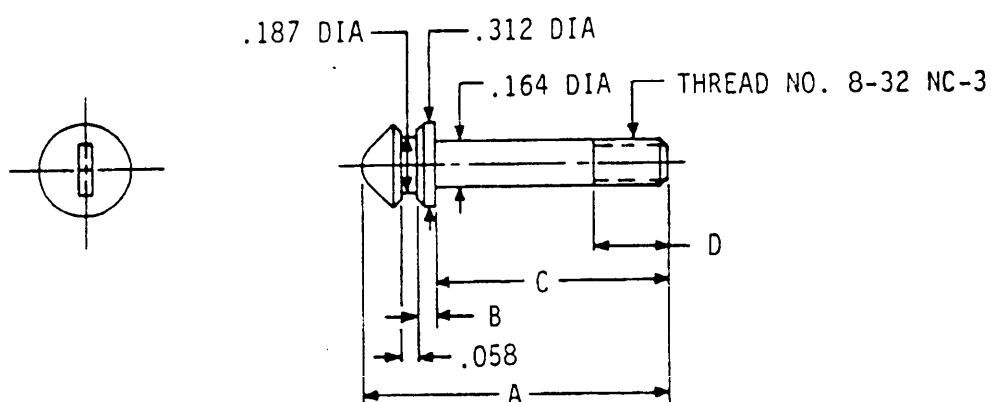

MATERIAL	PROTECTIVE FINISH
CRES	PASSIVATE

TABLE I. STUD CONFIGURATION DASH NUMBERS.

A	B	C	D	MS21326 DASH NO.
.641	.105	.344	.281	-1
.641	.077	.375	.312	-2
.797	.075	.531	.375	-3
.969	.091	.688	.375	-4
1.062	.055	.812	.500	-5
1.125	.105	.828	.500	-6

NOTE: TO BE USED WITH MS21322 (SEE 401.1).






MIL-STD-1754  
29 December 1978

## SECTION 601

FASTENER, ROTARY, QUICK-OPERATING, FLUSH HEAD  
FLOATING TYPE, 2210 LBS. MINIMUM TENSILE STRENGTH

APPLICABLE DOCUMENT: MS17731

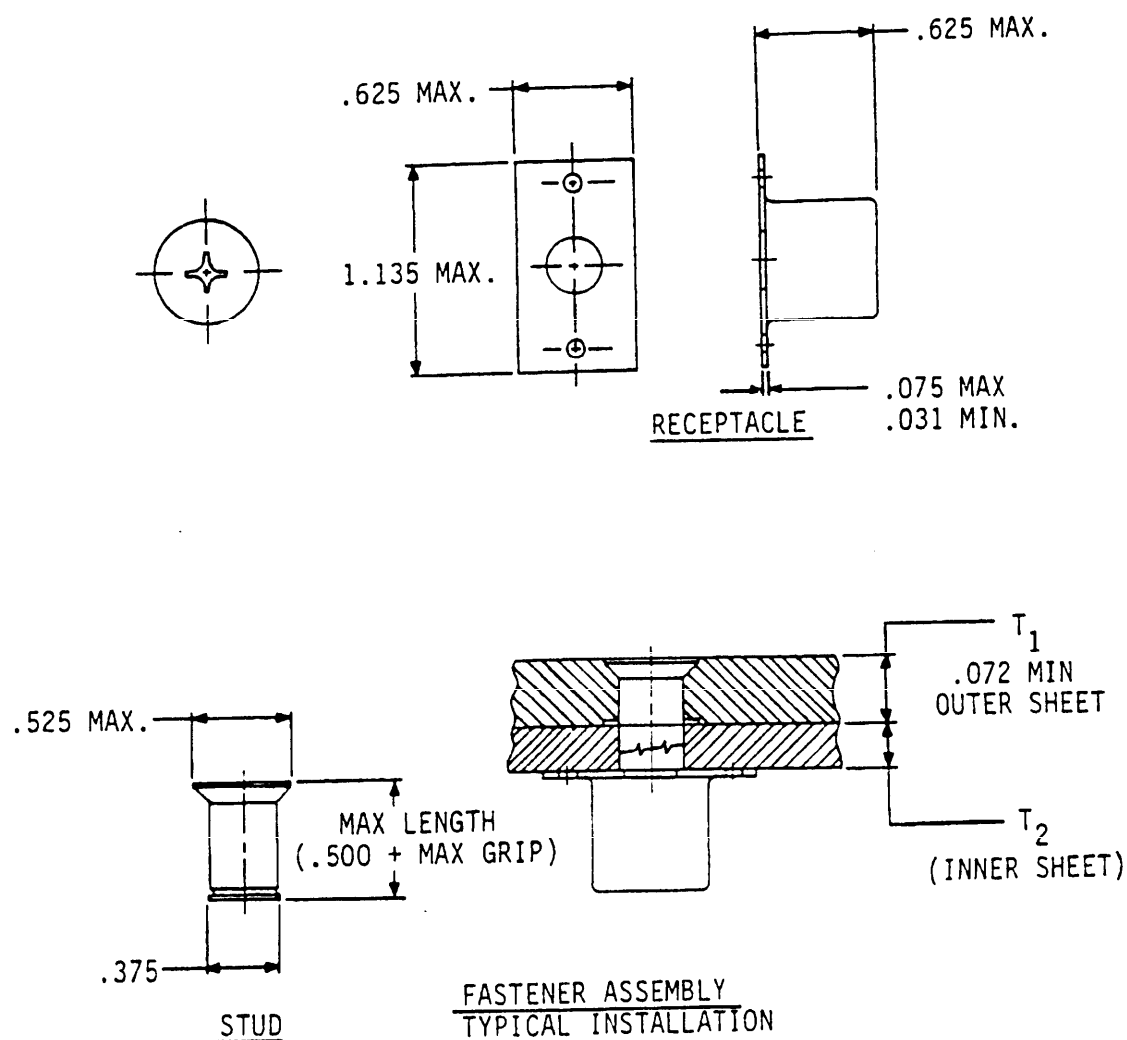

MATERIALS	TENSILE STRENGTH LBS. MIN.	PROTECTIVE FINISH	TEMP (MAX.)
STEEL CARBON & ALLOY	2210	CADMIUM PLATE	500°F

MIL-STD-1754

29 December 1978

TABLE I. FASTENER CONFIGURATION DASH NUMBERS.


GRIP RANGE	WEIGHT - LBS MAXIMUM		MS17731 DASH NO.
	STUD	RECEPTACLE	
$T_1 + T_2$			
.150 - .220	.015	.025	-1
.221 - .290	.016		-2
.291 - .360	.018		-3
.361 - .430	.020		-4
.431 - .500	.021		-5
.501 - .570	.022		-6
.571 - .640	.024		-7
.641 - .710	.026		-8
.711 - .780	.028		-9

**MIL-STD-1754**  
**29 December 1978**


## SECTION 602

FASTENER, ROTARY, QUICK-OPERATING, PROTRUDING HEAD,  
 FLOATING TYPE, 2210 LBS. MINIMUM TENSILE STRENGTH


APPLICABLE DOCUMENT: MS17732

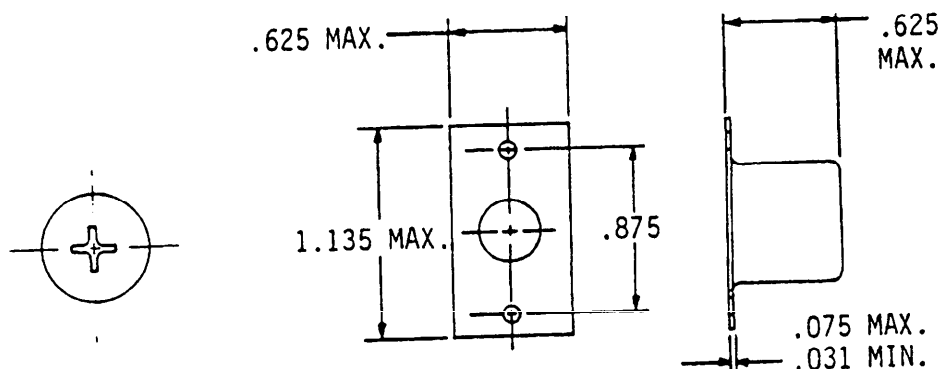

RECEPTACLE

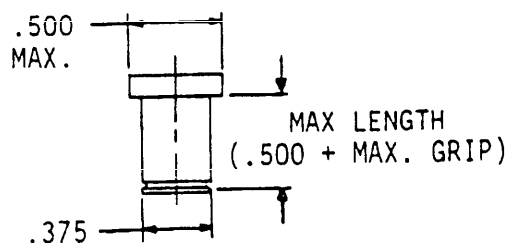

STUD

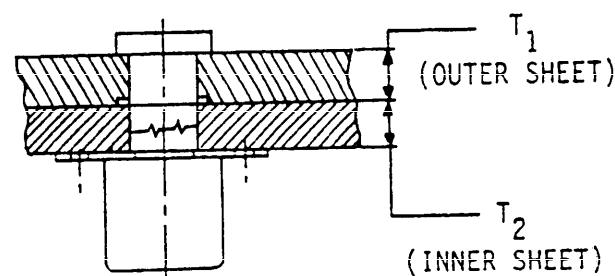

FASTENER ASSEMBLY  
TYPICAL INSTALLATION

MATERIALS	TENSILE STRENGTH LBS. MIN.	PROTECTIVE FINISH	TEMP (MAX.)
STEEL CARBON & ALLOY	2210	CADMIUM PLATE	500°F

**MIL-STD-1754**  
**29 December 1978**

TABLE I. FASTENERS CONFIGURATION DASH NUMBERS.

GRIP RANGE	WEIGHT - LBS MAXIMUM		MS17732 DASH NO.
$T_1 + T_2$	STUD ASSY	RECEPTACLE ASSEMBLY	
.116 - .185	.016	.025	-1
.186 - .255	.018		-2
.256 - .325	.020		-3
.326 - .395	.021		-4
.396 - .465	.023		-5
.466 - .535	.025		-6
.536 - .605	.027		-7
.606 - .675	.030		-8
.676 - .745	.033		-9


MIL-STD-1754  
29 December 1978

## SECTION 701

GROMMETS, METALLIC, PLAIN AND SPUR, WITH WASHER  
TYPE I AND TYPE III

APPLICABLE DOCUMENT: MS20230

### TYPE I, PLAIN GROMMET

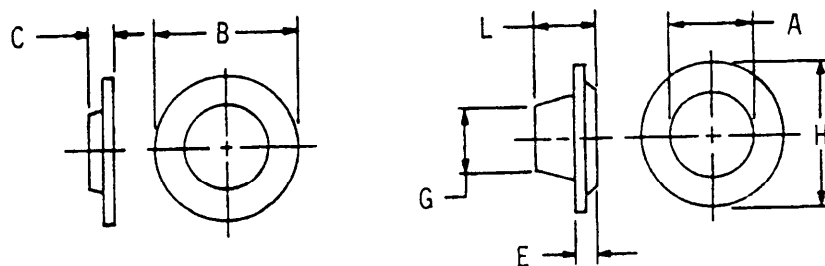


PLAIN WASHER

PLAIN GROMMET

MATERIAL	PROTECTIVE FINISH
BRASS	PLAIN OR CADMIUM PLATE
ALUMINUM	ANODIZE

### TYPE III, SPUR GROMMET

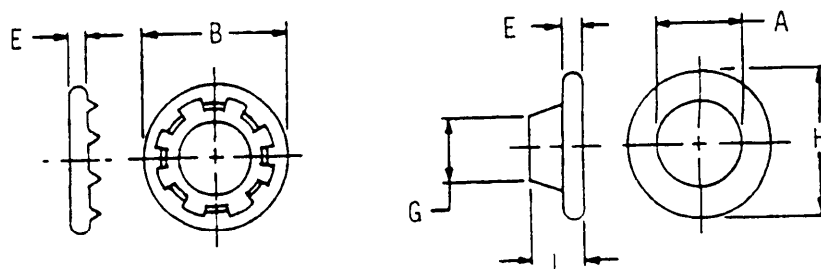

SPUR WASHER

ROLLED RIM GROMMET

MATERIAL	PROTECTIVE FINISH
BRASS	PLAIN OR CADMIUM PLATE

MIL-STD-1754

29 December 1978

TABLE I. PLAIN GROMMET CONFIGURATION DASH NUMBERS.

A DIA AFTER INSERTION	B	C	E	G	H	L	MS20230 DASH NO.		
							AL	BRASS	
								PLAIN	PLATED
.156	.460	.029	.035	.176	.425	.170	A20	B20	BP20
.250	.546	.030	.035	.240	.545	.210	A10	B10	BP10
.312	.700	.041	.035	.286	.687	.220	A1	B1	BP1
.375	.835	.045	.035	.362	.815	.250	A2	B2	BP2
.438	.955	.050	.050	.433	.970	.345	A3	B3	BP3
.500	1.062	.050	.046	.486	1.050	.420	A4	B4	BP4
.625	1.205	.055	.045	.594	1.220	.375	A5	B5	BP5


TABLE II. SPUR GROMMET CONFIGURATION DASH NUMBERS.

A DIA AFTER INSERTION	B	E	G	H	L	MS20230 DASH NO.	
						PLAIN	PLATED
.250	.645	.060	.270	.670	.235	BS10	BPS10
.312	.790	.065	.380	.790	.275	BS1	BPS1
.375	.890	.070	.425	.890	.315	BS2	BPS2
.438	.970	.075	.430	.970	.330	BS3	BPS3
.500	1.120	.080	.560	1.120	.405	BS4	BPS4
.625	1.270	.085	.600	1.285	.455	BS5	BPS5

MIL-STD-1754  
29 December 1978

# SECTION 801

GROMMET-DRAINAGE, PLASTIC  
APPLICABLE DOCUMENT: AN231

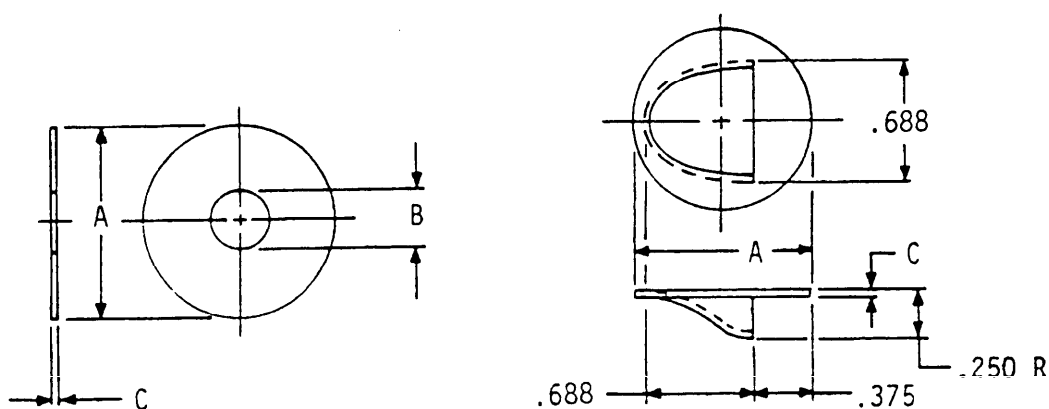

DASH NOS.  
1 AND 2

DASH NO. 4

MATERIAL	PROTECTIVE FINISH
CELLULOSE ACETATE BUTYRATE	NONE

TABLE I. GROMMET CONFIGURATION DASH NUMBERS.

A	B	C	AN231 DASH NO.
1.250	.375	.0200	-1
.750	.312	.0200	-2
1.187	--	.0325	-4






MIL-STD-1754  
29 December 1978

## SECTION 802

GROMMET, PLASTIC, EDGING  
APPLICABLE DOCUMENT: MS21266

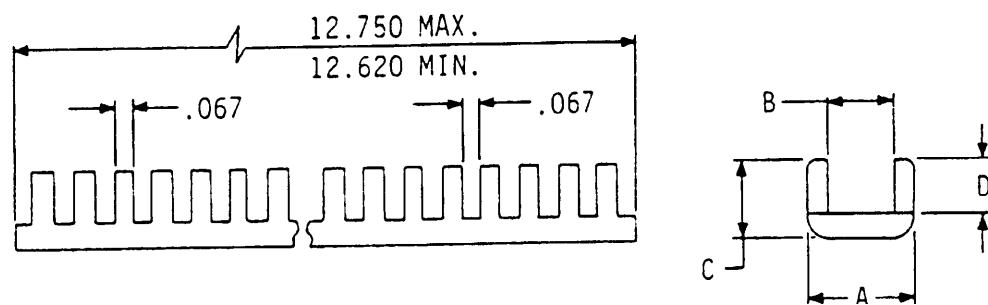

MATERIAL	PROTECTIVE FINISH
NYLON	NONE
POLYTETRA- FLUOROETHYLENE	NONE

TABLE I. GROMMET CONFIGURATION DASH NUMBERS.


SHEET THICKNESS (REF)	A	B	C	D	MS21266 DASH NO.	
					NYLON	POLYTETRA- FLUOROETHYLENE
.015 - .052	.150	.056	.155	.100	-1N	-1T
.052 - .085	.175	.090	.155	.100	-2N	-2T
.085 - .128	.220	.131	.155	.100	-3N	-3T
.128 - .192	.325	.195	.230	.160	-4N	-4T
.192 - .255	.385	.260	.240	.170	-5N	-5T
.255 - .318	.445	.320	.255	.180	-6N	-6T



MIL-STD-1754  
29 December 1978

# SECTION 803

GROMMET-PLASTIC FLIP TYPE  
APPLICABLE DOCUMENT: NAS1368

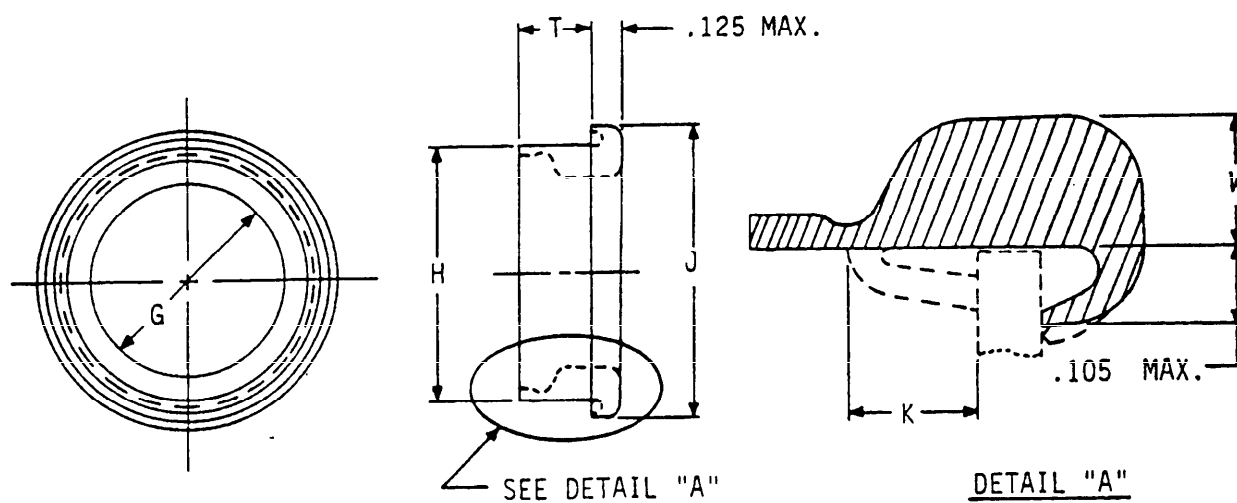

MATERIAL	PROTECTIVE FINISH
NYLON (SEE NOTE)	NONE

**MIL-STD-1754**  
**29 December 1978**

TABLE I. GROMMET CONFIGURATION DASH NUMBERS.



G	W	H	J	K APPROX	T	STRUCTURE THICKNESS	NAS1368 DASH NO.
.250	.058	.367	.567	.100	.235	.025 TO .080	N4A
					.295	.081 TO .140	N4B
					.360	.141 TO .200	N4C
					.420	.201 TO .250	N4D
.375	.058	.492	.692	.100	.235	.025 TO .080	N6A
					.295	.081 TO .140	N6B
					.360	.141 TO .200	N6C
					.420	.201 TO .250	N6D
.500	.058	.615	.815	.100	.235	.025 TO .080	N8A
					.295	.081 TO .140	N8B
					.360	.141 TO .200	N8C
					.420	.201 TO .250	N8D
.750	.083	.896	1.096	.100	.235	.025 TO .080	N12A
					.295	.081 TO .140	N12B
					.360	.141 TO .200	N12C
					.420	.201 TO .250	N12D
1.000	.104	1.178	1.378	.120	.275	.025 TO .080	N16A
					.335	.081 TO .140	N16B
					.400	.141 TO .200	N16C
					.460	.201 TO .250	N16D
1.500	.104	1.673	1.873	.120	.275	.025 TO .040	N24F
					.335	.041 TO .091	N24H
					.400	.092 TO .160	N24K
					.460	.161 TO .220	N24L
2.000	.104	2.173	2.373	.120	.275	.025 TO .040	N32F
					.335	.041 TO .091	N32H
					.400	.092 TO .160	N32K
					.460	.161 TO .220	N32L

NOTE: NYLON - TO BE USED WHERE TEMPERATURE DOES NOT EXCEED  
 -65° TO 300°F FOR 2,000 HOUR SERVICE LIFE  
 -65° TO 240°F FOR 12,000 HOUR SERVICE LIFE  
 -65° TO 200°F FOR 60,000 HOUR SERVICE LIFE

MIL-STD-1754  
29 December 1978


# SECTION 804

GROMMET, PLASTIC-SPLIT  
APPLICABLE DOCUMENT: NAS557

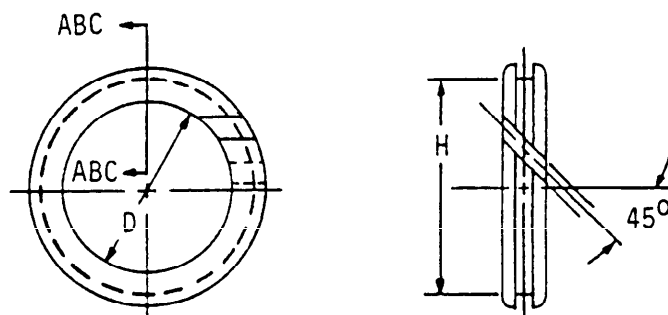


SECTION A-A

DASH NOS.  
3 THRU 6



SECTION B-B

DASH NOS.  
8 THRU 20

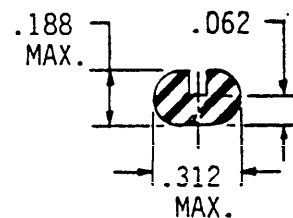

SECTION C-C

DASH NOS.  
22 THRU 48

MATERIAL	PROTECTIVE FINISH
NYLON	NONE

MIL-STD-1754

29 Decamber 1978

TABLE I. GROMMET CONFIGURATION DASH NUMBERS.

SECTION	SHEET THICKNESS (REF)	D INSTALLED DIA	H	NAS557 DASH NO.
A-A	.025 - .051	.188	.241	-3
		.250	.303	-4
		.375	.429	-6
B-B	.064 - .081	.500	.601	-8
		.625	.726	-10
		.750	.851	-12
		.875	.976	-14
		1.000	1.101	-16
		1.125	1.226	-18
C-C	.091 - .125	1.250	1.351	-20
		1.375	1.507	-22
		1.500	1.632	-24
		1.750	1.882	-28
		2.000	2.132	-32
		2.250	2.382	-36
		2.500	2.632	-40
		2.750	2.882	-44
		2.875	3.007	-46
		3.000	3.132	-48


NOTE: TO BE USED WHERE TEMPERATURE DOES NOT EXCEED 350°F

MIL-STD-1754  
29 December 1978

SECTION 901

GROMMETS, SYNTHETIC AND SILICONE RUBBER, HOT OIL AND COOLANT RESISTANT

APPLICABLE DOCUMENT: MS35489

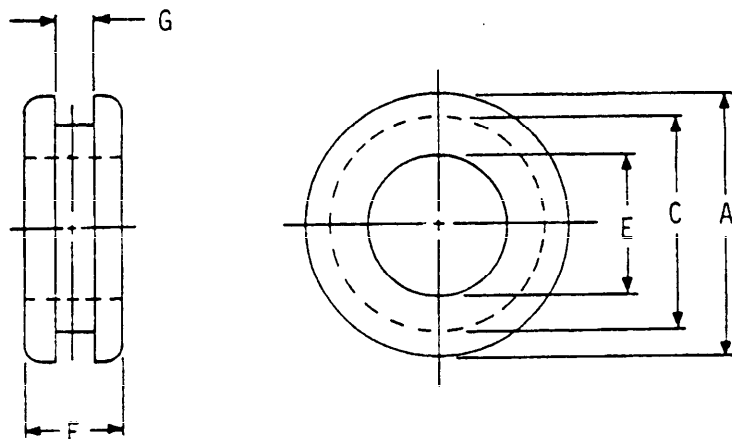

MATERIAL	PROTECTIVE FINISH
RUBBER, SYNTHETIC	NONE
RUBBER, SILICONE	NONE

**MIL-STD-1754**  
**29 December 1978**

**TABLE I. GROMMET CONFIGURATION DASH NUMBERS.**

E	C	A	G							
			0.062		0.125		0.188		0.250	
			MS35489 DASH NO.	F	MS35489 DASH NO.	F	MS35489 DASH NO.	F	MS35489 DASH NO.	F
0.125	0.250	0.344	1	0.188						
0.125	0.562	0.750	2	0.188	31	0.250	60	0.312	89	0.375
0.125	1.000	1.250	3	0.250	32	0.312	61	0.375	90	0.438
0.188	0.312	0.438	4	0.188	33	0.250	62	0.312	91	0.375
0.188	0.562	0.750	134	0.188	137	0.250	138	0.312	139	0.375
0.188	0.625	0.875	5	0.188	34	0.250	63	0.312	92	0.375
0.250	0.438	0.625	6	0.188	35	0.250	64	0.312	93	0.375
0.250	0.750	1.000	7	0.250	36	0.312	65	0.375	94	0.438
0.250	1.000	1.250	8	0.250	37	0.312	66	0.375	95	0.438
0.312	0.562	0.812	9	0.312	38	0.375	67	0.438	96	0.500
0.312	0.750	1.000	10	0.312	39	0.375	68	0.438	97	0.500
0.312	0.812	1.062	118	0.312	122	0.375	136	0.438	130	0.500
0.375	0.625	0.875	11	0.312	40	0.375	69	0.438	98	0.500
0.375	1.000	1.250	12	0.250	41	0.312	70	0.375	99	0.438
0.438	0.688	0.938	13	0.312	42	0.375	71	0.438	100	0.500
0.500	0.812	1.062	14	0.312	43	0.375	72	0.438	101	0.500
0.500	1.250	1.500	15	0.250	44	0.312	73	0.375	102	0.438
0.562	0.812	1.062	16	0.312	45	0.375	74	0.438	103	0.500
0.625	0.875	1.125	17	0.312	46	0.375	75	0.438	104	0.500
0.625	1.250	1.500	18	0.250	47	0.312	76	0.375	105	0.438
0.688	1.000	1.312	19	0.375	48	0.438	77	0.500	106	0.562
0.750	1.062	1.375	20	0.375	49	0.438	78	0.500	107	0.562
0.750	1.250	1.625	135	0.250	123	0.312	127	0.375	131	0.438
0.750	1.438	1.812	21	0.375	50	0.438	79	0.500	108	0.562
0.750	1.625	2.000	120	0.375	124	0.438	128	0.500	132	0.562
0.875	1.250	1.625	22	0.438	51	0.500	80	0.562	109	0.625
0.875	1.625	2.000	121	0.438	125	0.500	129	0.562	133	0.625
1.000	1.375	1.750	23	0.438	52	0.500	81	0.562	110	0.625
1.000	1.875	2.250	24	0.438	53	0.500	82	0.562	111	0.625
1.250	2.375	2.750	25	0.438	54	0.500	83	0.562	112	0.625
1.250	2.500	2.975	26	0.438	55	0.500	84	0.562	113	0.625
1.500	1.750	2.125	27	0.438	56	0.500	85	0.562	114	0.625
1.500	2.750	3.250	28	0.438	57	0.500	86	0.562	115	0.625
1.750	3.250	3.750	29	0.500	58	0.562	87	0.625	116	0.688
2.000	3.500	4.000	30	0.500	59	0.562	88	0.625	117	0.688

NOTE: ADD "X" AFTER DASH NUMBER FOR SILICONE RUBBER GROMMET.



## STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions - Reverse Side)

1. DOCUMENT NUMBER

2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS (Street, City, State, ZIP Code)

4. TYPE OF ORGANIZATION (Mark one)

☐ VENDOR☐ USER☐ MANUFACTURER☐ OTHER (Specify): \_\_\_\_\_

## 5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation.

## 6. REMARKS

7a. NAME OF SUBMITTER (Last, First, MI) - Optional

b. WORK TELEPHONE NUMBER (Include Area Code) - Optional

c. MAILING ADDRESS (Street, City, State, ZIP Code) - Optional

8. DATE OF SUBMISSION (YYMMDD)

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge (**DO NOT STAPLE**), and mailed. In block 3, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 3 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

**NOTE:** This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

OFFICIAL BUSINESS  
PENALTY FOR PRIVATE USE \$300

**BUSINESS REPLY MAIL**

FIRST CLASS PERMIT NO. 70236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

Commander  
Aeronautical Systems Division (AFSC)  
ATTN: ASD/ENESS  
Wright-Patterson AFB, OH 45433

29