


Review activities: Air Force-11
 These Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data does not constitute an authorization by implication or otherwise to its use for any purpose other than that for which it was prepared. If any drawings, specifications, or other data are to be reproduced or transmitted in any form, in any language, or by any means, it is the responsibility of the holder or any other person or corporation, or whoever may be licensing the holder or any other person or corporation, to secure the necessary permission in writing from the appropriate authority.

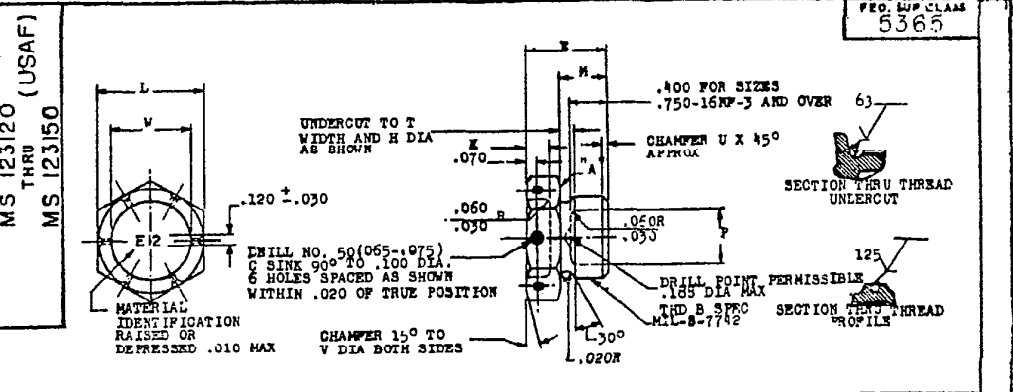

FED. SUP. CLASS 5365

TAD B	E	H DIA	J	K	L	M	P DIA	T	U	V DIA	W	WT. LBS.	PART NO.
.250-24 NF-3	.580	.155-.160	.015	.130	.431-.440	.320	--	.090-.095	.020-.050	.438	.250	.0037	MS123120
.3125-24 NF-3	.580	.219-.224	.017	.130	.555-.564	.360	--	.082-.097	.020-.050	.562	.312	.0065	MS123121
.375-24 NF-3	.590	.285-.290	.019	.130	.618-.627	.360	--	.073-.088	.020-.050	.625	.375	.0083	MS123122
.4375-20 NF-3	.640	.348-.353	.021	.130	.681-.690	.400	--	.076-.091	.030-.060	.688	.438	.0116	MS123123
.500-20 NF-3	.650	.411-.416	.023	.130	.743-.752	.400	--	.076-.091	.030-.060	.750	.500	.0139	MS123124
.5625-18 NF-3	.660	.418-.423	.024	.130	.805-.814	.400	--	.125-.141	.040-.070	.812	.562	.0190	MS123125
.625-18 NF-3	.730	.430-.435	.026	.160	.868-.877	.440	--	.125-.141	.040-.070	.875	.625	.0228	MS123126
.750-16 NF-3	.730	.606-.611	.030	.160	.993-1.002	.440	.250	.120-.135	.040-.070	1.000	.750	.0309	MS123127
.875-14 NF-3	.740	.727-.732	.030	.160	1.118-1.127	.440	.375	.112-.127	.050-.080	1.125	.875	.0414	MS123128
1.000-14 NF-3	.780	.859-.864	.030	.200	1.243-1.252	.440	.500	.112-.127	.050-.080	1.250	1.000	.0543	MS123129
1.0625-12 N-3	.830	.865-.870	.030	.200	1.368-1.377	.480	.562	.157-.172	.050-.080	1.375	1.062	.0602	MS123130
1.125-12 N-3	.830	.928-.933	.030	.200	1.431-1.440	.480	.625	.157-.172	.050-.080	1.438	1.125	.0650	MS123131
1.250-12 N-3	.840	1.050-1.055	.030	.200	1.555-1.564	.480	.750	.157-.172	.050-.080	1.562	1.250	.0724	MS123132
1.3125-12 N-3	.840	1.114-1.119	.030	.200	1.618-1.627	.480	.812	.157-.172	.050-.080	1.625	1.312	.0790	MS123133
1.375-12 N-3	.840	1.175-1.180	.030	.200	1.681-1.690	.480	.875	.157-.172	.050-.080	1.688	1.375	.0844	MS123134
1.500-12 N-3	.850	1.303-1.308	.030	.200	1.743-1.752	.480	.984	.157-.172	.050-.080	1.750	1.500	.0935	MS123135
1.562-12 N-3	.850	1.428-1.433	.030	.200	1.821-1.830	.480	1.185	.157-.172	.050-.080	1.838	1.562	.1058	MS123136
1.750-12 N-3	.850	1.553-1.558	.030	.200	2.054-2.063	.480	1.250	.157-.172	.050-.080	2.062	1.750	.1182	MS123137
1.875-12 N-3	.860	1.675-1.680	.050	.200	2.180-2.190	.480	1.375	.157-.172	.050-.080	2.188	1.875	.1300	MS123138
2.000-12 N-3	.860	1.801-1.806	.050	.200	2.304-2.314	.480	1.500	.157-.172	.050-.080	2.312	2.000	.1432	MS123139
2.125-12 N-3	.860	1.931-1.936	.050	.200	2.430-2.440	.480	1.625	.157-.172	.050-.080	2.438	2.125	.1573	MS123140
2.250-12 N-3	.870	2.053-2.058	.050	.200	2.554-2.564	.480	1.750	.157-.172	.050-.080	2.562	2.250	.1715	MS123141
2.375-12 N-3	.870	2.178-2.183	.050	.200	2.680-2.690	.480	1.875	.157-.172	.050-.080	2.688	2.375	.1857	MS123142
2.500-12 N-3	.870	2.303-2.308	.050	.200	2.804-2.814	.480	2.000	.157-.172	.050-.080	2.812	2.500	.2030	MS123143

NOTE: (1) THE CONCENTRICITY OF THE HEXAGON WITH THE THREAD PD SHALL BE WITHIN J FIT.
 (2) "A" SURFACES AND PD OF THREAD MUST BE CONCENTRIC, PARALLEL, FLAT, SQUARE AND TRUE (AS APPLICABLE) TO EACH OTHER WITHIN .005 FULL INDICATOR READING UNLESS OTHERWISE SPECIFIED.

MATERIAL: ALUMINUM AMS 4120
 FINISH: ANODIC TREATMENT AMS 2470. DO NOT DYE.
 SURFACE ROUGHNESS: AS 107
 BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.
 DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ± .010
 ANGULAR DIMENSIONS ± 2°.
 DO NOT USE UNASSIGNED PART NUMBERS.
 * APPROXIMATE WEIGHT LBS/EA

REINSTATED AS AN INACTIVE STANDARD AFTER 7 JUNE 1972
 NO SUPERSEDING STANDARD

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

P.A. AIR FORCE-82 Other Code	MILITARY STANDARD		MS 123120 THRU (USAF) 123150
	FLUO - STRAIGHT THREAD, 90° RING SEAL, ALUMINUM		
PROCUREMENT SPECIFICATION NUMBER			

APPROVED 24 Mar 53
 REVISED (A) 25 Apr 56 (B) 1 Sep 71 (C) 7 June 72