


REVISION ACTIVITIES: YD, EC  
USER ACTIVITIES: MC, EC  
CODE "C"

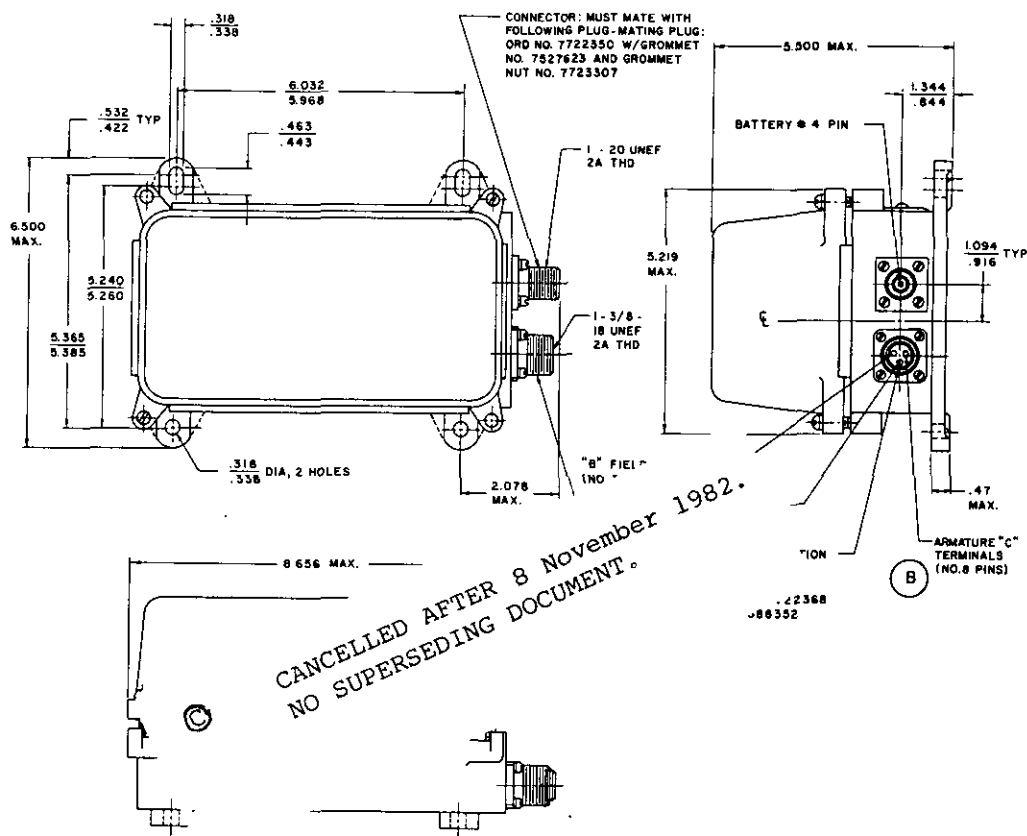

# NOTES:

1. REGULATOR SHALL PROVIDE THE PERFORMANCE CHARACTERISTICS SPECIFIED IN MS 13803.
2. MODIFICATIONS IN OUTSIDE APPEARANCE AND CONSTRUCTION ACCEPTABLE, PROVIDED UNIT INTERCHANGEABILITY IS NOT AFFECTED.
3. REGULATORS SHOULD BE MOUNTED ON A VERTICAL SURFACE WHICH IS AT RIGHT ANGLE TO AXIS OF ROTATION OF THE ENGINE CRANKSHAFT AND PROVISIONS MADE FOR SHOCK MOUNTING WHERE REQUIRED.
4. REGULATOR SHALL BE PROVIDED WITH 1/8-27 PIPE PLUG FOR TESTING PURPOSES. LOCATION OF PLUG SHALL BE AT OPTION OF MANUFACTURER.
5. REGULATOR SHALL HAVE WARNING PLATE OF RAISED LETTERS INDICATING: "DISCONNECT LEAD AT BATTERY BEFORE SERVICING UNIT."
6. REGULATOR SHALL HAVE NEGATIVE GROUND.
7. THIS REGULATOR IS IDENTIFIED AS TYPE II, GRADE A OF REFERENCED SPECIFICATION.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON INVITATION FOR BIDS.
9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
10. ALL DIMENSIONS ARE IN INCHES.

(B) TITLE CHANGED

MS PART NO. 13803-1

P.A. ARMY - ME  
Other Cust  
NAVY - YD

TITLE

REGULATOR, ENGINE GENERATOR(VOLTAGE AND CURRENT  
28 VOLT, 40-AMP)

MILITARY STANDARD

MS13803

PROCUREMENT SPECIFICATION  
MIL-R-10265

SUPERSEDES:

SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

\* U.S. GOVERNMENT PRINTING OFFICE: 1982-605-034-2

This Military Standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 29 NOVEMBER 1956 REVISED 12 SEPTEMBER 1962 29 JUNE 1967 8 NOV 82