


FED. SUP CLASS  
2920

FREE POSITION

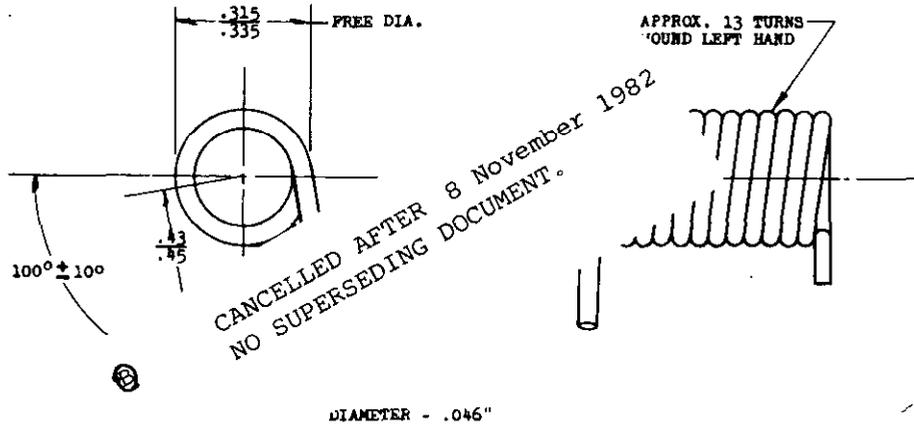

DIAMETER - .046"

NOTES:

1. MATERIAL: STEEL, CORROSION RESISTING WIRE, CONDITION B, COMP. FS 304, PER SPEC. QQ-W-423.
2. SPRING SHALL GIVE 23 TO 30 INCH OUNCES TORQUE AT 180 DEGREES DEFLECTION.
- (A) 3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
- (A) 4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

REVIEW INTEREST:  
NAVY - YD  
MC  
ARMY - MO

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 29 NOVEMBER 1956 REVISED (A) 23 JUNE 1965 (B) 8 November 1982

P.A. MO ERDL		MS PART NO. 13806-1	
Other Cust N YD	(A) TITLE	MILITARY STANDARD	
	(A) SPRING, BRUSH (GENERATOR ENGINE ACCESSORY 28-VOLT, 18-AMP)	MS 13806	
PROCUREMENT SPECIFICATION MIL-C-12604	SUPERSEDES.	SHEET 1 OF 1	

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE