


FED. SUP. CLASS.  
2920DSA - CS  
NAVY - YD  
MC  
ARMY - MO

REVIEW INTEREST:

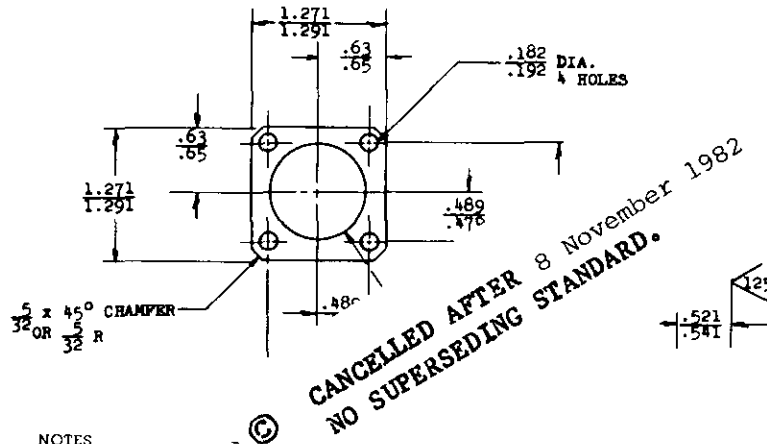

## NOTES

1. MATERIAL: AL, COND. T-4, PER SPEC. QQ-A-267 or QQ-A-268, ALU, COND. 1/2H or H, PER SPEC. QQ-A-318, ALU, WING, COMP. NO. 8, 9, or 18, PER SPEC. QQ-A-601, OR D. ALUM PER SPEC QQ-A-591.
2. REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION'S FOR BID.
3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
4. ALL DIMENSIONS ARE IN INCHES.

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

MS PART NO. 13815-1

P.A. MO ERDL  
Other Cust N YD

## TITLE

B SPACER, ELECTRICAL CONNECTOR, (GENERATOR, ENGINE-ACCESSORY, 28-VOLT, 18-AMP)

MILITARY STANDARD

MS 13815

PROCUREMENT SPECIFICATION  
MIL-G-12604

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 (Coordinated)  
1 SEP 57

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 29 NOVEMBER 1956 REVISED 12 SEPTEMBER 1962 B 28 JUNE 1965 C 8 November 1982