


REVIEW ACTIVITY : DCSC, 69  
USER ACTIVITY : YD, ATAC



WALL AT .43 ABOVE P.L.  
TO BE .0002-.0005  
LESS THAN WALL AT C —

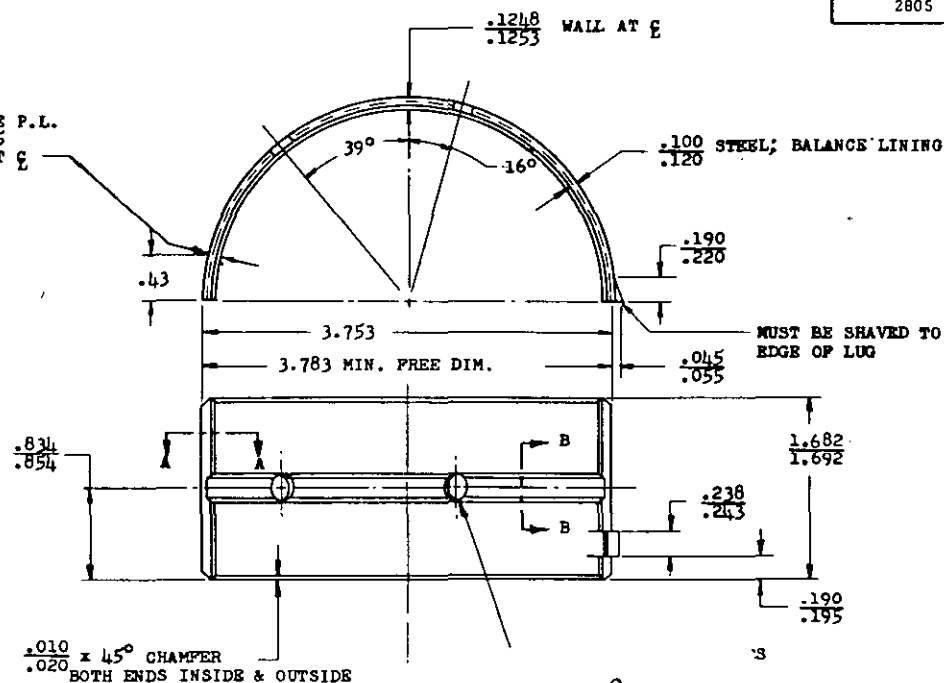

ENDS INSIDE & OUTSIDE

8 April 1982

ⓑ CANCELED AFTER  
NO SUPERSEDING STANDARD.



NOTES:

1. MATERIAL: COPPER-LEAD LINING, S.A.E. NO. 49  
ON STEEL, S.A.E. NO. 1008 OR 1010
2. PLATING: LEAD-TIN PLATE 1.D. (6% MIN. TIN) TO A THICKNESS .001 NOMINAL. FLASH-TIN PLATE ALL  
OVER AFTER LEAD-TIN PLATE.
3. IN 3.753 DIA. INSPECTION BLOCK WITH ONE PARTING LINE FACE AGAINST A STOP AT HORIZONTAL CENTER  
LINE OF BLOCK AND A PRESSURE OF 3025 LBS. ON OTHER P.L. FACE. HEIGHT WILL BE 1.878 - 1.879 ON  
SIDE OPPOSITE STOP.
4. REMOVE ALL BURRS.
5. MS PART NUMBER AND PART MANUFACTURER'S IDENTIFICATION TO BE CLEARLY MARKED WITHOUT  
INTERFERING WITH THE FUNCTION OF THE PART.
6. TOLERANCES: UNLESS OTHERWISE SPECIFIED, LINEAR MACHINED DIMENSIONS  $\pm .010$ ; ANGULAR  
MACHINED DIMENSIONS  $\pm 30'$ . DO NOT SCALE DRAWING.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS  
REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
9. ALL DIMENSIONS IN INCHES.

Ⓐ ENTIRE STANDARD REVISED

PART NO. MS 13905-1

P.A. ARMY - MO(ERDL) Other Cust A.F. - 69 NAVY - YD	TITLE BEARING, SLEEVE: ENGINE, PLAIN, 3-1/2" x 1-11/16"	MILITARY STANDARD
		MS 13905
PROCUREMENT SPECIFICATION MIL-E-11275	SUPERSEDES:	SHEET 1 OF 1

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new applications and for repetitive use shall be made from this document.

APPROVED 24 OCTOBER 1975 REVISED (A) 7 MAR 1966 (B) 8 APRIL 1982