
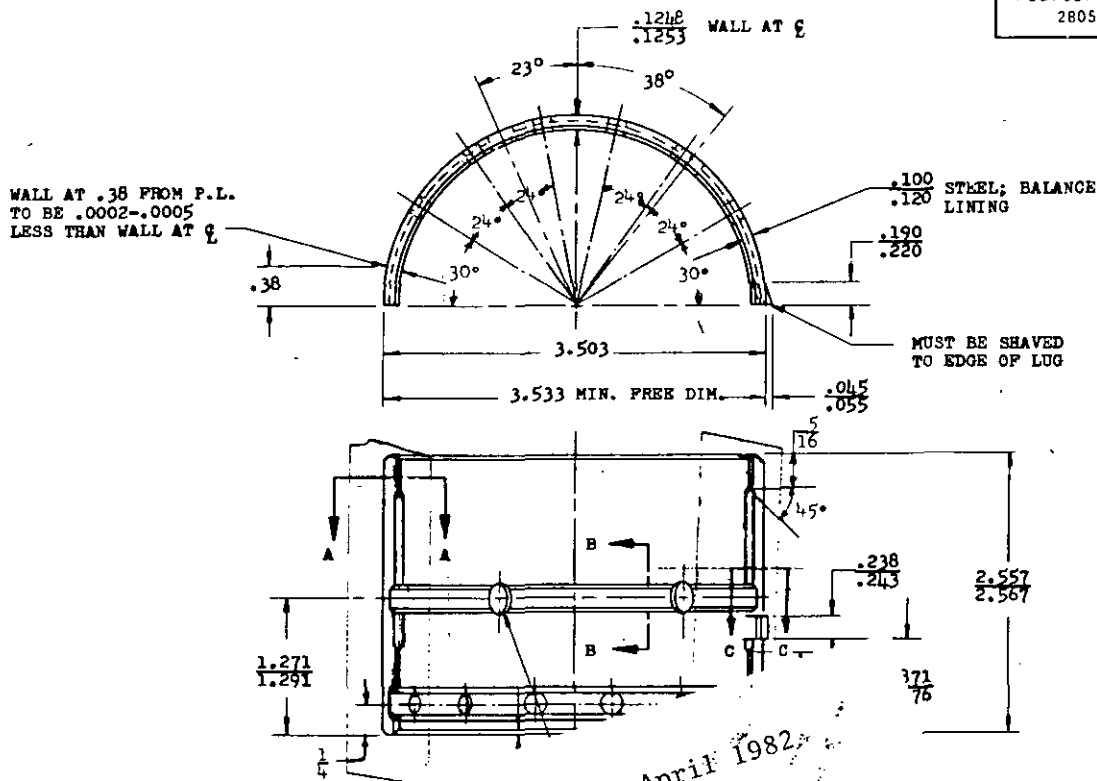




FED. SUP CLASS
2805REVIEW ACTIVITY : DCSC, 69
USER ACTIVITY : YD, ATAC

ⓑ CANCELED AFTER 8 April 1982
NO SUPERSEDING STANDARD.



NOTES:

1. MATERIAL: COPPER-LEAD LINING, S.A.E. NO. 49
ON STEEL, S.A.E. NO. 1008 OR 1010
2. PLATING: LEAD-TIN PLATE I.D. (6% MIN. TIN) TO A THICKNESS .001 NOMINAL. FLASH-TIN PLATE ALL
OVER AFTER LEAD-TIN PLATE.
3. IN 3.503 DIA. INSPECTION BLOCK WITH ONE PARTING LINE FACE AGAINST A STOP AT HORIZONTAL
CENTER LINE OF BLOCK AND A PRESSURE OF 3480 LBS. ON OTHER P.L. FACE. HEIGHT WILL BE
1.7525 - 1.7535 ON SIDE OPPOSITE STOP.
4. REMOVE ALL BURRS.
5. MS PART NUMBER AND PART MANUFACTURER'S IDENTIFICATION TO BE CLEARLY MARKED WITHOUT
INTERFERING WITH THE FUNCTION OF THE PART.
6. TOLERANCES; UNLESS OTHERWISE SPECIFIED, LINEAR MACHINED DIMENSIONS $\pm .010$; ANGULAR
MACHINED DIMENSION $\pm 30'$. DO NOT SCALE DRAWING.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS
REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
9. ALL DIMENSIONS IN INCHES.

Ⓐ ENTIRE STANDARD REVISED

PART NO. MS 13906-1

P.A. ARMY - MO(ENR)

TITLE

Other Cust

A.F. - 69
NAVY - YD

BEARING, SLEEVE: ENGINE, PLAIN, 3-1/4" x 2-9/16"

MILITARY STANDARD

PROCUREMENT SPECIFICATION
MIL-E-11275

SUPERSEDES:

MS 13906

SHEET 1 OF 1

DD FORM 672-1 (Continued)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 24 OCTOBER 1955 REVISED Ⓐ 7 MAR 1966 ⓑ 8 APRIL 1982

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.