


REVIEW ACTIVITY : DCSC, 69
USER ACTIVITY : YD, ATAC

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new applications and design applications and for repetitive use shall be made from this document.

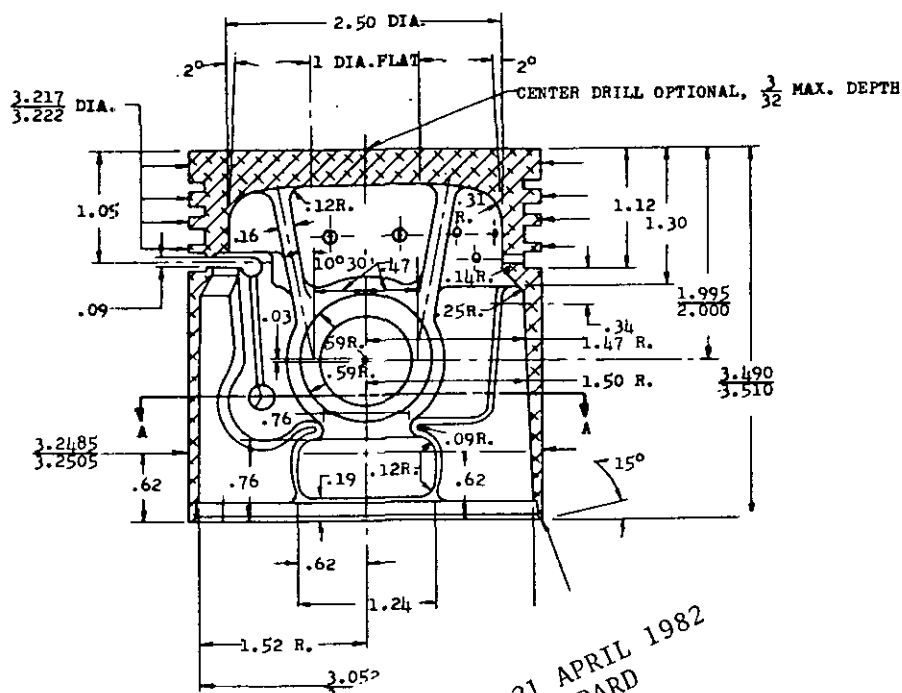


.125 DRILL-8 HOLES SPACED
AS SHOWN ON E OF #3
GROOVE.

1.24
1.52 R.
3.05
3 SPACE
3
① CANCELED AFTER 21 APRIL 1982
NO SUPERSEDING STANDARD
UN S
0005 TO
MAX. DI
RING LA

ON SKIRT IS GROUND TAPERED
.0005 TO .0015 (.001 DESIRED)
MAX. DIA. AT BOTTOM.

RING LANDS MAY LOCALLY SHOW
EFFECT OF CAM GRINDING SKIRT.

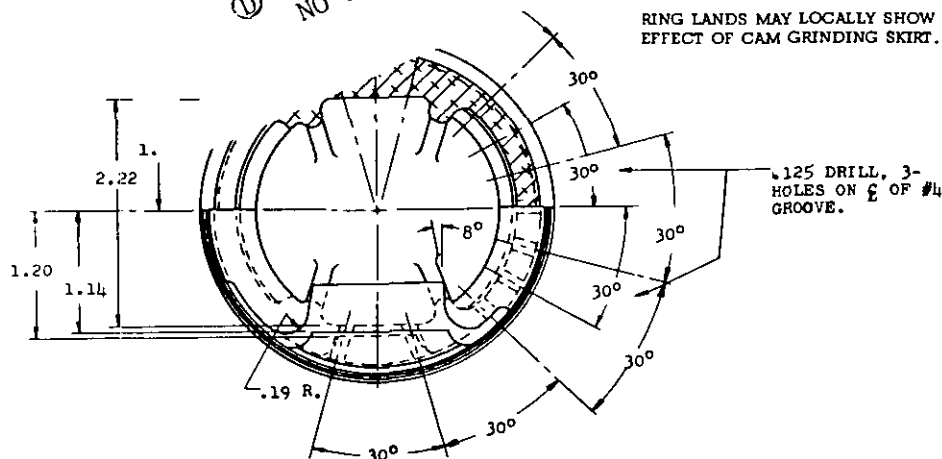

WT. OF FIN. PISTON: 424 ± 3 GRAMS.

(C) ENTIRE STANDARD REVISED

PART NO. MS 13958-1

P.A. ARMY MO(ERDL)	TITLE	MILITARY STANDARD
Other Cust. A.F. - 69 NAVY - YD	PISTON, INTERNAL COMBUSTION ENGINE: 3-1/4" X 3-1/2"	MS 13958
PROCUREMENT SPECIFICATION MIL-E-11275	SUPERSEDES:	SHEET 1 OF 6