


REVIEW ACTIVITY : DSCC, 69  
USER ACTIVITY : YD

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

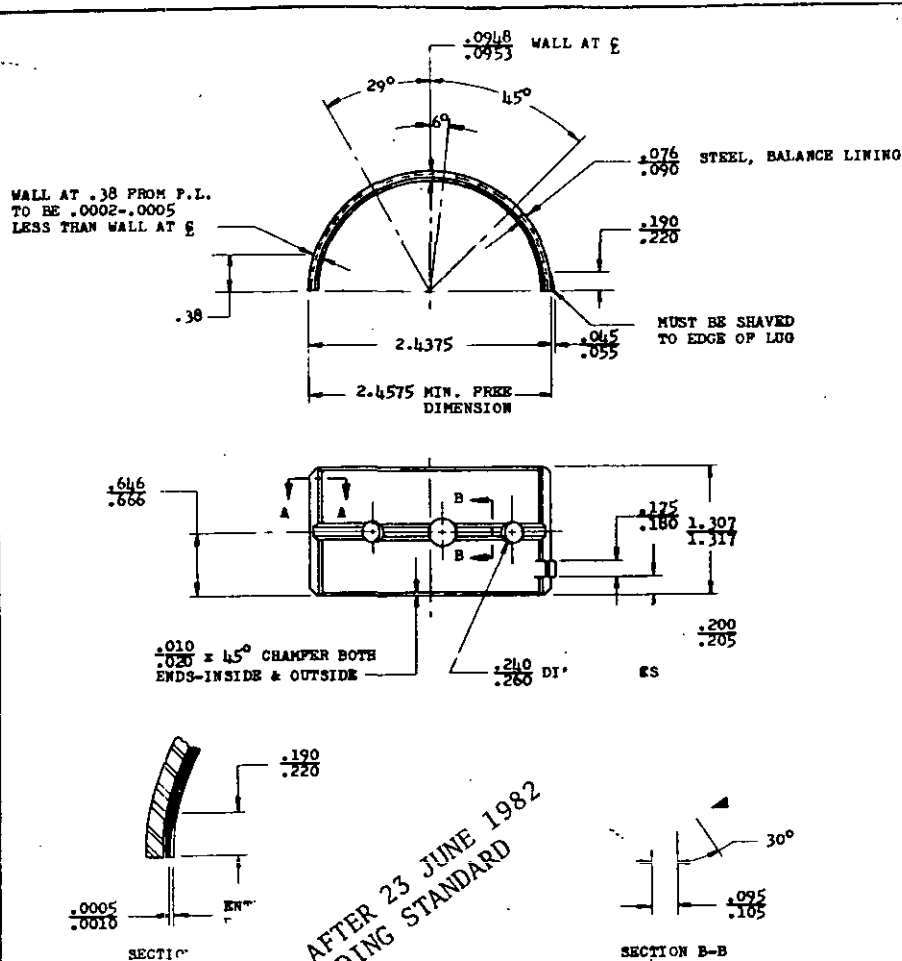

## NOTES:

1. A.E. NO. 49  
J. 1008 OR 1010  
(6% MIN. TIN) TO A THICKNESS .001 NOMINAL. FLASH-TIN PLATE ALL OVER AFTER
2. SECTION BLOCK WITH ONE PARTING LINE FACE AGAINST A STOP AT HORIZONTAL CENTER LINE OF FACE OF 1865 LBS. ON OTHER P.L. FACE. HEIGHT WILL BE 1.21925-1.22025 ON SIDE OPPOSITE STOP
3. MANUFACTURER AND PART MANUFACTURER'S IDENTIFICATION TO BE CLEARLY MARKED WITHOUT INTERFERING WITH IDENTIFICATION OF THE PART.
4. UNLESS OTHERWISE SPECIFIED, LINEAR MACHINED DIMENSIONS  $\pm .010$ ; ANGULAR MACHINED DIMENSIONS  $\pm 30'$ . DO NOT SCALE DRAWING.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
7. ALL DIMENSIONS IN INCHES.

(C) ENTIRE STANDARD REVISED

P.A.	Army - MO(ENCL)	TITLE	PART NO. MS 13988-1
Other Cust	A.F. - 69 NAVY - YD	BEARING, SLEEVE: ENGINE, PLAIN, 2-1/4" X 1-5/16"	MILITARY STANDARD
PROCUREMENT SPECIFICATION A IL-E-11275	SUPERSEDES:		MS 13988
			SHEET 1 OF 1

APPROVED 19 JUNE 1952 REVISED 27 NOVEMBER 1953 24 OCTOBER 1955 8 JULY 1966 23 JUNE 1982