


REVIEW ACTIVITY : DCSC, C
USER ACTIVITY : YD.

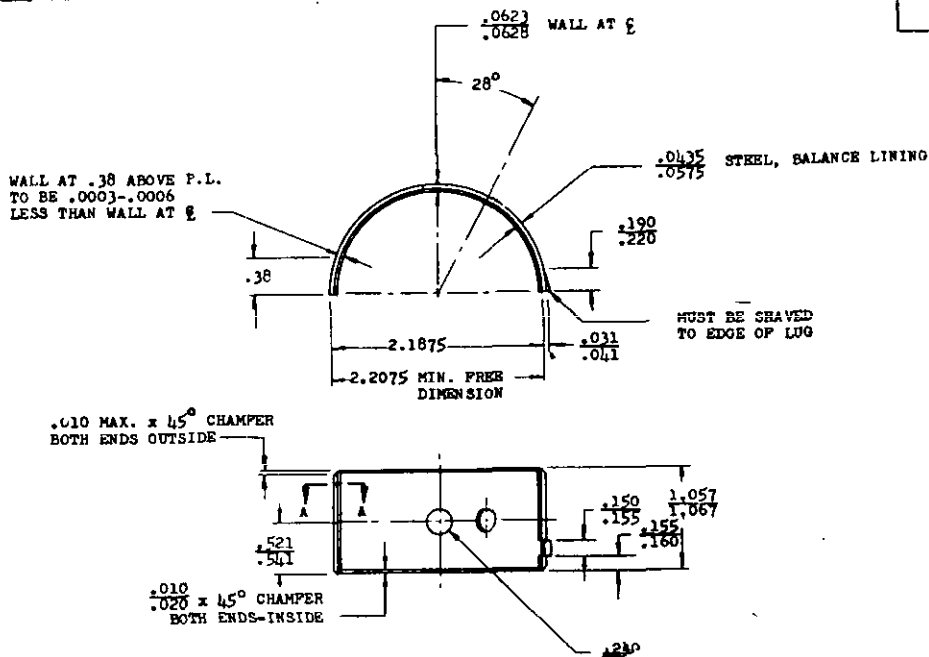

Ⓐ CANCELED AFTER 24 JUNE 1982
NO SUPERSEDING STANDARD

NOTE.

1. MIL-E. NO. 49
J. 1008 OR 1010
2. PL. S. : : : : : I.D. (6% MIN. TIN) TO A THICKNESS .001 NOMINAL. FLASH-TIN PLATE ALL OVER AFTER
IN PLATE.
3. IN 2.1675 DIA. INSPECTION BLOCK WITH ONE PARTING LINE FACE AGAINST A STOP AT HORIZONTAL CENTER LINE OF
BLOCK AND A PRESSURE OF 1335 LBS. ON OTHER P.L. FACE. HEIGHT WILL BE 1.09475-1.09575 ON SIDE OPPOSITE STOP.
4. REMOVE ALL BURRS.
5. MS PART NUMBER AND PART MANUFACTURER'S IDENTIFICATION TO BE CLEARLY MARKED WITHOUT INTERFERING WITH
THE FUNCTION OF THE PART.
6. TOLERANCES: UNLESS OTHERWISE SPECIFIED, LINEAR MACHINED DIMENSIONS $\pm .010$; ANGULAR MACHINED DIMEN-
SIONS $\pm 30^\circ$. DO NOT SCALE DRAWING.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED
HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
9. ALL DIMENSIONS IN INCHES.

Ⓒ ENTIRE STANDARD REVISED

P.A. Army - MO(ERDL)		PART NO. MS 13994-1	
Other Cust		MILITARY STANDARD	
A.F. - 69 NAVY - YD		MS 13994	
PROCUREMENT SPECIFICATION MIL-E-11275		SHEET 1 OF 1	

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 19 JUNE 1952 REVISED 27 NOVEMBER 1953 24 OCTOBER 1955 8 JULY 1966 24 JUNE 1982