


User activities: Army - AR, MI
Navy - YD, AS
Air Force -

Review activities: Army -
Navy - MC
Air Force - II, 17, 99
DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

FED. SUP CLASS
5935

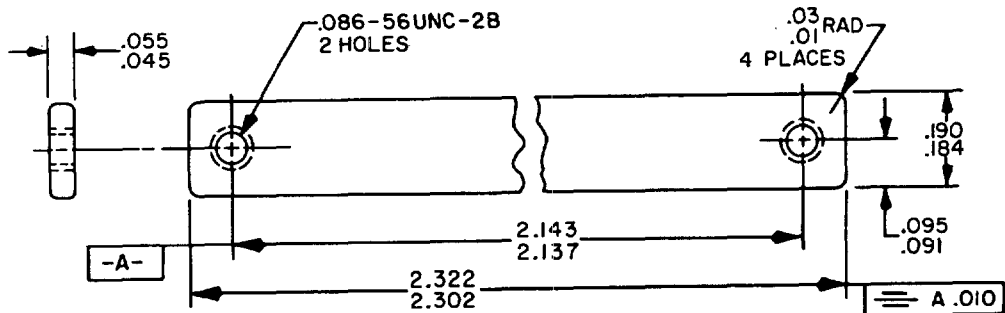

DESIGN STANDARD FOR USE WITH MIL-C-28754/17

INCHES	MM
.010	.25
.015	.38
.03	.8
.045	1.14
.055	1.40
.086	2.18
.091	2.31
.095	2.41
.184	4.67
.190	4.83
2.137	54.28
2.143	54.43
2.302	58.47
2.322	58.98

NOTES:

1. Dimensions are in inches.
2. Break sharp edges .015 maximum.
3. Material: AISI 304 ANL, pickled, bright, CR
or per QQ-S-766, CL 304, Cond. A, Fin. 2B.
4. Passivate as specified in QQ-P-35, type optional.
5. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
6. Unless otherwise specified, tolerances are ± 0.005 (.13 mm) for three place decimals, ± 0.01 (.3 mm) for two place decimals and $\pm 2^\circ$ for angles.
7. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

(B) denotes changes

P.A. NAVY - EC Other Cust AF - 85 ARMY - CR	INTERNATIONAL INTEREST	TITLE CLAMP, CABLE	MILITARY STANDARD MS14060
Procurement Specifications NONE	SUPERSEDES: Drawing 2825810 Code Ident 10001		PAGE 1 OF 1

DD FORM 672
1 MAY 73

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-3036-50