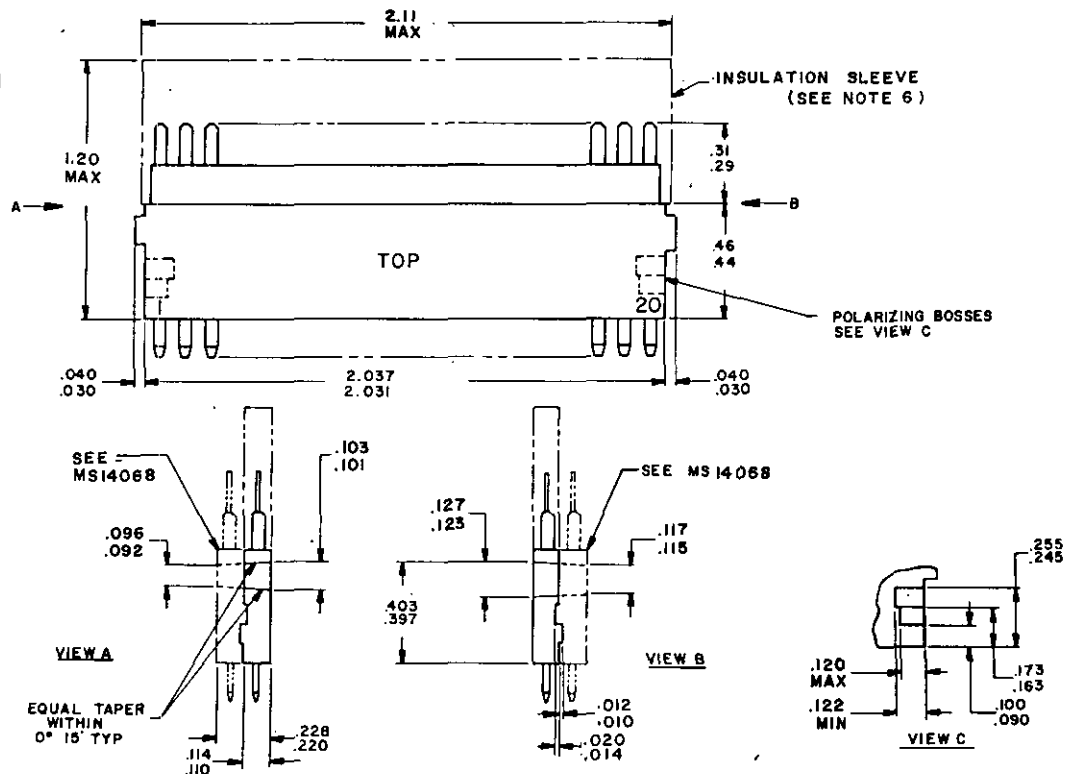


FED. SUP CLASS
5935

Type	Wire accommodation	Contact style	Wire size	Termination tool /1
1	Flat conductor cable	I	22-24	MTMT-B-1000
2	Single round wires	II	24-30	MTMT-B-1000
3	Multiple round wire cable	II	24-30	AA-400

/1 Raychem part number or equivalent.

DESIGN STANDARD FOR USE WITH MIL-C-28754/31 (EC)

NOTES:

- Dimensions are in inches.
- Break sharp edges .005 maximum.
- Contact numbers 1 and 20, and "top" shall be marked as shown in white characters, .296 inch high.
- Contacts shall be copper based alloy per QQ-B-613, No. 260.
- Material: Polyphenylene sulfide or diallyl phthalate.
- Insulation sleeve material optional.
- For design feature purposes, this standard takes precedence over procurement documents referenced herein.

Ⓒ CANCELED AFTER 16 NOVEMBER 1979
USE MIL-C-28754/50

P.A. Navy - EC	INTERNATIONAL INTEREST	TITLE INSERT, TOP	MILITARY STANDARD
Other Cust			MS14067(NAVY)
Procurement Specifications None	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672 (LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U.S. GOVERNMENT PRINTING OFFICE: 1979-603-121/172

This military standard is approved by the Naval Elec. Systems Cmd., Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 4 Sep 1975
REVISED Ⓐ 16 APR 76 Ⓑ 18 AUG 76 Ⓒ 16 NOV 79